


# **RITCHIE**Specs

Everything about Equipment



Daewoo DSL602 Skid Steer Loader

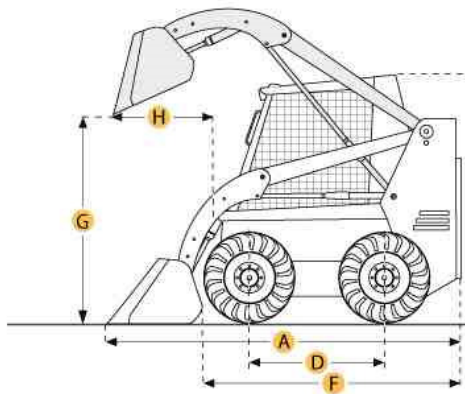

## Selected Dimensions

### Dimensions

|                                   |           |         |
|-----------------------------------|-----------|---------|
| A. Length with Bucket             | 9.8 ft in | 2972 mm |
| B. Width Over Tires               | 4.9 ft in | 1486 mm |
| C. Height to Top of Cab           | 6.3 ft in | 1934 mm |
| D. Wheelbase                      | 3.1 ft in | 957 mm  |
| E. Ground Clearance               | 7.5 in    | 190 mm  |
| F. Length w/o Bucket              | 7.5 ft in | 2296 mm |
| G. Clearance at Max Lift and Dump | 7.2 ft in | 2192 mm |
| H. Reach at Max Lift and Dump     | 20.4 in   | 518 mm  |

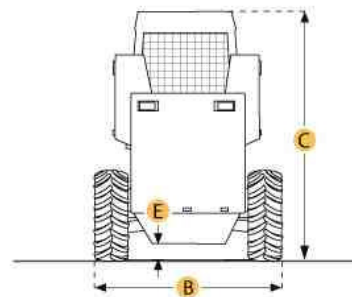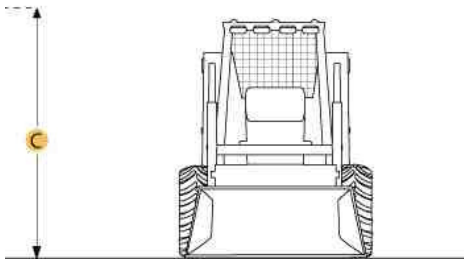

# **RITCHIE**Specs

Everything about Equipment

Daewoo DSL602 Skid Steer Loader

## Specification

Engine  
Make  
Model

Yanmar  
4TNE84

|                                           |              |            |
|-------------------------------------------|--------------|------------|
| Gross Power                               | 42 hp        | 31.3 kw    |
| Power Measured @                          | 2800 rpm     |            |
| Displacement                              | 121.7 cu in  | 2 L        |
| Number of Cylinders                       | 4            |            |
| Operational                               |              |            |
| Operational Weight                        | 5412.3 lb    | 2455 kg    |
| Fuel Capacity                             | 13.8 gal     | 52.4 L     |
| Max Speed                                 | 6.6 mph      | 10.7 km/h  |
| Tire Size                                 | 10 x 16.5    |            |
| Loader                                    |              |            |
| Operating Load Rating                     | 1300.7 lb    | 590 kg     |
| Tipping Load                              | 2910.1 lb    | 1320 kg    |
| Breakout Force                            | 2888.1 lb    | 1310 kg    |
| Bucket Capacity                           | 0.41 yd3     | 0.31 m3    |
| Hydraulic                                 |              |            |
| Pump Flow Capacity                        | 11.9 gal/min | 44.9 L/min |
| Dimensions                                |              |            |
| Length with Bucket                        | 9.8 ft in    | 2972 mm    |
| Length w/o Bucket                         | 7.5 ft in    | 2296 mm    |
| Width Over Tires                          | 4.9 ft in    | 1486 mm    |
| Height to Top of Cab                      | 6.3 ft in    | 1934 mm    |
| Clearance at Max Lift and Dump            | 7.2 ft in    | 2192 mm    |
| Wheelbase                                 | 3.1 ft in    | 957 mm     |
| Ground Clearance                          | 7.5 in       | 190 mm     |
| Reach at Max Lift and Dump                | 20.4 in      | 518 mm     |
| Turning Radius from Center - machine rear | 57.7 in      | 1465 mm    |
| Turning Radius from Center - inc bucket   | 71 in        | 1804 mm    |