

7SA743 MARCH 2005

Application and Installation

DDEC® IV On-Highway

DETROIT DIESEL
CORPORATION



Detroit Diesel Corporation
13400 Outer Drive, West / Detroit, Michigan 48239-4001
Telephone: 313-592-5000
Fax: 313-592-7888
<http://www.detroitdiesel.com>

Detroit Diesel®, DDC® and the spinning arrows design are registered trademarks of Detroit Diesel Corporation. Printed in U.S.A.
DDEC® is a registered trademark of Detroit Diesel Corporation. All other trademarks are the property of their respective owners.
All information subject to change without notice.
7SA743 0503 Copyright © 2005 DETROIT DIESEL CORPORATION. All rights reserved.

**CALIFORNIA
Proposition 65 Warning**

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.

ATTENTION

This document is a guideline for qualified personnel. Detroit Diesel Corporation makes no representations or warranties regarding the information contained in this document and disclaims all liability or other responsibility for the design, manufacture or installation of these ancillary systems, or the preparation or distribution to users of appropriate information regarding these systems. The information contained in this document may not be complete and is subject to change without notice.

TRADEMARK INFORMATION

Detroit Diesel[®], DDC[®], Series 60[®], Series 50[®], DDEC[®], Optimized Idle[®], ProManager[®], ProDriver[®], Data Hub[®], Diagnostic Link[®], Electronic Fire Commander[®], Ether Start[®], and the spinning arrows design are registered trademarks of Detroit Diesel Corporation. Smart Cruise[®] is a registered trademark of Eaton Vorad Technologies. SmartMedia[®] is a registered trademark of Kabushiki Kaisha Toshiba DBA Toshiba Corporation.

DDEC IV ON-HIGHWAY - EGR APPLICATION AND INSTALLATION

ABSTRACT

Detroit Diesel Corporation has produced electronically controlled engines over the past decade. DDEC IV, the fourth generation electronic engine controller, offers improved engine control and a more extensive range of engine and vehicle options.

The detail provided will facilitate the following:

- ☐ The selection of features and settings, based on individual applications
- ☐ The fabrication and installation of a vehicle interface harness, based on individual applications
- ☐ The communication of messages & data between sensors and various electronic control modules within the installation
- ☐ The use of industry standard tools to obtain engine data and diagnostic information, as well as to reprogram key parameters

The manual is arranged as follows:

- ☐ The initial portion covers the installation, beginning with an overview, followed by hardware and wiring requirements and available features.
- ☐ The second portion covers communication protocol.
- ☐ The third portion covers the tools capable of obtaining engine data and diagnostic information from the Electronic Control Module, as well as reprogramming of its key parameters.
- ☐ The fourth portion covers application specific recommendations.
- ☐ The final portion summarizes detailed information on codes and kit availability.

This manual does not cover the installation of the engine itself into various applications. For this, the reader should refer to the specific engine application and installation manual.

This manual is intended for those with an electrical background. A simple installation may require a basic understanding of electrical circuits while a more comprehensive electrical/electronics background is required to access all of DDEC IV's capability.

TABLE OF CONTENTS

1	INTRODUCTION	1-1
2	SAFETY PRECAUTIONS	2-1
2.1	STANDS	2-1
2.2	GLASSES	2-1
2.3	WELDING	2-2
2.4	WORK PLACE	2-2
2.5	CLOTHING	2-3
2.6	ELECTRIC TOOLS	2-3
2.7	AIR	2-4
2.8	FLUIDS AND PRESSURE	2-4
2.9	BATTERIES	2-5
2.10	FIRE	2-5
2.11	DIAGNOSTIC DATA READER	2-6
2.12	DETROIT DIESEL DIAGNOSTIC LINK	2-6
2.13	PAINT	2-6
2.14	FLUOROELASTOMER (VITON)	2-7
2.15	OPTIMIZED IDLE	2-8
3	HARDWARE AND WIRING	3-1
3.1	SUPPLIED HARDWARE	3-3
3.1.1	OEM-SUPPLIED HARDWARE	3-3
3.1.2	DDC-SUPPLIED HARDWARE	3-3
3.2	ELECTRONIC CONTROL MODULE	3-5
3.2.1	ECM PART NUMBERS	3-6
3.2.2	ENVIRONMENTAL CONDITIONS	3-7
	TEMPERATURE	3-7
	ATMOSPHERIC PRESSURE	3-7
	WATER INTRUSION	3-7
3.3	ENGINE SENSOR HARNESS	3-9
3.4	VEHICLE INTERFACE HARNESS	3-15
3.4.1	VIH DESIGN	3-19
3.4.2	VIH INSTALLATION	3-19
3.4.3	HARNESS DESIGN GUIDELINES	3-20
	PULSE WIDTH MODULATED PORT (PWM #1, 2, 4)	3-20
	DIGITAL OUTPUT PORTS	3-20
	DIGITAL INPUT PORTS	3-21
	SWITCH GROUND	3-22
	IGNITION	3-22
3.4.4	OEM INTERFACE TO ENGINE SENSOR HARNESS	3-23
	SERIES 60	3-23
	SERIES 50	3-24
	NATURAL GAS APPLICATIONS	3-24
3.4.5	VARIABLE PRESSURE OUTPUT DEVICE — SERIES 60 ONLY	3-25

3.4.6	NATURAL GAS APPLICATIONS — VIH REQUIREMENTS	3-26
	DEDICATED POWER & GROUND REQUIREMENTS	3-26
	RELAY POWERED THROTTLE	3-27
	RELAY POWERED FUEL SHUTOFF VALVES	3-28
	OEM SENSOR POWER HARNESS	3-29
	FUEL SHUTOFF HARNESS	3-30
	OEM SENSOR GROUND HARNESS	3-31
	COIL POWER HARNESS	3-32
	OEM INTERFACE CONNECTOR FOR NATURAL GAS APPLICATIONS	3-33
3.5	COMMUNICATION HARNESS	3-35
3.5.1	DESIGN GUIDELINES	3-36
3.6	INJECTOR HARNESS	3-37
3.6.1	ELECTRONIC UNIT INJECTOR	3-38
3.7	POWER HARNESS	3-39
3.7.1	DUAL-FUSE INSTALLATION	3-39
3.7.2	SINGLE-FUSE INSTALLATION	3-41
3.7.3	POWER HARNESS DESIGN	3-43
	WIRE RESISTANCES	3-43
	FUSE HOLDER AND CONNECTOR	3-44
3.7.4	POWER HARNESS INSTALLATION	3-45
3.8	POWER SUPPLY	3-47
3.8.1	AVERAGE BATTERY DRAIN CURRENT	3-48
3.8.2	REQUIREMENTS FOR 12 OR 24 VOLT SYSTEM	3-48
3.8.3	MAIN POWER SHUTDOWN	3-49
3.8.4	WELDING CAUTION	3-50
3.9	FUSES	3-51
3.10	CONNECTORS	3-53
3.10.1	ECM VEHICLE HARNESS CONNECTORS	3-53
	VIH-TO-ECM CONNECTOR	3-53
	POWER HARNESS-TO-ECM CONNECTOR	3-57
	COMMUNICATION HARNESS-TO-ECM CONNECTOR	3-58
3.10.2	ECM ENGINE HARNESS CONNECTORS	3-59
	ESH-TO-ECM CONNECTOR	3-60
3.10.3	FCI APEX CONNECTORS	3-63
3.10.4	DATA LINK CONNECTORS	3-64
	SAE J1939/J1587 DATA LINK NINE-PIN CONNECTOR (RECOMMENDED)	3-65
	SAE J1708/J1587 DATA LINK SIX-PIN CONNECTOR	3-66
3.11	WIRES AND WIRING	3-67
3.11.1	GENERAL REQUIREMENTS	3-67
3.11.2	GENERAL WIRE	3-67
3.11.3	WIRING FOR VIH-TO-ECM CONNECTOR	3-68
3.11.4	RETURN POWER (GROUND) CIRCUITS	3-68
3.11.5	DATA LINK CIRCUITS	3-68
3.11.6	POWER HARNESS WIRE RESISTANCE	3-68
3.11.7	PACKARD ELECTRIC TERMINAL INSTALLATION AND REMOVAL	3-69
	CRIMP AND REMOVAL TOOLS	3-69
	PUSH-TO-SEAT TERMINAL INSTALLATION GUIDELINES	3-70

	PUSH-TO-SEAT TERMINAL REMOVAL	3-73
	PULL-TO-SEAT TERMINAL INSTALLATION GUIDELINES	3-74
	PULL-TO-SEAT TERMINAL REMOVAL	3-77
3.11.8	FCI APEX TERMINAL INSTALLATION AND REMOVAL	3-78
	FCI APEX MALE TERMINAL INSTALLATION	3-78
	FCI APEX MALE TERMINAL REMOVAL	3-79
	FCI APEX FEMALE TERMINAL INSTALLATION	3-81
	FCI APEX FEMALE TERMINAL REMOVAL	3-82
3.11.9	DEUTSCH TERMINAL INSTALLATION AND REMOVAL	3-84
	DEUTSCH TERMINAL INSTALLATION GUIDELINES	3-84
	DEUTSCH TERMINAL REMOVAL	3-86
3.11.10	SPLICING GUIDELINES	3-87
	CLIPPED AND SOLDERED SPLICING METHOD	3-87
	SPLICING AND REPAIRING STRAIGHT LEADS-ALTERNATE METHOD 1	3-89
	SPLICING AND REPAIRING STRAIGHT LEADS - ALTERNATE METHOD 2	3-92
	SHRINK WRAP	3-94
	STAGGERING WIRE SPLICES	3-95
3.12	CONDUIT AND LOOM	3-97
3.13	TAPE AND TAPING	3-99
3.14	SENSORS	3-101
3.14.1	FACTORY-INSTALLED SENSORS	3-101
3.14.2	AIR TEMPERATURE SENSOR	3-102
3.14.3	BAROMETRIC PRESSURE SENSOR	3-102
3.14.4	COOLANT TEMPERATURE SENSOR	3-103
3.14.5	EGR DELTA PRESSURE SENSOR	3-104
3.14.6	EGR TEMPERATURE SENSOR	3-104
3.14.7	FUEL RESTRICTION SENSOR	3-105
3.14.8	FUEL TEMPERATURE SENSOR	3-106
3.14.9	OIL LEVEL SENSOR	3-107
3.14.10	OIL PRESSURE SENSOR	3-107
3.14.11	OIL TEMPERATURE SENSOR	3-108
3.14.12	TIMING AND SYNCHRONOUS REFERENCE SENSORS	3-109
3.14.13	TURBO BOOST SENSOR	3-110
3.14.14	TURBO COMPRESSOR OUT TEMPERATURE SENSOR	3-110
3.14.15	TURBO SPEED SENSOR	3-111
3.14.16	OEM-INSTALLED SENSORS	3-112
3.14.17	AIR FILTER RESTRICTION SENSOR — SERIES 50 ONLY	3-113
3.14.18	COOLANT LEVEL SENSOR	3-115
3.14.19	ADD COOLANT LEVEL SENSOR — SERIES 50 ONLY	3-119
3.14.20	OPTICAL COOLANT LEVEL SENSOR	3-121
3.14.21	EXHAUST TEMPERATURE SENSOR	3-123
	EXHAUST TEMPERATURE SENSOR INSTALLATION	3-123
3.14.22	FIRE TRUCK PUMP PRESSURE SENSOR	3-125
3.14.23	RELATIVE HUMIDITY/TURBO COMPRESSOR INLET TEMPERATURE SENSOR .	3-127
	INSTALLATION OF RELATIVE HUMIDITY/TCI TEMPERATURE SENSOR	3-128
3.14.24	THROTTLE POSITION SENSOR	3-129
3.14.25	VEHICLE SPEED SENSOR	3-130

	MAGNETIC PICKUP	3-131
	OPEN COLLECTOR	3-132
	SAE J1939 DATA LINK	3-134
	VSS ANTI-TAMPER	3-134
3.14.26	AFTERMARKET INSTALLED SENSORS	3-135
	EXHAUST BACK PRESSURE SENSOR	3-135
	DE-GREENING PROCESS FOR PARTICULATE TRAP FILTERS	3-135
	EXHAUST BACK PRESSURE SENSOR INSTALLATION	3-135
3.15	THROTTLE DEVICES	3-139
3.15.1	ELECTRONIC FOOT PEDAL ASSEMBLY	3-139
3.15.2	CRUISE CONTROL SWITCHES	3-140
3.15.3	HAND THROTTLE	3-140
3.15.4	FAST IDLE SWITCH (ALTERNATE MINIMUM VSG)	3-140
3.15.5	VOLTAGE DIVIDERS	3-140
3.16	LIGHTS	3-141
3.16.1	CHECK ENGINE LIGHT	3-141
	CHECK ENGINE LIGHT REQUIREMENTS AND GUIDELINES	3-142
	CHECK ENGINE LIGHT WIRING	3-143
3.16.2	STOP ENGINE LIGHT	3-144
	STOP ENGINE LIGHT REQUIREMENTS AND GUIDELINES	3-144
	STOP ENGINE LIGHT WIRING	3-145
3.16.3	SERVICE NOW LAMP	3-146
	INSTALLATION	3-146
4	DIGITAL INPUTS AND OUTPUTS	4-1
4.1	OVERVIEW	4-3
4.2	DIGITAL INPUTS	4-5
4.2.1	CRUISE CONTROL	4-7
	CRUISE ENABLE	4-7
	SET / COAST ON (DECREASE)	4-7
	RESUME / ACCEL ON (INCREASE)	4-7
	CLUTCH RELEASED (MANUAL TRANSMISSIONS)	4-8
	SERVICE BRAKE RELEASED (AUTOMATIC AND MANUAL TRANSMISSIONS)	4-8
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-8
	INTERACTION WITH OTHER FEATURES	4-8
4.2.2	ENGINE BRAKE	4-9
	ENGINE BRAKE DISABLE	4-9
	ENGINE BRAKE LOW	4-9
	ENGINE BRAKE MEDIUM	4-9
	KONSTANTDROSSEL SWITCH	4-9
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-10
4.2.3	ENGINE PROTECTION	4-11
	AUXILIARY SHUTDOWN #1 AND #2	4-11
	DIAGNOSTIC REQUEST SWITCH	4-11
	DIAGNOSTIC REQUEST SWITCH/STOP ENGINE OVERRIDE SWITCH	4-11
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-12

	DIAGNOSTICS	4-12
4.2.4	ENGINE RATINGS	4-13
	LIMITING TORQUE CURVE	4-13
	RATING SWITCH #1 AND #2	4-13
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-13
	DIAGNOSTICS	4-13
4.2.5	FAN CONTROL	4-14
	AIR CONDITIONER STATUS OPERATION	4-14
	FAN CONTROL OVERRIDE OPERATION	4-14
	TRANSMISSION RETARDER ACTIVE OPERATION	4-14
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-14
4.2.6	PRESSURE SENSOR GOVERNOR	4-15
	PRESSURE ENABLE SWITCH	4-15
	PRESSURE/RPM MODE SWITCH	4-15
	DECREASE (SET/COAST ON)	4-15
	INCREASE (RESUME/ACCELERATION ON)	4-15
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-15
	INTERACTION WITH OTHER FEATURES	4-16
4.2.7	THROTTLE CONTROL	4-16
	ALTERNATE MINIMUM VSG SPEED/FAST IDLE OPERATION	4-16
	DUAL THROTTLE (LSG) OPERATION	4-16
	EXTERNAL ENGINE SYNCHRONIZATION/FREQUENCY INPUT ACTIVE	4-16
	IDLE VALIDATION SWITCH OPERATION	4-17
	THROTTLE INHIBIT	4-17
	VSG STATION CHANGE AND VSG STATION CHANGE COMPLEMENT	4-17
	VSG INHIBIT (RELEASE 28.0 OR LATER)	4-17
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-17
4.2.8	ADDITIONAL FUNCTIONS	4-18
	AUXILIARY COOLANT LEVEL SWITCH	4-18
	PARKING BRAKE INTERLOCK OPERATION	4-19
	AIR COMPRESSOR LOAD SWITCH OPERATION	4-19
	THROTTLE KICKDOWN OPERATION	4-19
	RPM FREEZE OPERATION	4-19
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-19
4.3	DIGITAL OUTPUTS	4-21
4.3.1	AIR COMPRESSOR LOAD SOLENOID	4-23
	INSTALLATION	4-23
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-23
4.3.2	COOLANT LEVEL LOW LIGHT	4-24
	INSTALLATION	4-24
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-24
	INTERACTION WITH OTHER FEATURES	4-24
4.3.3	CRUISE CONTROL ACTIVE LIGHT (PRESSURE SENSOR GOVERNOR ACTIVE LIGHT)	4-24
	INSTALLATION	4-24
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-24
	INTERACTION WITH OTHER FEATURES	4-24

4.3.4	DECELERATION LIGHT	4-25
	INSTALLATION	4-25
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-25
4.3.5	ENGINE BRAKE ACTIVE	4-25
	INSTALLATION	4-25
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-25
4.3.6	ENGINE OVERSPEED	4-26
	INSTALLATION	4-26
	PROGRAMMING REQUIREMENTS & FLEXIBILITY	4-26
4.3.7	ETHER INJECTION	4-26
	INSTALLATION	4-26
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-26
	DIAGNOSTICS	4-26
4.3.8	EXTERNAL ENGINE BRAKE ENABLE	4-27
	INSTALLATION	4-27
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-27
4.3.9	EXTERNAL ENGINE SYNCHRONIZATION/FREQUENCY INPUT ACTIVE	4-27
	INSTALLATION	4-27
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-27
4.3.10	FAN CONTROL #1 & #2	4-28
	INSTALLATION	4-28
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-28
4.3.11	HIGH COOLANT TEMPERATURE LIGHT	4-29
	INSTALLATION	4-29
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-29
	DIAGNOSTICS	4-29
4.3.12	HIGH CRANKCASE PRESSURE LIGHT	4-29
	INSTALLATION	4-29
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-29
	DIAGNOSTICS	4-29
4.3.13	HIGH OIL TEMPERATURE LIGHT	4-30
	INSTALLATION	4-30
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-30
	DIAGNOSTICS	4-30
4.3.14	LOW COOLANT PRESSURE LIGHT	4-30
	INSTALLATION	4-30
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-30
	DIAGNOSTICS	4-30
4.3.15	LOW DDEC VOLTAGE WARNING LIGHT	4-31
	INSTALLATION	4-31
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-31
	DIAGNOSTICS	4-31
4.3.16	LOW OIL PRESSURE LIGHT	4-31
	INSTALLATION	4-31
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-31
	DIAGNOSTICS	4-31
4.3.17	OPTIMIZED IDLE ACTIVE LIGHT	4-32

	INSTALLATION	4-32
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-32
	DIAGNOSTICS	4-32
4.3.18	PRESSURE SENSOR GOVERNOR PRESSURE MODE LIGHT	4-32
	INSTALLATION	4-32
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-32
4.3.19	SERVICE NOW LAMP	4-33
	INSTALLATION	4-33
4.3.20	STARTER LOCKOUT	4-33
	INSTALLATION	4-33
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-33
4.3.21	TOP2 SHIFT SOLENOID	4-34
	INSTALLATION	4-34
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-34
	DIAGNOSTICS	4-34
4.3.22	TOP2 SHIFT LOCKOUT SOLENOID	4-35
	INSTALLATION	4-35
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-35
	DIAGNOSTICS	4-35
4.3.23	TRANSMISSION RETARDER	4-35
	INSTALLATION	4-35
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-35
4.3.24	VEHICLE POWER SHUTDOWN	4-36
	INSTALLATION	4-36
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-36
	DIAGNOSTICS	4-37
	INTERACTION WITH OTHER FEATURES	4-37
4.3.25	VSG ACTIVE INDICATION	4-37
	INSTALLATION	4-37
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	4-37
	INTERACTION WITH OTHER FEATURES	4-37
5	DDEC FEATURES	5-1
5.1	AIR COMPRESSOR CONTROL	5-5
5.1.1	OPERATION	5-5
	INCREASE (RESUME/ACCELERATION ON)	5-5
	DECREASE (SET/COAST ON)	5-6
	AIR COMPRESSOR LOAD SWITCH	5-6
	AIR COMPRESSOR SOLENOID	5-6
	AIR COMPRESSOR SHUTDOWN	5-6
	MULTIPLE PRESSURE RATINGS	5-6
5.1.2	INSTALLATION	5-7
5.1.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-8
5.1.4	INTERACTION WITH OTHER FEATURES	5-9
5.2	ANTI-LOCK BRAKE SYSTEMS	5-11
5.2.1	OPERATION	5-11
5.3	CRUISE CONTROL	5-15

5.3.1	OPERATION	5-15
	ENGINE SPEED CRUISE CONTROL	5-15
	VEHICLE SPEED CRUISE CONTROL	5-15
	SMART CRUISE	5-15
	AUTO RESUME	5-16
	CRUISE PAUSE	5-16
	CRUISE POWER	5-16
	CRUISE ENABLE	5-16
	SET / COAST ON	5-16
	RESUME / ACCEL ON	5-17
	CLUTCH RELEASED (MANUAL TRANSMISSIONS)	5-17
	SERVICE BRAKE RELEASED (AUTOMATIC AND MANUAL TRANSMISSIONS)	5-17
5.3.2	INSTALLATION	5-18
5.3.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-19
5.3.4	DIAGNOSTICS	5-20
5.3.5	INTERACTION WITH OTHER FEATURES	5-21
5.4	DIAGNOSTICS	5-23
5.4.1	OPERATION	5-23
	DIAGNOSTIC REQUEST SWITCH	5-24
	DIAGNOSTIC REQUEST SWITCH/STOP ENGINE OVERRIDE	5-25
5.4.2	DEFINITIONS AND ABBREVIATIONS	5-26
5.5	ELECTRONIC FIRE COMMANDER	5-27
5.5.1	OPERATION	5-27
5.5.2	INSTALLATION	5-28
5.5.3	ORDERING EFC	5-28
5.5.4	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-29
5.6	ENGINE BRAKE CONTROLS	5-31
5.6.1	OPERATION	5-31
	CRUISE CONTROL WITH ENGINE BRAKE	5-31
	ENGINE BRAKE DISABLE	5-31
	ENGINE BRAKE ACTIVE	5-31
	ENGINE FAN BRAKING	5-32
	CLUTCH RELEASED INPUT	5-32
	SERVICE BRAKE CONTROL OF ENGINE BRAKES	5-32
	MIN MPH FOR ENGINE BRAKES	5-32
5.6.2	INSTALLATION	5-32
5.6.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-35
5.6.4	INTERACTION WITH OTHER FEATURES	5-36
5.7	ENGINE PROTECTION	5-37
5.7.1	OPERATION	5-37
	WARNING ONLY	5-37
	RAMPDOWN	5-38
	SHUTDOWN	5-38
5.7.2	ENGINE OVERTEMPERATURE PROTECTION	5-39
5.7.3	ENGINE PROTECTION SWITCHES	5-44
	DIAGNOSTIC REQUEST SWITCH	5-44

5.7.4	STOP ENGINE OVERRIDE OPTIONS	5-45
5.7.5	INSTALLATION	5-47
5.7.6	PROGRAMMING FLEXIBILITY	5-47
5.7.7	INTERACTION WITH OTHER FEATURES	5-48
5.8	ENGINE RATINGS	5-49
5.8.1	OPERATION	5-49
	ENGINE RATING SWITCHES	5-49
	CRUISE POWER	5-50
	LIMITING TORQUE CURVE OPTION (DIGITAL TORQUE LIMITING)	5-50
5.8.2	INSTALLATION	5-51
5.8.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-52
	RATING SWITCHES	5-52
	CRUISE POWER	5-52
	LIMITING TORQUE OPTION	5-52
5.9	ETHER START	5-53
5.9.1	OPERATION	5-53
5.9.2	INSTALLATION	5-55
	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-56
5.10	FAN CONTROL	5-57
5.10.1	OPERATION	5-57
5.10.2	INSTALLATION	5-58
5.10.3	SINGLE FAN	5-59
	INSTALLATION	5-61
5.10.4	DUAL FANS	5-64
	INSTALLATION - DUAL FANS	5-65
5.10.5	TWO-SPEED FAN	5-66
	INSTALLATION -TWO-SPEED FANS	5-68
5.10.6	VARIABLE SPEED SINGLE-FAN	5-69
5.10.7	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-70
5.11	FUEL ECONOMY INCENTIVE	5-73
5.11.1	OPERATION	5-73
5.11.2	PROGRAMMING FLEXIBILITY	5-74
5.11.3	INTERACTION WITH OTHER FEATURES.	5-74
5.12	HALF ENGINE IDLE	5-75
5.12.1	OPERATION	5-75
5.12.2	INSTALLATION	5-75
5.12.3	PROGRAMMING FLEXIBILITY	5-75
5.12.4	DIAGNOSTICS	5-75
5.13	IDLE SHUTDOWN TIMER AND VEHICLE POWER SHUTDOWN	5-77
5.13.1	OPERATION	5-77
	IDLE SHUTDOWN OVERRIDE - OPTIONAL	5-78
	VEHICLE POWER SHUTDOWN - OPTIONAL	5-79
	ENABLED ON VARIABLE SPEED GOVERNOR (VSG) - OPTIONAL	5-79
	AMBIENT AIR TEMPERATURE OVERRIDE DISABLE - OPTIONAL	5-80
	AMBIENT AIR TEMPERATURE AUTOMATIC OVERRIDE — OPTIONAL	5-80
	INACTIVE SHUTDOWN	5-80
5.13.2	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-81

5.13.3	INTERACTION WITH OTHER FEATURES	5-81
5.14	IRIS	5-83
5.14.1	OPERATION	5-83
5.14.2	INSTALLATION	5-86
	MOBILE UNIT INSTALLATION	5-86
	IRIS HARDWARE AND KITS	5-91
5.15	LOW GEAR TORQUE LIMITING	5-95
5.15.1	OPERATION	5-95
5.15.2	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-95
5.16	MAINTENANCE ALERT SYSTEM	5-97
5.16.1	OPERATION	5-97
	ECM POWER DOWN BEHAVIOR	5-98
	CEL/SEL FLASHING	5-98
	PRODRIVER DC	5-99
	MAINTENANCE ALERT SYSTEM DISPLAY MODULE	5-99
	DIAGNOSTIC DATA READER	5-101
	DETROIT DIESEL DIAGNOSTIC LINK	5-102
5.16.2	INSTALLATION	5-104
	AIR FILTER RESTRICTION SENSOR	5-105
	ADD COOLANT LEVEL SENSOR	5-107
	FUEL RESTRICTION SENSOR	5-109
	OIL LEVEL SENSOR	5-110
	MAINTENANCE ALERT SYSTEM DISPLAY MODULE INSTALLATION	5-111
	MAINTENANCE ALERT SYSTEM DISPLAY HARNESS	5-115
5.16.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-115
5.16.4	DIAGNOSTICS	5-116
5.16.5	INTERACTION WITH OTHER FEATURES	5-116
5.17	MANAGEMENT INFORMATION PRODUCTS	5-117
5.17.1	OPERATION	5-117
5.17.2	DDEC III DATA PAGES	5-118
5.17.3	DDEC IV DATA	5-119
5.17.4	DDEC REPORTS	5-119
5.17.5	DETROIT DIESEL DATA SUMMARIES	5-127
5.17.6	PRODRIVER DC	5-128
	PRODRIVER DC INSTALLATION	5-129
5.17.7	MANAGEMENT INFORMATION PRODUCTS KITS	5-137
5.18	OPTIMIZED IDLE	5-139
5.18.1	OPERATION	5-139
	ENGINE MODE	5-140
	THERMOSTAT MODE	5-140
	OPTIMIZED IDLE START UP SEQUENCE	5-140
5.18.2	INSTALLATION	5-141
5.18.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-142
5.18.4	DIAGNOSTICS	5-143
5.18.5	INTERACTION WITH OTHER FEATURES	5-143
5.19	PASSMART	5-145
5.19.1	OPERATION	5-145

5.19.2	INSTALLATION	5-146
5.19.3	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-147
5.19.4	INTERACTION WITH OTHER FEATURES	5-147
5.20	PASSWORDS	5-149
5.20.1	RATING PASSWORD	5-149
5.20.2	INJECTOR PASSWORD	5-149
5.20.3	CUSTOMER PASSWORD	5-150
	PARAMETER GROUP LOCKOUT	5-150
5.20.4	PROGRAMMING REQUIREMENTS & FLEXIBILITY	5-152
5.21	PRESSURE SENSOR GOVERNOR	5-153
5.21.1	PSG OPERATION	5-153
	RPM MODE	5-153
	PRESSURE MODE	5-153
5.21.2	SWITCHES - DECREASE AND INCREASE	5-154
	INCREASE (RESUME/ACCELERATION ON)	5-154
	DECREASE (SET/COAST ON)	5-154
5.21.3	INSTALLATION	5-155
5.21.4	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-156
5.21.5	INTERACTION WITH OTHER FEATURES	5-157
5.22	PROGRESSIVE SHIFT	5-159
5.22.1	OPERATION	5-159
5.22.2	LOW RANGE #1	5-160
5.22.3	LOW RANGE #2	5-160
5.22.4	HIGH RANGE	5-161
5.22.5	INSTALLATION INFORMATION	5-163
5.22.6	PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-164
5.22.7	INTERACTION WITH OTHER FEATURES	5-164
5.23	TACHOMETER DRIVE	5-165
5.24	THROTTLE CONTROL/GOVERNORS	5-167
5.24.1	LIMITING SPEED GOVERNOR - ON-HIGHWAY	5-167
	LSG PRIMARY WITH VSG AS A SECONDARY CONTROL	5-167
	LSG CONTROL OPTIONS	5-168
	LSG ELECTRONIC FOOT PEDAL ASSEMBLY	5-168
	LSG ELECTRONIC FOOT PEDAL ASSEMBLY INSTALLATION	5-168
	LSG ELECTRONIC FOOT PEDAL ASSEMBLY DIAGNOSTICS	5-170
	LSG DUAL ELECTRONIC FOOT PEDAL ASSEMBLY THROTTLE CONTROLS	5-170
	LSG DUAL THROTTLE CONTROL INSTALLATION	5-170
	LSG DUAL THROTTLE CONTROL PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-171
	LSG DUAL THROTTLE CONTROL DIAGNOSTICS	5-171
5.24.2	VARIABLE SPEED GOVERNOR - NONROAD	5-171
	VSG PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-172
	CRUISE SWITCH VSG	5-172
	CRUISE SWITCH VSG INSTALLATION REQUIREMENTS	5-173
	CRUISE SWITCH VSG PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-173
	VSG HAND THROTTLE	5-174
	VSG HAND THROTTLE INSTALLATION	5-174

VSG HAND THROTTLE CALIBRATION	5-175
VSG ELECTRONIC FOOT PEDAL ASSEMBLY	5-175
ALTERNATE MINIMUM VSG (FAST IDLE)	5-176
ALTERNATE MINIMUM VSG INSTALLATION	5-176
ALTERNATE MINIMUM VSG PROGRAMMING FLEXIBILITY	5-176
VSG VOLTAGE DIVIDERS	5-176
VSG VOLTAGE DIVIDERS INSTALLATION	5-177
VSG RESISTOR SELECTION FOR VOLTAGE DIVIDERS	5-177
VSG DUAL THROTTLE CONTROLS	5-179
VSG DUAL THROTTLE CONTROLS INSTALLATION	5-180
DUAL THROTTLE CONTROLS PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-181
VSG DUAL THROTTLE CONTROLS DIAGNOSTICS	5-182
VSG FREQUENCY INPUT	5-182
VSG FREQUENCY INPUT INSTALLATION	5-182
VSG FREQUENCY INPUT PROGRAMMING FLEXIBILITY	5-183
5.25 TRANSMISSION INTERFACE	5-185
5.25.1 PWM1 OPERATION	5-185
MODULATED SIGNAL	5-185
DISCRETE ON/OFF SIGNAL	5-187
5.25.2 PWM1 INSTALLATION	5-187
ALLISON INTERFACE MODULES	5-188
GE PROPULSION SYSTEM CONTROLLER	5-190
ZF ECOMAT AND VOITH TRANSMISSIONS	5-191
ALLISON HYDRAULIC TRANSMISSION	5-192
PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-192
5.25.3 COMMUNICATION LINKS OPERATION	5-194
5.25.4 COMMUNICATION LINKS INSTALLATION	5-194
ALLISON WORLD TRANSMISSION	5-194
EATON CEEMAT TRANSMISSION	5-197
SAE J1939 TRANSMISSIONS	5-197
PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-197
5.25.5 DIGITAL INPUT AND DIGITAL OUTPUT TRANSMISSIONS	5-198
5.25.6 EATON TOP2 OPERATION	5-198
INSTALLATION	5-199
PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-199
DIAGNOSTICS	5-200
5.26 TRANSMISSION RETARDER	5-201
5.26.1 OPERATION	5-201
5.26.2 PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-201
5.26.3 INTERACTION WITH OTHER FEATURES	5-201
5.27 VEHICLE SPEED LIMITING	5-203
5.27.1 OPERATION	5-203
5.27.2 INSTALLATION	5-203
5.27.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY	5-203
5.27.4 INTERACTION WITH OTHER FEATURES	5-203
5.28 VEHICLE SPEED SENSOR ANTI-TAMPER	5-205

5.28.1	OPERATION	5-205
5.28.2	PROGRAMMING FLEXIBILITY	5-205
6	COMMUNICATION PROTOCOLS	6-1
6.1	OVERVIEW	6-3
6.2	SAE J1587	6-5
6.2.1	MESSAGE FORMAT	6-5
6.2.2	1708/1587 MESSAGE PRIORITY	6-6
	SAE J1587 PARAMETERS AVAILABLE WITH DDEC IV	6-6
6.2.3	SAE J1587 PIDS REQUIRING DDEC ACTION	6-8
	DATA REQUEST	6-8
	COMPONENT SPECIFIC REQUEST	6-8
	RETARDER STATUS REQUEST	6-8
	TRANSMITTER DATA REQUEST / CLEAR COUNT	6-9
	PID 256 (255 0) PAGE 2 DATA REQUEST	6-9
	J1587 OUTPUTS - SINGLE BYTE PARAMETERS	6-10
	DOUBLE BYTE PARAMETERS	6-20
	VARIABLE LENGTH PARAMETERS	6-27
6.3	SAE J1922	6-37
6.3.1	MESSAGE FORMAT	6-37
6.3.2	SAE J1922 PARAMETERS AVAILABLE WITH DDEC IV	6-37
6.3.3	SAE J1922 MIDS	6-37
	ENGINE TO POWERTRAIN	6-38
	ENGINE INITIALIZATION RESPONSE	6-39
	TRANSMISSION TO POWERTRAIN MESSAGE	6-40
	TRANSMISSION INITIALIZATION REQUEST	6-41
	ABS/TRACTION CONTROL TO POWERTRAIN	6-42
	ABS/TRACTION CONTROL INITIALIZATION REQUEST	6-43
	RETARDER TO POWERTRAIN	6-44
	RETARDER INITIALIZATION RESPONSE	6-44
6.4	SAE J1939	6-45
6.4.1	MESSAGE FORMAT	6-45
6.4.2	SAE J1939/71 APPLICATION LAYER	6-46
	ELECTRONIC ENGINE CONTROLLER #1 -- EEC1	6-46
	ELECTRONIC ENGINE CONTROLLER #2 -- EEC2	6-47
	IDLE OPERATION — IO	6-47
	TURBOCHARGER — TC	6-48
	ELECTRONIC ENGINE CONTROLLER #3 -- EEC3	6-48
	VEHICLE DISTANCE — VD	6-49
	IDLE SHUTDOWN — SHUTDOWN	6-49
	ENGINE HOURS, REVOLUTIONS — HOURS	6-50
	TIME/DATE — TD	6-51
	VEHICLE HOURS — VH	6-51
	FUEL CONSUMPTION (LIQUID) — LFC	6-52
	CRUISE CONTROL / VEHICLE SPEED SETUP — CCSS	6-52
	ENGINE TEMPERATURE #1— ET1	6-53
	ENGINE FLUID LEVEL/PRESSURE #1 — EFL/P1	6-53

	POWER TAKEOFF INFORMATION — PTO	6-54
	CRUISE CONTROL / VEHICLE SPEED — CCVS	6-55
	FUEL ECONOMY (LIQUID) – LFE	6-57
	AMBIENT CONDITIONS – AMB	6-57
	INLET / EXHAUST CONDITIONS – IC	6-58
	TURBOCHARGER INFORMATION #6 – TCI6	6-58
	EXHAUST PORT TEMPERATURE #1 – EPT1	6-59
	EXHAUST PORT TEMPERATURE #2 – EPT2	6-59
	EXHAUST PORT TEMPERATURE #3 – EPT3	6-60
	EXHAUST PORT TEMPERATURE #4 – EPT4	6-60
	VEHICLE ELECTRICAL POWER – VEP	6-61
	ALTERNATE FUEL #1 – A1	6-61
	AUXILIARY WATER PUMP PRESSURE – AWPP	6-62
	ENGINE FLUID LEVEL/PRESSURE #2 – EFL/P2	6-62
	HIGH RESOLUTION VEHICLE DISTANCE – VDHR	6-62
	ELECTRONIC ENGINE CONTROLLER #4 – EEC4	6-63
	FAN DRIVE – FD	6-64
	ELECTRONIC RETARDER CONTROLLER #1 - ERC1	6-65
	SOFTWARE IDENTIFICATION – SOFT	6-66
	COMPONENT IDENTIFICATION – CI	6-67
	RETARDER CONFIGURATION – RC	6-68
	ENGINE CONFIGURATION – EC	6-68
	ADAPTIVE CRUISE CONTROL – ACC1	6-70
	TORQUE SPEED CONTROL — TSC1	6-71
	ELECTRONIC TRANSMISSION CONTROLLER #1 -- ETC1	6-72
6.4.3	SAE J1939/21 DATA LINK LAYER	6-73
	ACKNOWLEDGE / NEGATIVE ACKNOWLEDGE – ACK/NACK	6-73
	REQUESTS	6-74
	TRANSPORT PROTOCOL BROADCAST ANNOUNCE (TP.CM_BAM)	6-74
	TRANSPORT PROTOCOL DATA (TP.DT)	6-75
	TRANSPORT PROTOCOL REQUEST TO SEND (TP.CM_RTS)	6-75
	TRANSPORT PROTOCOL CONNECTION ABORT (TP.CONNABORT)	6-76
	TRANSPORT PROTOCOL END OF MESSAGE (TP.ENDOFMSGACK)	6-76
	TRANSPORT PROTOCOL CLEAR TO SEND (TP.CM_CTS)	6-77
	TRANSPORT PROTOCOL DATA (TP.DT)	6-77
6.4.4	SAE J1939/73 DIAGNOSTIC LAYER	6-78
	ACTIVE DIAGNOSTIC TROUBLE CODES – DM1	6-78
	PREVIOUSLY ACTIVE DIAGNOSTIC TROUBLE CODES – DM2	6-79
	DIAGNOSTIC DATA CLEAR/RESET OF PREVIOUSLY ACTIVE DTCS – DM3 ..	6-80
	DIAGNOSTIC DATA CLEAR/RESET OF ACTIVE DTCS – DM11	6-80
	STOP START BROADCAST – DM13	6-80
7	TOOLS	7-1
7.1	DIAGNOSTIC REQUEST SWITCH	7-3
7.2	VEHICLE ELECTRONIC PROGRAMMING SYSTEM	7-5
7.2.1	SOFTWARE	7-5
7.2.2	HARDWARE	7-5

7.3	DIAGNOSTIC DATA READER	7-7
7.3.1	REQUIREMENTS	7-7
7.4	DETROIT DIESEL DIAGNOSTIC LINK	7-11
7.4.1	CALIBRATION	7-11
7.4.2	DIAGNOSTICS AND MAINTENANCE	7-11
7.5	DDEC REPROGRAMMING SYSTEM	7-13
7.5.1	REQUIREMENTS	7-13
7.5.2	DRS WELCOME SCREEN	7-13
	PROGRAM ECM	7-13
	PROGRAM FLEET ECM	7-13
	PROGRAM ECM WITH MAINFRAME DATA	7-13
	DISPLAY CUSTOMER CALIBRATION	7-13
	UPDATE CALIBRATION AT DDC	7-14
	ENGINE CONFIGURATION DATA	7-14
	UPDATE CUSTOMER CALIBRATION	7-14
	UPDATE INJECTOR CALIBRATION	7-14
	UPDATE ECM ACCUMULATORS	7-14
	DDC MAINFRAME COMMUNICATIONS	7-15
	PRINT ECM PARAMETERS	7-15
7.5.3	DRS MENU OPTIONS	7-15
	UPGRADE ECM SOFTWARE	7-15
	RESET CUSTOMER CALIBRATION	7-15
	CHANGE PASSWORDS	7-15
	RANDOM CUSTOMER PASSWORD	7-15
	RANDOM RATING PASSWORD	7-15
	RANDOM LOCKOUT PASSWORD	7-15
	DISPLAY AVAILABLE ECM S/W VERSIONS	7-15
	DISPLAY STATION LOG FILE	7-16
	DISPLAY DOWNLOADED UNITS	7-16
	COMMS SETTING	7-16
	OPTIONS	7-16
7.5.4	DDECCOMM	7-16
	DOWNLOAD ENGINE SERIAL CALIBRATION(S)	7-16
	DOWNLOAD FLEET CALIBRATION(S)	7-16
	UPLOAD HISTORY	7-16
	DISPLAY AVAILABLE ECM S/W VERSIONS	7-17
	DISPLAY STATION LOG FILE	7-17
	DISPLAY DOWNLOADED UNITS	7-17
	UPDATE LOGON PARAMETERS	7-17
7.6	DDEC ENGINE PROTECTION SIMULATION KIT	7-19
7.6.1	COOLANT LEVEL LOW SIMULATOR	7-19
7.6.2	HIGH OIL/COOLANT TEMPERATURE SIMULATOR	7-19
7.6.3	LOW OIL PRESSURE SIMULATOR	7-20
7.6.4	HIGH CRANKCASE PRESSURE SIMULATOR (SERIES 4000 ONLY)	7-20
7.7	DDEC MANUALS	7-21
8	APPLICATIONS	8-1

8.1	APPLICATION CODE SYSTEM	8-3
8.2	TYPICAL ON-HIGHWAY APPLICATION	8-11
8.3	TYPICAL INDUSTRIAL APPLICATION - ON-HIGHWAY CRANE	8-13
8.4	TYPICAL FIRE TRUCK APPLICATION	8-15
APPENDIX A: CODES		A-1
APPENDIX B: HARNESS WIRING DIAGRAMS		B-1
APPENDIX C: SYMBOLS		C-1
APPENDIX D: ACRONYMS		D-1
APPENDIX E: VENDORS		E-1
GLOSSARY		G-1
INDEX		INDEX-1

LIST OF FIGURES

Figure 3-1	The Electronic Control Module	3-5
Figure 3-2	A Typical On-highway Engine Sensor Harness — Series 60	3-9
Figure 3-3	A Typical On-highway Engine Sensor Harness — Series 50	3-10
Figure 3-4	Typical On-highway Vehicle Interface Harness	3-15
Figure 3-5	DDEC IV Internal Digital Output Circuits	3-21
Figure 3-6	DDEC IV Digital Input Circuit	3-22
Figure 3-7	OEM Connection to the Engine Sensor Harness – Series 60	3-23
Figure 3-8	VPOD Location — Series 60 Only	3-25
Figure 3-9	Power Wiring	3-27
Figure 3-10	OEM Sensor Power Harness	3-29
Figure 3-11	Fuel Shutoff Harness	3-30
Figure 3-12	OEM Sensor Ground Harness	3-31
Figure 3-13	Coil Power Harness	3-32
Figure 3-14	OEM Connection to the Engine Sensor Harness — Natural Gas Applications .	3-33
Figure 3-15	Communication Harness	3-35
Figure 3-16	Typical On-highway Injector Harness	3-37
Figure 3-17	The Electronic Unit Injector	3-38
Figure 3-18	Power Harness - Single-ECM, Dual-Fuses	3-39
Figure 3-19	Spliced Power Connector Wire	3-40
Figure 3-20	Power Harness - Single-ECM, Single-Fuse	3-41
Figure 3-21	Spliced Power Connector Wire	3-42
Figure 3-22	Main Power Supply Shutdown 12 or 24 Volt Systems	3-49
Figure 3-23	Welding Precaution	3-50
Figure 3-24	ECM Right Side, Vehicle Harness Connections	3-53
Figure 3-25	Five-Pin Power Harness Connector	3-57
Figure 3-26	Communication Harness Connector	3-58
Figure 3-27	ECM Left Side, Engine Harness Connections	3-59
Figure 3-28	Ten-pin OEM Engine Sensor Harness Interface Connector	3-63
Figure 3-29	Relative Humidity/Turbo Compressor Inlet Temperature Sensor Connector	3-64
Figure 3-30	Wiring for Nine-pin Data Link Connector	3-65
Figure 3-31	Wiring for Six-pin Data Link Connector	3-66
Figure 3-32	Seal Positioning	3-70
Figure 3-33	Terminal Installation (Shown with a Seal)	3-71
Figure 3-34	Terminal Position (Shown With a Seal)	3-71
Figure 3-35	Typical Push-to-Seat Terminal Installation	3-73
Figure 3-36	Removal Tool Procedure	3-74
Figure 3-37	Wire Inserted Through the Connector	3-75
Figure 3-38	Typical Terminal Position	3-75
Figure 3-39	Typical Terminal Installation	3-76
Figure 3-40	Installing the FCI Male Terminal	3-78
Figure 3-41	Removing the Terminal	3-79
Figure 3-42	Pressing the Locking Tang	3-80
Figure 3-43	Installing the Terminal	3-81

Figure 3-44	Removing the Terminal	3-82
Figure 3-45	Pressing the Locking Tang	3-83
Figure 3-46	Setting Wire Gage Selector and Positioning the Contact	3-85
Figure 3-47	Pushing Contact Into Grommet	3-85
Figure 3-48	Locking Terminal Into Connector	3-86
Figure 3-49	Removal Tool Position	3-86
Figure 3-50	Removal Tool Insertion	3-87
Figure 3-51	Positioning the Leads	3-88
Figure 3-52	Securing the Leads With a Clip	3-88
Figure 3-53	Recommended Strain Relief of Spliced Joint	3-89
Figure 3-54	Splicing Straight Leads - Alternate Method 1	3-91
Figure 3-55	Splicing Straight Leads - Alternate Method 2	3-93
Figure 3-56	The Correct and Incorrect Method of Staggering Multiple Splices	3-95
Figure 3-57	Air Temperature Sensor — Series 50 and Series 60	3-102
Figure 3-58	Barometric Pressure Sensor — Series 60 Only	3-102
Figure 3-59	Coolant Temperature Sensor — Series 60	3-103
Figure 3-60	Coolant Temperature Sensor — Series 50	3-103
Figure 3-61	EGR Delta Pressure Sensor — Series 50 and Series 60	3-104
Figure 3-62	EGR Temperature Sensor — Series 50 and Series 60	3-104
Figure 3-63	Fuel Restriction Sensor – Series 50 Only	3-105
Figure 3-64	Fuel Temperature Sensor — Series 60	3-106
Figure 3-65	Fuel Temperature Sensor — Series 50	3-106
Figure 3-66	Oil Level Sensor – Series 50 Only	3-107
Figure 3-67	Oil Pressure Sensor — Series 50 and Series 60	3-107
Figure 3-68	Oil Temperature Sensor - Series 60	3-108
Figure 3-69	Oil Temperature Sensor — Series 50	3-108
Figure 3-70	SRS and TRS — Series 60	3-109
Figure 3-71	SRS and TRS — Series 50	3-109
Figure 3-72	The Turbo Boost Pressure Sensor — Series 50 and Series 60	3-110
Figure 3-73	Turbo Compressor Out Temperature Sensor — Series 60	3-110
Figure 3-74	Turbo Speed Sensor — Series 50 and Series 60	3-111
Figure 3-75	Air Filter Restriction Sensor	3-113
Figure 3-76	Air Filter Restriction Sensor Wiring Diagram	3-114
Figure 3-77	Coolant Level Sensor Specifications	3-115
Figure 3-78	Coolant Level Sensor Installation	3-116
Figure 3-79	Coolant Level Sensor Location - Top of Radiator Tank	3-117
Figure 3-80	Add Coolant Level Sensor Location - Radiator Surge Tank	3-119
Figure 3-81	Add Coolant Level Sensor Installation – MAS	3-120
Figure 3-82	Optical Coolant Level Sensor Specifications	3-121
Figure 3-83	Optical Coolant Level Sensor Harness	3-122
Figure 3-84	Exhaust Temperature Sensor	3-123
Figure 3-85	Exhaust Temperature Sensor Installation	3-124
Figure 3-86	The Fire Truck Pump Pressure Sensor	3-125
Figure 3-87	Fire Truck Pump Pressure Sensor Installation	3-126
Figure 3-88	Relative Humidity/TCI Temperature Sensor Dimensions	3-127
Figure 3-89	Relative Humidity/TCI Temperature Sensor Installation for Series 60 Only	3-128

Figure 3-90	Relative Humidity/TCI Temperature Sensor Installation for Natural Gas Applications	3-129
Figure 3-91	Vehicle Speed Sensor	3-130
Figure 3-92	Magnetic Pickup Vehicle Speed Sensor Installation	3-131
Figure 3-93	Open Collector Vehicle Speed Sensor Installation	3-133
Figure 3-94	Exhaust Temperature and Pressure Sensor Harness	3-136
Figure 3-95	Typical EFPA Throttle Device (Shown with 6-pin Connector)	3-139
Figure 3-96	Check Engine Light Wiring	3-143
Figure 3-97	Stop Engine Light Wiring	3-145
Figure 3-98	OEM Installation of the Service Now Lamp	3-146
Figure 3-99	Aftermarket Installation of the Service Now Lamp	3-147
Figure 4-1	Two Methods to Activate a Digital Input	4-6
Figure 4-2	Coolant Level Switch Location	4-18
Figure 4-3	Two Methods to Use a Digital Output	4-22
Figure 4-4	Vehicle Power Shutdown	4-36
Figure 5-1	Air Compressor Control Harness	5-7
Figure 5-2	Meritor/WABCO ABS/ATC Interface	5-12
Figure 5-3	Bosch ABS/ATC Interface	5-13
Figure 5-4	Cruise Control Circuit	5-18
Figure 5-5	Typical Diagnostic Request/SEO Switch and Warning Lights	5-23
Figure 5-6	Flash Codes	5-25
Figure 5-7	Electronic Fire Commander Pump Panel Display	5-27
Figure 5-8	Electronic Fire Commander Harness	5-29
Figure 5-9	Internal Engine Brake for DDEC IV ECM	5-33
Figure 5-10	Internal Engine Brake for DDEC IV ECM World Transmission Interface	5-34
Figure 5-11	Rampdown	5-38
Figure 5-12	Engine Shutdown	5-39
Figure 5-13	Engine Overtemperature Protection and Warning Only	5-40
Figure 5-14	Engine Overtemperature Protection and Rampdown	5-41
Figure 5-15	Engine Overtemperature Protection and Shutdown	5-42
Figure 5-16	Series 60 Engine Overtemperature Protection and Rampdown	5-43
Figure 5-17	Series 60 Engine Overtemperature Protection and Shutdown	5-44
Figure 5-18	Typical SEO Switch, Diagnostic Request Switch and Warning Lights	5-45
Figure 5-19	Engine Overtemperature Protection and Shutdown Protection with Stop Engine Override	5-46
Figure 5-20	Engine Overtemperature Protection and Shutdown Protection with Continuous Override, Option 2	5-47
Figure 5-21	Simple Engine Rating Switch	5-51
Figure 5-22	Rotary Switch for Multiple Engine Ratings	5-51
Figure 5-23	DDEC Ether Start System	5-53
Figure 5-24	Series 60 Intake Manifold - Injector Nozzle Location	5-55
Figure 5-25	DDC Ether Start Harness	5-56
Figure 5-26	Fan Control Inputs with Two Digital Outputs	5-58
Figure 5-27	Fan Control Inputs with PWM Output for Variable Speed Fan Control	5-58
Figure 5-28	Fan Control Inputs and Outputs Electro Magnetic Single-Speed Digital Fans (Linnig)	5-61
Figure 5-29	Fan Control Inputs and Outputs Index Control Module	5-62

Figure 5-30	Fan Control Inputs - Normally Closed Air Solenoid Single-Speed Fan (BorgWarner®, Bendix®)	5-63
Figure 5-31	Fan Control Inputs and Outputs - Second Fan	5-65
Figure 5-32	Fan Control Inputs and Outputs - Electro Magnetic Two-Speed Fans (Linnig) .	5-68
Figure 5-33	Park Brake Digital Input	5-78
Figure 5-34	Vehicle Power Shutdown Relay	5-79
Figure 5-35	Ambient Air Temperature Override Disabled	5-80
Figure 5-36	IRIS Configuration	5-83
Figure 5-37	IRIS Transceiver	5-84
Figure 5-38	IRIS - Infrared Two-way Communication	5-85
Figure 5-39	Horizontal and Vertical Alignment is not Critical	5-86
Figure 5-40	IRIS Transceiver Dimensions	5-87
Figure 5-41	Recommended Cut Out Pattern	5-88
Figure 5-42	IRIS Dash Light	5-89
Figure 5-43	IRIS Harness	5-90
Figure 5-44	Maintenance Alert System Display (P/N: 23525655)	5-99
Figure 5-45	MAS Pigtail Connection to the Air Filter Restriction Sensor	5-104
Figure 5-46	Air Filter Restriction Sensor	5-105
Figure 5-47	Air Filter Restriction Wiring Diagram	5-106
Figure 5-48	Add Coolant Level Sensor Location - Radiator Surge Tank	5-107
Figure 5-49	Add Coolant Level Sensor Installation	5-108
Figure 5-50	Fuel Restriction Sensor Installation	5-109
Figure 5-51	Oil Level Sensor Installation	5-110
Figure 5-52	Maintenance Alert System Display Dimensions	5-111
Figure 5-53	Maintenance Alert Display Bracket	5-112
Figure 5-54	Maintenance Alert Display and Bracket	5-113
Figure 5-55	Maintenance Alert Display Bracket with Label	5-114
Figure 5-56	Maintenance Alert System Display Harness	5-115
Figure 5-57	DDEC Reports, On-highway - Idle and Drive Time	5-121
Figure 5-58	DDEC Reports, On-highway - Daily Engine Usage	5-122
Figure 5-59	DDEC Reports, On-highway - Engine Load/RPM	5-123
Figure 5-60	DDEC Reports, Nonroad - Periodic Maintenance	5-124
Figure 5-61	DDEC Reports, Nonroad - High RPM Detail	5-125
Figure 5-62	DDEC Reports, Nonroad - Diagnostic Record	5-126
Figure 5-63	ProDriver DC	5-128
Figure 5-64	ProDriver DC Flush Mount	5-130
Figure 5-65	ProDriver DC Flush Mount Mounting Bracket	5-131
Figure 5-66	ProDriver DC Flush Mount Display Template	5-132
Figure 5-67	ProDriver DC Surface Mount	5-133
Figure 5-68	ProDriver DC Surface Mount Bracket	5-134
Figure 5-69	ProDriver DC Vehicle Harness	5-135
Figure 5-70	ProDriver DC Jumper Harness	5-136
Figure 5-71	Optimized Idle System Overview — October 2002 and Later	5-141
Figure 5-72	Pressure Sensor Governor System - Vehicle Interface Harness Connector	5-155
Figure 5-73	Progressive Shift Chart - Represents Default	5-160
Figure 5-74	Progressive Shift Corrects Problem with High and Low Gears Modified	5-162
Figure 5-75	Tachometer Drive Installation	5-165

Figure 5-76	Tachometer Output Signal	5-166
Figure 5-77	VSG or LSG Only Operation Using VSG Inhibit	5-168
Figure 5-78	Electronic Foot Pedal Assembly Installation	5-169
Figure 5-79	LSG Dual Electronic Foot Pedal Assembly Throttle	5-170
Figure 5-80	Hand Throttle Installation	5-175
Figure 5-81	Voltage Divider	5-177
Figure 5-82	Throttle Count Profile	5-178
Figure 5-83	Dual Hand Throttle	5-181
Figure 5-84	Frequency Input Diagram	5-182
Figure 5-85	Frequency Input Diagram Using Aux Timed Input	5-183
Figure 5-86	PWM Output - 10% Duty Cycle	5-186
Figure 5-87	PWM Output - 50% Duty Cycle	5-186
Figure 5-88	PWM Output - 90% Duty Cycle	5-187
Figure 5-89	Throttle Interface Module, Allison Transmission	5-188
Figure 5-90	Maximum Feature Throttle Interface Module, Allison Transmission	5-189
Figure 5-91	Allison Automatic Transmission Open Collector Speed Sensor	5-190
Figure 5-92	DDEC IV to GE Propulsion System Controller	5-190
Figure 5-93	DDEC IV to ZF Ecomat Transmission	5-191
Figure 5-94	DDEC IV to Voith Transmission	5-191
Figure 5-95	DDEC IV to Allison Hydraulic Transmission)	5-192
Figure 5-96	DDEC IV to Allison WT-Series Transmission	5-195
Figure 5-97	Allison Automatic Transmission Open Collector Speed Sensor	5-196
Figure 5-98	DDEC IV to CEEMAT Transmission	5-197
Figure 5-99	Top2 Transmission	5-199
Figure 6-1	Communication Harness	6-45
Figure 7-1	Flash Codes	7-3
Figure 7-2	Pro-Link Plus/Diagnostic Data Reader Components	7-8

LIST OF TABLES

Table 2-1	The Correct Type of Fire Extinguisher	2-5
Table 3-1	OEM-supplied Hardware	3-3
Table 3-2	Minimum DDC Supplied Hardware	3-3
Table 3-3	ECM Part Numbers for DDEC IV	3-6
Table 3-4	ECM Connectors	3-6
Table 3-5	Typical ESH-to-ECM Connector Pin Definitions — Series 60	3-11
Table 3-6	30-pin ESH-to-ECM Connector	3-11
Table 3-7	Typical ESH-to-ECM Connector Pin Definitions — Natural Gas Applications ...	3-12
Table 3-8	Typical ESH-to-ECM Connector Pin Definitions — Series 50	3-13
Table 3-9	Typical VIH-to-ECM Connector Pin Definitions — Truck/Coach Applications ...	3-16
Table 3-10	30-pin VIH-to-ECM Connector	3-16
Table 3-11	Typical VIH-to-ECM Connector Pin Definitions — Urban Bus Applications	3-17
Table 3-12	Typical VIH-to-ECM Connector Pin Definitions — Natural Gas Applications	3-18
Table 3-13	Fuse Holder Part Numbers	3-22
Table 3-14	VPOD Operating Characteristics	3-25
Table 3-15	Wires Requiring Dedicated Power and Ground	3-26
Table 3-16	Power Harness Length Criteria for Dual Fuse Installations	3-40
Table 3-17	Power Harness Length Criteria for Single Fuse Installations	3-42
Table 3-18	Wire Characteristics	3-43
Table 3-19	Fuse Holder Part Numbers	3-44
Table 3-20	Power Harness Connector Assembly	3-44
Table 3-21	Operating Voltage	3-47
Table 3-22	Average Battery Drain Current for Single ECM Configurations	3-48
Table 3-23	Average Battery Drain Current for the Series 60	3-48
Table 3-24	Fuse Current and Blow Time	3-52
Table 3-25	Fuse Temperature and Current	3-52
Table 3-26	Wire Comb Part Numbers	3-53
Table 3-27	Typical VIH-to-ECM Connector Pin Definitions — Truck/Coach Applications ...	3-54
Table 3-28	30-pin VIH-to-ECM Connector	3-54
Table 3-29	Typical VIH-to-ECM Connector Pin Definitions — Urban Bus Applications	3-55
Table 3-30	Typical VIH-to-ECM Connector Pin Definitions — Natural Gas Applications	3-56
Table 3-31	Five-pin Power Harness Connector Part Numbers	3-57
Table 3-32	Communication Harness Connector Part Numbers	3-58
Table 3-33	Typical ESH-to-ECM Connector Pin Definitions — Series 60	3-60
Table 3-34	30-pin ESH-to-ECM Connector	3-60
Table 3-35	Typical ESH-to-ECM Connector Pin Definitions — Series 50	3-61
Table 3-36	Typical ESH-to-ECM Connector Pin Definitions — Natural Gas Applications ...	3-62
Table 3-37	Required Components to Incorporate an SAE J1939/J1587 Data Link in the VIH	3-65
Table 3-38	Required Components to Incorporate an SAE J1939/J1587 Data Link in the VIH	3-66
Table 3-39	Power Harness Wire Characteristics	3-69
Table 3-40	Crimp and Removal Tools	3-69

Table 3-41	Applied Load Criteria for the Terminal	3-72
Table 3-42	Applied Load Criteria for the Terminal	3-76
Table 3-43	Removal Tools for Deutsch Terminals	3-86
Table 3-44	Recommended Splicing Tools	3-87
Table 3-45	Applied Load Criteria for Terminals	3-89
Table 3-46	Recommended Splicing Tools	3-89
Table 3-47	Applied Load Criteria for Terminals	3-90
Table 3-48	Recommended Splicing Tools	3-92
Table 3-49	Sensor Types	3-101
Table 3-50	Function of Factory-installed Sensors	3-101
Table 3-51	Function and Guidelines for OEM-installed Sensors	3-112
Table 3-52	Metri-Pack 280 Connectors and Part Numbers	3-116
Table 3-53	CLS Installation Kit 1/4 in. NPTF P/N: 23515397	3-118
Table 3-54	CLS Installation Kit 3/8 in. NPTF P/N: 23515398	3-118
Table 3-55	Optical Coolant Level Sensor and Parts	3-122
Table 3-56	Exhaust Temperature Sensor and Harness Kits	3-123
Table 3-57	Fire Truck Pump Pressure Sensor Connector	3-125
Table 3-58	Vehicle Speed Sensor Parameters	3-130
Table 3-59	Magnetic Pickup Vehicle Speed Sensor Requirements	3-131
Table 3-60	Open Collector Vehicle Speed Sensor Requirements	3-133
Table 3-61	Vehicle Mileage Parameters	3-134
Table 3-62	Exhaust Back Pressure Sensor Kit with 589 cm/232 in. Harness, P/N: 23531230	3-137
Table 3-63	Exhaust Back Pressure Sensor Kit with 432 cm/170 in. Length Harness, P/N: 23531231	3-138
Table 3-64	Exhaust Back Pressure Sensor Kit with 254 cm/100 in. Length Harness P/N: 23531232	3-138
Table 3-65	Connectors for the Throttle Position Sensor	3-140
Table 4-1	Digital Inputs Listed by Feature	4-5
Table 4-2	Cruise Control Digital Inputs	4-8
Table 4-3	Engine Brake Digital Inputs	4-10
Table 4-4	Engine Protection Digital Inputs	4-12
Table 4-5	Auxiliary Shutdown Flash Codes	4-12
Table 4-6	Rating Switches	4-13
Table 4-7	Fan Control Digital Inputs	4-14
Table 4-8	Fan On-time Parameter	4-14
Table 4-9	Pressure Sensor Governor Digital Inputs	4-16
Table 4-10	Throttle Control Digital Inputs	4-18
Table 4-11	Additional Functions Digital Inputs	4-20
Table 4-12	Digital Outputs	4-21
Table 5-1	Engine Operation with Air Compressor Controls	5-5
Table 5-2	Air Compressor Control Required Digital Inputs and Outputs	5-8
Table 5-3	Air Compressor Control Parameters	5-8
Table 5-4	Multiple Pressure Ratings Required Digital Inputs	5-8
Table 5-5	Variable Speed Governor Maximum and Minimum RPM	5-9
Table 5-6	Air Compressor Parameters	5-9
Table 5-7	Cruise Control Related Digital Input and Output Signals	5-19

Table 5-8	Smart Cruise Parameter	5-19
Table 5-9	Cruise Control Parameters	5-20
Table 5-10	Electronic Fire Commander and Pressure Sensor	5-28
Table 5-11	Electronic Fire Commander Kit	5-28
Table 5-12	Required Digital Inputs for EFC	5-30
Table 5-13	Required Digital Outputs for EFC	5-30
Table 5-14	Required Digital Inputs for Engine Brake Controls	5-35
Table 5-15	Cruise Control Engine Brake Parameters	5-35
Table 5-16	Optional Digital Output for Engine Brakes	5-35
Table 5-17	Optional Fan Braking for Engine Brakes	5-36
Table 5-18	Service Brake Control of Engine Brakes Parameter	5-36
Table 5-19	Minimum MPH for Engine Brakes Option	5-36
Table 5-20	Engine Protection	5-48
Table 5-21	Examples of Engine Ratings	5-49
Table 5-22	Rating Selections with One Rating Switch	5-49
Table 5-23	Rating Selections with Two Rating Switches	5-50
Table 5-24	Rating Switches Digital Input Requirements	5-52
Table 5-25	Limiting Torque Curve Option Digital Input Requirements	5-52
Table 5-26	Single Fan Digital Inputs and Outputs	5-60
Table 5-27	Dual Fans Digital Inputs and Outputs	5-65
Table 5-28	Two-speed Fan Digital Inputs and Outputs	5-67
Table 5-29	PWM Outputs and Specifications	5-69
Table 5-30	PWM Fan Control Digital Inputs and Outputs	5-70
Table 5-31	Fan Control Digital Input and Outputs - Single and Dual Speed Fans	5-70
Table 5-32	Fan Control Digital Input and Outputs - Variable Speed Fans	5-70
Table 5-33	Fan Timer Parameter	5-71
Table 5-34	Fuel Economy Limits	5-73
Table 5-35	Fuel Economy Incentive Parameters	5-74
Table 5-36	Conditions for HEI	5-75
Table 5-37	Idle Shutdown Timer Digital Input	5-81
Table 5-38	Idle Shutdown Timer Programming Options	5-81
Table 5-39	IRIS Hardware	5-91
Table 5-40	IRIS Base Adapter Kit	5-92
Table 5-41	IRIS PC Extraction Kit	5-92
Table 5-42	IRIS RDI Extraction Kit	5-93
Table 5-43	IRIS Mobile Service Kit, 12 V	5-93
Table 5-44	IRIS Mobile Retrofit Kit, 12 V	5-93
Table 5-45	Transmission Ratios	5-95
Table 5-46	Low Gear Torque Limiting Parameters	5-95
Table 5-47	Factory Set Defaults for CEL and SEL	5-98
Table 5-48	Active Faults Displayed by ProDriver DC Without Description	5-99
Table 5-49	Maintenance Alert System Display Light Status	5-100
Table 5-50	DDR Maintenance Status Menu List of MAS Parameters	5-101
Table 5-51	DDR Main Data List MAS Parameters	5-101
Table 5-52	Maintenance Codes that Can Be Cleared by the DDR	5-102
Table 5-53	DDDL Maintenance Alert Menu List of MAS Parameters	5-102
Table 5-54	DDDL Instrumentation Menu List of MAS Parameters	5-103

Table 5-55	MAS Maintenance Codes DDDL Can Clear Under the Maintenance Alert Menu	5-103
Table 5-56	DDR Options	5-116
Table 5-57	Maintenance Alert System Codes	5-116
Table 5-58	On-highway Reports Available from DDEC Reports	5-119
Table 5-59	Nonroad Reports Available from DDEC Reports	5-120
Table 5-60	Data Card Functions	5-128
Table 5-61	ProDriver DC Flush Mount Kit P/N: 23525759	5-137
Table 5-62	ProDriver DC Flush Mount Kit P/N: 23525753	5-137
Table 5-63	ProDriver DC Surface Mount Kit P/N: 23525760	5-137
Table 5-64	ProDriver DC Surface Mount Kit P/N: 23525754	5-138
Table 5-65	Other ProDriver DC Parts	5-138
Table 5-66	Optimized Idle Digital Inputs and Digital Outputs	5-142
Table 5-67	Idle Shutdown Timer Parameters	5-142
Table 5-68	Engine Protection Parameters	5-143
Table 5-69	PasSmart Limits	5-146
Table 5-70	PasSmart Parameters	5-147
Table 5-71	Features and Parameters Selected for Additional Password Protection	5-150
Table 5-72	Features and Parameters Selected for Additional Password Protection (Continued)	5-151
Table 5-73	Group Lockout Parameters	5-152
Table 5-74	Increase and Decrease for RPM and Pressure Mode	5-154
Table 5-75	Required Digital Inputs for PSG	5-156
Table 5-76	Required Digital Outputs for PSG	5-156
Table 5-77	PSG Parameters and Defaults	5-156
Table 5-78	VSS Parameters	5-163
Table 5-79	Progressive Shift Programming	5-164
Table 5-80	Tachometer Drive Signal Output Characteristics	5-166
Table 5-81	Predetermined LSG % Throttle	5-167
Table 5-82	LSG Dual Throttle Control Digital Input	5-171
Table 5-83	VSG Options	5-172
Table 5-84	Cruise Switch VSG Digital Inputs	5-173
Table 5-85	Cruise Switch VSG Programming	5-174
Table 5-86	Alternate Minimum VSG Programming	5-176
Table 5-87	Precision Resistor Values (+/-1%; 1/4 Watt Minimum)	5-179
Table 5-88	Dual VSG Throttle Control Digital Inputs	5-182
Table 5-89	Transmissions Communicating with PWM1	5-187
Table 5-90	Transmission Types	5-193
Table 5-91	VSS Information for Various Transmissions	5-194
Table 5-92	Transmissions Communicating with the Data Links	5-194
Table 5-93	Transmission Types	5-197
Table 5-94	Transmissions Communicating with Digital Inputs and Digital Outputs	5-198
Table 5-95	Digital Outputs Used by Top2	5-199
Table 5-96	Top2 Transmission Types	5-199
Table 5-97	Top2 Reprogramming Choices	5-200
Table 5-98	Transmission Retarder Digital Outputs	5-201
Table 5-99	Vehicle Speed Limiting Parameters	5-203

Table 5-100	VSS Anti-tamper Parameters	5-205
Table 6-1	Identifiers Used by DDEC	6-5
Table 6-2	Message Priority Assignments	6-6
Table 6-3	SAE J1587 PIDs Provided by DDEC IV	6-6
Table 6-4	SAE J1587 PIDs Provided by DDEC IV (continued)	6-7
Table 6-5	SAE J1922 MIDs Supported by DDEC	6-37
Table 7-1	VEPS Hardware	7-5
Table 7-2	VEPS Cable Kit	7-5
Table 7-3	VEPS Translator and Cable Kit	7-6
Table 7-4	VEPS Software Kit	7-6
Table 7-5	Diagnostic Data Reader/Pro-Link® Components and Part Numbers	7-7
Table 7-6	DDR/Pro-Link® Printers and Power Supply	7-8
Table 7-7	Parameters that can be Updated with the Update Customer Calibration Option	7-14
Table 7-8	DDEC Engine Protection Simulation Kit, P/N: 23526923	7-19
Table 8-1	Transmission Options and Codes	8-7
Table 8-2	Digital Input Options and Codes	8-8
Table 8-3	Digital Output Options and Codes	8-9

1 INTRODUCTION

The Detroit Diesel Electronic Control System (DDEC®) is an advanced electronic fuel injection and control system that can be integrated into many applications. DDEC provides the customer value throughout the life of the unit and at time of resale.

DDEC IV provides three industry standard serial data links: SAE Standards J1587, J1922, and J1939. SAE Standard J1587 provides two way communications for the diagnostic equipment and vehicle displays. SAE Standards J1922 and J1939 provide control data to other vehicle systems such as transmissions and traction control devices.

This manual supports on-highway DDEC IV equipped engines built after October 2002.

FEATURES

DDEC IV offers significant operating advantages over traditional mechanically governed engines. The following features can be tailored to achieve specific customer preferences:

- ☐ Cruise Control operation
- ☐ Vehicle speed limit control
- ☐ Variable speed governing
- ☐ Fast Idle operation
- ☐ Idle Shutdown control
- ☐ Crank and throttle inhibiting
- ☐ Device controlling power take-off (PTO) is both in-cab and remotely operable
- ☐ Application specific safety features, such as door interlock
- ☐ Application specific control features
- ☐ A customer security/reprogramming password
- ☐ Fan control

ADVANTAGES

DDEC IV offers significant operating advantages over traditional mechanically governed engines offering end users:

- ☐ State-of-the-art fuel management and economy, including compensation for changing environmental conditions and user preferences
- ☐ EPA and CARB smoke and emissions compliance (nonroad and on-highway applications)
- ☐ Total system integration including the availability of SAE Standards J1587, J1922, and J1939 data links
- ☐ Application specific features to meet customer needs
- ☐ Multi-level password protected security and reprogramming flexibility
- ☐ Proven reliability and durability that customers demand
- ☐ Easily accessible components, reducing maintenance time and simplifying troubleshooting
- ☐ Integrated engine protection features with lights for visual awareness
- ☐ Easily retrievable historical fault codes for diagnostic capability
- ☐ Operating statistics are tracked, fuel consumed, miles traveled (hours used), ... for accurate unit and fleet management

TYPICAL INSTALLATION

A typical installation includes:

- ☐ A fused ignition wire to the ECM
- ☐ A Power Harness that supplies 12/24V to the ECM.
- ☐ An Engine Sensor Harness from the engine-mounted sensors to the ECM and to the injector solenoids
- ☐ An OEM supplied Vehicle Interface Harness (VIH) from the remaining sensors, switches, throttle device, and other components attached to the SAE 1587 Data Link back to the ECM
- ☐ A Communication Harness that connects the ECM's J1922 and J1939 ports to other vehicle systems such as traction control devices and transmissions
- ☐ Display devices (lights, tachometer, etc.)


APPLICATION FLEXIBILITY

DDEC IV can be tailored to operate and/or interact with various systems, drivelines, and driven devices including:

- ☐ Manual, automatic, and electronically controlled transmissions
- ☐ Electronically controlled transmission retarders and other engine retarders
- ☐ Various types of single or dual throttle devices like foot- and hand-actuated, in-cab and remote controlled devices
- ☐ PTOs
- ☐ A Pressure Sensor Governor
- ☐ Air compressors
- ☐ Anti-lock brakes and automatic traction control
- ☐ Electronic speedometers, tachometers, and instruments and displays, such as the Electronic Display Module, ProDriver® and Electronic Fire Commander®

DIAGNOSTICS AND TOOLS


Diagnostic and other fleet management tools offer additional flexibility and convenience. Pressing a panel-mounted Data Request Button retrieves active and inactive (historic) codes.

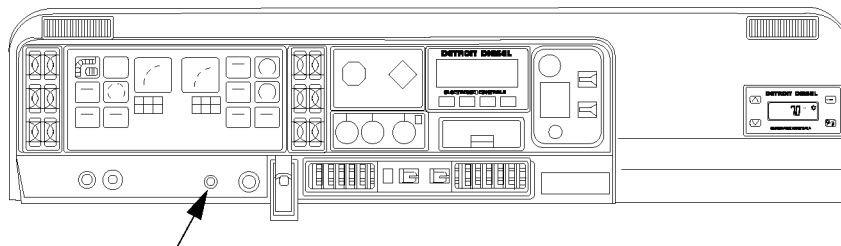


Diagnostic Request Switch

41079

A hand-held Diagnostic Data Reader (DDR) obtains the same codes, performs self-checks, collects snapshot data, and reprograms certain features.

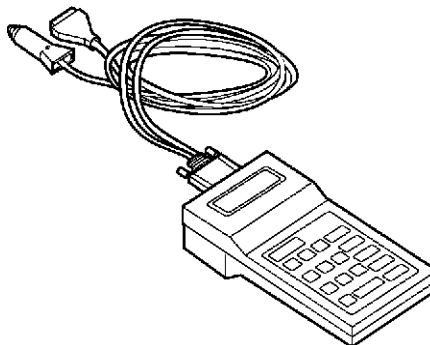


The Detroit Diesel Diagnostic Link™ (DDDL) is a sophisticated software package supporting the set up, maintenance and repair of engines using DDEC. Used as a diagnostic tool DDDL can be used to change the engine rating, view an audit trail of ECM and injector calibration change, monitor fault codes as they occur, snap shot recording, and set the ECM output functions to particular values to support troubleshooting.

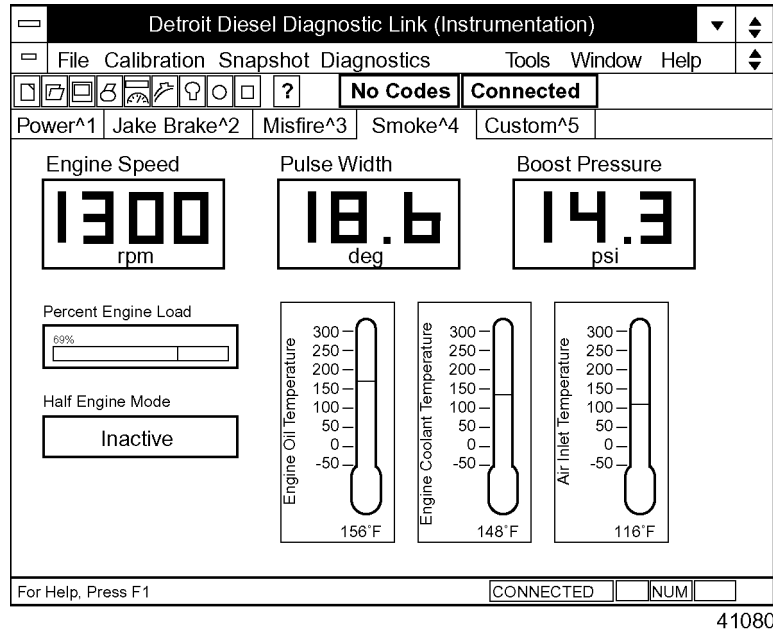


ELECTRONIC DISPLAYS

DDEC IV SAE J1587 Data Link is used to transmit and display sensor and engine data to other vehicle modules including electronic dashboard displays.


A panel-mounted ProDriver DC display shows operational data such as instantaneous fuel economy and idle time.

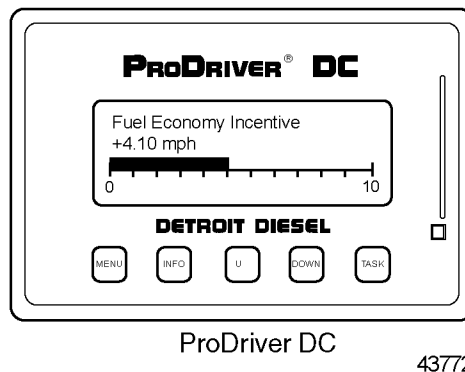

Electronic Display Module (EDM) is an electronic display system which displays engine and equipment parameters. Electronic Fire Commander (EFC) is a complete pressure governor control unit which displays engine speed, battery voltage, engine oil pressure, and either engine oil temperature or engine coolant temperature (programmable).

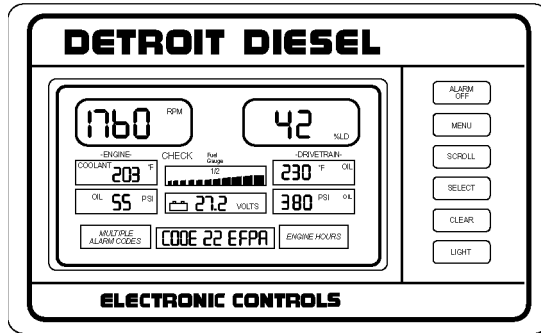

ELECTRONIC DISPLAY MODULE

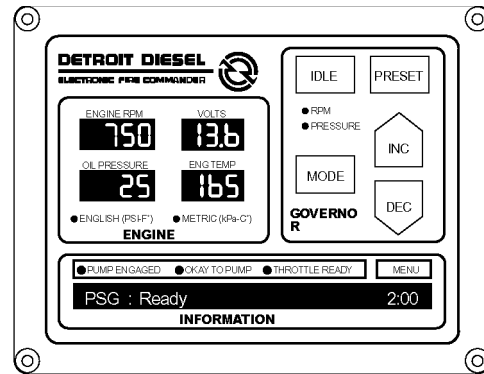

ELECTRONIC FIRE COMMANDER

41082

Optimized Idle[®] automatically stops and restarts the engine to keep the engine oil temperature between factory set limits, keep the battery charged, and keep the vehicle interior at the desired temperature (using the optional thermostat). Engine idle time is reduced, there is an overall reduction in exhaust emissions and noise, and improved starter and engine life. The system also reduces dead batteries due to electrical loads, such as refrigerators or satellite systems.



41624

THE BASICS

The ECM can be considered the most important component of the DDEC system, as it controls the engine operation and acts as an interface with the other subsystems and devices, via the SAE J1587, J1922, or J1939 data links.

In these roles, the ECM adjusts engine speed and torque by transmitting output signals to the electronic unit injectors or electronic unit pumps via the Injector Harness and interacts with the other subsystems by:

- ☐ Monitoring system status
- ☐ Transmitting engine status
- ☐ Receiving sensor input
- ☐ Receiving system requests

The ECM adjusts engine speed and torque after:

- ☐ Receiving input signals, diagnostic information, and requests from sensors and other subsystems and devices
- ☐ Conditioning input signals
- ☐ Performing calculations
- ☐ Determining output signals necessary to achieve operating goals

The ECM also monitors and reacts to various situations as detailed below:

- ☐ Certain ambient conditions can result in fuel rate and timing adjustments to control smoke during starting
- ☐ Certain barometric conditions can result in fuel rate and timing adjustments to compensate for altitude
- ☐ Certain oil temperatures require changes to compensate for differences in oil viscosity, reducing fuel injection variation
- ☐ Engine speed and cranking time is monitored to determine if crank inhibiting is necessary
- ☐ Vehicle speed is monitored and compared to user settings and instantaneous preferences specified by input switches to meet cruise control requirements
- ☐ Requirements for driven devices like PTOs, air compressors, and pumps are monitored and compared to user settings, monitored conditions, and instantaneous preferences specified by input switches to achieve in-cab or remotely controlled PTO operation requirements

The ECM also:

- ☐ Performs self-checks and retains fault codes within its memory
- ☐ Monitors operating conditions and either signals the user with a light or cuts back fuel in an attempt to control overtemperature and abnormal pressure conditions for engine protection
- ☐ Monitors operations to signal the user of an impending service interval
- ☐ Broadcasts operational and diagnostic information over the data link

2 SAFETY PRECAUTIONS

The following safety measures are essential when installing DDEC IV in a vehicle equipped with a Detroit Diesel engine.

 WARNING: PERSONAL INJURY
Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm. ☐ Always start and operate an engine in a well ventilated area. ☐ If operating an engine in an enclosed area, vent the exhaust to the outside. ☐ Do not modify or tamper with the exhaust system or emission control system.

2.1 STANDS

Use safety stands in conjunction with hydraulic jacks or hoists. Do not rely on either the jack or the hoist to carry the load.

2.2 GLASSES

Select appropriate safety glasses for the job. Safety glasses *must* be worn when using tools such as hammers, chisels, pullers and punches.

2.3 WELDING

Consider the consequences of welding.

NOTICE:
When welding, the following must be done to avoid damage to the electronic controls or the engine:
☐ Both the positive (+) and negative (-) battery leads must be disconnected before welding.
☐ Ground cable must be in close proximity to welding location - engine must never be used as a grounding point.
☐ Welding on the engine or engine mounted components is NEVER recommended.

Wear welding goggles and gloves when welding or using an acetylene torch.

 WARNING:
FIRE
To avoid injury from fire, check for fuel or oil leaks before welding or carrying an open flame near the engine.

Insure that a metal shield separates the acetylene and oxygen which must be chained to a cart.

2.4 WORK PLACE

Organize your work area and keep it clean.

 WARNING:
PERSONAL INJURY
To avoid injury from slipping and falling, immediately clean up any spilled liquids.

Eliminate the possibility of a fall by:

- ☐ Wiping up oil spills
- ☐ Keeping tools and parts off the floor

A fall could result in a serious injury.

After installation of the engine is complete:

 WARNING:
PERSONAL INJURY
To avoid injury from rotating belts and fans, do not remove and discard safety guards.

- ☐ Reinstall all safety devices, guards or shields
- ☐ Check to be sure that all tools and equipment used to install the engine are removed from the engine

2.5 CLOTHING

Wear work clothing that fits and is in good repair. Work shoes must be sturdy and rough-soled. Bare feet, sandals or sneakers are not acceptable foot wear when installing an engine.

 WARNING:
PERSONAL INJURY
To avoid injury when working near or on an operating engine, remove loose items of clothing and jewelry. Tie back or contain long hair that could be caught in any moving part causing injury.

2.6 ELECTRIC TOOLS

Improper use of electrical equipment can cause severe injury.

 WARNING:
ELECTRICAL SHOCK
To avoid injury from electrical shock, follow OEM furnished operating instructions prior to usage.

Check power tools before using.

2.7 AIR

Use proper shielding to protect everyone in the work area.

 WARNING: EYE INJURY
To avoid injury from flying debris when using compressed air, wear adequate eye protection (face shield or safety goggles) and do not exceed 40 psi (276 kPa) air pressure.

2.8 FLUIDS AND PRESSURE

Be extremely careful when dealing with fluids under pressure.

 WARNING: HOT COOLANT
To avoid scalding from the expulsion of hot coolant, never remove the cooling system pressure cap while the engine is at operating temperature. Wear adequate protective clothing (face shield, rubber gloves, apron, and boots). Remove the cap slowly to relieve pressure.

Fluids under pressure can have enough force to penetrate the skin.

 WARNING: PERSONAL INJURY
To avoid injury from penetrating fluids, do not put your hands in front of fluid under pressure. Fluids under pressure can penetrate skin and clothing.

These fluids can infect a minor cut or opening in the skin. See a doctor at once, if injured by escaping fluid. Serious infection or reaction can result without immediate medical treatment.

2.9 BATTERIES

Electrical storage batteries give off highly flammable hydrogen gas when charging and continue to do so for some time after receiving a steady charge.



WARNING:

Battery Explosion and Acid Burn

To avoid injury from battery explosion or contact with battery acid, work in a well ventilated area, wear protective clothing, and avoid sparks or flames near the battery. If you come in contact with battery acid:

- ☐ **Flush your skin with water.**
- ☐ **Apply baking soda or lime to help neutralize the acid.**
- ☐ **Flush your eyes with water.**
- ☐ **Get medical attention immediately.**

Always disconnect the battery cable before working on the Detroit Diesel Electronic Controls system.

2.10 FIRE

Keep a charged fire extinguisher within reach. Be sure you have the correct type of extinguisher for the situation. The correct fire extinguisher types for specific working environments are listed in Table 2-1.

Fire Extinguisher	Work Environment
Type A	Wood, Paper, Textile and Rubbish
Type B	Flammable Liquids
Type C	Electrical Equipment

Table 2-1 The Correct Type of Fire Extinguisher

2.11 DIAGNOSTIC DATA READER

For mobile applications, the Diagnostic Data Reader (DDR) must be used by personnel other than the vehicle operator.

 WARNING: PERSONAL INJURY
To avoid injury from loss of vehicle/vessel control, the operator of a DDEC equipped engine must not use or read any diagnostic tool while the vehicle/vessel is moving.

The vehicle operator must maintain control of the vehicle while an assistant performs the diagnostic evaluations.

2.12 DETROIT DIESEL DIAGNOSTIC LINK

For mobile applications, Detroit Diesel Diagnostic Link (DDDL) must be used by personnel other than the vehicle operator.

 WARNING: PERSONAL INJURY
To avoid injury from loss of vehicle/vessel control, the operator of a DDEC equipped engine must not use or read any diagnostic tool while the vehicle/vessel is moving.

The vehicle operator must maintain control of the vehicle while an assistant performs the diagnostic evaluations.

2.13 PAINT

NOTICE:
Do not apply paint to the ECM or EFC. The application of paint may affect the performance of the ECM and EFC.

Mask off the ECM and EFC, prior to applying any paint.

2.14 FLUROELASTOMER (VITON)

Fluroelastomer (Viton) parts such as O-rings and seals are perfectly safe to handle under normal design conditions.



WARNING:

CHEMICAL BURNS

To avoid injury from chemical burns, wear a face shield and neoprene or PVC gloves when handling fluroelastomer O-rings or seals that have been degraded by excessive heat. Discard gloves after handling degraded fluroelastomer parts.

A potential hazard may occur if these components are raised to a temperature above 600°F (316°C) (in a fire for example). Fluroelastomer will decompose (indicated by charring or the appearance of a black, sticky mass) and produce hydrofluoric acid. This acid is extremely corrosive and, if touched by bare skin, may cause severe burns (the symptoms could be delayed for several hours).

2.15 OPTIMIZED IDLE

Optimized Idle enhances the DDEC Idle Shutdown feature. Optimized Idle will automatically stop and restart the engine when required in order to keep the engine temperature above 60°F, the battery charged, and/or the vehicle interior at the desired temperature.



CAUTION:

UNEXPECTED ENGINE START

To avoid injury from an unexpected startup of an engine equipped with the Optimized Idle system, remove the starter relay from the relay holder.

3 HARDWARE AND WIRING

Section	Page
3.1 SUPPLIED HARDWARE	3-3
3.2 ELECTRONIC CONTROL MODULE	3-5
3.3 ENGINE SENSOR HARNESS	3-9
3.4 VEHICLE INTERFACE HARNESS	3-15
3.5 COMMUNICATION HARNESS	3-35
3.6 INJECTOR HARNESS	3-37
3.7 POWER HARNESS	3-39
3.8 POWER SUPPLY	3-47
3.9 FUSES	3-51
3.10 CONNECTORS	3-53
3.11 WIRES AND WIRING	3-67
3.12 CONDUIT AND LOOM	3-97
3.13 TAPE AND TAPING	3-99
3.14 SENSORS	3-101
3.15 THROTTLE DEVICES	3-139
3.16 LIGHTS	3-141

THIS PAGE INTENTIONALLY LEFT BLANK

3.1 SUPPLIED HARDWARE

Hardware supplied by the Original Equipment Manufacturer (OEM) and DDC is required to install DDEC IV. The following sections list the minimum hardware required.

3.1.1 OEM-SUPPLIED HARDWARE

The minimum OEM-supplied hardware required is listed in Table 3-1.

Hardware	Description
Ignition Switch (refer to section 3.4.3)	Switched 12/24 volt ignition source
Vehicle Interface Harness (VIH) (refer to section 3.4)	Connects the vehicle functions to the ECM.
Communication Harness (refer to section 3.5)	Connects the ECM's SAE J1922 Data Link and SAE J1939 Data Link to other vehicle systems.
Power Harness (refer to section 3.7)	Connects battery power (12/24 volts) and ground to the ECM and includes fuse(s) or circuit breaker(s).
Power to EGR and VNT Systems (refer to section 3.4.5)	Connects ignition power and battery ground to the EGR and VNT.
Diagnostic Connector (refer to section 3.10.4)	Cab-mounted diagnostic connector
Throttle Input Device (refer to section 3.15)	An electronic foot pedal assembly (EFPA), hand throttle, or alternative throttle device
Coolant Level Sensor (CLS) (refer to section 3.14.18)	A radiator top tank or remote surge tank mounted sensor
Check Engine Light (CEL) (refer to section 3.16.1)	A panel mounted yellow indicator light.
Stop Engine Light (SEL) (refer to section 3.16.2)	A panel mounted red indicator light.

Table 3-1 OEM-supplied Hardware

3.1.2 DDC-SUPPLIED HARDWARE

The minimum DDC-supplied hardware required is listed in Table 3-2.

Hardware	Description
Engine Sensor Harness (refer to section 3.3)	Factory installed harness that facilitates the receipt of input and output signal, controlling the fuel injection process and engine speed.
Injector Harness (refer to section 3.6)	Factory installed harness that is connected to the injectors and the ECM.
Engine Sensors (refer to section 3.14.1)	Various engine mounted sensors for engine control.
Electronic Control Module (ECM) (refer to section 3.2)	Engine mounted ECM provides control logic to provide overall engine management.
Relative Humidity/Turbo Compressor Inlet (TCI) Temperature Sensor (refer to section 3.14.23)	Sensor to measure turbo compressor inlet temperature and relative humidity. Must be installed by OEM.

Table 3-2 Minimum DDC Supplied Hardware

THIS PAGE INTENTIONALLY LEFT BLANK

3.2 ELECTRONIC CONTROL MODULE

The engine-mounted ECM includes control logic to provide overall engine management. The ECM continuously performs self diagnostic checks and monitors other system components. System diagnostic checks are made at ignition-on and continue throughout all engine operating modes. See Figure 3-1.

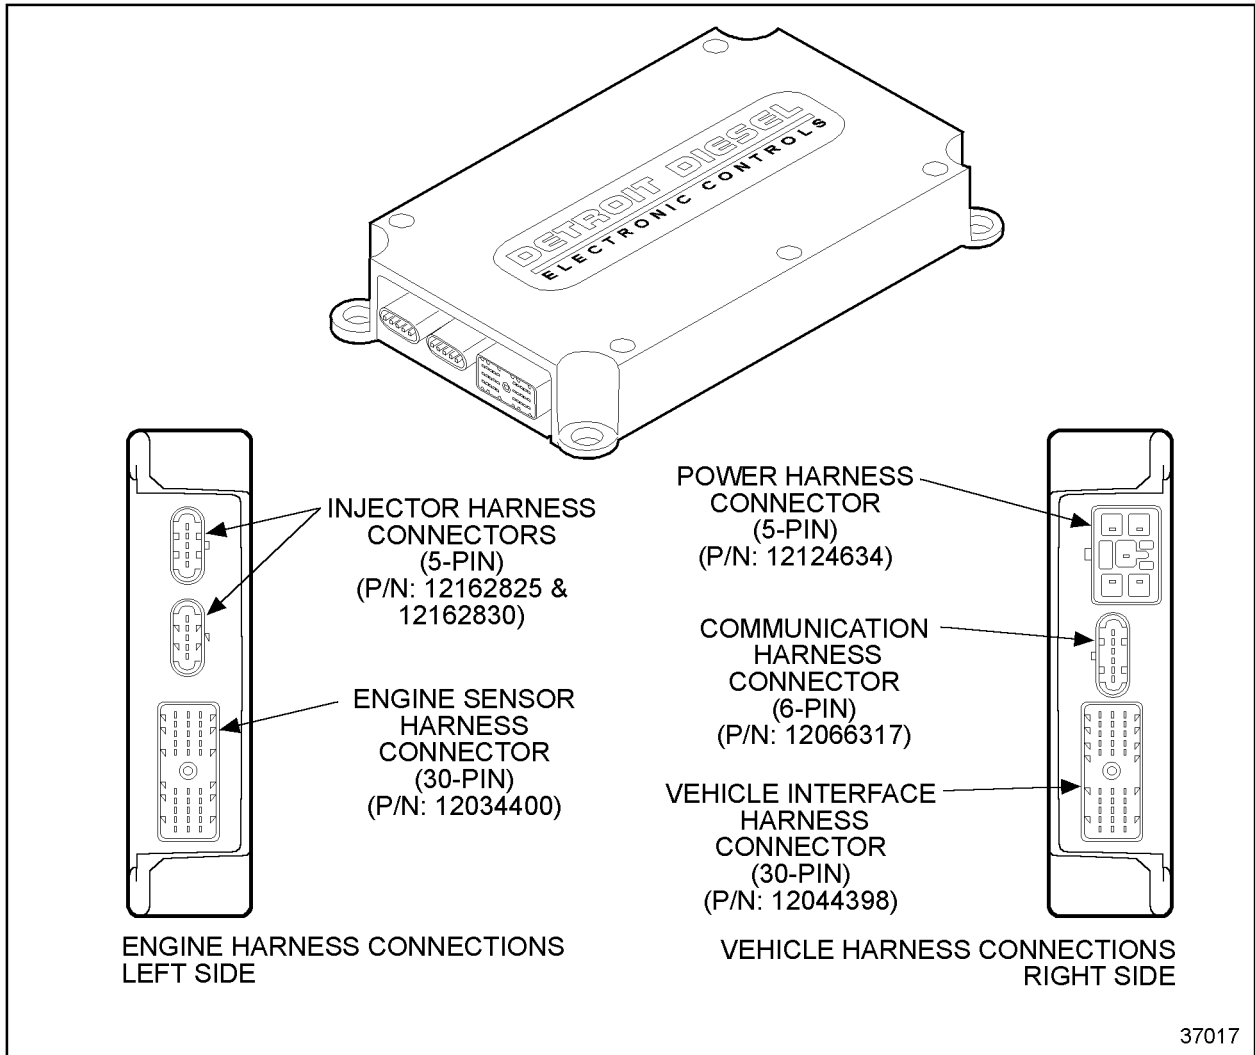


Figure 3-1 The Electronic Control Module

The ECM contains an Electronically Erasable Programmable Read Only Memory (EEPROM). The EEPROM controls the basic engine functions, such as rated speed and power, timing of fuel injection, engine governing, torque shaping, cold start logic, transient fuel delivery, diagnostics, and engine protection. The control logic determines duration and timing of fueling, which results in precise fuel delivery and improved fuel economy.

3.2.1 ECM PART NUMBERS

Part numbers for DDEC IV ECMs are listed in Table 3-3.

Part Number	Description	Voltage	No. of Cylinders
23519307	DDEC IV - Standard On-highway ECM	12 V	6
23519308	DDEC IV - Universal ECM	12/24 V	8

Table 3-3 ECM Part Numbers for DDEC IV

The part numbers for the ECM connectors are listed in Table 3-4.

Description	Part Number
Injector Harness Connectors (5-pin) (2 connectors)	12162825
	12162830
Engine Sensor Harness Connector (30-pin)	12034400
Power Harness Connector (5-pin)	12124634
Communication Harness Connector (6-pin)	12066317
Vehicle Interface Harness Connector (30-pin)	12044398

Table 3-4 ECM Connectors

For more information on the ECM connectors, refer to section 3.10.

3.2.2 ENVIRONMENTAL CONDITIONS

The following environmental conditions must be considered.

Temperature

The ambient operating temperature is -40°F (-40°C) minimum and 221°F (105°C) maximum.

Atmospheric Pressure

The engine mounted ECM can withstand atmospheric pressures ranging from 62.0 to 120.0 kPa absolute that result from altitude and weather changes in the operating and non-operating conditions.

Water Intrusion

The ECM can be exposed to steam cleaning and pressure washing. Care should be taken not to pressure spray the connectors.

THIS PAGE INTENTIONALLY LEFT BLANK

3.3 ENGINE SENSOR HARNESS

The Engine Sensor Harness (ESH) is installed at the factory and is delivered connected to all engine sensors and the ECM. See Figure 3-2 for an illustration of a typical on-highway ESH for the Series 60 and Figure 3-3 for the Series 50. Refer to Appendix B for a harness schematic.

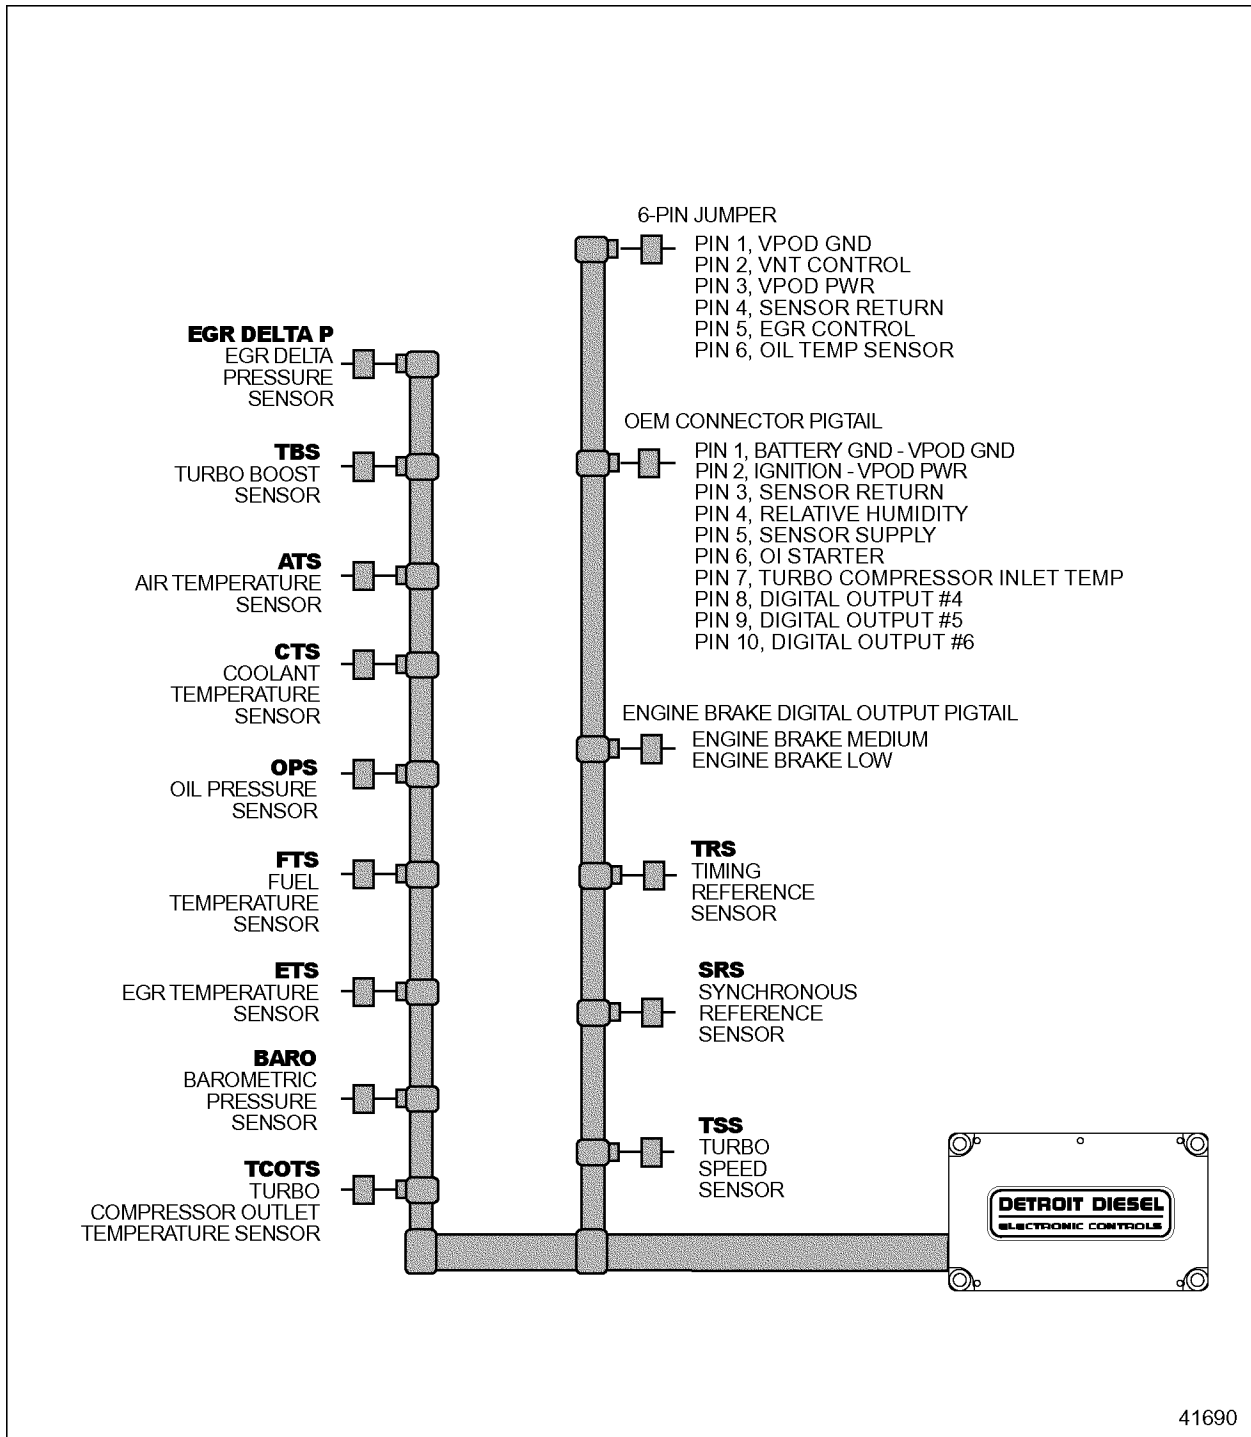


Figure 3-2 A Typical On-highway Engine Sensor Harness — Series 60

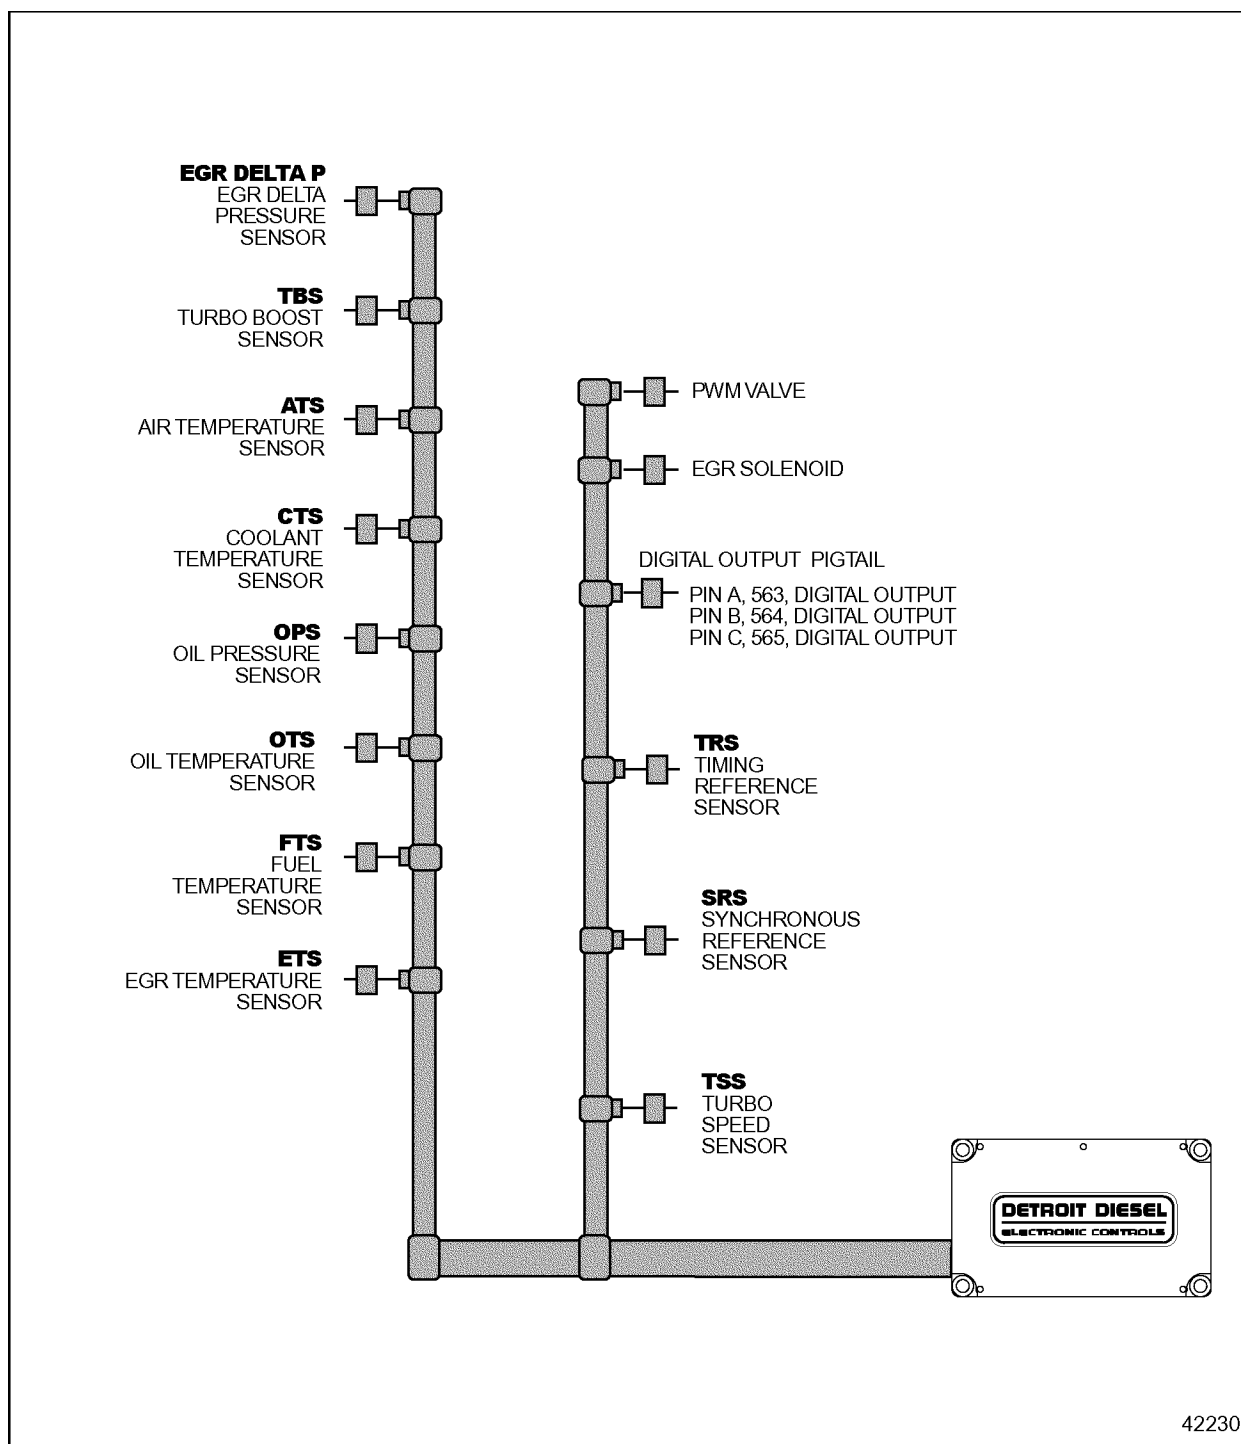


Figure 3-3 A Typical On-highway Engine Sensor Harness — Series 50

The wiring for the 30-pin ESH-to-ECM connector on a Series 60 engine is listed in Table 3-5.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	OIL TEMPERATURE	
N-2	132	AIR TEMPERATURE	
P-3	133	COOLANT TEMPERATURE	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	TURBO BOOST	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMPERATURE	
P-2	530	OIL PRESSURE	
S-3	561	ENGINE BRAKE MED	
T-3	562	ENGINE BRAKE LO	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	TURBO SPEED	
L-1	904	BAROMETRIC PRESSURE	
M-1	905	TURBO COMPRESSOR IN TEMPERATURE	
N-1	906	TURBO COMPRESSOR OUT TEMPERATURE	
R-1	907	EGR TEMPERATURE	
Y-1	909	EGR CONTROL	
W-2	910	OI STARTER	
X-2	911	VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	EGR DELTA PRESSURE	
L-2	976	RELATIVE HUMIDITY	

Table 3-5 Typical ESH-to-ECM Connector Pin Definitions — Series 60

The 30-pin ESH-to-ECM connector, listed in Table 3-6, is a Metri-Pack 150 series pull-to-seat connector.

Part	Part Number
Connector	12034400
Terminal	12103881
Seal	In Connector
Plug	12034413

Table 3-6 30-pin ESH-to-ECM Connector

The wiring for the 30-pin ESH-to-ECM connector on a natural gas engine is listed in Table 3-7.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	41449
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	EXHAUST TEMPERATURE	
N-2	132	INTAKE AIR TEMPERATURE	
P-3	133	COOLANT TEMPERATURE	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	INTAKE MANIFOLD PRESSURE	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMPERATURE	
P-2	530	OIL PRESSURE	
S-3	561	THROTTLE SUPPLY	
T-3	562	FUEL SHUTOFF	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	SNEF	
L-1	904	BAROMETRIC PRESSURE	
M-1	905	FUEL PRESSURE	
N-1	906	OXYGEN SENSOR	
R-1	907	THROTTLE PLATE POSITION	
Y-1	909	THROTTLE ACTUATOR	
W-2	910	UNUSED	
X-2	911	VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	PULSE STEPPER VALVE	
L-2	976	KNOCK SENSOR	

Table 3-7 Typical ESH-to-ECM Connector Pin Definitions — Natural Gas Applications

The wiring for the 30-pin ESH-to-ECM connector on a Series 50 engine is listed in Table 3-8.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	OIL TEMPERATURE	
N-2	132	AIR TEMPERATURE	
P-3	133	COOLANT TEMPERATURE	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	TURBO BOOST	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMPERATURE	
P-2	530	OIL PRESSURE	
S-3	561	VGT POWER	
T-3	562	EGR SOLENOID CONTROL	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	TURBO SPEED	
L-1	904	AIR FILTER RESTRICTION (MAS ONLY)	
M-1	905	FUEL RESTRICTION (MAS ONLY)	
N-1	906	ADD COOLANT LEVEL (MAS ONLY) — 2002–2003 COMPRESSOR TEMP OUT (330 hp only) — 2004–Present	
R-1	907	EGR TEMPERATURE	
Y-1	909	PWM #2 — NOT USED	
W-2	910	PWM #3 — NOT USED	
X-2	911	PWM #3 — VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	EGR DELTA PRESSURE	
L-2	976	OIL LEVEL (MAS ONLY)	

Table 3-8 Typical ESH-to-ECM Connector Pin Definitions — Series 50

THIS PAGE INTENTIONALLY LEFT BLANK

3.4 VEHICLE INTERFACE HARNESS

The OEM supplied Vehicle Interface Harness (VIH) connects the ECM to other vehicle systems as shown in the VIH illustrations. See Figure 3-4. Refer to Appendix B for a harness schematic.

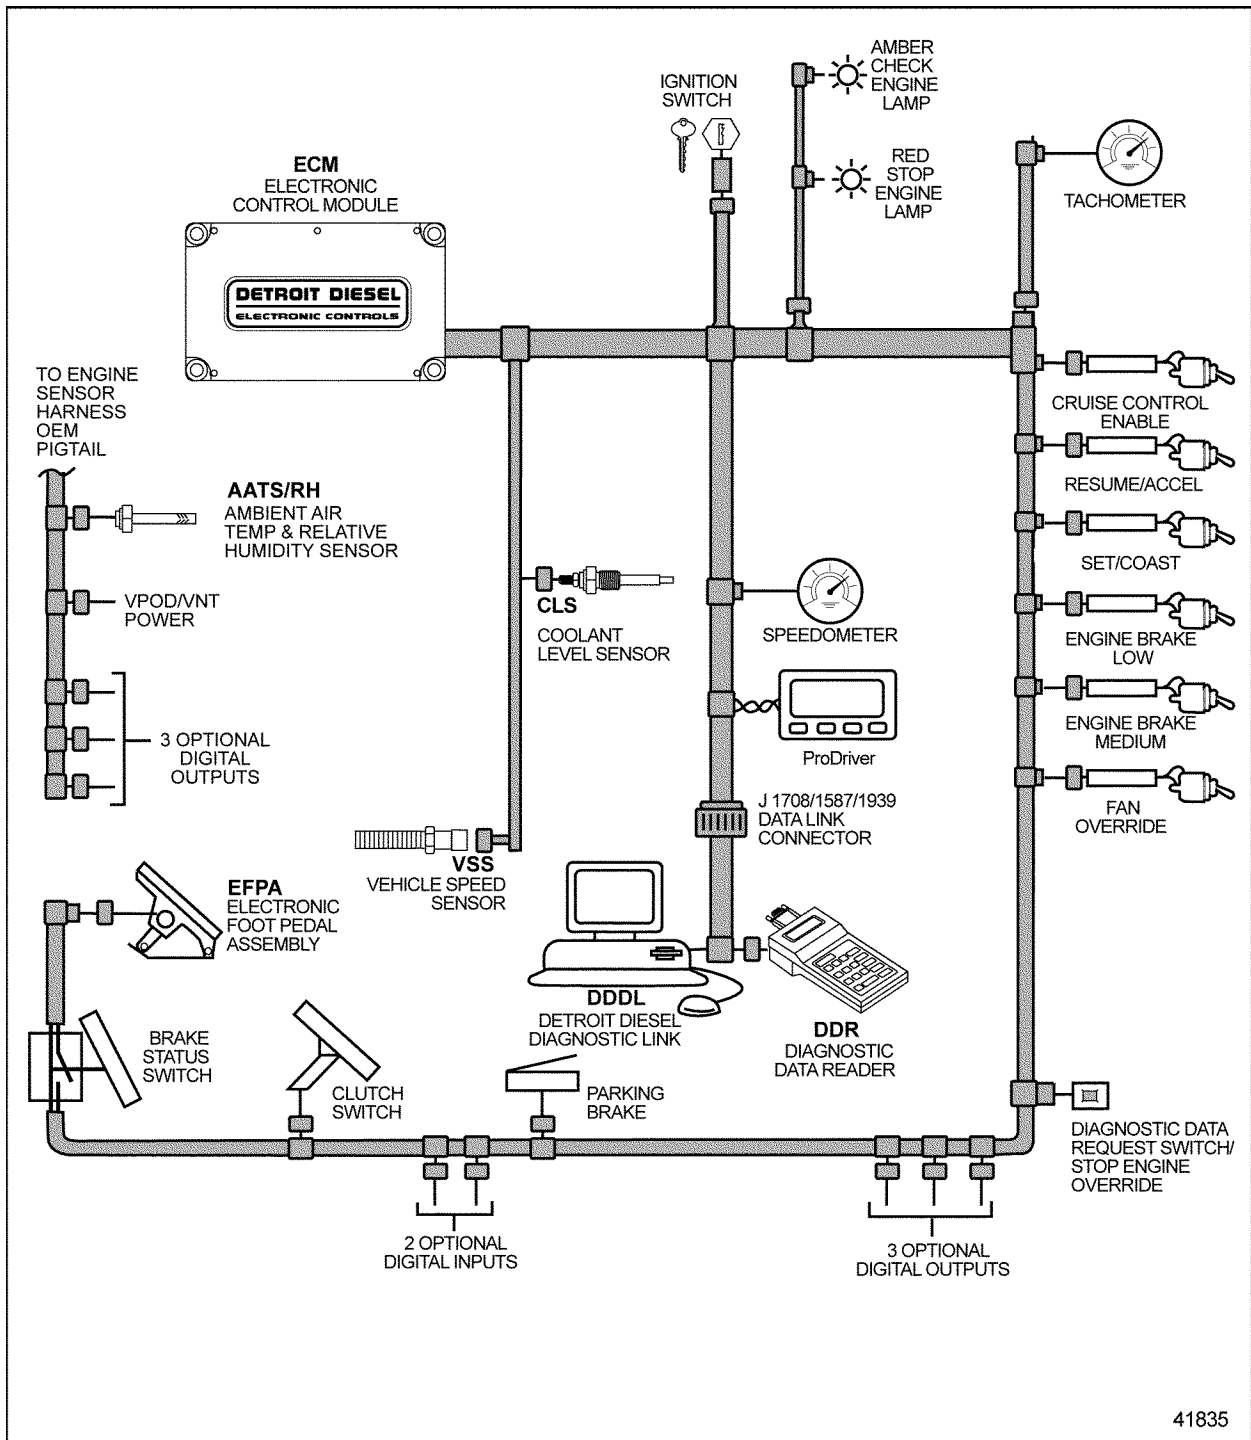


Figure 3-4 Typical On-highway Vehicle Interface Harness

The wiring for the 30-pin VIH-to-ECM connector is listed in Table 3-9.

Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	37018
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	OI THERMOSTAT OR PTO OR EXHAUST BACK PRESSURE SENSOR (COACH ONLY)	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	DIGITAL INPUT #11	
D-3	749	ESS OR FIRE TRUCK PUMP PRESSURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	VARIABLE SPEED FAN OR PWM TRANSMISSION OR OI ALARM	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-9 Typical VIH-to-ECM Connector Pin Definitions — Truck/Coach Applications

The 30-pin VIH-to-ECM connector, listed in Table 3-10, is a Metri-Pack 150 series pull-to-seat connector.

Part	Part Number
Connector	12034398
Terminal	12103881
Plug	12034413

Table 3-10 30-pin VIH-to-ECM Connector

The ECM connector assembly center screw must be torqued to 22–28 in·lb. (2.49–3.16 N·m).

The 30-pin VIH-to-ECM connector wiring for urban bus applications is listed in Table 3-11.

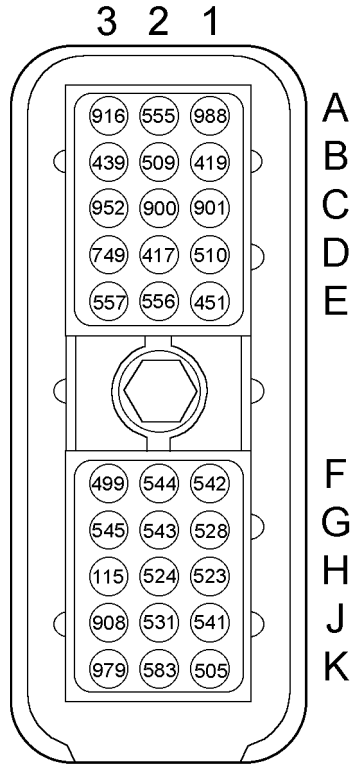
Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	 37018
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	PTO OR EXHAUST BACKPRESSURE (OPTIONAL)	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	DIGITAL INPUT #11	
D-3	749	EXHAUST TEMPERATURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	PWM #1 — VARIABLE SPEED FAN OR PWM TRANSMISSION	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-11 Typical VIH-to-ECM Connector Pin Definitions — Urban Bus Applications

The wiring for the 30-pin VIH-to-ECM connector for natural gas applications is listed in Table 3-12.

Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	37018
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	RELATIVE HUMIDITY	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	PSV DIAGNOSTIC	
D-3	749	AMBIENT AIR TEMPERATURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	VARIABLE SPEED FAN OR PWM TRANSMISSION	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-12 Typical VIH-to-ECM Connector Pin Definitions — Natural Gas Applications

3.4.1 VIH DESIGN

The following criteria are to be used when designing the VIH.



Criteria: VIH Design

The VIH 30-pin connector is designed to accept 18 gage (0.75 - 0.80 mm²) standard wall thickness cable only.

The acceptable cable insulations are Teflon (EFTE), cross-link polyethylene (XLPE) or any equivalent self-extinguishing insulation such as GXL having a minimum rating of -40°C to 125°C. An equivalent insulation must meet the acceptable cable diameters from 2.00 - 2.42 mm.

The conductor must be annealed copper, not aluminum, and must comply with the industry standard SAE J1128 document.

Detroit Diesel Corporation recommends color coding and hot stamping wire numbers in contrasting colors at intervals of four inches or less.

NOTE:

Avoid renumbering DDC circuits since all troubleshooting guides reference the circuit numbers shown in the schematic. DDC suggests including a prefix or suffix with the DDC circuit numbers when conflicts exist.

NOTE:

The Vehicle Speed Sensor (VSS) circuits 556 and 557 and the Data Link circuits 900 and 901 (SAE J1587) must be twisted pairs. The twists are a minimum of 12 turns per foot (305 mm) and are required to minimize electromagnetic field coupling.

NOTE:

The maximum length for the SAE J1708/J1587 Data Link is 40 m (130 ft). The maximum length for the SAE J1939 Data Link is 40 m (130 ft).

3.4.2 VIH INSTALLATION

The following concepts have proven to be effective in installing the VIH.

Provide maximum physical separation of the VIH from other vehicle electrical systems. Other electrical system cables should ideally be at least three feet away from the VIH and should not be parallel to the VIH. This will eliminate coupling electromagnetic energy from other systems into the VIH.

Do not route the harness near any vehicle moving parts, exhaust or any high heat source.

Use a protective sheath to prevent wires from being cut or frayed when weaving harness through the frame.

The 30-pin VIH-to-ECM connector assembly (12034398) center screw must be torqued to 22–28 in·lb. (2.49–3.16 N·m).

Adhere to industry standards for relief length and maximum wire bend radius at the connectors.

3.4.3 HARNESS DESIGN GUIDELINES

The electrical characteristics of some of the system elements including the ECM are described in the following sections. This information is useful for harness design.

NOTE:

All output loads (PWM and digital outputs), ignition, and ECM power must be powered by the same battery voltage.

Pulse Width Modulated Port (PWM #1, 2, 4)

The output of this port is capable of providing 50 to 1000 Hz modulation between 0% and 100% duty cycle with a resolution of less than or equal to 0.1% duty cycle and an accuracy of less than or equal to 20 μ sec.

Output Characteristics:

Output On: E_{out} is less than or equal to 0.8 volts with respect to ECM ground.
 I_{sink} is less than or equal to 5 mA.
 Output Off: $I_{leakage}$ (I_{sink}) is less than or equal to 1.0 mA while $0 \leq E_{out} \leq V_{battery}$.

Load Drive Capabilities:

Inductance: Capable of connecting to an inductance less than or equal to 60 mH at 100 Hz.
 I_{sink} : Capable of sinking an average current of 3 A or less and peak current of 6 A or less.

PWM #2 (909) is used for EGR control – Series 60 only.

PWM #3 (910) is used for Optimized Idle starter only.

PWM #4 (911) is used for VGT control – Series 50 and Series 60.

Digital Output Ports

The digital output ports are: 419, 509, 988, 555, 499, 563, 564, and 565. Wire numbers 419 and 509 are reserved for the CEL and SEL, respectively. Refer to section 4.3, "Digital Outputs" for additional information.

Output Characteristics:

Output On: E_{out} is less than or equal to 0.8 volts with respect to ECM ground (#150).
 I_{sink} is less than or equal to 1.5 A.
 Output Off: $I_{leakage}$ (I_{sink}) is less than or equal to 1.0 mA while $0 \leq E_{out} \leq V_{battery}$.

Load Drive Capabilities:

Inductance: Capable of connecting to an inductance less than or equal to 85 mH. If load is >85 mH then external clamping is required.
 I_{sink} : Capable of sinking less than or equal to 1.5 A.

The digital output ports are capable of driving a #168 bulb (three candlepower lamp) in a 12 volt system or a # 313 bulb (three candlepower lamp) in a 24 volt system. See Figure 3-5.

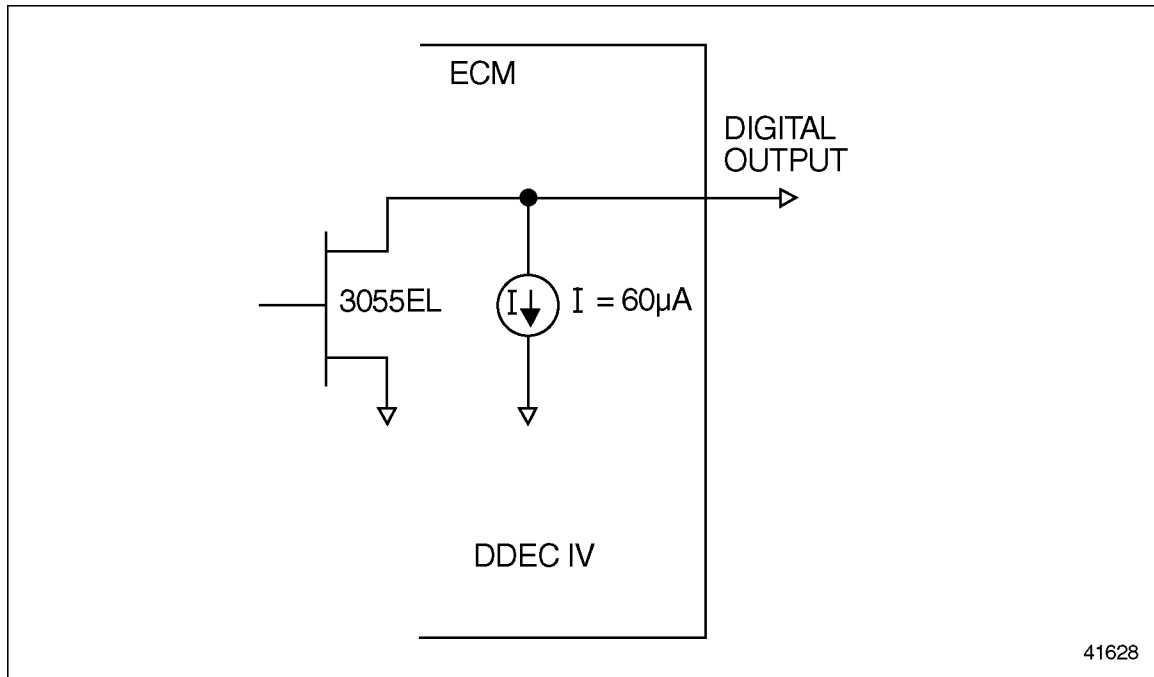


Figure 3-5 DDEC IV Internal Digital Output Circuits

Digital Input Ports

The digital input ports are: 451, 542, 528, 523, 541, 544, 543, 524, 531, 583, 545 and 979. Refer to section 4.3, "Digital Inputs" for additional information.

Input Requirements:

High State:	$32 \text{ volts} > E_{in} > 4 \text{ volts}$ at less than 0.2 mA leakage current. The ECM has an internal $1k\Omega$ pull-up to 5 volts.
Low State:	$E_{in} < 1.0 \text{ volts}$.
I_{source} :	Capable of sourcing up to 5 mA.

NOTE:

Use switches that will not oxidize with the passage of time and environmental factors due to the low source current.

A DDEC IV digital input circuit may be seen in the next illustration (see Figure 3-6).

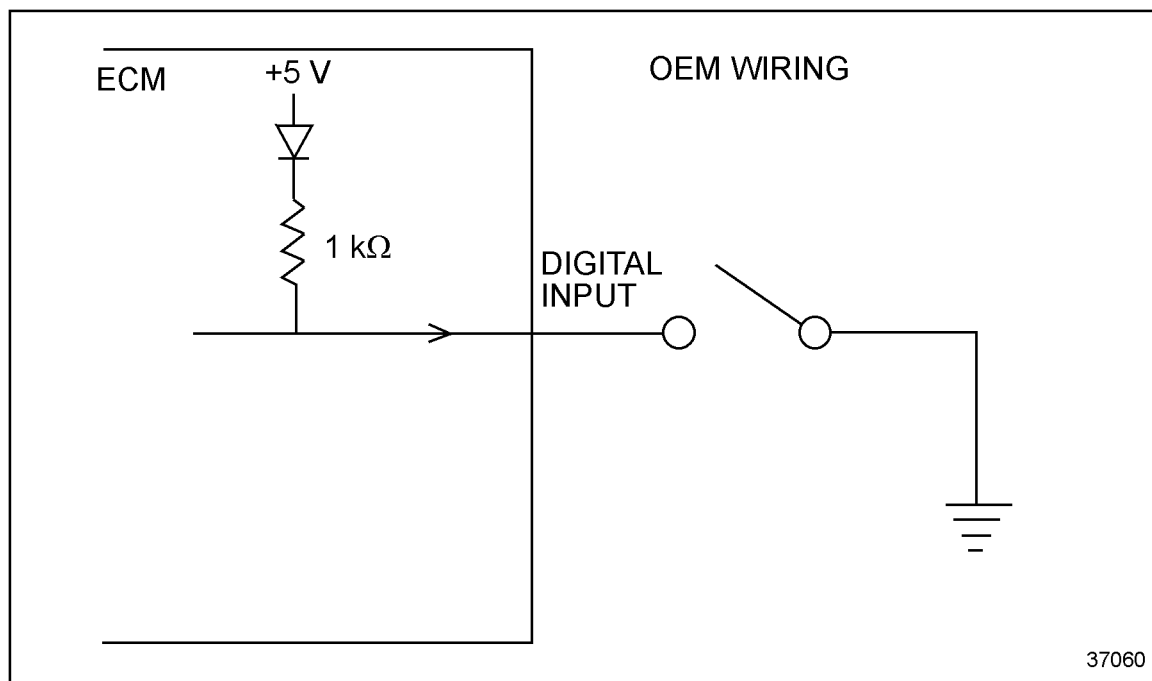


Figure 3-6 DDEC IV Digital Input Circuit

Switch Ground

Switch ground (circuit 953) must only be used to provide ground for DDEC components (i.e. digital inputs) and must be sourced directly from the negative battery or bus bar terminal; refer to section 3.7, "Power Harness."

NOTE:

This circuit can not be used to provide ground for non-DDEC OEM-supplied electronics.

Ignition

The ignition source may be either 12 or 24 volts depending on the ECM configuration. The DDEC ignition must be an independent input sourced directly from the battery post via a weatherproof blade type fuse, circuit breaker, or equivalent. Fuse holders for blade type fuses may be purchased from the DDC Parts Distribution Center. Part numbers are listed in Table 3-13.

Part	Part Number
Fuse Holder	12033769
Cover	12033731
Terminals	12066614

Table 3-13 Fuse Holder Part Numbers

Ignition voltage must be continuously provided in the crank and run modes. The ignition fuse must be sized for the loads utilized in each application.

3.4.4 OEM INTERFACE TO ENGINE SENSOR HARNESS

The connector that is the OEM interface to the Engine Sensor Harness (ESH) is different for the Series 60 and Series 50 engines.

Series 60

A ten-pin connector will be used for the OEM connection to the ESH (see Figure 3-7).

This connector contains the following functions:

- ☐ VPOD Power and Ground
- ☐ Relative Humidity/Turbo Compressor Inlet Temperature Sensor
- ☐ Three Optional Digital Outputs
- ☐ Optimized Idle Starter

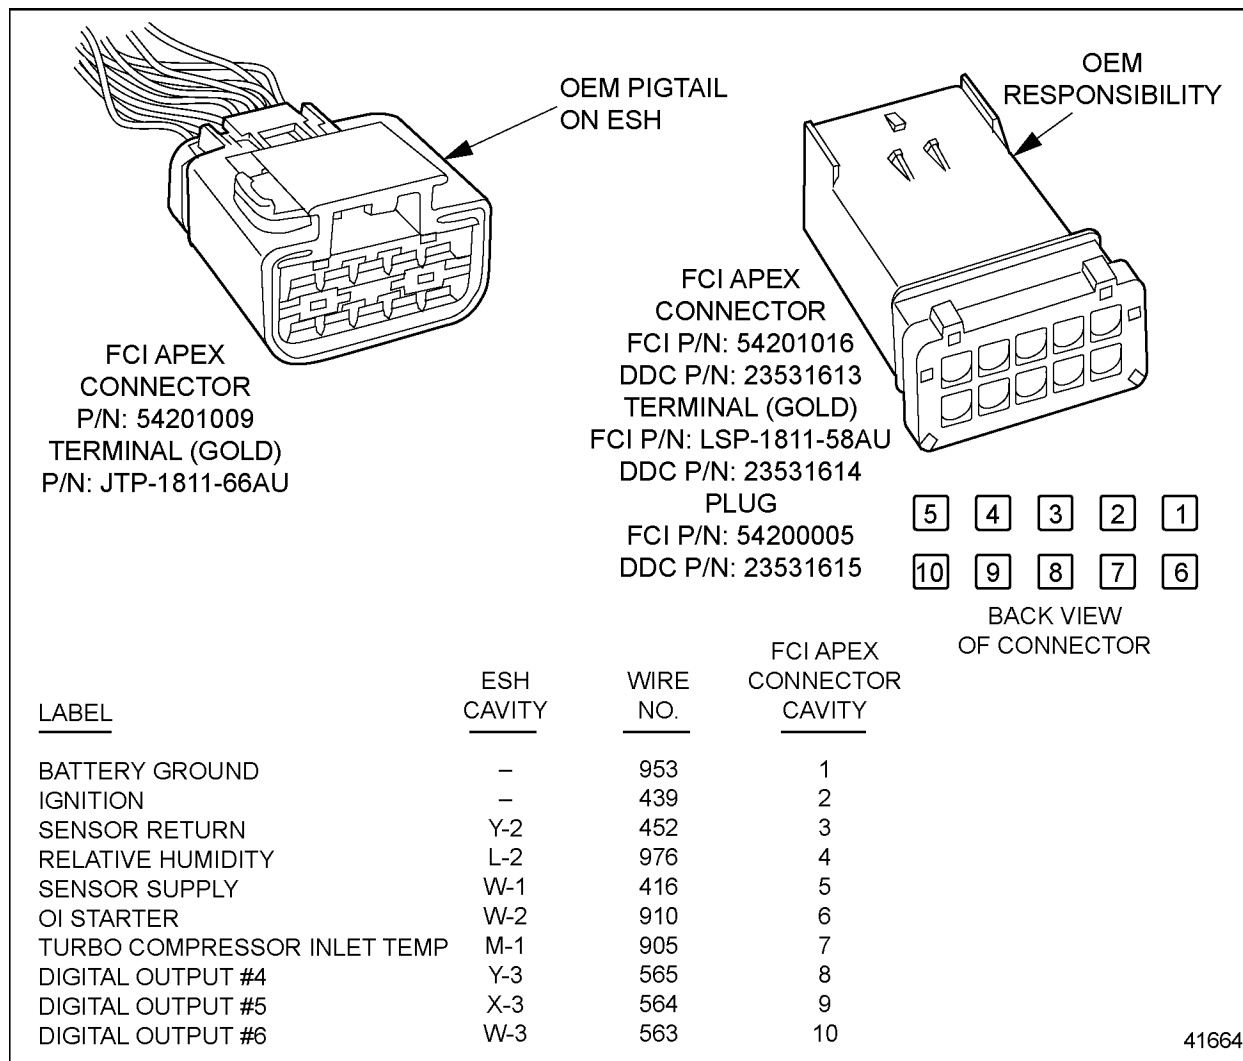


Figure 3-7 OEM Connection to the Engine Sensor Harness – Series 60

FCI Apex connectors are available from:

NTI, LLC

300 Randall Street, Suit B

Greer, SC 29651

Telephone: 864-877-4800

Fax: 864-877-2997

FCI Automotive

Telephone: 1-800-303-3577

734-728-2100

For more information on the installation of the Relative Humidity/Turbocharger Compressor Inlet Temperature Sensor, refer to section 3.14.23.

Series 50

For Series 50 applications, the OEM will have a 3-pin Metri-Pack connector for use with optional digital outputs and an optional 8-pin connector for the Maintenance Alert System. Refer to the VIH diagram in Appendix B.

Natural Gas Applications

Refer to section 3.4.6 for the natural gas application requirements for interfacing to the Engine Sensor Harness.

3.4.5 VARIABLE PRESSURE OUTPUT DEVICE — SERIES 60 ONLY

There are two Variable Pressure Output Devices (VPOD) that control the Variable Geometry Turbo (VGT) and the Exhaust Gas Recirculation (EGR) system (see Figure 3-8). The location of the VPODs is application dependent.

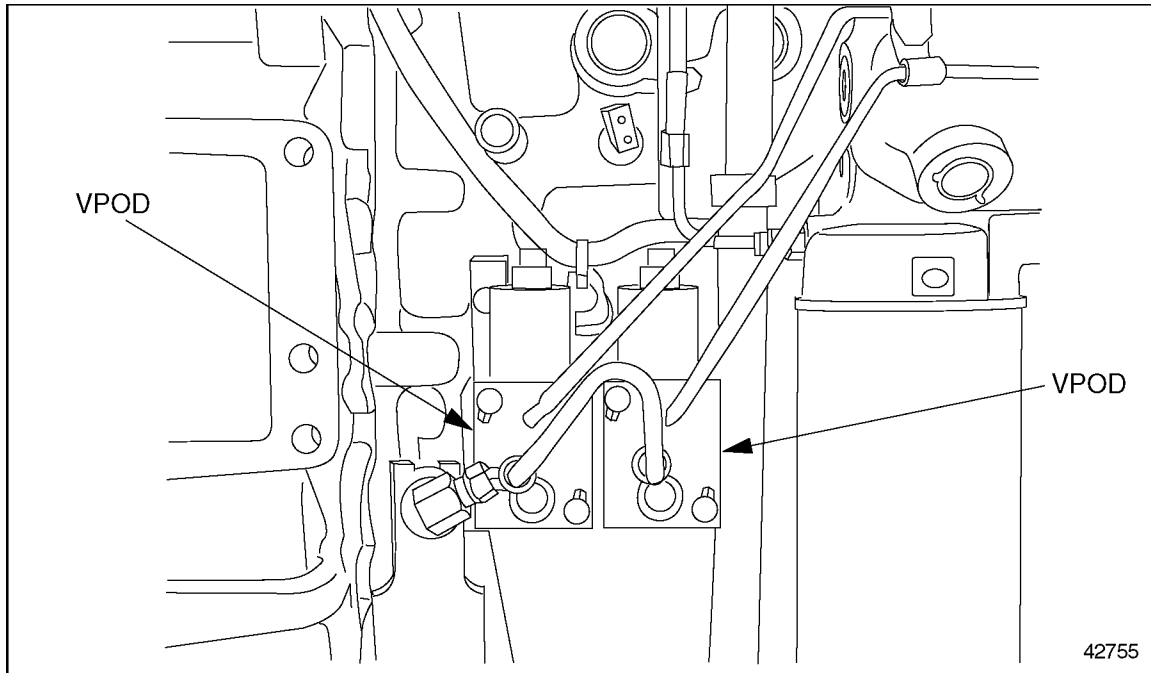


Figure 3-8 VPOD Location — Series 60 Only

The OEM is responsible for supplying power to the VPODs via the 10-pin OEM interface connector (refer to section 3.4.4). The power can be sourced from the ignition switch. The fuse must be properly sized. The operating characteristics of one VPOD are listed in Table 3-14. There are two VPODs in the system.

Description	12V	24V
Minimum Operating Voltage	8V	16V
Maximum Current Draw (ignition on, engine not running)	20mA	30mA
Maximum Operating Average Current	1.0A	0.5A
Maximum Operating Peak Current	3.0A	2.0A
In Rush Current	20.0A	10.0A

Table 3-14 VPOD Operating Characteristics

3.4.6 NATURAL GAS APPLICATIONS — VIH REQUIREMENTS

The following information is required for natural gas engine installations.

Dedicated Power & Ground Requirements

The wires listed in Table 3-15 require dedicated power and grounds. They can be found on the wiring diagram (refer to Appendix B).

Wire Number	Description
956	Throttle Ground
443	SNEF Power (Ignition Switched)
150	PSV Ground
446	PSV Power (Ignition Switched)
957	Oxygen Sensor Interface Module Ground
444	Oxygen Sensor Interface Power (Ignition Switched)
445	Throttle Power (Ignition Switched and DDEC Switched)

Table 3-15 Wires Requiring Dedicated Power and Ground

Correct grounding of the DDEC components is critical to proper engine operation. Poor grounds can cause ignition system misfire, RFI/EMI, and false DDEC codes. Grounding problems can be minimized by adhering to the following guidelines:

- ☐ The engine block must be properly grounded.
- ☐ Ground wires #150, 956, 957, and 959 from the OEM Sensor Ground Harness (see Figure 3-12) ground wire #953 from the Coil Power Harness (see Figure 3-13) and the three DDEC ECM main power ground wires #150 (see Figure 3-9) must go to a common negative battery terminal. Use an individual 12 AWG wire (do not exceed 28 ft in length) for each of the seven ground wires to the battery. If a ground stud or bar is used before going to the battery, do not source any other grounds from that ground stud or bar. Use an individual 12 AWG wire (do not exceed 28 ft in length) for each of the seven ground wires to the ground stud or bar. A 2/0 AWG or larger cable must be used to connect the ground stud or bar directly to a negative battery terminal. Do not source any other grounds from this cable.
- ☐ Do not install relays in any of the DDEC ground circuits unless it is required by DDC.

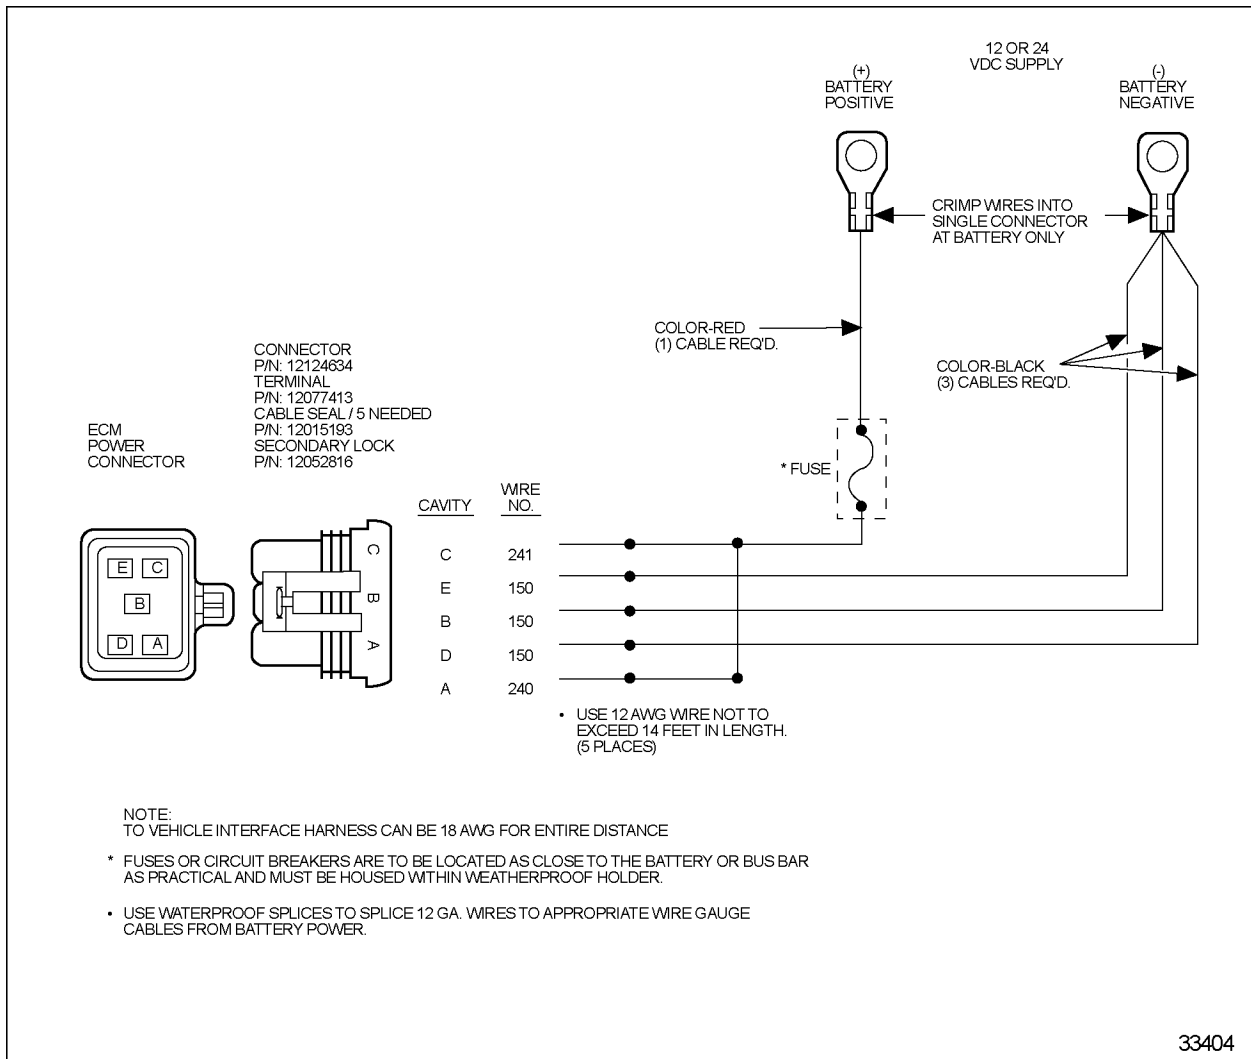


Figure 3-9 Power Wiring

The following guidelines should be followed in designing the DDEC power circuits:

- ☐ Do not install relays in any of the DDEC power or control circuits other than those required by DDC.
- ☐ Do not install more than one fuse per circuit.

Relay Powered Throttle

Throttle power actuation will be done through an OEM supplied relay using either 12 or 24 volts. S3 wire 561 (High Side Digital Output) will provide ECM power (12 V or 24 V) to trigger the relay. A dedicated 12 or 24 volt power source will travel through the relay to wire 445 to the throttle. Wire 561 and 445 are shown on the main wiring diagram layout and their individual connector diagram layouts (see Figure 3-10).

The relay must have a response time of <100 ms to avoid false throttle codes. also the resistance across the trigger side of the relay must be within 1 k–2 k Ω to avoid false driver codes. A supplemental resistor can be used if necessary.

Relay Powered Fuel Shutoff Valves

Electronically controlled fuel shutoff solenoid valves are required on the high pressure side of the fuel system (typically at the fuel tanks) and the low pressure side of the fuel system near the engine. The OEM is responsible for the high pressure shutoff valves. The low pressure shutoff valve must be purchased from DDC (12 V or 24 V valves are available). All electronic fuel shutoff solenoid valves must be DDEC controlled.

The relay must have a response time of <100 ms to avoid false throttle codes. also the resistance across the trigger side of the relay must be within 1 k–2 k Ω to avoid false driver codes. A supplemental resistor can be used if necessary.

DDEC control of the fuel shutoff solenoid valves will be done through an OEM supplied relay using either 12 V or 24 V. Digital output T3 wire 562 (High Side Digital Output) will provide ECM power, either 12 V or 24 V, to trigger the relay. A dedicated 12 V or 24 V power source will travel from the relay to the solenoid valves (see Figure 3-11). The tank side solenoids and the engine side solenoid must be controlled in this manner. Separate relays can be used for the tank side solenoids and the engine side solenoid, as long as they are triggered by T3 wire 562.

OEM Sensor Power Harness

This harness provides 12 VDC power to the SNEF module, PSV, throttle, VPODs, and ECM through a 6-pin connector (see Figure 3-10).

NOTICE:

The SNEF module power supply must be 12 VDC only to ensure proper operation.

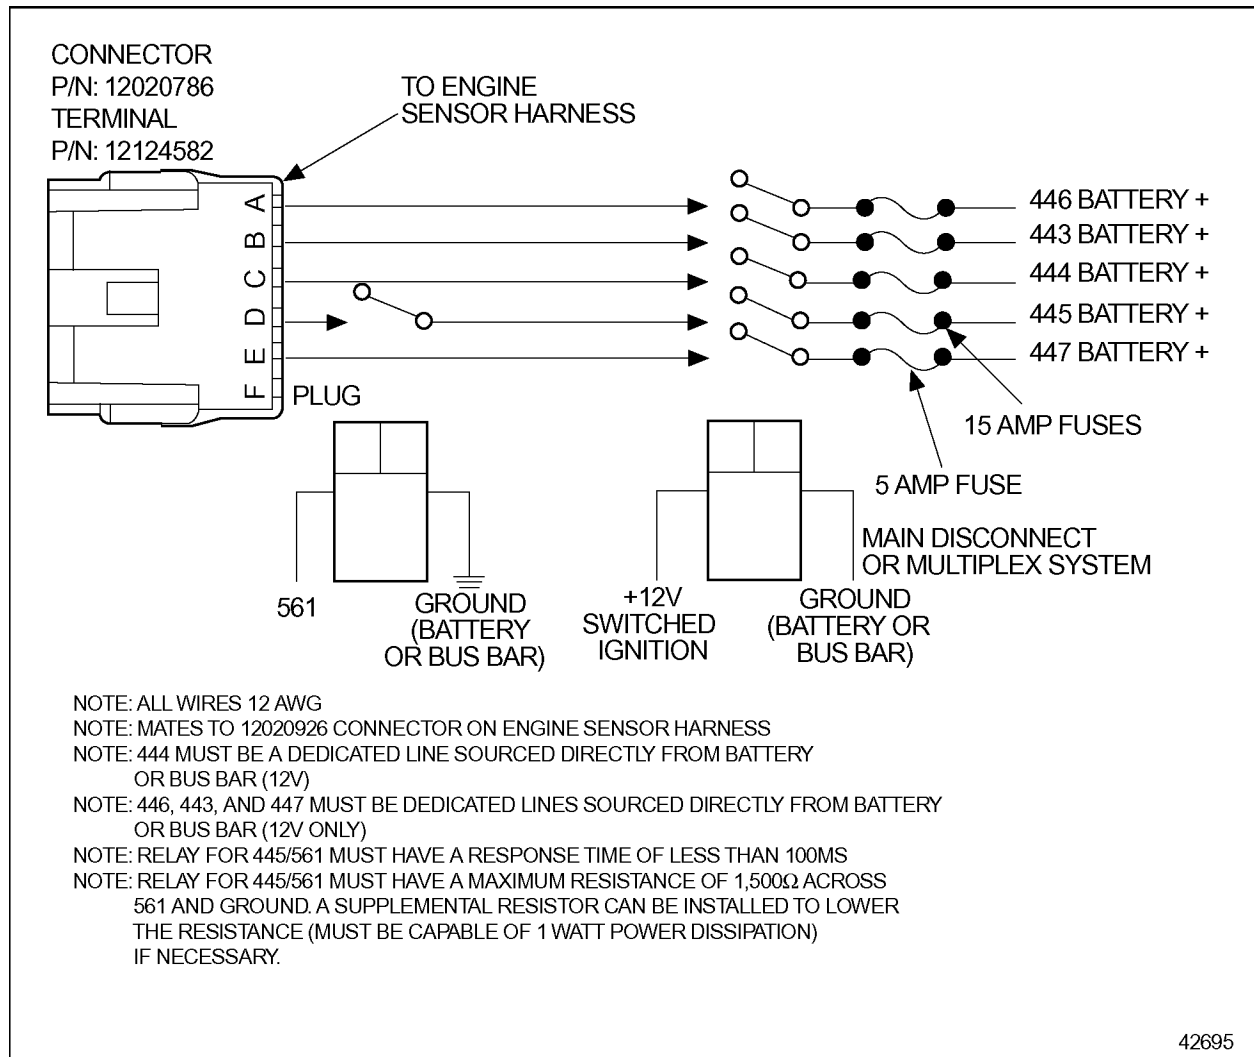


Figure 3-10 OEM Sensor Power Harness

Fuel Shutoff Harness

This harness connects to the engine side fuel shutoff solenoid and provides power to the fuel shutoff valve (DDEC switch, 12/24 V). See Figure 3-11.

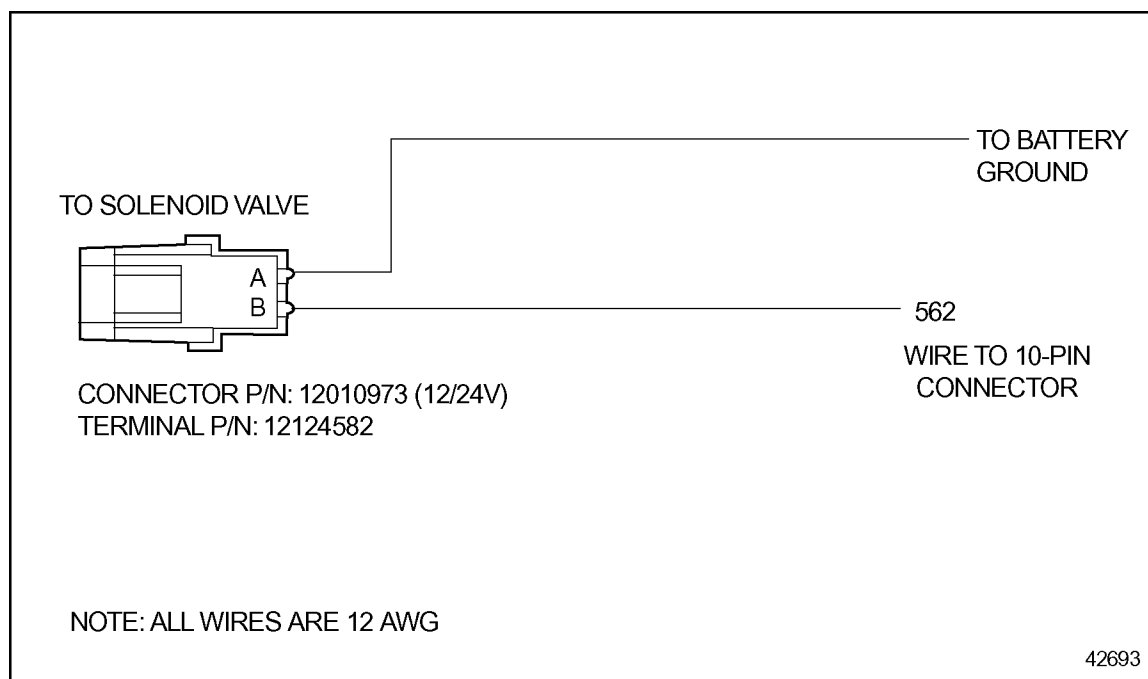


Figure 3-11 Fuel Shutoff Harness

OEM Sensor Ground Harness

Provides ground to the PSV, throttle and Oxygen Sensor Interface Module. This harness connects to a pigtail on the Engine Sensor Harness. See Figure 3-12.

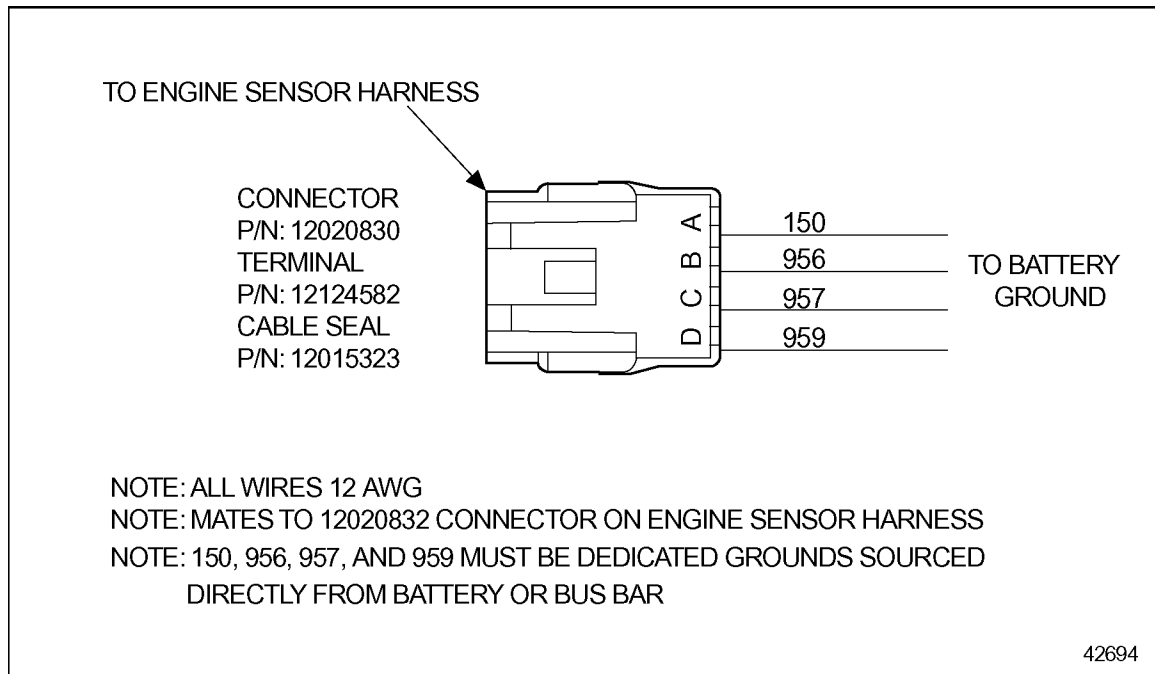


Figure 3-12 OEM Sensor Ground Harness

Coil Power Harness

This harness provides power to the engine ignition coils (see Figure 3-13).

NOTICE:

The ignition coil power supply must be 12 VDC only to ensure proper operation.

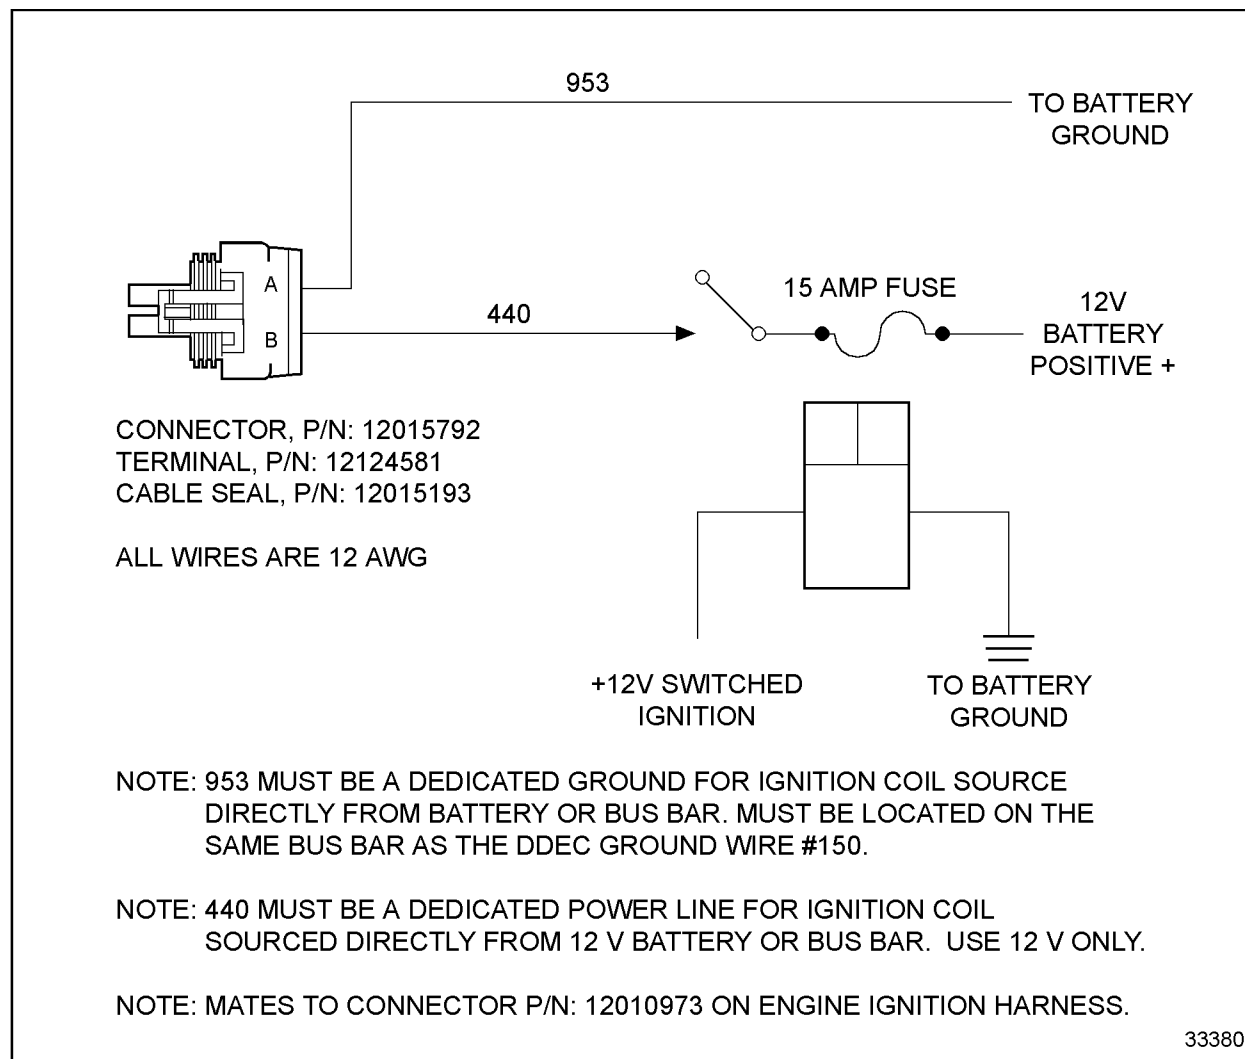


Figure 3-13 **Coil Power Harness**

OEM Interface Connector for Natural Gas Applications

A ten-pin connector will be used for the OEM connection the Engine Sensor Harness (see Figure 3-14).

This connector contains the following functions:

- ☐ Throttle Supply Circuit
- ☐ Fuel Shutoff Circuit
- ☐ Three Optional Digital Outputs
- ☐ PSV Diagnostics

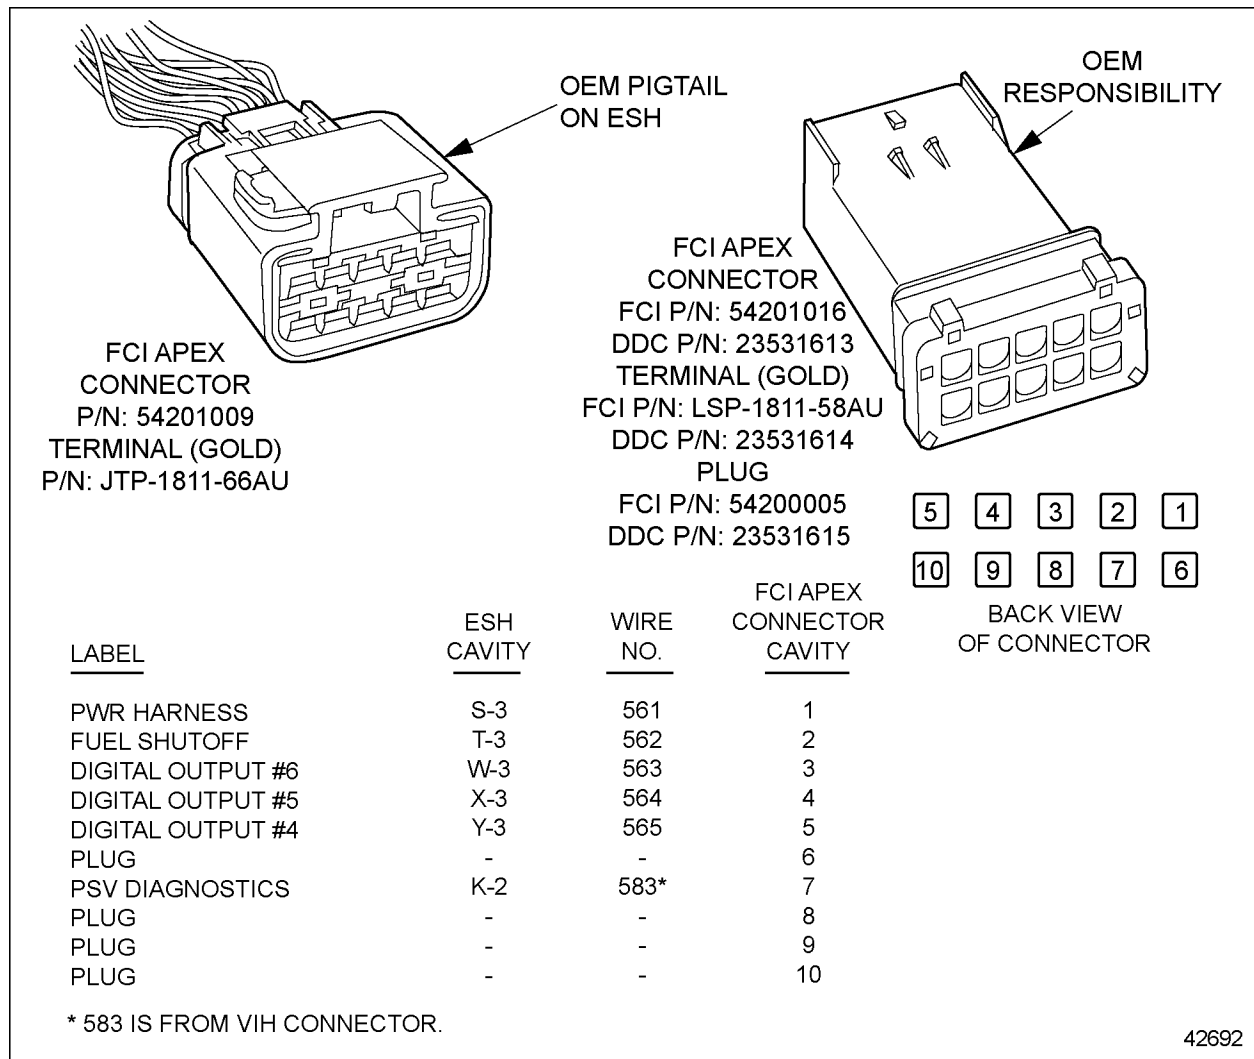


Figure 3-14 OEM Connection to the Engine Sensor Harness — Natural Gas Applications

THIS PAGE INTENTIONALLY LEFT BLANK

3.5 COMMUNICATION HARNESS

The OEM-supplied Communication Harness connects the ECM ports for SAE J1922 and SAE J1939 to other vehicle systems such as traction control devices, transmissions, braking systems, and retarders as shown in the communication harness schematic; see Figure 3-15.

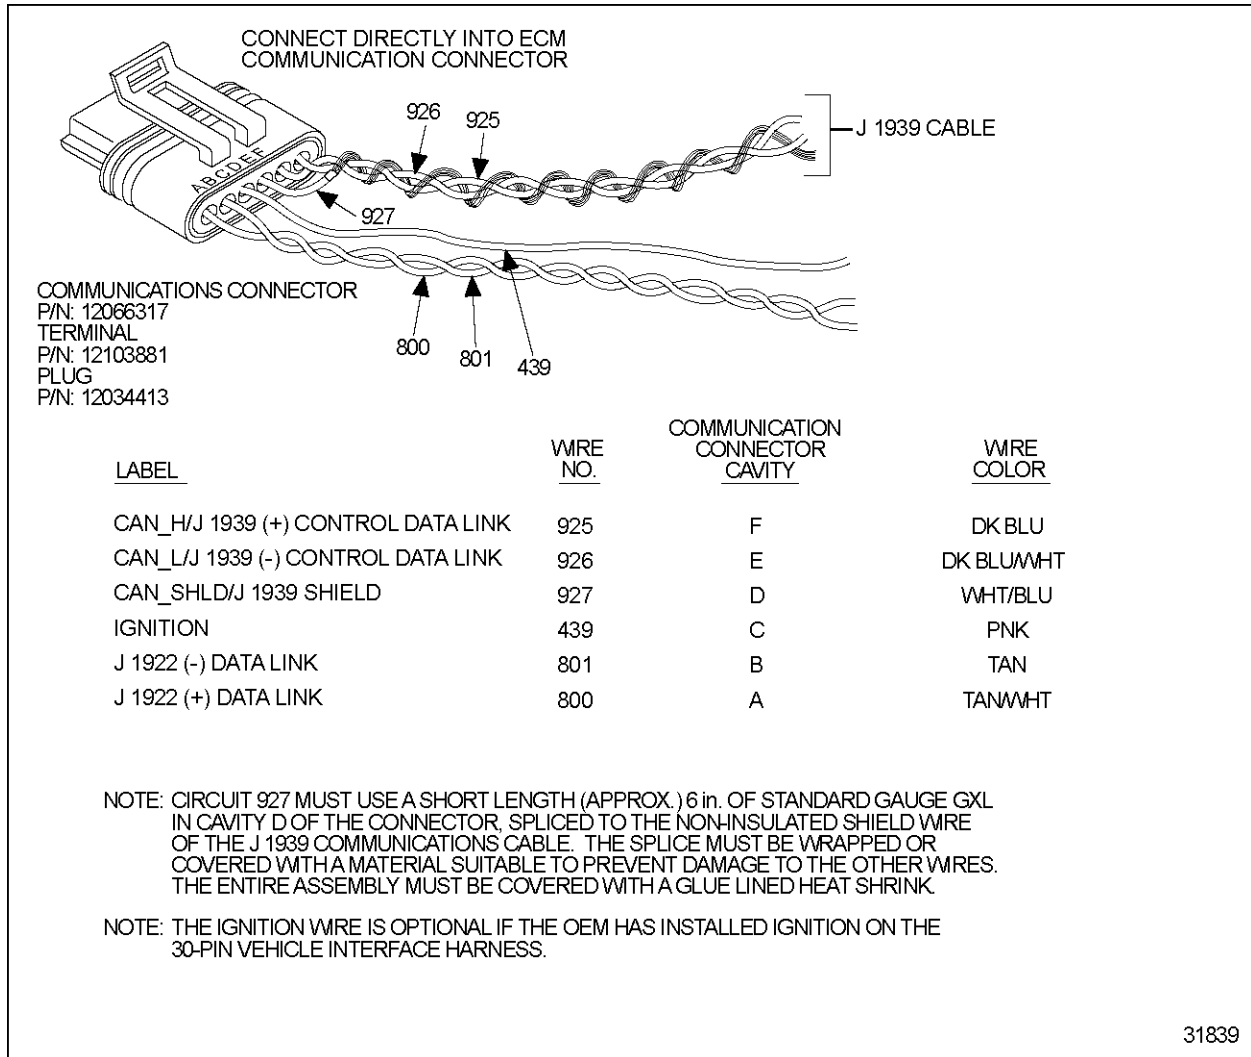


Figure 3-15 Communication Harness

Both SAE J1922 and SAE J1939 provide for the interchange of interactive control data between vehicle systems and eliminate the need for redundant sensors. SAE J1922 runs at 9.6K baud while SAE J1939 runs at 250K baud.

3.5.1 DESIGN GUIDELINES

The design guidelines for the Communication Harness are as follows:

- SAE J1922:** The SAE J1922 wire pairs (800 & 801) must be twisted a minimum of 12 turns per foot (305 mm). Twisting this wire pair will minimize the electromagnetic coupling effects.
- SAE J1939:** The SAE J1939 wiring must follow the SAE J1939 wiring guidelines including termination resistors. Refer to SAE J1939-11 for further details on cable specification.

J1939 cable is available from the following vendors:

Belden Electronics Division

2200 U.S. 27 South
Richmond, IN 47374
Phone: 1-800-235-3361
www.belden.com

Tyco Electronics Corporation

Raychem Wire and Harnessing
300 Constitution Drive
Menlo Park, CA 94025
Phone: 1-800-926-2425
www.raychem.com

The following list of SAE documents covers SAE J1939:

- ☐ J1939 - Top Layer (Overview)
- ☐ J1939/11 Physical Layer
- ☐ J1939/21 Data Link Layer
- ☐ J1939/71 Vehicle Application Layer
- ☐ J1939/01 Recommended Practice for Control and Communications Network for On-highway Equipment
- ☐ J1939/73 Application Layer Diagnostics

To obtain a copy of the SAE documents for SAE J1922 and SAE J1939, contact the Society of Automotive Engineers (SAE).

SAE International

400 Commonwealth Drive
Warrendale, PA 15096
Attention: Publications
Phone: (412) 776-4970
www.sae.org

For a list of messages supported by DDEC, refer to Chapter 5, "Communication Protocols."

3.6 INJECTOR HARNESS

The injector harness (see Figure 3-16) is installed at the factory and are delivered completely connected to the injection units and the ECMs.

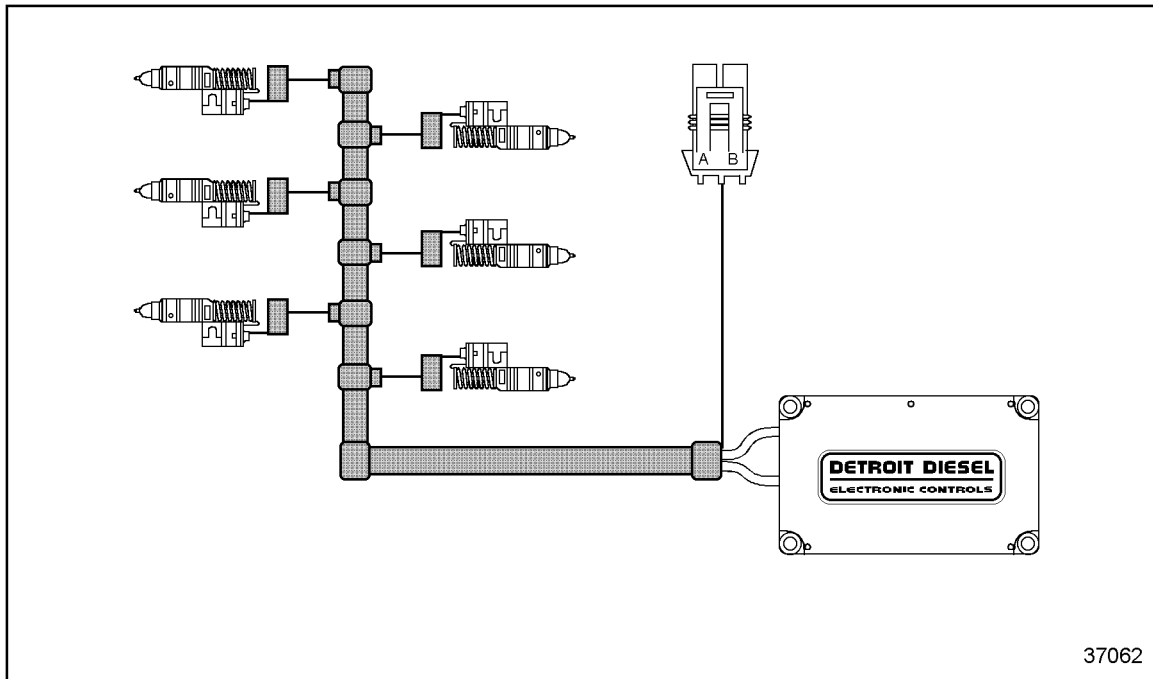


Figure 3-16 Typical On-highway Injector Harness

Injector harness schematic may be found in the Appendix (refer to Appendix B).

3.6.1 ELECTRONIC UNIT INJECTOR

The Electronic Unit Injector (EUI) uses a solenoid operated valve to control injection timing and metering. The source for high pressure fuel delivery is the cam/rocker arm system. Fuel injection begins when the solenoid valve is closed. Opening the solenoid valve ends injection. The duration of valve closure determines the quantity of fuel injected. See Figure 3-17.

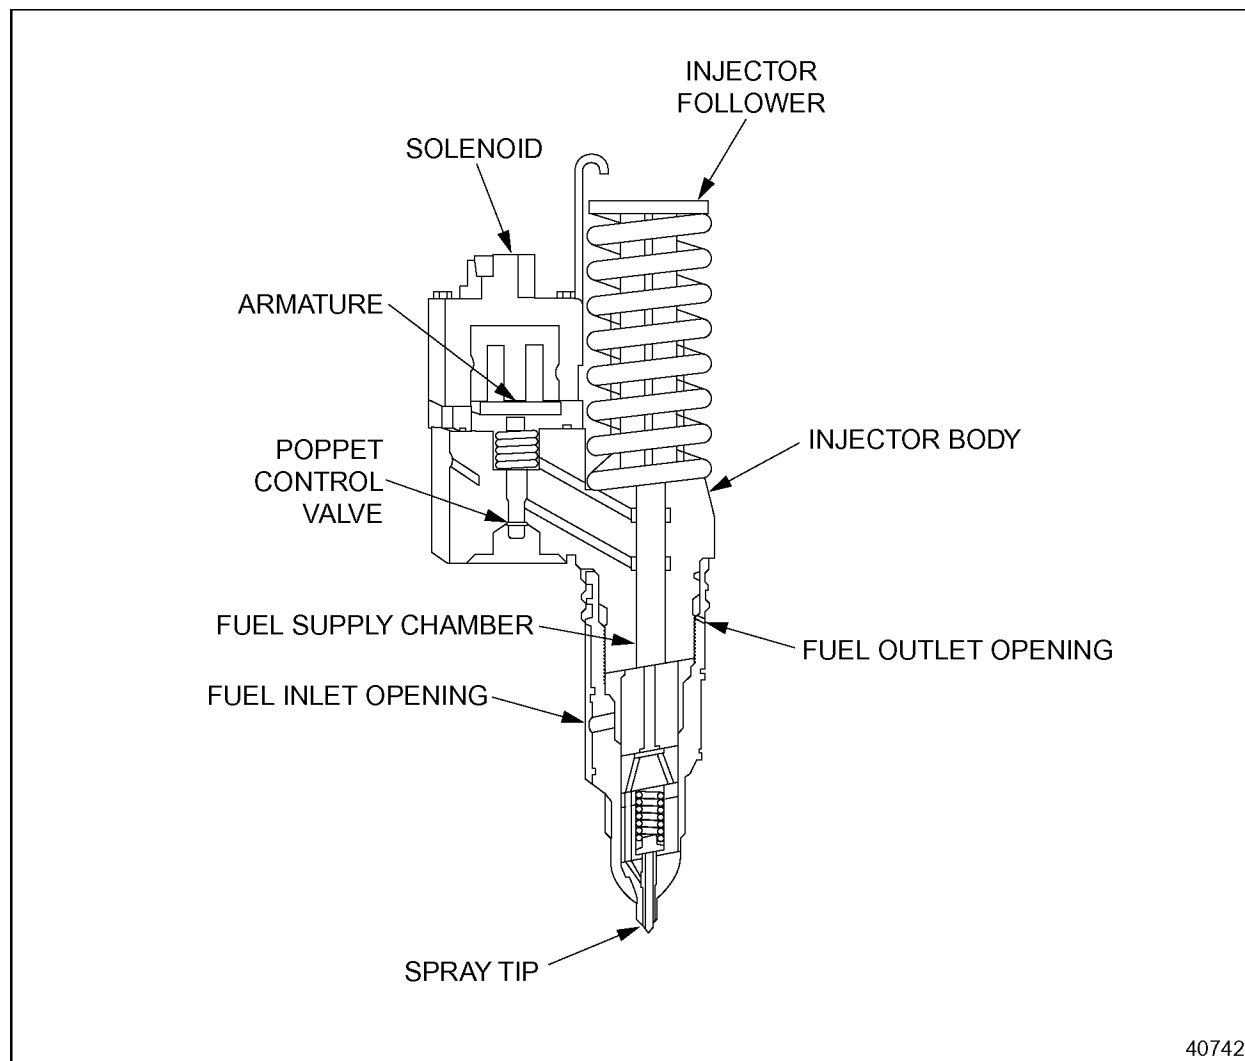


Figure 3-17 The Electronic Unit Injector

Because fuel injection is controlled electronically and is not tied to the injector in a mechanical sense, fuel metering becomes a function of a variety of selected parameters such as throttle position, engine speed, oil, water, and air temperatures, turbocharger boost levels, and barometric conditions.

3.7 POWER HARNESS

The OEM-supplied Power Harness supplies 12 or 24 volts to the ECM. The system must be sourced directly from the battery or bus bar.

3.7.1 DUAL-FUSE INSTALLATION

DDC's primary recommendation is a dual-fuse installation. This will provide redundancy on a critical circuit and prevent splicing of wire into fuse holders or power connectors. Dual-fuse installations have two lines wired in parallel. This configuration also allows for a greater distance from ECM to battery. See Figure 3-18.

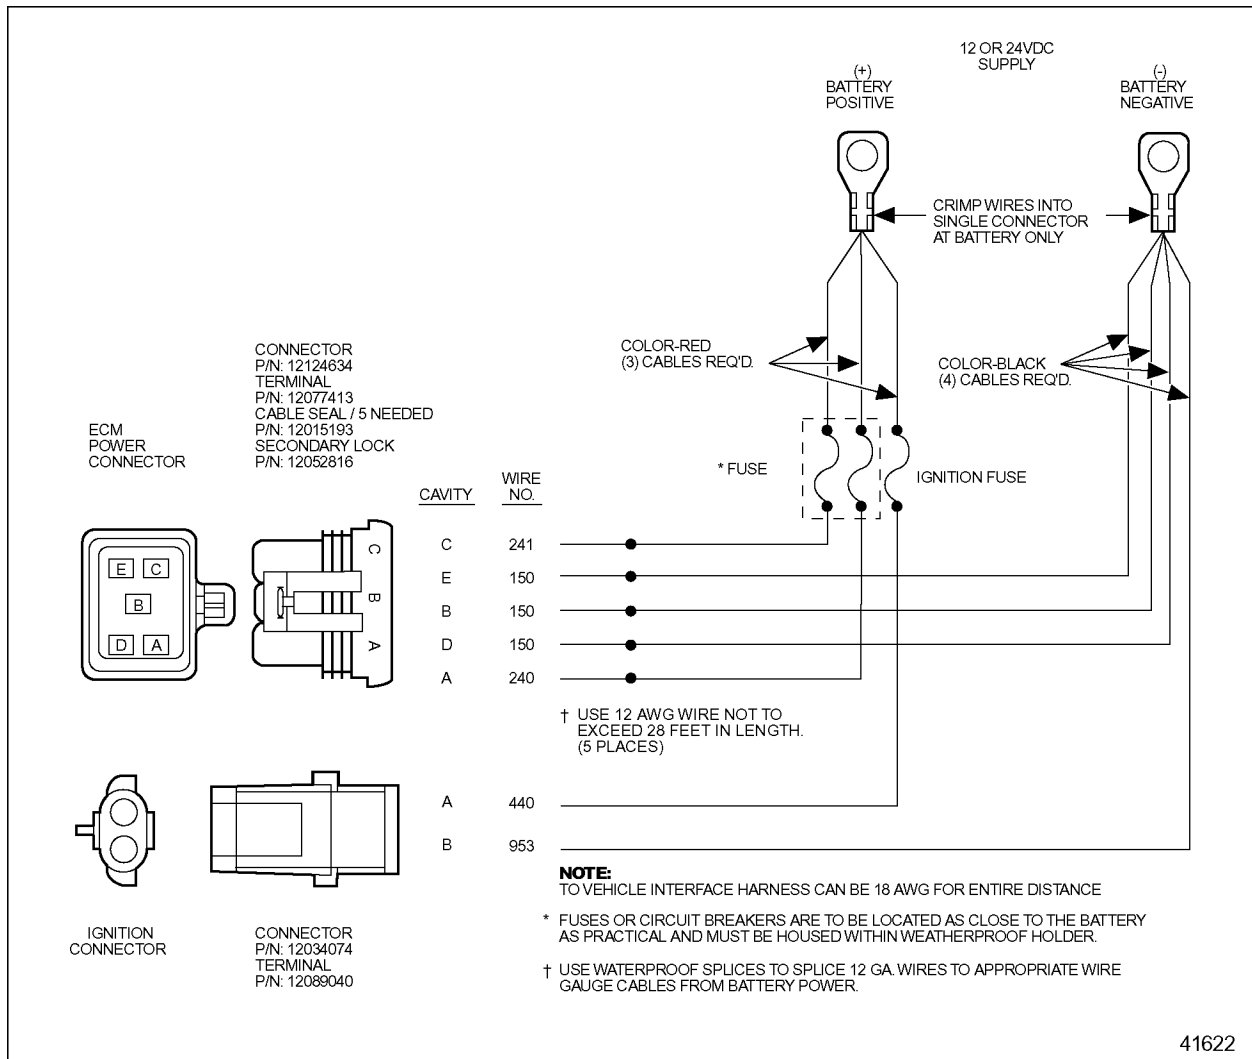


Figure 3-18 Power Harness - Single-ECM, Dual-Fuses

The resistance requirement is unchanged. The correct fuse size for a six cylinder engine is 2 @ 15 A.

NOTICE:

Connection to reverse polarity will damage the system if not properly fused.

To determine minimum cable gage based upon harness length from the battery source to the ECM, use the information listed in Table 3-16.

Length from ECM to Battery or Bus Bar		Minimum Wire Size		Total Resistance of Maximum Length	
U.S. (ft)	International (m)	U.S. (Ga.)	International (mm ²)	U.S. (mΩ)	International (mΩ)
0 to 28	0 to 6	12	2.5	24.8	22.8
28 to 44	6 to 10	10	4	24.57	23.55
44 to 70	10 to 14	8	6	24.58	21.98
70 to 110	14 to 26	6	10	24.7	23.66
110 to 178	26 to 40	4	16	25.0	23.2

Table 3-16 Power Harness Length Criteria for Dual Fuse Installations

NOTE:

For international wire sizes the harness length must be recalculated to meet the resistance requirement.

If larger than 12 AWG wire is required, it should be spliced to 12 AWG wire as close as possible to the connector (see Figure 3-19).

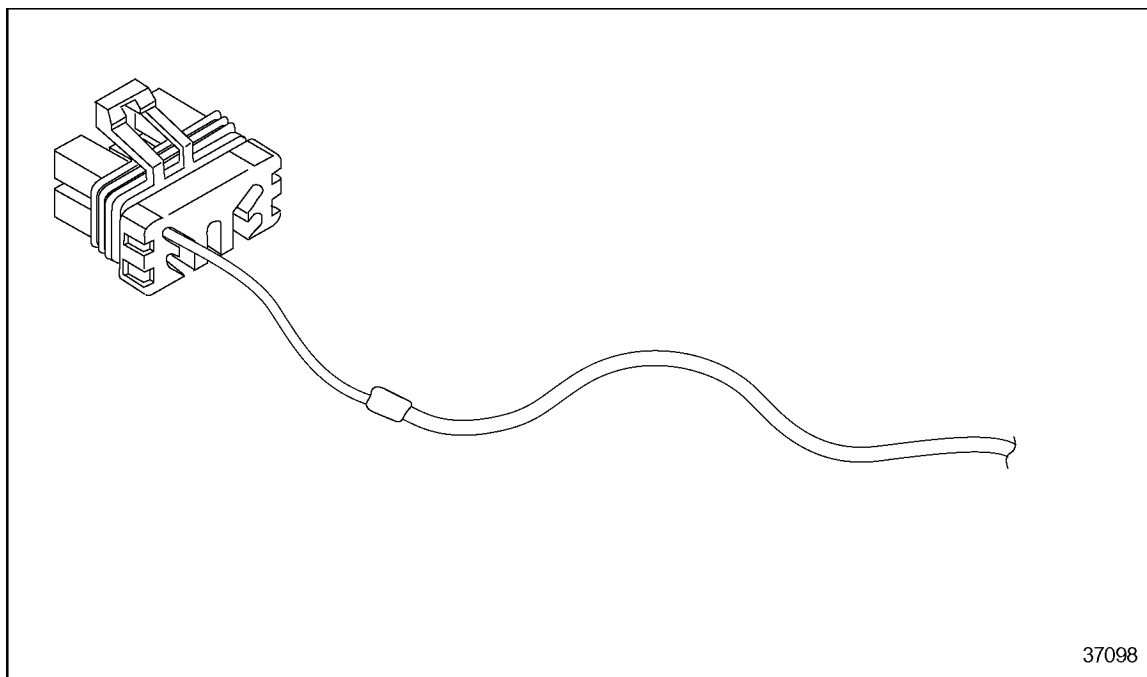


Figure 3-19 Spliced Power Connector Wire

These length and sizes are based on the use of stranded *annealed copper* not aluminum wire.

Splices must be soldered and sealed with a waterproof insulator. Alpha FIT-300, Raychem TAT-125 or any equivalent heat shrink - dual wall epoxy encapsulating adhesive polyolefin is required.

3.7.2 SINGLE-FUSE INSTALLATION

Single-fuse installations have one line from the battery to the ECM. The correct fuse size for a 6 cylinder engine is 1 @ 30 A.

NOTE:

A single-fuse installation does not provide redundancy on a critical circuit and does not prevent splicing of wire into fuse holders or power connectors.

Single fuse installations are simpler and less expensive than two fuse installations. See Figure 3-20.

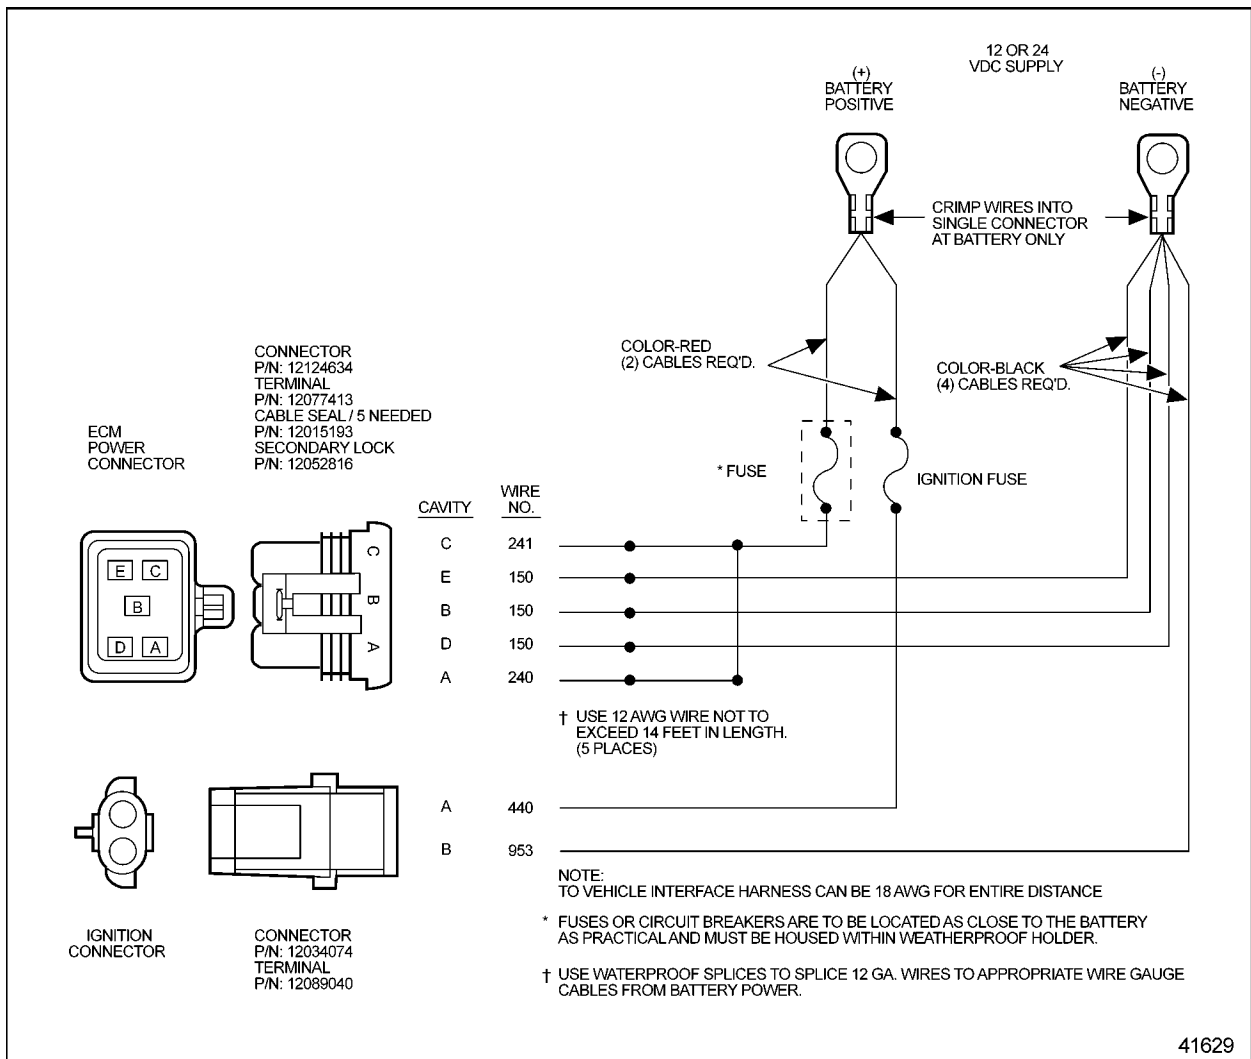


Figure 3-20 Power Harness - Single-ECM, Single-Fuse

The minimum cable gage based upon harness length from the battery source to the ECM is listed in Table 3-17.

Length from ECM to Battery or Bus Bar		Minimum Wire Size		Total Resistance of Maximum Length	
U.S. (ft)	International (m)	U.S. (Ga.)	International (mm ²)	U.S. (mΩ)	International (mΩ)
0 to 14	0 to 3	12	2.5	24.8	22.8
14 to 22	3 to 5	10	4	24.57	23.55
22 to 35	5 to 7	8	6	24.58	21.98
35 to 55	7 to 13	6	10	24.7	23.66
55 to 89	13 to 20	4	16	25.0	23.2

Table 3-17 Power Harness Length Criteria for Single Fuse Installations

If larger than 12 AWG wire is required, it should be spliced to 12 AWG wire as close as possible to the connector (see Figure 3-21).

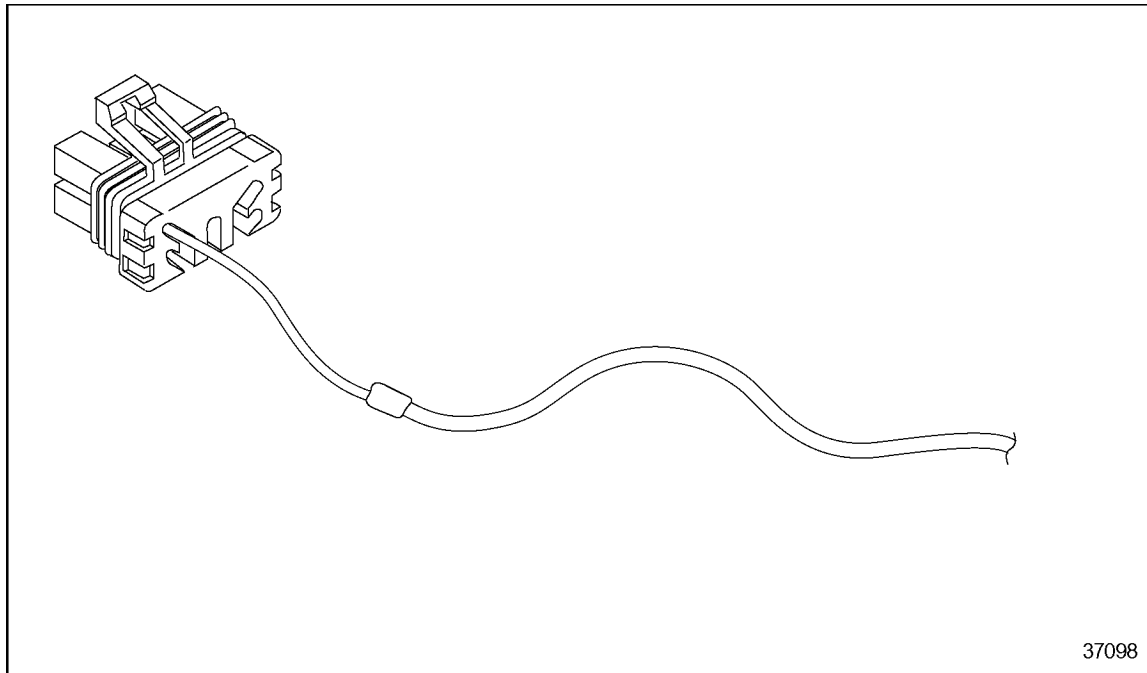


Figure 3-21 Spliced Power Connector Wire

These length and sizes are based on the use of stranded *annealed copper* not aluminum wire.

Splices must be soldered and sealed with a waterproof insulator. Alpha FIT-300, Raychem TAT-125 or any equivalent heat shrink - dual wall epoxy encapsulating adhesive polyolefin is required.

3.7.3 POWER HARNESS DESIGN

The following criteria are to be used when designing the Power Harness.



Criteria: Power Harness Design

The power connector is designed to accept 12 Ga. standard wall cable only.

The acceptable cable insulations are Teflon (EFTE), cross-link polyethylene (XLPE) or any equivalent self-extinguishing insulation such as GXL having a minimum rating of -40°C to 125°C. An equivalent insulation must meet the acceptable cable diameters 3.49 - 3.65 mm.

The conductor must be annealed copper not aluminum and must comply with the industry standard SAE J1128 document.

Splices must be soldered and sealed with a waterproof insulator. Alpha FIT-300, Raychem TAT-125 or any equivalent heat shrink - dual wall epoxy encapsulating adhesive polyolefin is required.

Detroit Diesel Corporation recommends color coding and hot stamping wire numbers in contrasting colors at intervals of four inches or less.

Wire Resistances

Twelve gage wires are required at the power harness connector. The total resistance of any power harness wire from the ECM to the battery (or bus bar) can not exceed 50 mΩ. The characteristics for Teflon coated and GXL type wire gages are listed in Table 3-18.

SAE Wire Gage	Metric Gage #	Area mm ²	Resistance mΩ/m	Resistance mΩ/ft @ 20°C	Resistance mΩ/ft @ 120°C	Diameter mm
16	1	1.129	15.300	4.66	6.50	0.72
14	2	1.859	9.290	2.83	3.94	1.18
12	3	2.929	5.900	1.80	2.50	1.86
10	5	4.663	3.720	1.13	1.58	2.97
8	8	7.277	2.400	0.73	1.02	4.63

Table 3-18 Wire Characteristics

Fuse Holder and Connector

The use of weatherproof blade type fuses, circuit breakers, or equivalent protection is required. Blade fuse holders may be purchased from DDC parts distribution network. The part numbers are listed in Table 3-19.

Part	Part Number
Fuse Holder	12033769
Cover	12033731
Terminal	12033997

Table 3-19 Fuse Holder Part Numbers

Power harness connectors and terminals may be purchased from the DDC parts distribution network. The part numbers are listed in Table 3-20.

Part	Part Number
Connector Assembly	12124634
Terminal	12077413
Cable Seal	12015193
Secondary Lock	12052816

Table 3-20 Power Harness Connector Assembly

3.7.4 POWER HARNESS INSTALLATION

The following criteria should be used when installing power harnesses. See Figure 3-22 for main power supply shutdown.



Criteria: Power Harness Installation

Power must be sourced directly from the battery or bus bar. An electrically solid connection to the battery or bus bar is required so the battery can filter electrical noise from the power lines. Power for other vehicle systems must not be sourced from the power harness assembly. **Do not** use chassis ground.

The DDEC ground wire must be electrically separate from chassis ground.

Power and ground bus bars may be used. The bus bar must be connected to the battery posts with 0 AWG or larger wire depending upon the total vehicle current requirement. The connecting wires must be as short as possible to minimize circuit resistance. **Do not** connect the ground wire to the chassis ground.

Provide maximum physical separation of the power harness from other vehicle electrical systems. Other electrical system cables should ideally be at least three feet away from the power harness and should not be parallel to the power harness. This will eliminate coupling electromagnetic energy from other systems into the power harness.

Do not route harness near any vehicle moving parts.

Do not route harness assembly near exhaust system or any high heat source.

Use a protective sheath and clips to prevent wires from being cut or frayed when weaving a harness through the frame.

THIS PAGE INTENTIONALLY LEFT BLANK

3.8 POWER SUPPLY

Normal operating voltage for DDEC, listed in Table 3-21, is ECM dependent.

NOTICE:	
Operating the ECM over the voltage limits listed in Table 3-21 will cause damage to the ECM.	

Part Number	Description	Normal Operating Voltage	Voltage Limits
23519307	DDEC IV - Standard On-highway ECM	11-14 Volts DC	14 Volts
23519308	DDEC IV - Universal ECM	11-32 Volts DC	32 Volts

Table 3-21 Operating Voltage

Operating the ECM between 6 and 11 volts may result in degraded engine operation. (Transient operation in this range during engine starting is considered normal for 12 volt systems.)

NOTICE:	
Reversing polarity will cause damage to the ECM if the power harness is not properly fused.	

3.8.1 AVERAGE BATTERY DRAIN CURRENT

The average battery drain current for various engines may be found in the following tables. The current draw for a single ECM configurations is listed in Table 3-22.

Engine	Condition	Current for 12V System (Average DC)	Current for 24V System (Average DC)
Single ECM	Ignition Off	20 mA	25 mA
Single ECM	Ignition On & Engine Stopped	500 mA	400 mA

NOTE: Add up to 1.5 A to the current draw total for every digital output.

NOTE: Power supply and harness must be able to transition from 0 A to 30 A in .6 milliseconds with no more than 0.75 volt loss at the ECM.

NOTE: Add 6.0A to the current draw for the two Variable Pressure Output Devices (VPOD).

Table 3-22 Average Battery Drain Current for Single ECM Configurations

The current draw for the Series 60 is listed in Table 3-23.

Engine	Condition	Current for 12V System (Average DC)	Current for 24V System (Average DC)
8 Cylinder	Idle	1.0 A	0.8 A
6 Cylinder	Rated RPM, Full Load	4.5 A	3.0 A

NOTE: Add up to 1.5 A to the current draw total for every digital output.

NOTE: Power supply and harness must be able to transition from 0 A to 30 A in 0.6 milliseconds with no more than 0.75 volt loss at the ECM.

NOTE: Add 6.0A to the current draw for the two Variable Pressure Output Devices (VPOD).

Table 3-23 Average Battery Drain Current for the Series 60

3.8.2 REQUIREMENTS FOR 12 OR 24 VOLT SYSTEM

The alternator size must be suitable for the amount of current drawn as listed in Table 3-22 and Table 3-23.

The ECM will not activate injectors at speeds below 120 RPM.

3.8.3 MAIN POWER SHUTDOWN

The main power supply shutdown schematic shows the DDC approved method for main power switch implementation. See Figure 3-22.

NOTE:

Disconnecting positive power is not sufficient to isolate the ECM for welding purposes.

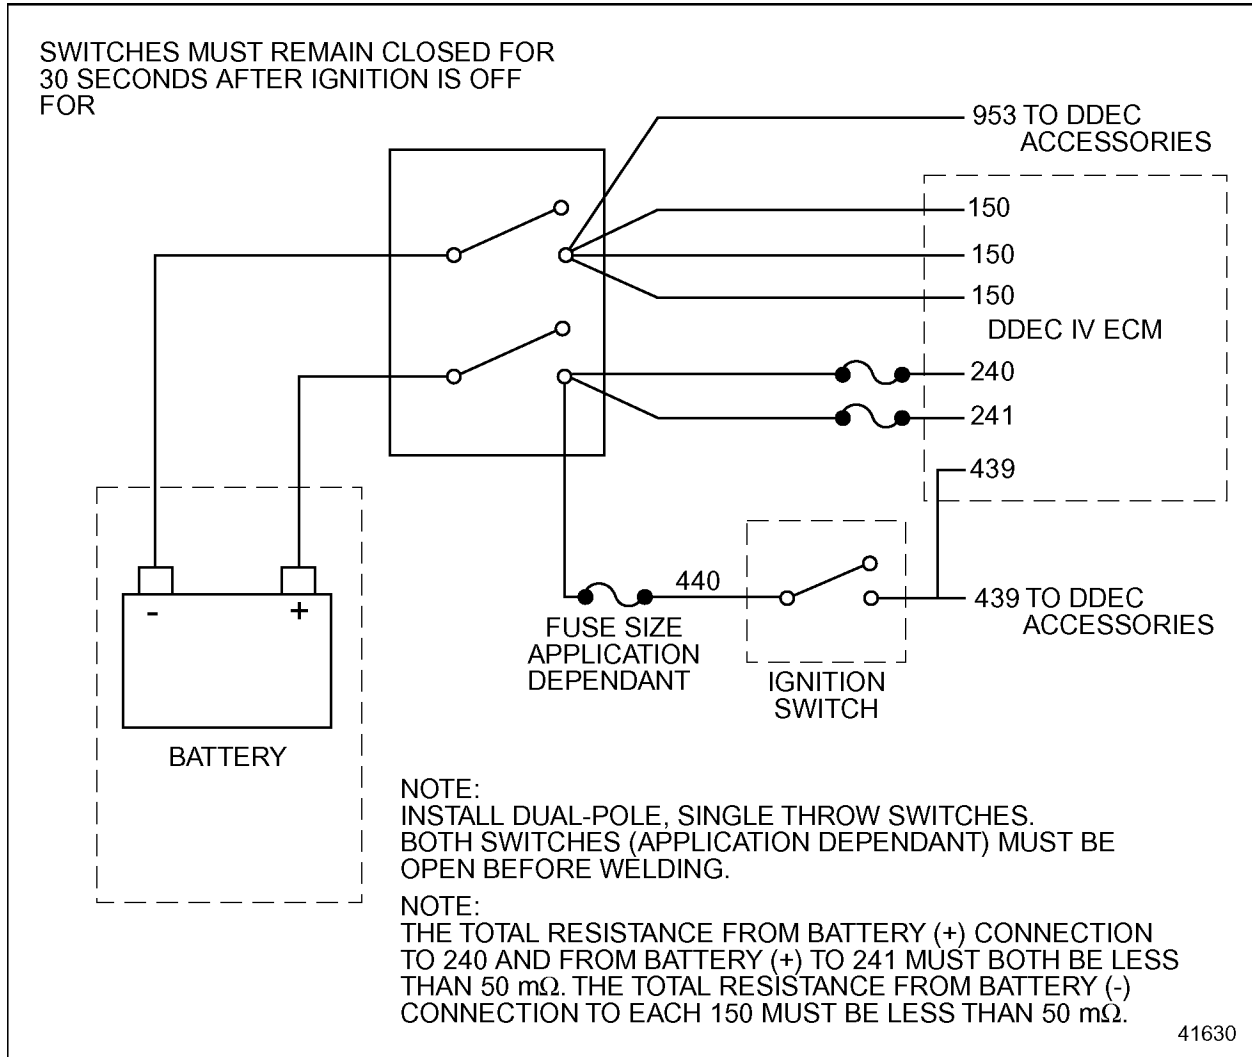


Figure 3-22 Main Power Supply Shutdown 12 or 24 Volt Systems

3.8.4 WELDING CAUTION

Prior to any welding on the vehicle or equipment, the following precautions must be taken to avoid damage to the electronic controls and/or the engine (see Figure 3-23).

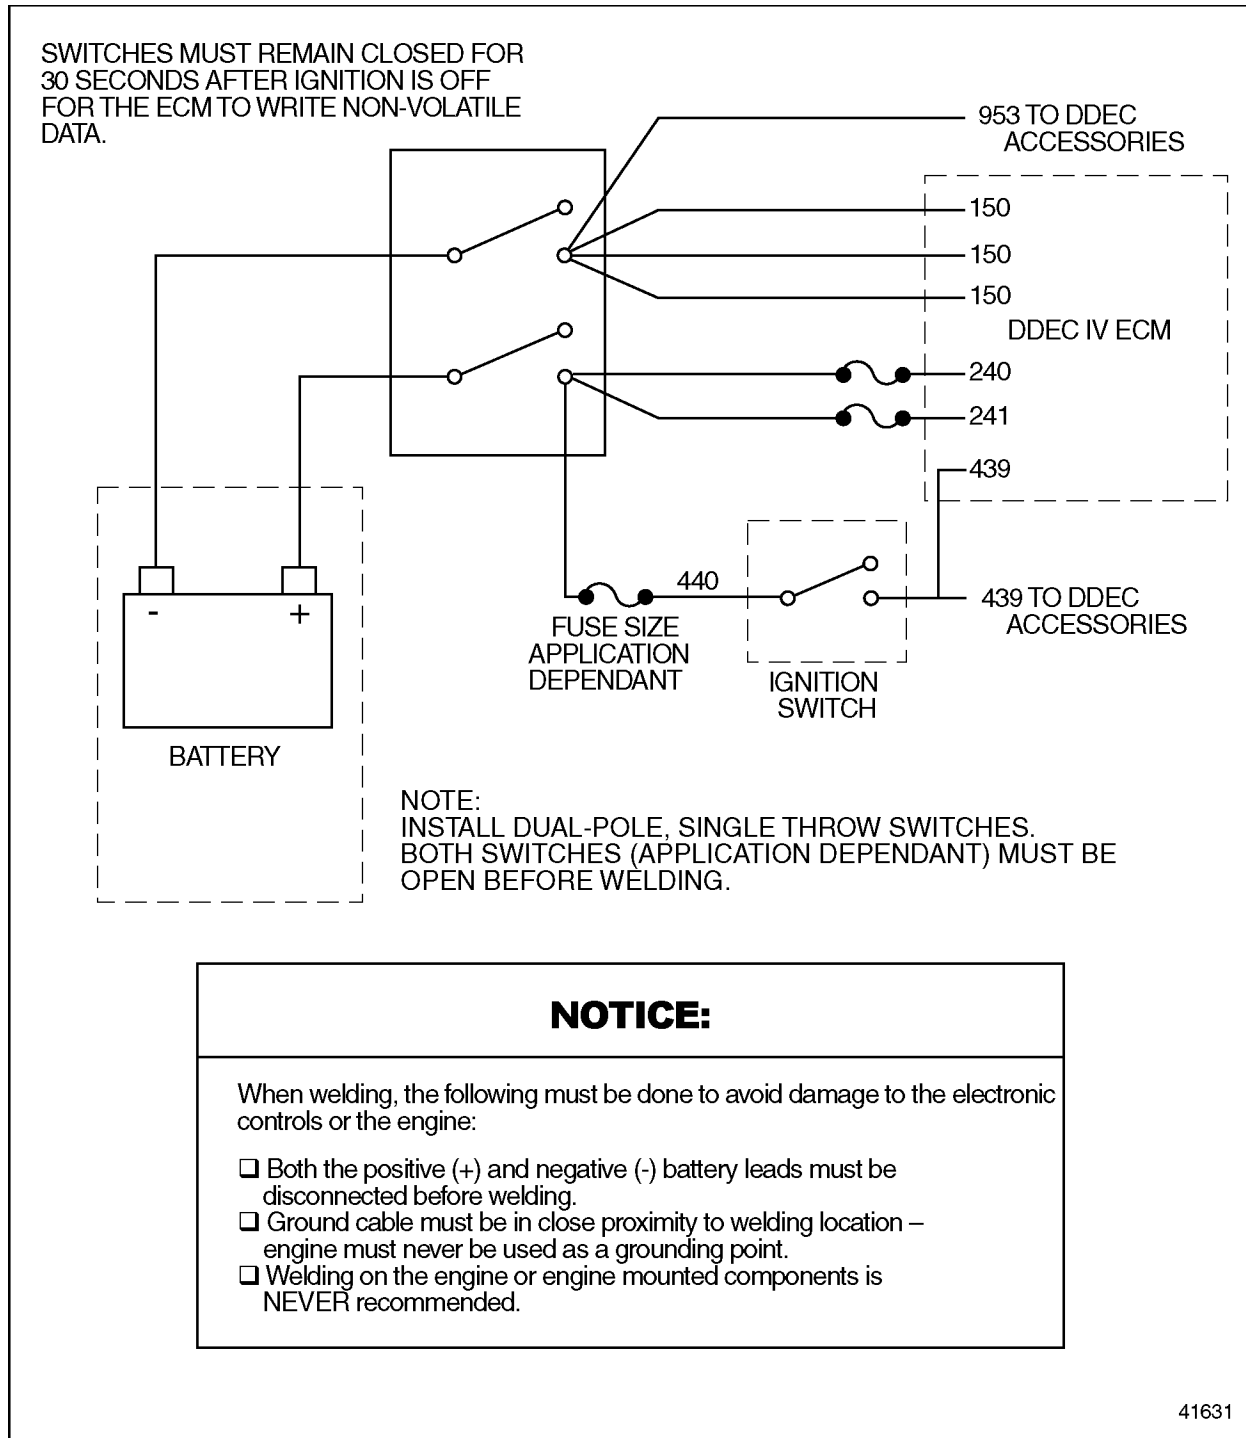


Figure 3-23 Welding Precaution

3.9 FUSES

A Battery (+) fuse and an ignition circuit fuse must be provided by the vehicle wiring harness. Blade-type automotive fuses are normally utilized; however, manual or automatic reset circuit breakers which meet the following requirements are also acceptable. The fuse voltage rating must be compatible with the ECU's maximum operating voltage.



CAUTION:

FIRE

To avoid injury from fire, additional loads should not be placed on existing circuits. Additional loads may blow the fuse (or trip the circuit breaker) and cause the circuit to overheat and burn.



CAUTION:

FIRE

To avoid injury from fire, do not replace an existing fuse with a larger amperage fuse. The increased current may overheat the wiring, causing the insulation and surrounding materials to burn.

The ignition fuse current rating must be sized for the loads utilized in each application; however, a rating of between 5 and 10 amps is usually sufficient.

The Battery (+) fuse current rating must satisfy two criteria:

- ☐ Must not open during normal operation
- ☐ Must open before the ECU is damaged during a reverse battery condition

Acceptable blow times versus current and temperature derating characteristics are listed in Table 3-24 and Table 3-25.

% of Rated Fuse Current	Minimum Blow Time	Maximum Blow Time
100%	100 hours	-
135%	1 minute	30 minutes
200%	6 seconds	40 seconds

Table 3-24 Fuse Current and Blow Time

Temperature	% of Rated Fuse Current
-40°C	110% max
+25°C	100%
+120°C	80% min

Table 3-25 Fuse Temperature and Current

3.10 CONNECTORS

The connectors listed in this section are required to properly wire a Detroit Diesel engine equipped with DDEC.

3.10.1 ECM VEHICLE HARNESS CONNECTORS

The ECM vehicle harness connections are on the right side of the ECM (see Figure 3-24).

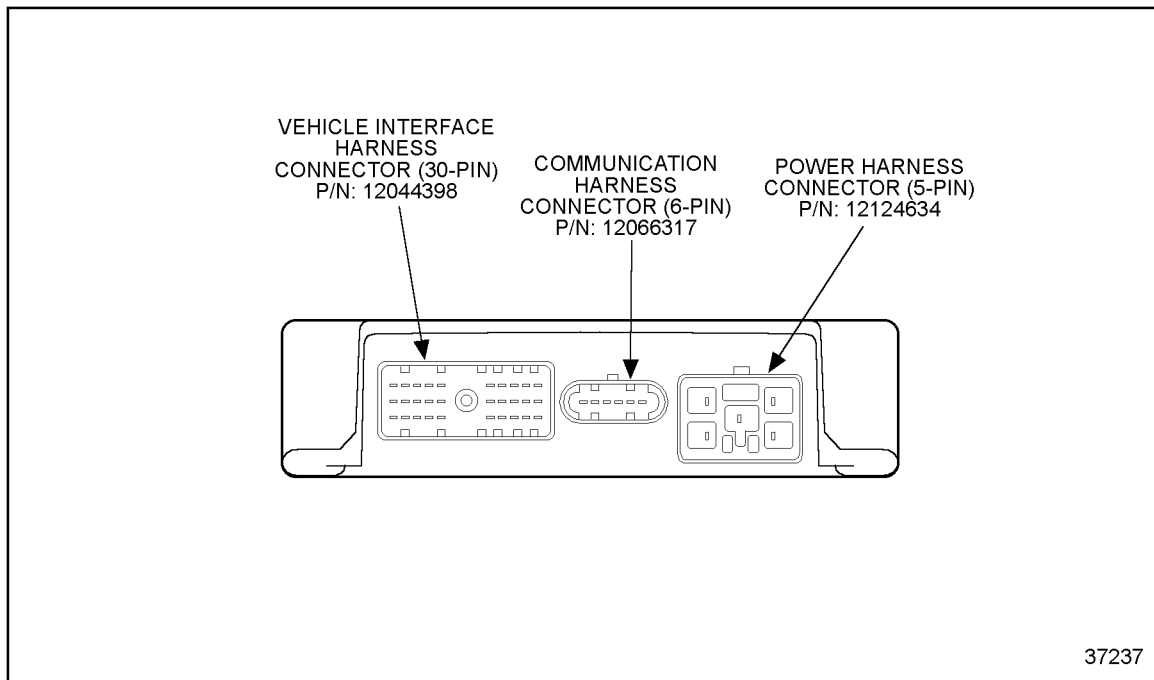


Figure 3-24 ECM Right Side, Vehicle Harness Connections

VIH-to-ECM Connector

The wire comb is a strain relief for the back of the VIH connector to prevent water from entering the connector from the back. To use the wire comb, the original bolt in the VIH connector must be removed and discarded. The wire comb should be attached to the back of the VIH connector. The new bolt must be inserted through the assembly and used to tighten the VIH connector into the ECM. These parts listed in Table 3-26 are available from the Detroit Diesel Parts Distribution Center. The wire comb is required for all Series 50 applications.

Description	Part Number
Wire Comb	12110546
Bolt	12129426

Table 3-26 Wire Comb Part Numbers

The wiring for the 30-pin VIH-to-ECM connector is listed in Table 3-27.

Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	OI THERMOSTAT OR PTO OR EXHAUST BACK PRESSURE SENSOR (COACH ONLY)	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	DIGITAL INPUT #11	
D-3	749	ESS OR FIRE TRUCK PRESSURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	VARIABLE SPEED FAN OR PWM TRANSMISSION OR OI ALARM	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-27 Typical VIH-to-ECM Connector Pin Definitions — Truck/Coach Applications

The 30-pin VIH-to-ECM connector, listed in Table 3-28, is a Metri-Pack 150 series pull-to-seat connector.

Part	Part Number
Connector	12034398
Terminal	12103881
Plug	12034413

Table 3-28 30-pin VIH-to-ECM Connector

The ECM connector assembly center screw must be torqued to 22–28 in·lb. (2.49–3.16 N·m). The 30-pin VIH-to-ECM connector wiring for urban bus applications is listed in Table . 3-29.

Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	PTO OR EXHAUST BACKPRESSURE (OPTIONAL)	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	DIGITAL INPUT #11	
D-3	749	EXHAUST TEMPERATURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	PWM #1 – VARIABLE SPEED FAN OR PWM TRANSMISSION	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-29 Typical VIH-to-ECM Connector Pin Definitions — Urban Bus Applications

The wiring for the 30-pin VIH-to-ECM connector for natural gas applications is listed in Table 3-30.

Cavity	Wire No.	Label	VIH-to-ECM Connector
H-3	115	COOLANT LEVEL	3 2 1 A B C D E F G H J K 37018
D-2	417	LIMITING SPEED GOVERNOR	
B-1	419	CHECK ENGINE LIGHT	
B-3	439	IGNITION	
E-1	451	DIGITAL INPUT #1	
F-3	499	DIGITAL OUTPUT #1	
K-1	505	TACHOMETER DRIVE	
B-2	509	STOP ENGINE LIGHT	
D-1	510	RELATIVE HUMIDITY	
H-1	523	DIGITAL INPUT #7	
H-2	524	DIGITAL INPUT #8	
G-1	528	DIGITAL INPUT #4	
J-2	531	DIGITAL INPUT #10	
J-1	541	DIGITAL INPUT #9	
F-1	542	DIGITAL INPUT #2	
G-2	543	DIGITAL INPUT #5	
F-2	544	DIGITAL INPUT #3	
G-3	545	DIGITAL INPUT #6	
A-2	555	DIGITAL OUTPUT #2	
E-2	556	VEHICLE SPEED (+)	
E-3	557	VEHICLE SPEED (-)	
K-2	583	PSV DIAGNOSTIC	
D-3	749	AMBIENT AIR TEMPERATURE	
C-2	900	J1587 DATA LINK (+)	
C-1	901	J1587 DATA LINK (-)	
J-3	908	VARIABLE SPEED FAN OR PWM TRANSMISSION	
A-3	916	SENSOR SUPPLY (5VDC)	
C-3	952	SENSOR RETURN	
K-3	979	DIGITAL INPUT #12	
A-1	988	DIGITAL OUTPUT #3	

Table 3-30 Typical VIH-to-ECM Connector Pin Definitions — Natural Gas Applications

Power Harness-to-ECM Connector

See Figure 3-25 for the wiring for the ECM-to-Power Harness connector. Refer to section 3.7 for more information on the Power Harness.

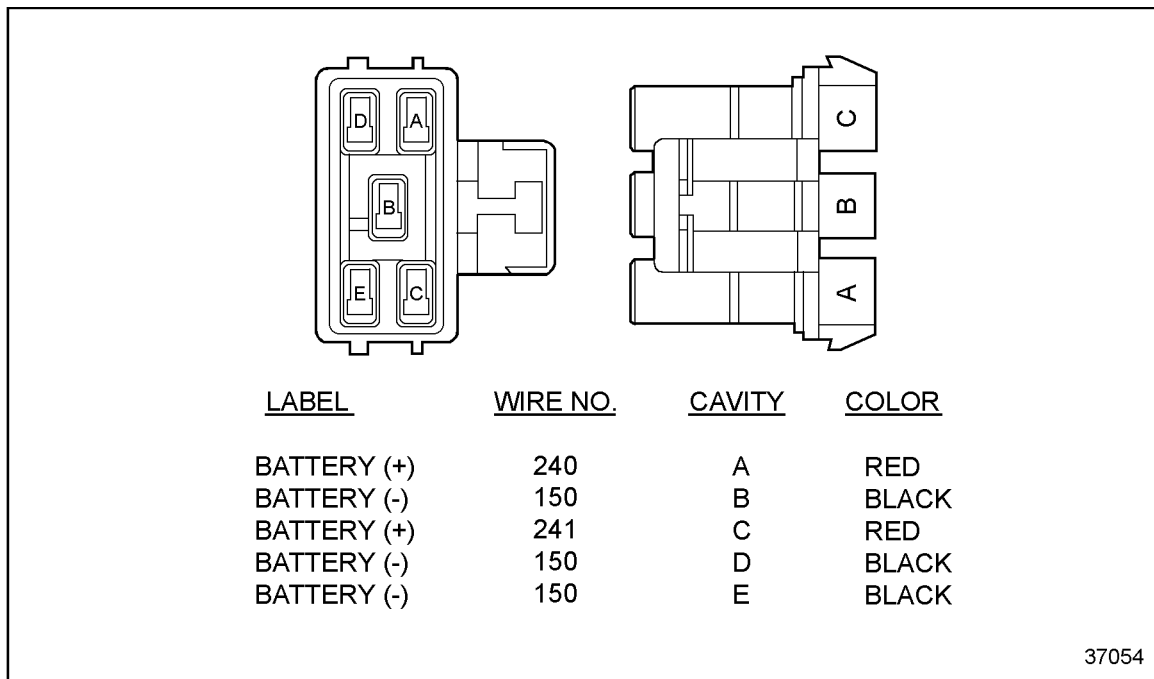


Figure 3-25 Five-Pin Power Harness Connector

The parts for the five-pin Power Harness Connector are listed in Table 3-31.

Part	Part Number
Connector	12124634
Terminal	12077413
Cable Seal	12015193
Secondary Lock	12052816

Table 3-31 Five-pin Power Harness Connector Part Numbers

Communication Harness-to-ECM Connector

See Figure 3-26 for the wiring for the ECM-to-Communication Harness connector. Refer to section 3.5 for more information on the Communication Harness.

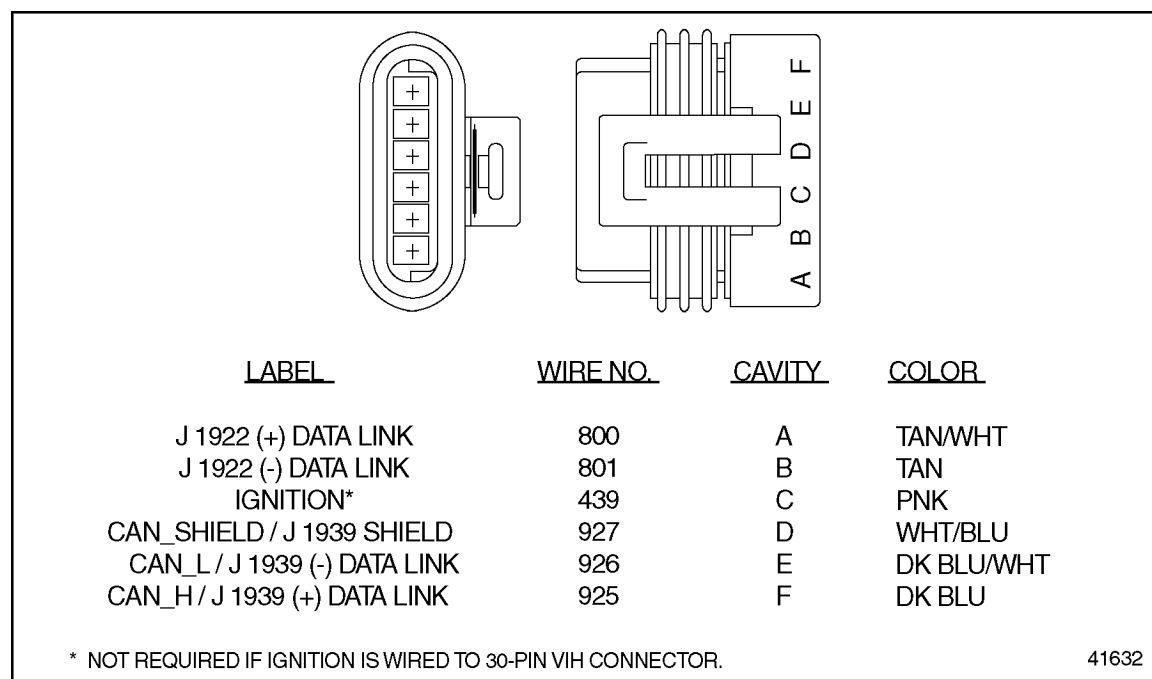


Figure 3-26 Communication Harness Connector

The part numbers for the Communication Harness Connector are listed in Table 3-32.

Part	Part Number
Connector	12066317
Terminal	12103881
Plug	12034413

Table 3-32 Communication Harness Connector Part Numbers

3.10.2 ECM ENGINE HARNESS CONNECTORS

The ECM engine harness connections are on the left side of the ECM and come factory installed (see Figure 3-27).

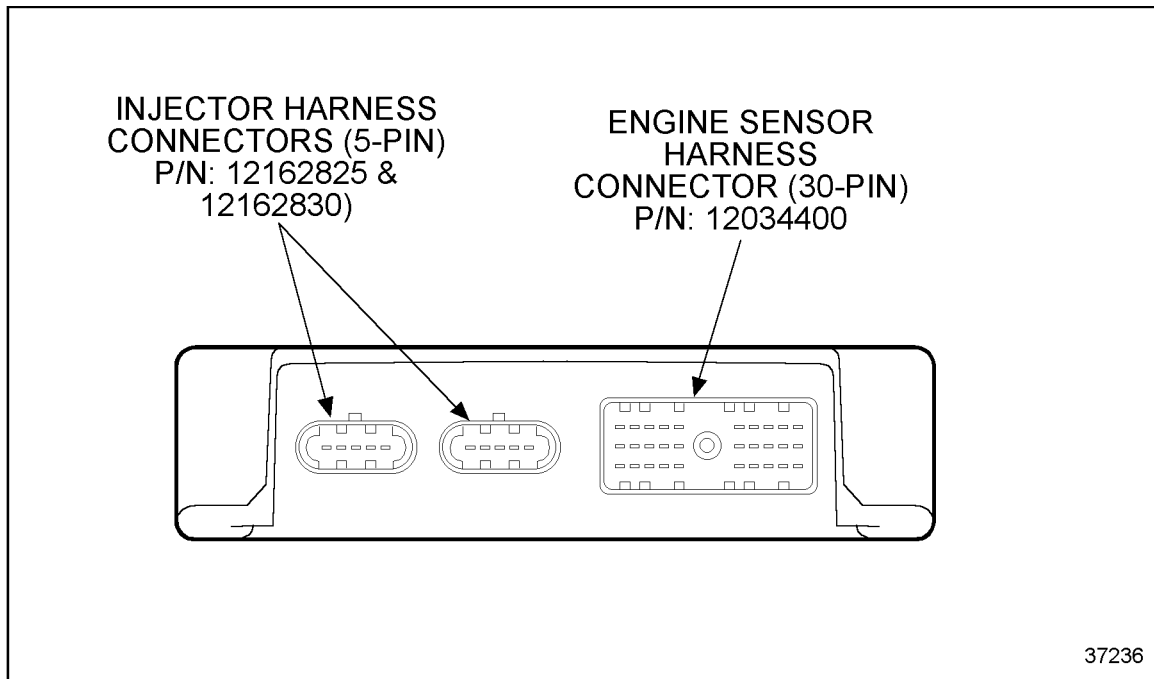


Figure 3-27 ECM Left Side, Engine Harness Connections

ESH-to-ECM Connector

The wiring for the 30-pin ESH-to-ECM connector is listed in Table 3-33.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	OIL TEMPERATURE	
N-2	132	AIR TEMPERATURE	
P-3	133	COOLANT TEMP	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	TURBO BOOST	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMP	
P-2	530	OIL PRESSURE	
S-3	561	ENGINE BRAKE MED	
T-3	562	ENGINE BRAKE LO	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	TURBO SPEED	
L-1	904	BAROMETRIC PRESSURE	
M-1	905	TURBO COMPRESSOR IN TEMP	
N-1	906	TURBO COMPRESSOR OUT TEMP	
R-1	907	EGR TEMPERATURE	
Y-1	909	EGR CONTROL	
W-2	910	OI STARTER	
X-2	911	VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	EGR DELTA PRESSURE	
L-2	976	RELATIVE HUMIDITY	

Table 3-33 Typical ESH-to-ECM Connector Pin Definitions — Series 60

The 30-pin ESH-to-ECM connector, listed in Table 3-34, is a Metri-Pack 150 series pull-to-seat connector.

Part	Part Number
Connector	12034400
Terminal	12103881
Seal	In Connector
Plug	12034413

Table 3-34 30-pin ESH-to-ECM Connector

The wiring for the 30-pin ESH-to-ECM connector for the Series 50 is listed in Table 3-35.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	OIL TEMPERATURE	
N-2	132	AIR TEMPERATURE	
P-3	133	COOLANT TEMPERATURE	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	TURBO BOOST	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMPERATURE	
P-2	530	OIL PRESSURE	
S-3	561	VGT POWER	
T-3	562	EGR SOLENOID CONTROL	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	TURBO SPEED	
L-1	904	AIR FILTER RESTRICTION (MAS ONLY)	
M-1	905	FUEL FILTER RESTRICTION (MAS ONLY)	
N-1	906	ADD COOLANT LEVEL (MAS ONLY) — 2002–2003 COMPRESSOR TEMP OUT (330 hp only) — 2004 – Present	
R-1	907	EGR TEMPERATURE	
Y-1	909	PWM #2 – NOT USED	
W-2	910	PWM #3 –NOT USED	
X-2	911	PWM #4 –VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	EGR DELTA PRESSURE	
L-2	976	OIL LEVEL (MAS ONLY)	

Table 3-35 Typical ESH-to-ECM Connector Pin Definitions — Series 50

The wiring for the 30-pin ESH-to-ECM connector on a natural gas engine is listed in Table 3-36.

Cavity	Wire No	Label	ESH-to-ECM Connector
T-1	109	TRS (-)	41449
T-2	110	TRS (+)	
S-2	111	SRS (+)	
S-1	112	SRS (-)	
R-2	120	EXHAUST TEMPERATURE	
N-2	132	INTAKE AIR TEMPERATURE	
P-3	133	COOLANT TEMPERATURE	
W-1	416	SENSOR SUPPLY (5VDC)	
P-1	432	INTAKE MANIFOLD PRESSURE	
Y-2	452	SENSOR RETURN (ENGINE)	
R-3	472	FUEL TEMPERATURE	
P-2	530	OIL PRESSURE	
S-3	561	THROTTLE SUPPLY	
T-3	562	FUEL SHUTOFF	
W-3	563	DIGITAL OUTPUT #6	
X-3	564	DIGITAL OUTPUT #5	
Y-3	565	DIGITAL OUTPUT #4	
X-1	573	SNEF	
L-1	904	BAROMETRIC PRESSURE	
M-1	905	FUEL PRESSURE	
N-1	906	OXYGEN SENSOR	
R-1	907	THROTTLE PLATE POSITION	
Y-1	909	THROTTLE ACTUATOR	
W-2	910	UNUSED	
X-2	911	VGT CONTROL	
L-3	925	J1939 (+)	
M-3	926	J1939 (-)	
N-3	927	J1939 SHIELD	
M-2	958	PULSE STEPPER VALVE	
L-2	976	KNOCK SENSOR	

Table 3-36 Typical ESH-to-ECM Connector Pin Definitions — Natural Gas Applications

3.10.3 FCI APEX CONNECTORS

These FCI Apex connectors are the OEM's responsibility. These connectors are used for Series 60 and natural gas applications only. The 10-pin connector is the OEM interface to the ESH and the 4-pin is used for the RH/TCI Temperature Sensor (see Figure 3-28 and Figure 3-29).

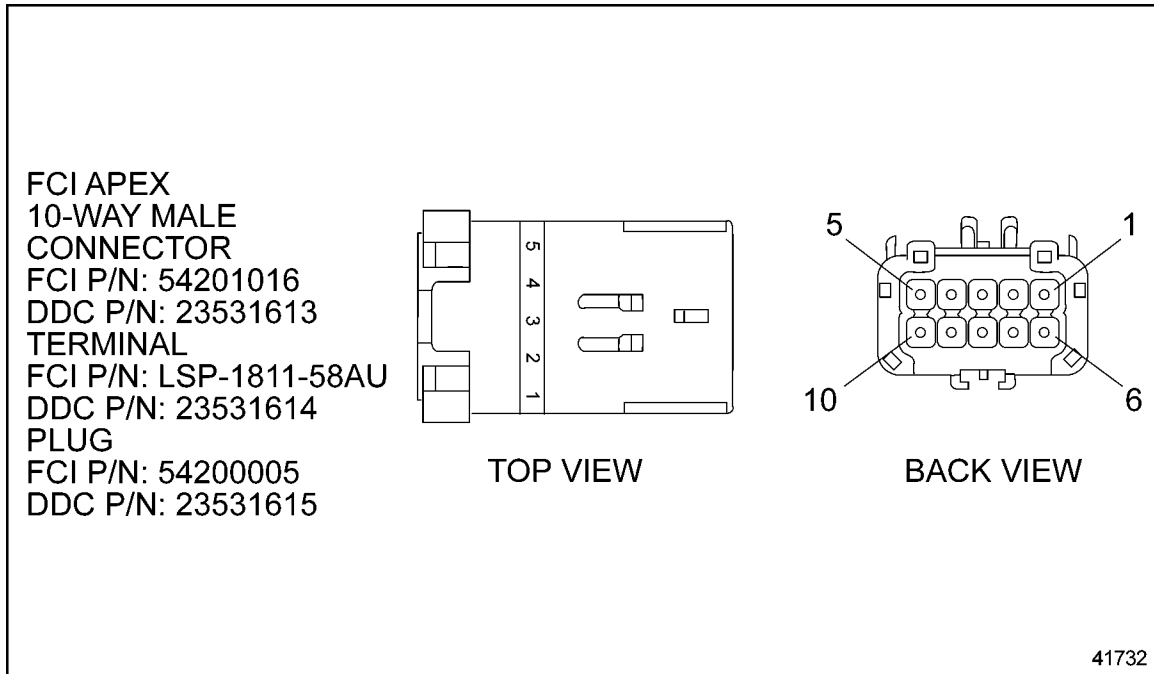


Figure 3-28 Ten-pin OEM Engine Sensor Harness Interface Connector

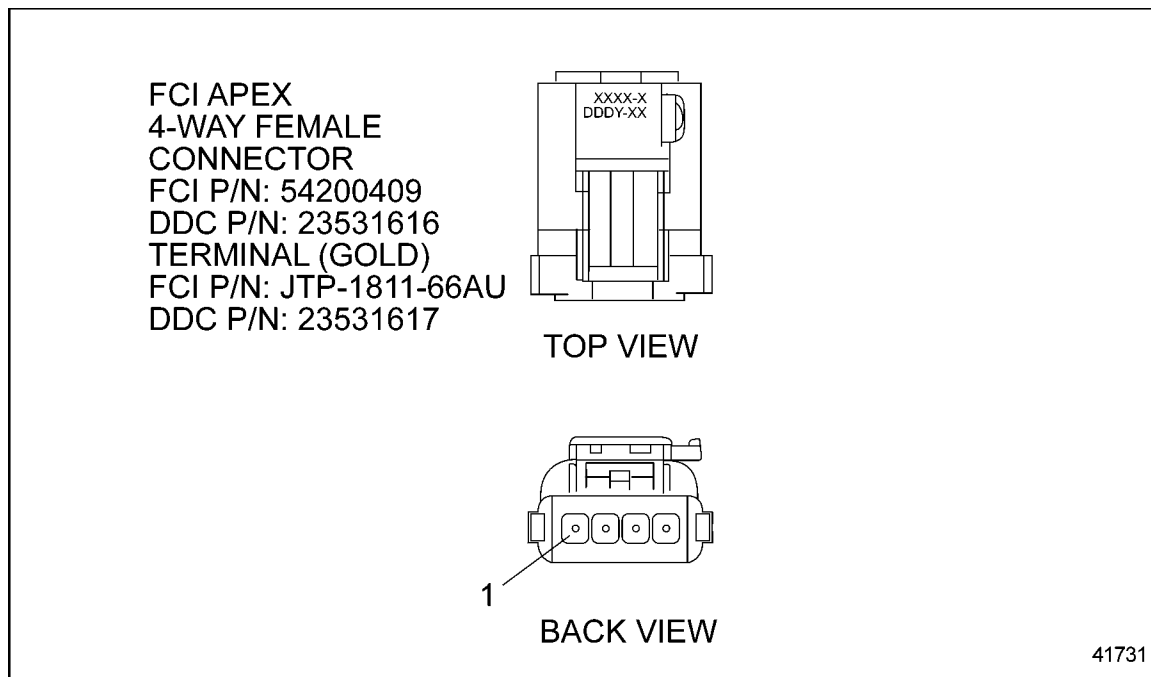


Figure 3-29 Relative Humidity/Turbo Compressor Inlet Temperature Sensor Connector

FCI Apex connectors are available from:

NTI, LLC

300 Randall Street, Suit B

Greer, SC 29651

Telephone: 864-877-4800

Fax: 864-877-2997

FCI Automotive

Telephone: 1-800-303-3577

734-728-2100

3.10.4 DATA LINK CONNECTORS

The connectors used to connect the data links are a 6-pin Deutsch connector for the J1708/J1587 Data Link or a 9-pin Deutsch connector for the J1939 and J1587 Data Link. DDC recommends that the OEM-supplied Data Link Connector be conveniently positioned in a well protected location facilitating subsequent DDDL/DDR usage (i.e., reprogramming, diagnostics, etc.).

SAE J1939/J1587 Data Link Nine-pin Connector (Recommended)

The SAE J1939/J1587 nine-pin data link connector is the recommended diagnostic connector. The components listed in Table 3-37 are required to incorporate an SAE J1939/J1587 Data Link in a VIH so a DDR or other diagnostic devices can be attached without a unique jumper:

Component	DDC Part Number	Deutsch Part Number
Nine-pin Deutsch Connector	23529496	HD10-9-1939P
Connector Cover	23529497	HDC 16-9
Two (2) Cavity Plugs	23507136	114017
Seven (7) Terminals	23507132	0460-202-16141

Table 3-37 Required Components to Incorporate an SAE J1939/J1587 Data Link in the VIH

The following illustration shows the wiring for the nine-pin connector (see Figure 3-30).

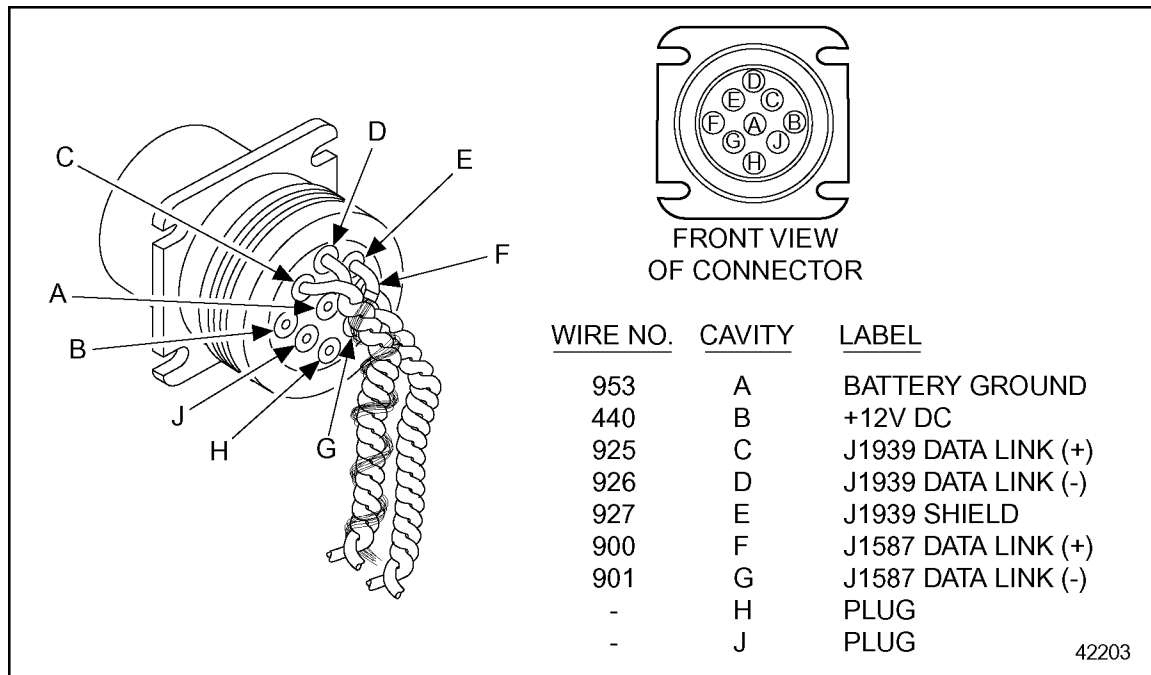


Figure 3-30 Wiring for Nine-pin Data Link Connector

The maximum length for the SAE J1939 Data Link is 130 ft (40 m).

The SAE J1587/J1708 Data Link must be twisted at a minimum of 12 turns per foot. The maximum length is 130 ft (40 m).

SAE J1708/J1587 Data Link Six-pin Connector

The components listed in Table 3-38 are required to incorporate a SAE J1708/J1587 Data Link in a VIH so a DDR or other diagnostic devices can be attached without a unique jumper:

Component	DDC Part Number	Deutsch Part Number
Six-pin Deutsch Connector	23513052	HD-10-6-12P
Connector Cover	23513054	HDC-16-6
Two (2) Cavity Plugs	23507136	114017
Four (4) Terminals	23513053	0460-220-1231

Table 3-38 Required Components to Incorporate an SAE J1939/J1587 Data Link in the VIH

The following illustration shows the wiring for the 6-pin connector (see Figure 3-31).

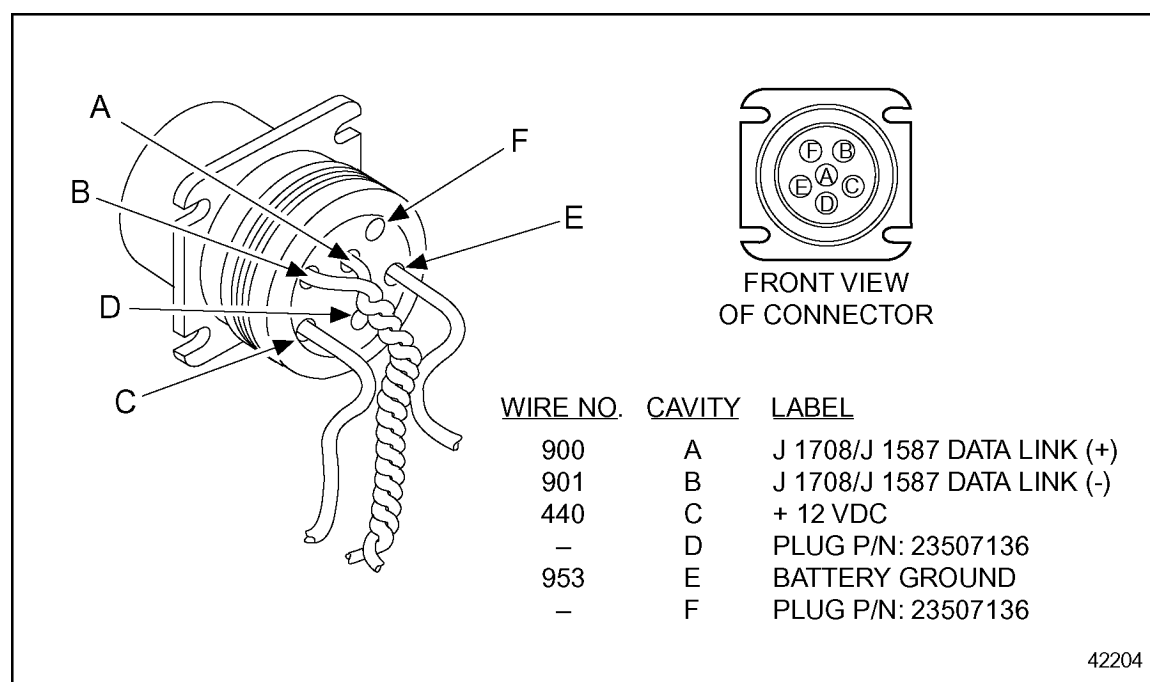


Figure 3-31 Wiring for Six-pin Data Link Connector

3.11 WIRES AND WIRING

Detroit Diesel Corporation recommends color coding and hot stamping wire numbers in contrasting colors at intervals of four inches or less.

3.11.1 GENERAL REQUIREMENTS

NOTE:

Avoid renumbering DDC circuits since all troubleshooting guides reference the circuit numbers shown in the schematic. DDC suggests including a prefix or suffix with the DDC circuit numbers when conflicts exist.

3.11.2 GENERAL WIRE

All wires used in conjunction with the DDEC must meet the following criteria:

NOTICE:
DDC does not recommend using any type of terminal lubricant or grease compounds. These products may cause dirt or other harmful substances to be retained in the connector. DDC has not tested these products and cannot stand behind their use.

NOTICE:
Insulation must be free of nicks.



Criteria: Wires

Tape, conduit, loom or a combination thereof must be used to protect the wires. Refer to sections 3.12 and 3.13.

All wires must be annealed copper wire (not aluminum).

All wires must comply with SAE J1128.

All wires must be insulated with cross-link polyethylene (XLPE) such as GXL, or any self-extinguishing insulation having a minimum rating of -40°C (-40°F) to 125°C (257°F).

3.11.3 WIRING FOR VIH-TO-ECM CONNECTOR

NOTICE:

Wires greater than 2.97 mm (.117 in.) must not be used in the VIH-to-ECM connector, as irreparable damage to the seal may result.

NOTICE:

Failure to use the proper cable diameter may result in the inability to obtain proper terminal installation.
--

The VIH 30-pin connector is designed to accept 18 gage (0.75 - 0.80 mm²) standard wall thickness cable, only.

3.11.4 RETURN POWER (GROUND) CIRCUITS

Switch ground (circuit 953) must only be used to provide ground for DDEC components and must be sourced directly from the negative battery or bus bar terminal

NOTE:

This circuit can not be used to provide ground for non- DDEC IV OEM-supplied electronics.

3.11.5 DATA LINK CIRCUITS

Twisting of the following wire pairs a minimum of 12 turns per foot (305 mm), is required to minimize electromagnetic field coupling effects.

- ☐ Data link circuits 900 and 901 (SAE J1587)
- ☐ Data link circuits 800 and 801 (SAE J1922)

Circuits 900 (Data Link +) and 901 (Data Link -) are used as the J1587 communication link. These circuits also exist in the DDEC six-pin or nine-pin diagnostic connector for use with the DDR.

Circuits 800 (Data Link +) and 801 (Data Link-) as shown on the communications harness schematic are used as the SAE J1922 communication link.

Circuits 925 [CAN_H/J1939 (+)], 926 [CAN_L J1939 (-)] and 927 (CAN_SHLD/J1939 Shield) as shown on the communications harness schematic are used as the SAE J1939 communication link. See Figure 3-15.

3.11.6 POWER HARNESS WIRE RESISTANCE

Twelve gage wires are required at the power harness connector. The total resistance of any power harness wire from the ECM to the battery (or bus bar) can not exceed 50 mΩ. The characteristics for Teflon coated and GXL type wire gages are listed in Table 3-39.

SAE Wire Gage	Metric Gage #	Area mm ²	Resistance mΩ/m	Resistance mΩ/ft @ 20°C	Resistance mΩ/ft @ 120°C	Diameter mm
16	1	1.129	15.300	4.66	6.50	0.72
14	2	1.859	9.290	2.83	3.94	1.18
12	3	2.929	5.900	1.80	2.50	1.86
10	5	4.663	3.720	1.13	1.58	2.97
8	8	7.277	2.400	0.73	1.02	4.63

Table 3-39 Power Harness Wire Characteristics

3.11.7 PACKARD ELECTRIC TERMINAL INSTALLATION AND REMOVAL

The method of terminal installation and removal varies, depending on the terminal/connector design. Crimp techniques and harness dressing must also be performed in accordance with recommended procedures to assure waterproof connections.

NOTICE:
Terminals should not be soldered to the cable.

Crimp and Removal Tools

Crimp tools and connector removing tools can be purchased from Kent-Moore. The part and associated part numbers are listed in Table 3-40 below:

Connector	Tool	Kent-Moore P/N
Metri-Pack 150	Removing	J 35689-A
	Crimp	J 35123
Weather Pack	Removing	J 36400-5
Metri-Pack 280	Removing (18 AWG)	J 33095
	Crimp (18 AWG)	J 38125-12A
	Removing (12 AWG - Used for power harness)	J 33095
	Crimp (12 AWG - Used for power harness)	J 39848
Deutsch	Removing (12 AWG)	J 37451
	Removing (16-18 AWG)	J 34513-1
	Crimp	J 34182

Table 3-40 Crimp and Removal Tools

Kent-Moore

Phone: 1-800-345-2233

www.spkentmoore.com

Push-to-Seat Terminal Installation Guidelines

The following guidelines apply to all push-to-seat terminals.

NOTICE:

If a separate seal is required, be sure to install the seal onto the wire before stripping the insulation.
--

NOTICE:

No more than one strand in a 16 strand wire may be cut or missing.
--

1. Position a seal on each terminal lead so 5.0 ± 0.5 mm ($.20 \pm .02$ in.) conductor and 1.0 ± 0.1 mm ($.05 \pm .005$ in.) cable protrudes past the seal after being stripped (see Figure 3-32).

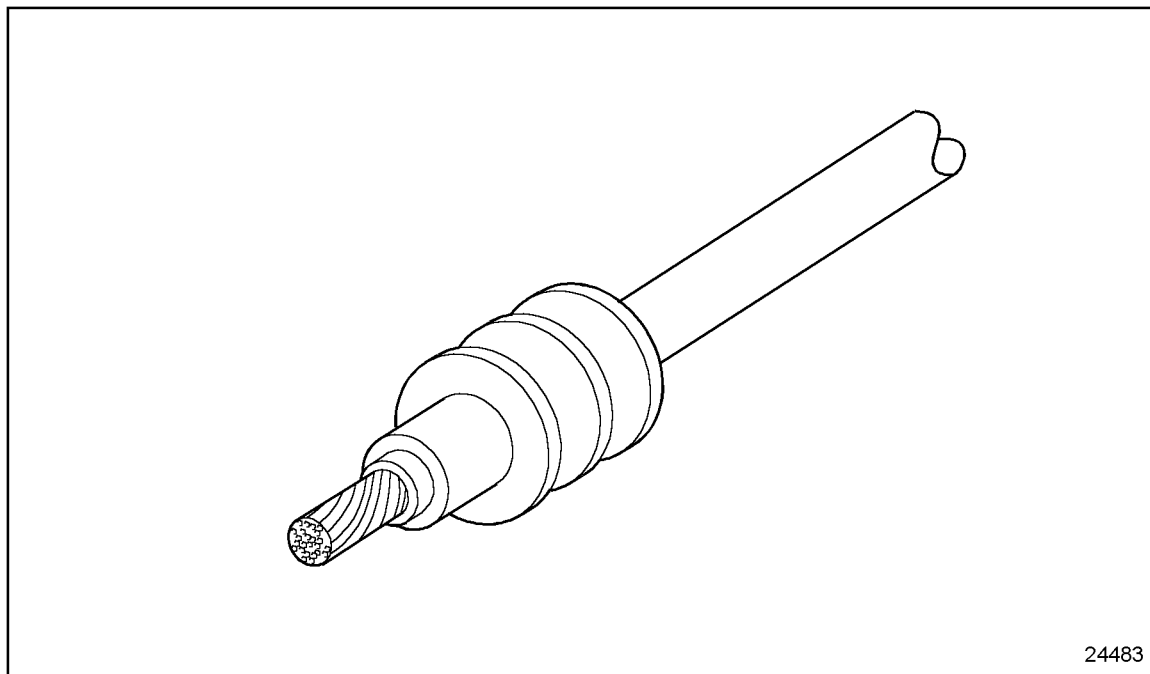


Figure 3-32 Seal Positioning

2. Remove the insulation from the end of the cable with J 35615 (or equivalent), exposing 5.0 ± 0.5 mm ($0.2 \pm .02$ in.) conductor (wire), a sufficient amount of wire to be crimped by the terminal core wings (see Figure 3-33).

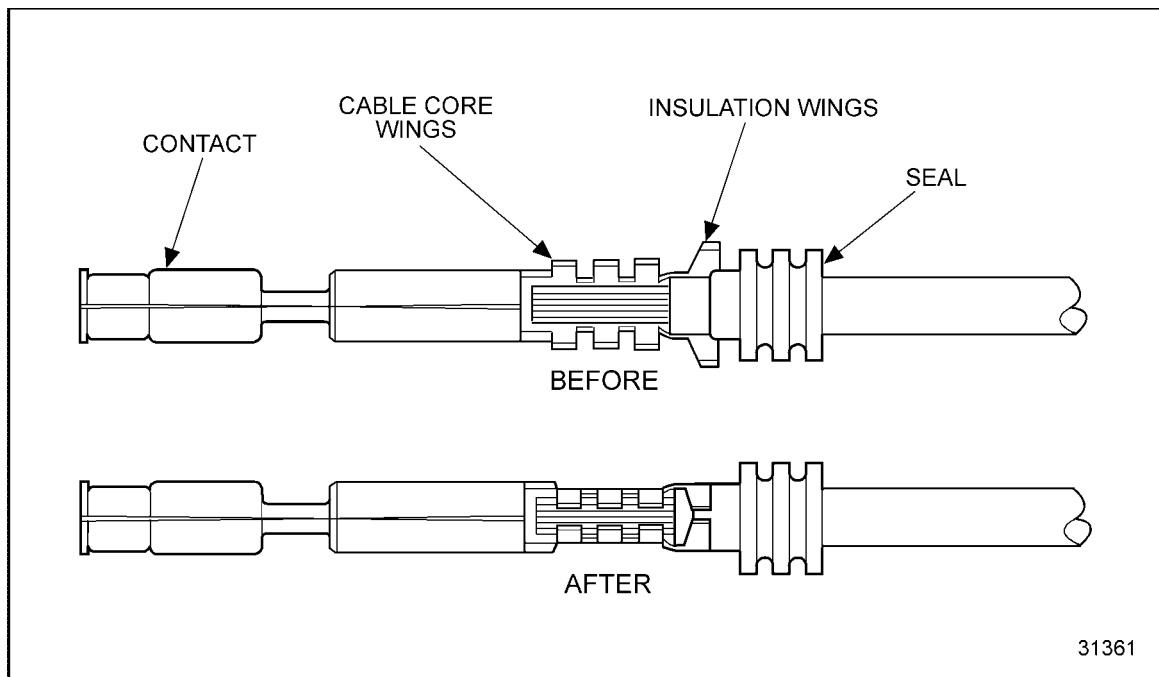


Figure 3-33 Terminal Installation (Shown with a Seal)

3. Insert the terminal into the locating hole of the crimping tool using the proper hole according to the gage and function of the cable to be used. See Figure 3-34.

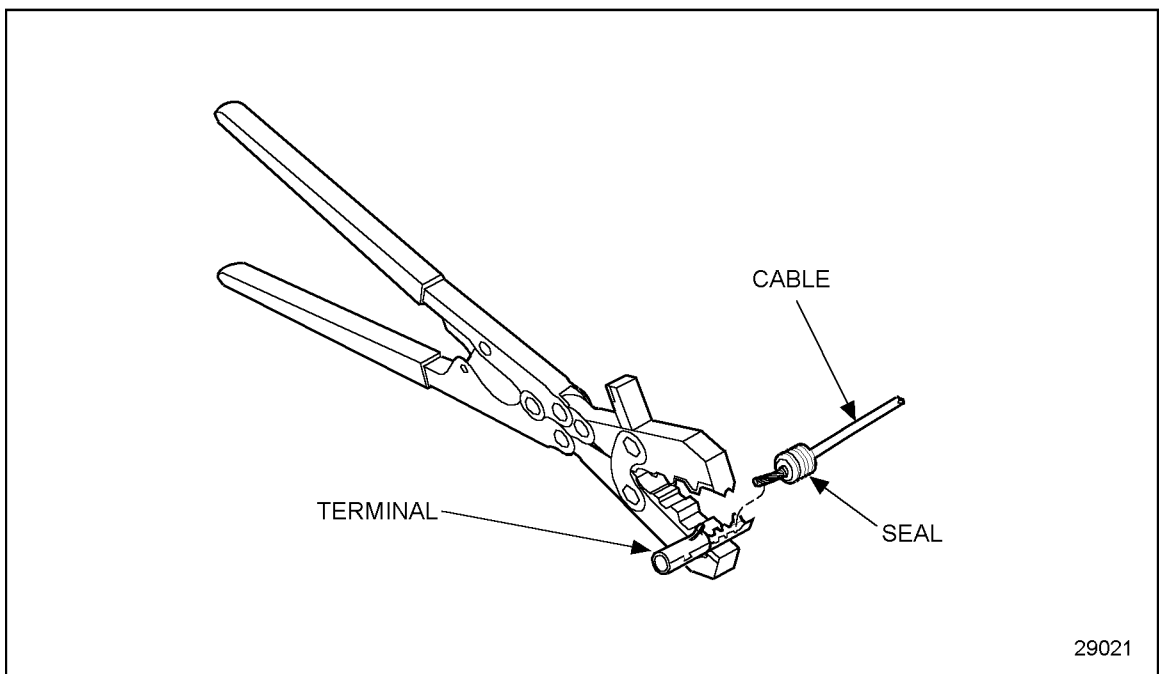


Figure 3-34 Terminal Position (Shown With a Seal)

4. Insert the cable in the terminal so the stripped portion is positioned in the cable core wings and the insulated portion of the cable is in the insulation wings (see Figure 3-34). Position the seal on the cable so the insulation wings grip the seal (see Figure 3-33).
5. Compress the handles of the crimping tool to crimp the core and insulation wings until the ratchet automatically releases.
6. To install the remaining terminals, repeat steps 3 and 4.

NOTE:

Release the crimping tool with the lock lever located between the handles, in case of jamming.

7. Gently tug on the terminal to make sure it is secure. The criteria listed in Table 3-41 must be met.

Wire Gage	Must Withstand Applied Load
14 AWG	45 lb (200 N)
16 AWG	27 lb (120 N)
18 AWG	20 lb (90 N)

Table 3-41 Applied Load Criteria for the Terminal

NOTICE:
Any terminal that is cracked or ruptured is unacceptable as malfunctions may occur.

8. Replace incorrectly installed and damaged terminals by cutting off the terminal just after the insulation wings.

9. Insert terminals into connector and push to seat (see Figure 3-35). Insert the secondary lock(s) to position and secure the assembly.

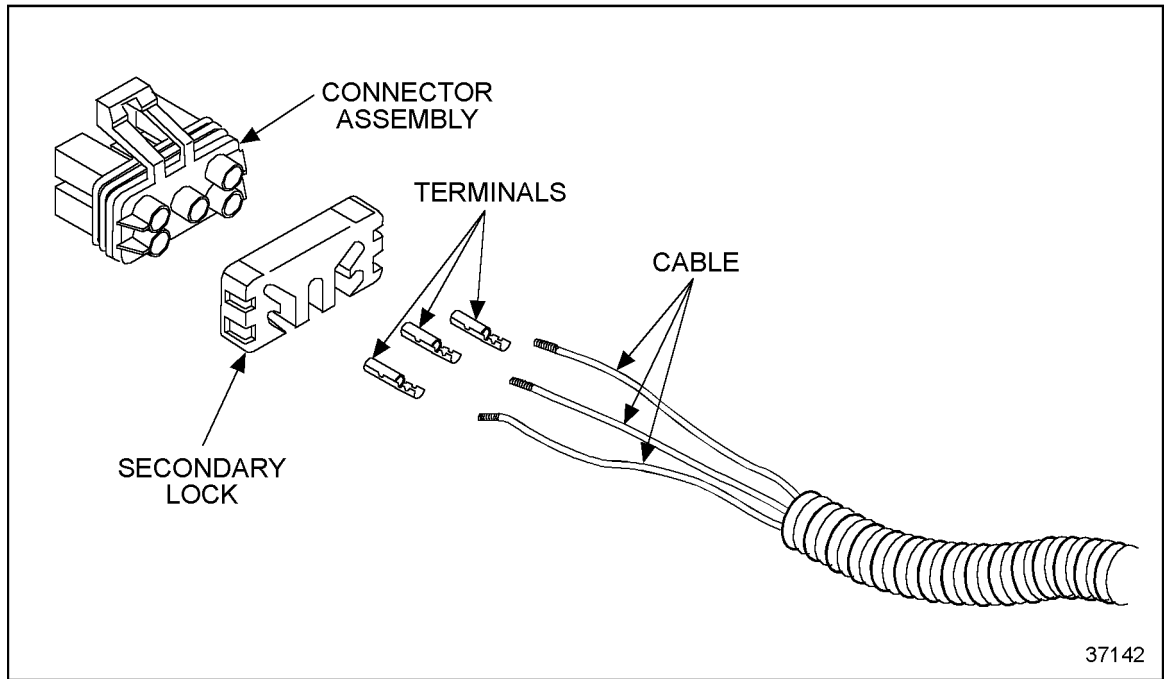


Figure 3-35 Typical Push-to-Seat Terminal Installation

Push-to-Seat Terminal Removal

One locking tang secures the push-to-seat terminals to the connector body. Use the following instructions for removing terminals from the connector body.

1. Grasp the cable to be removed and push the terminal to the forward position.
2. Insert the removal tool straight into the front of the connector cavity until it rests on the cavity shoulder. See Figure 3-36.

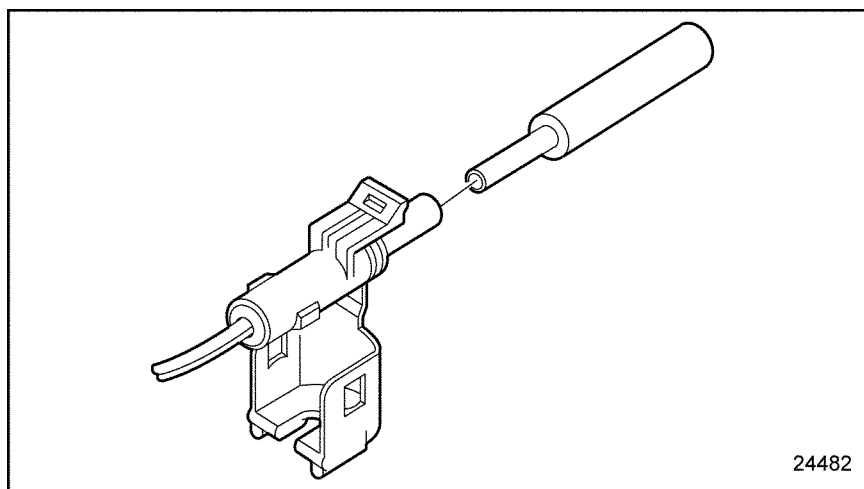


Figure 3-36 Removal Tool Procedure

3. Grasp the cable and push it forward through the connector cavity into the tool while holding the tool securely in place. The tool will depress the locking tangs of the terminal.
4. Pull the cable rearward (back through the connector).
5. Remove the tool from the connector cavity.
6. Cut the wire immediately behind the terminal crimp.
7. Follow the installation instructions for crimping on a replacement terminal.

Pull-to-Seat Terminal Installation Guidelines

The following guidelines apply to all pull-to-seat terminals.

Use the following instructions for pull-to-seat terminal installation without a seal:

1. Insert the wire through the appropriate connector hole/cavity (see Figure 3-37).

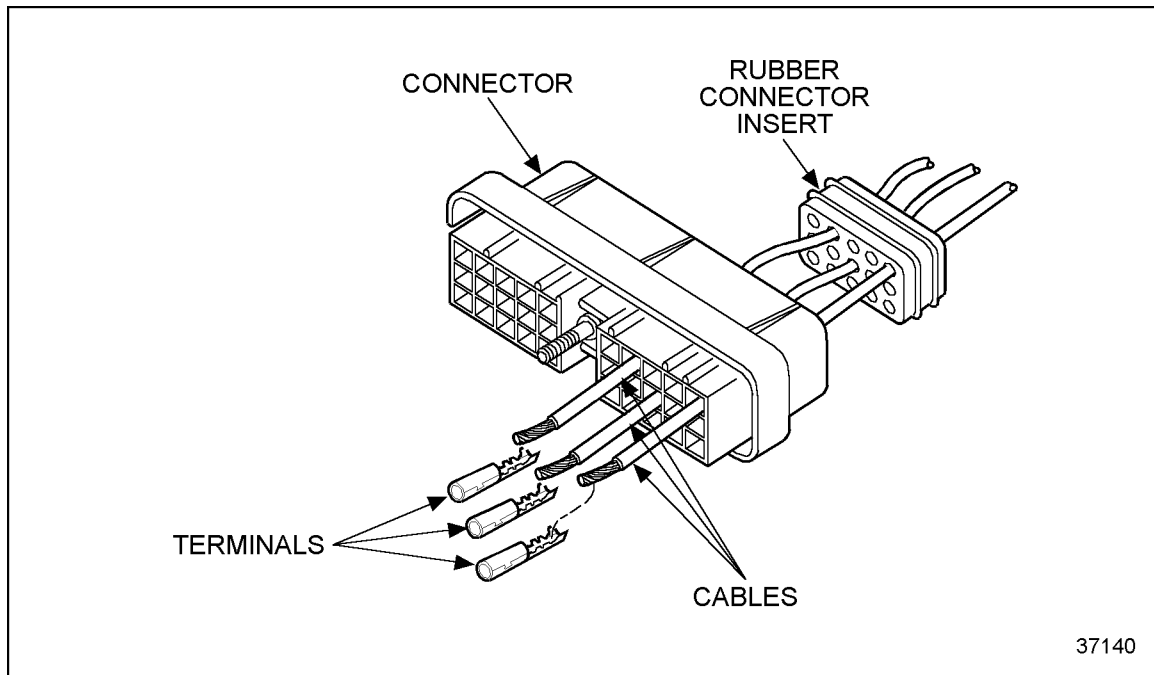


Figure 3-37 Wire Inserted Through the Connector

2. Remove the insulation from the end of the cable, exposing a sufficient amount of core leads to be crimped by the terminal core wings (see Figure 3-37).
3. Insert the terminal into the locating hole of the crimping tool using the proper hole according to the gage of the cable to be used (see Figure 3-38).

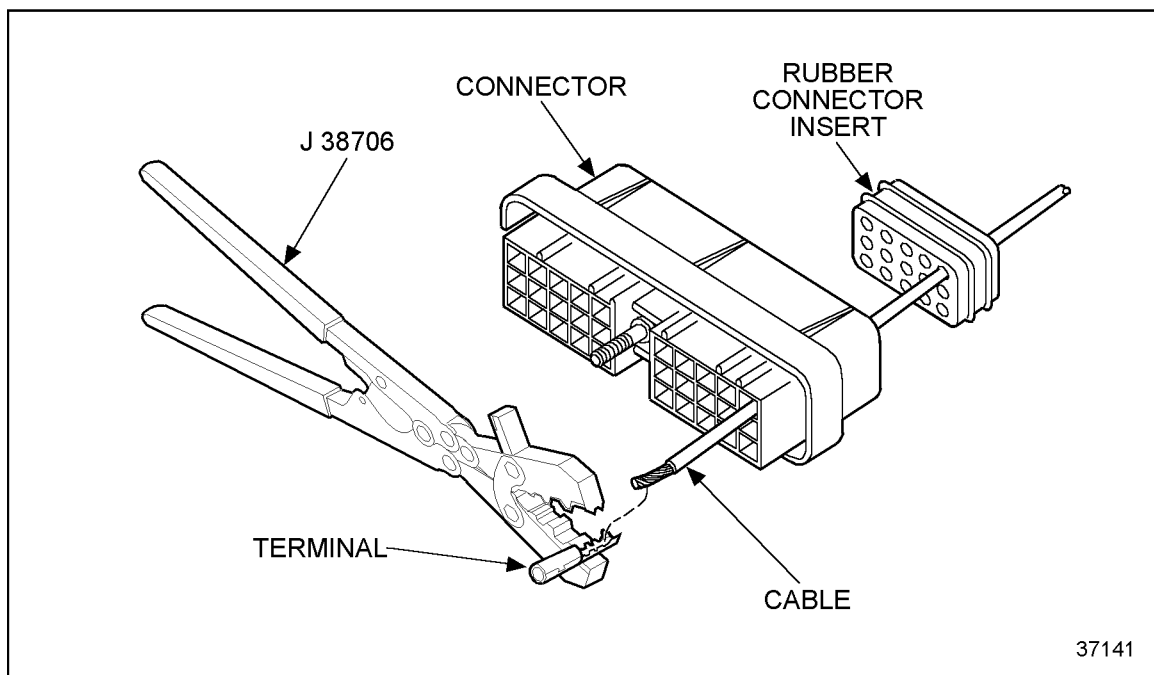


Figure 3-38 Typical Terminal Position

4. Insert the cable into the terminal so the stripped portion is positioned in the cable core wings and the insulated portion of the cable is in the insulation wings (see Figure 3-39).

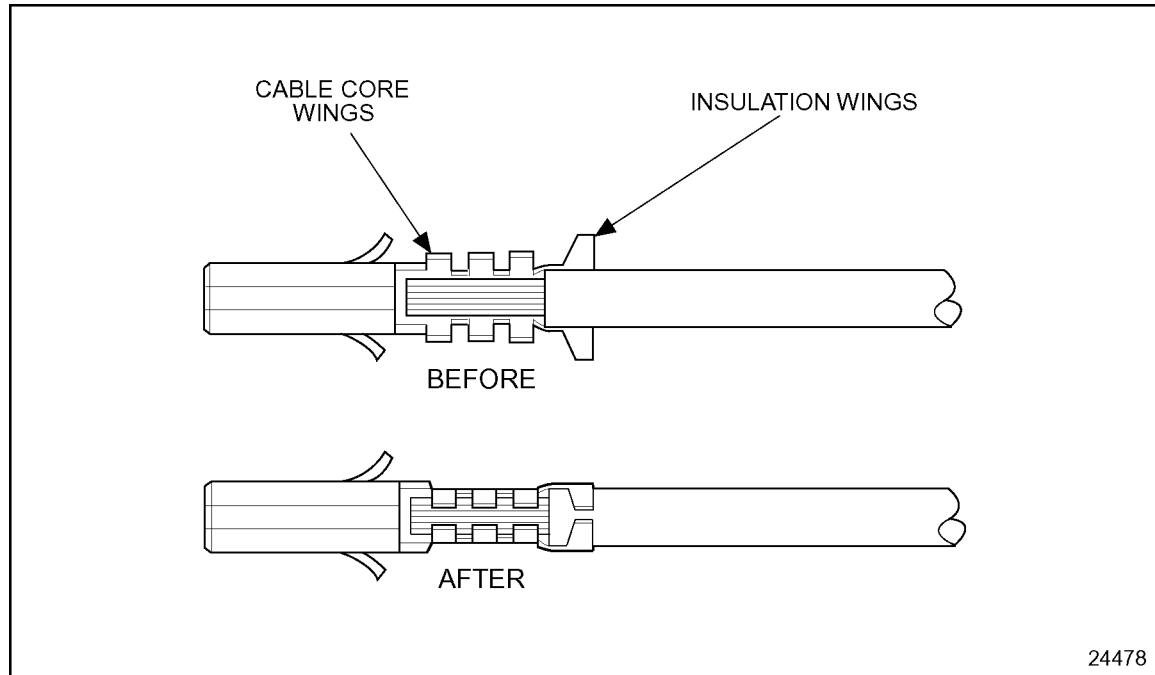


Figure 3-39 Typical Terminal Installation

5. Compress the handles of the crimping tool to crimp the core wing until the ratchet automatically releases.
6. Repeat steps 3, 4, and 5.

NOTE:

Release the crimping tool with the lock lever located between the handles, in case of jamming.

7. Gently tug on the terminal to make sure it is secure. The criteria listed in Table 3-42 must be met.

Wire Gage	Must Withstand Applied Load
14 AWG	45 lb (200 N)
16 AWG	27 lb (120 N)
18 AWG	20 lb (90 N)

Table 3-42 Applied Load Criteria for the Terminal

NOTICE:

Any terminal that is cracked or ruptured is unacceptable as malfunctions may occur.

8. Replace incorrectly installed and damaged terminals by cutting off the terminal just after the insulation wings.

Pull-to-seat Terminal Removal

A tang on the terminal locks into a tab molded into the plastic connector to retain the cable assembly. Remove terminals using the following instructions:

1. Insert the removal tool into the cavity of the connector, placing the tip of the tool between the locking tang of the terminal and the wall of the cavity.
2. Depress the tang of the terminal to release it from the connector.
3. Push the cable forward through the terminal until the complete crimp is exposed.
4. Cut the cable immediately behind the damaged terminal to repair it.
5. Follow the installation instructions for crimping the terminal and inserting it into the connector.

3.11.8 FCI APEX TERMINAL INSTALLATION AND REMOVAL

The following sections cover FCI APEX male and female terminal installation and removal.

FCI Apex Male Terminal Installation

Install the FCI APEX male terminal as follows:

1. Determine if the connector is new or used.
 - [a] If the connector is new, the red Terminal Assurance Position (TPA) is in an unlocked position so go to step 2.
 - [b] If the connector is used, pull the TPA out (see Figure 3-40).
2. Insert the crimped terminal into the connector until it clicks (see Figure 3-40). The orientation of the terminal is not critical.

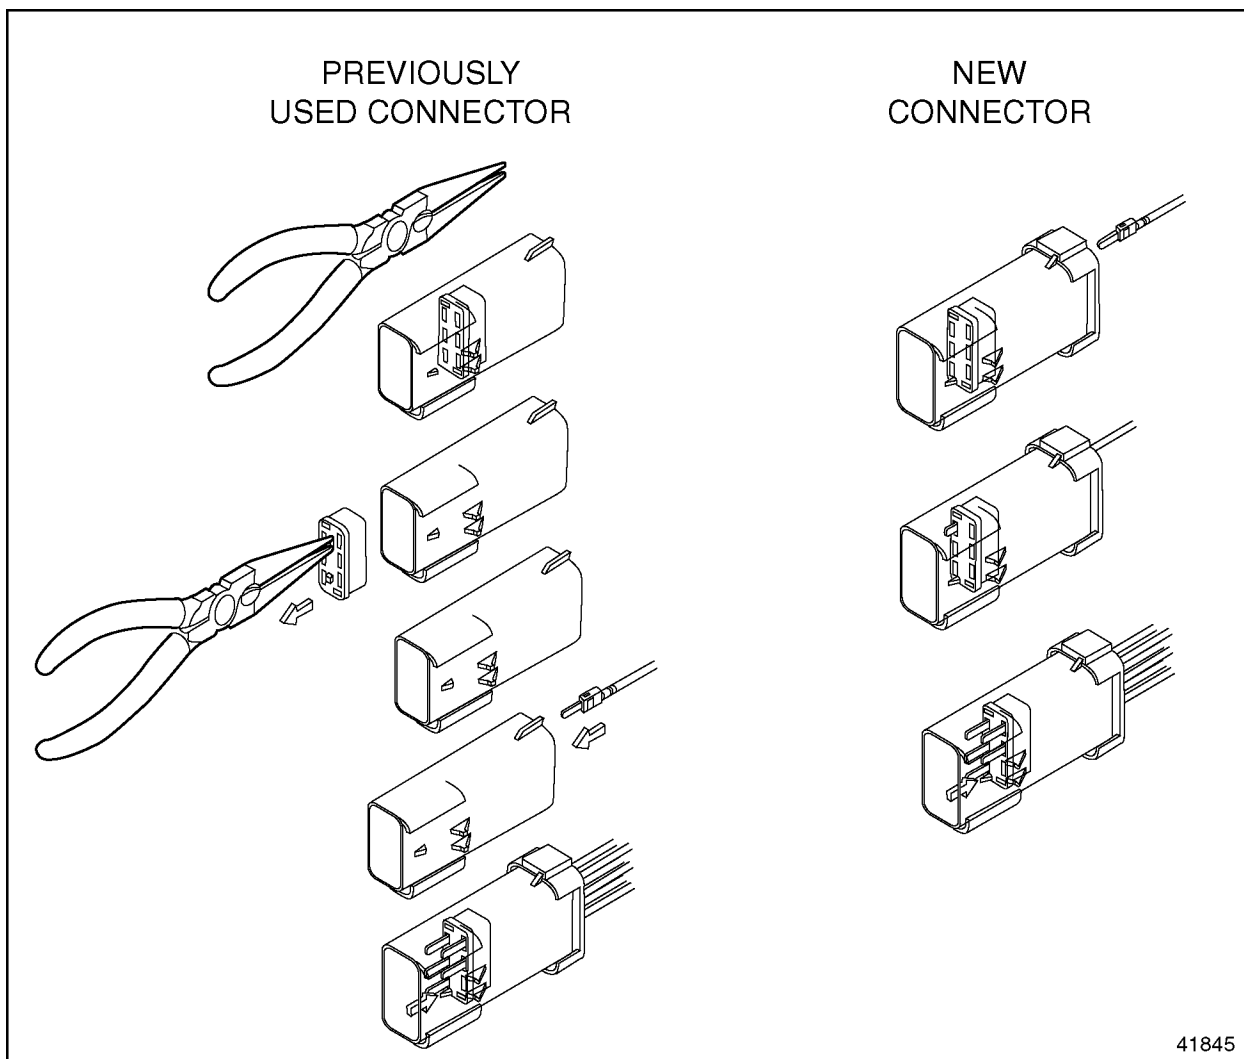


Figure 3-40 Installing the FCI Male Terminal

3. Push the TPA into the locked (fully seated) position.

NOTE:

The TPAs will self lock when the connectors are mated.

FCI Apex Male Terminal Removal

Remove the terminal as follows:

1. Using pliers pull out the red Terminal Position Assurance (TPA) (see Figure 3-41).

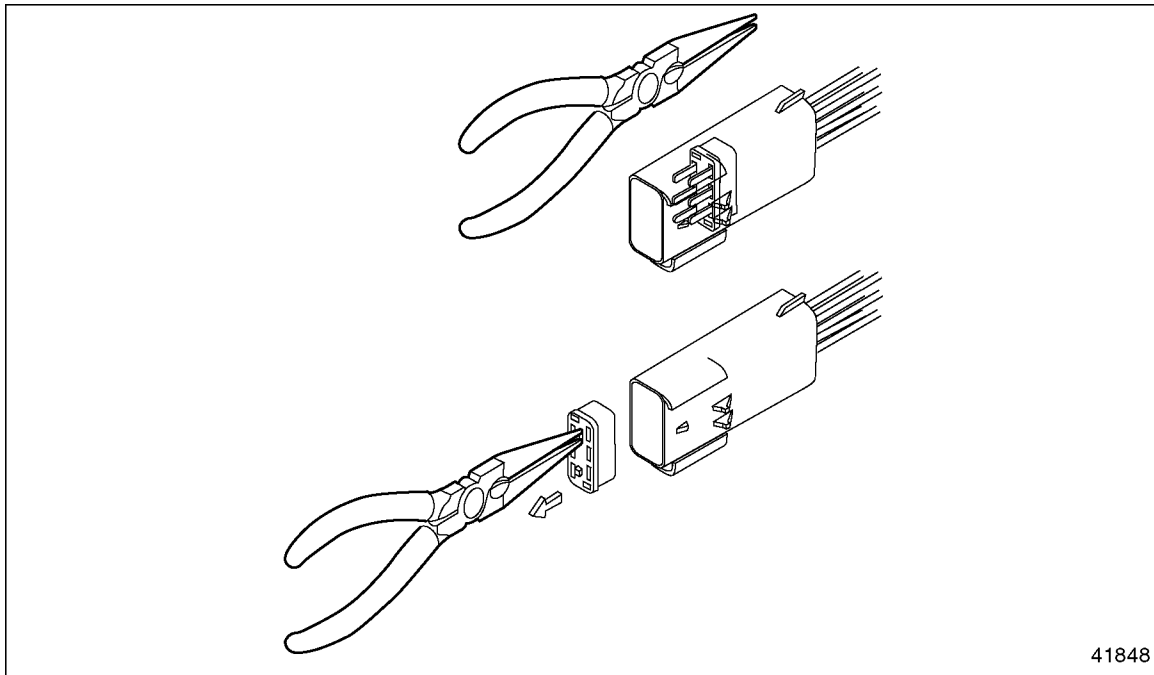


Figure 3-41 **Removing the Terminal**

2. Using a FCI APEX repair tool (P/N: 54900002) or a #2 jeweler's screwdriver, press back the terminal locking tang (see Figure 3-42).

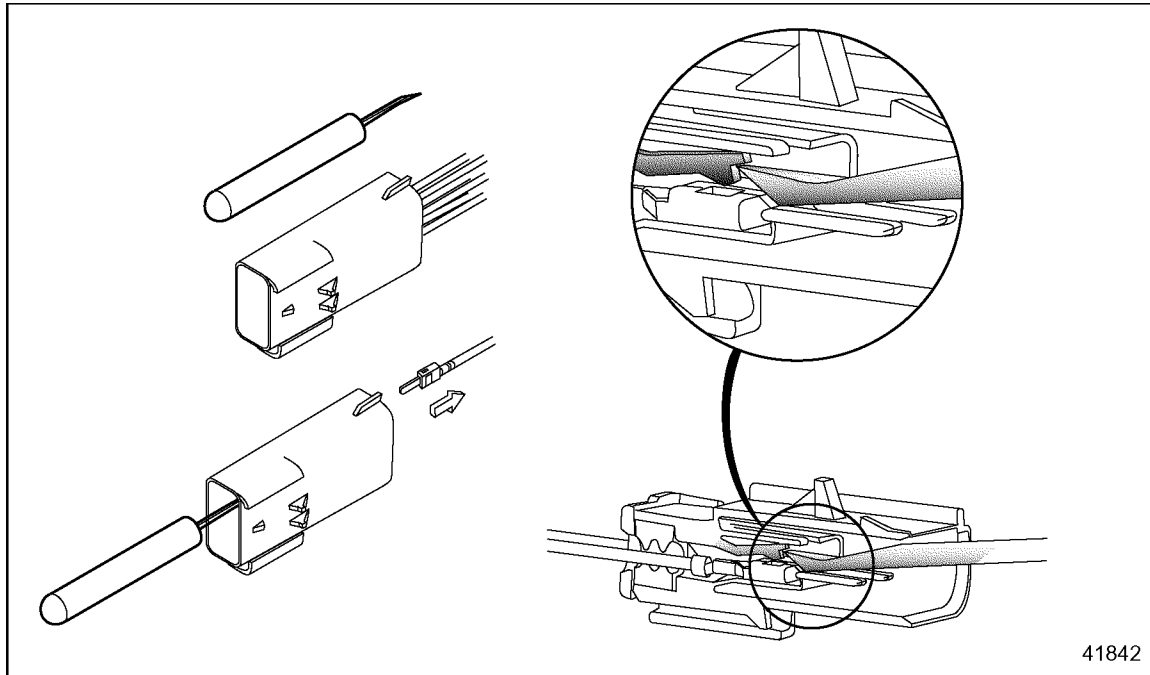


Figure 3-42 Pressing the Locking Tang

3. Pull the cable back through the connector (see Figure 3-41).

FCI Apex Female Terminal Installation

Install the terminal as follows:

1. Determine if the connector is new or used.
 - [a] If the connector is new, the blue Terminal Assurance Position (TPA) is in an unlocked position so go to 2.
 - [b] If the connector is used, pull the TPA out (see Figure 3-43).
2. Insert the crimped terminal into the connector until it clicks (see Figure 3-43).

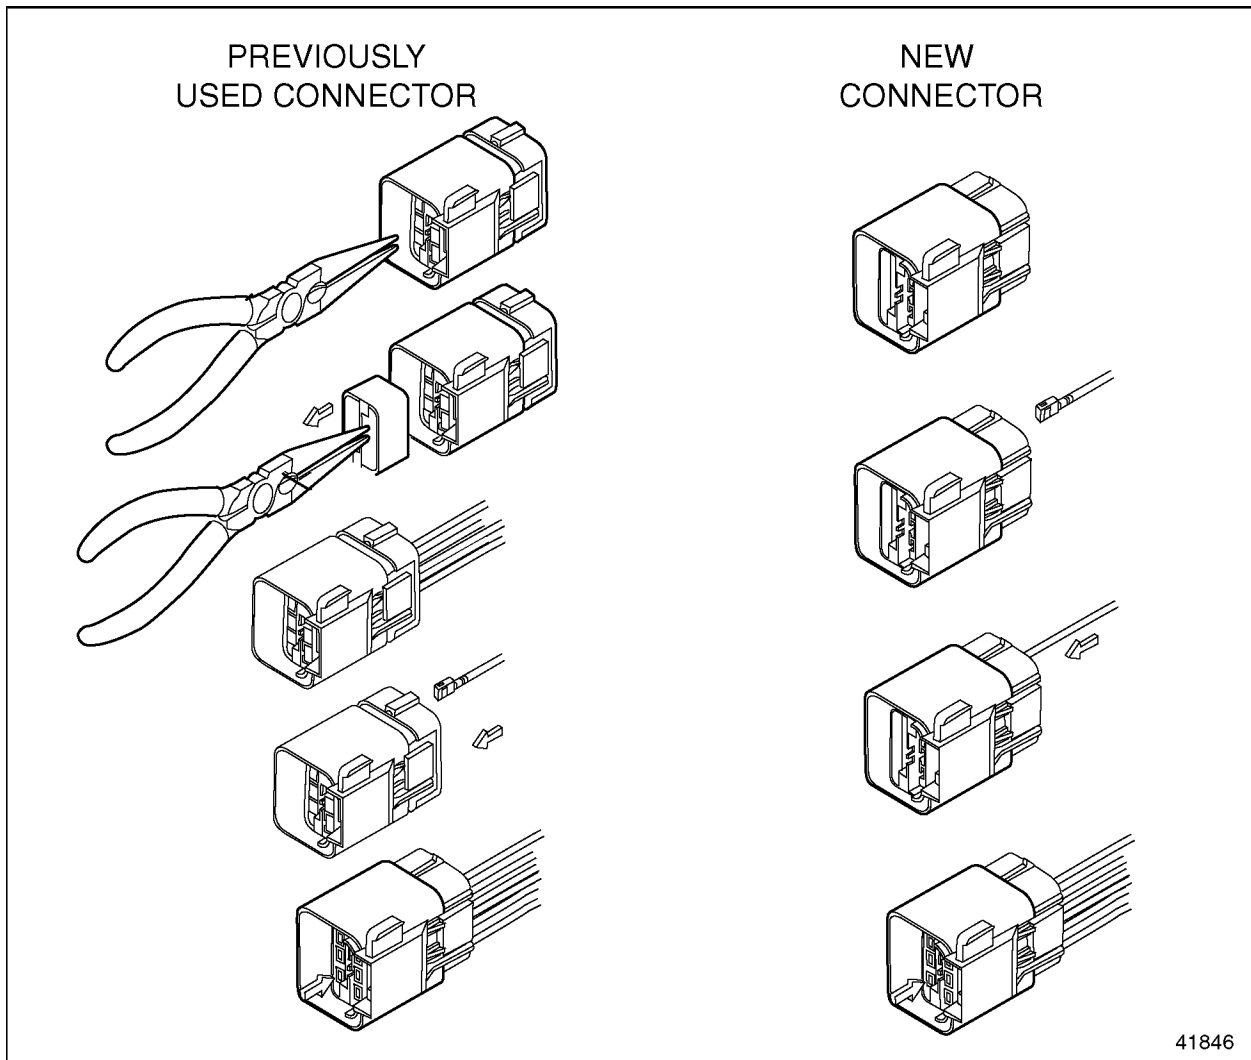


Figure 3-43 Installing the Terminal

3. Push the TPA into the locked (fully seated) position.

NOTE:

The TPAs will self lock when the connectors are mated.

FCI Apex Female Terminal Removal

Remove the terminal as follows:

1. Using pliers pull out the blue Terminal Position Assurance (TPA) that is located inside the connector (see Figure 3-44).

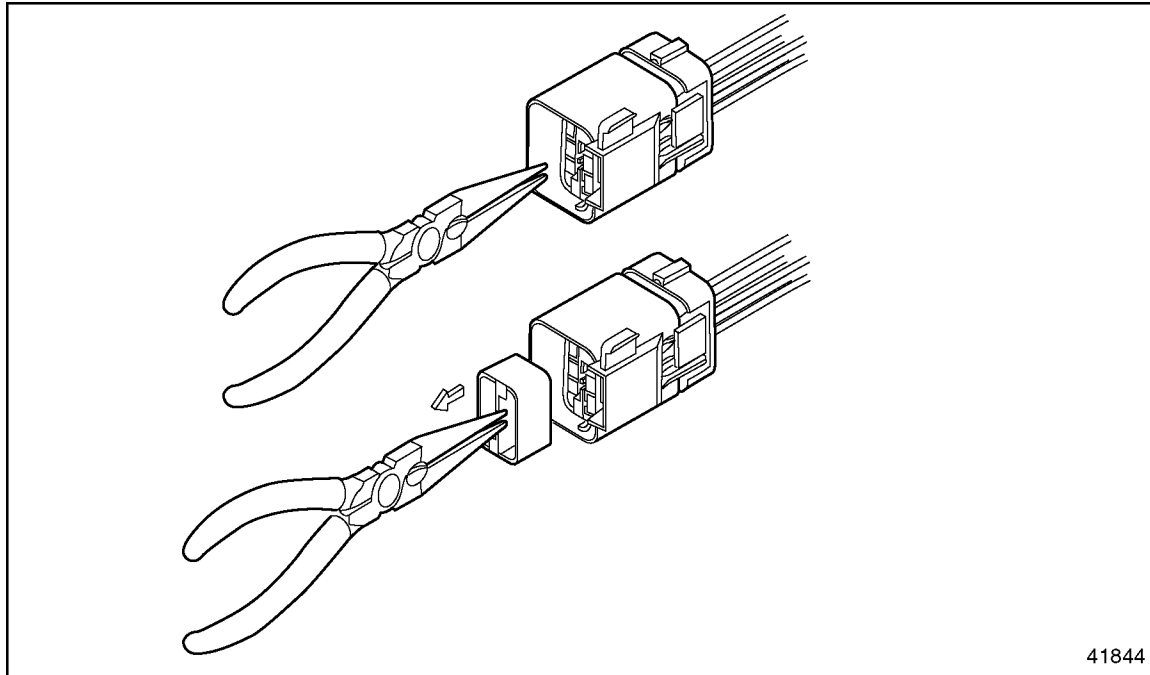


Figure 3-44 **Removing the Terminal**

2. Using a FCI APEX repair tool (P/N: 54900002) or a #2 jeweler's screwdriver, press back the terminal locking tang (see Figure 3-45).

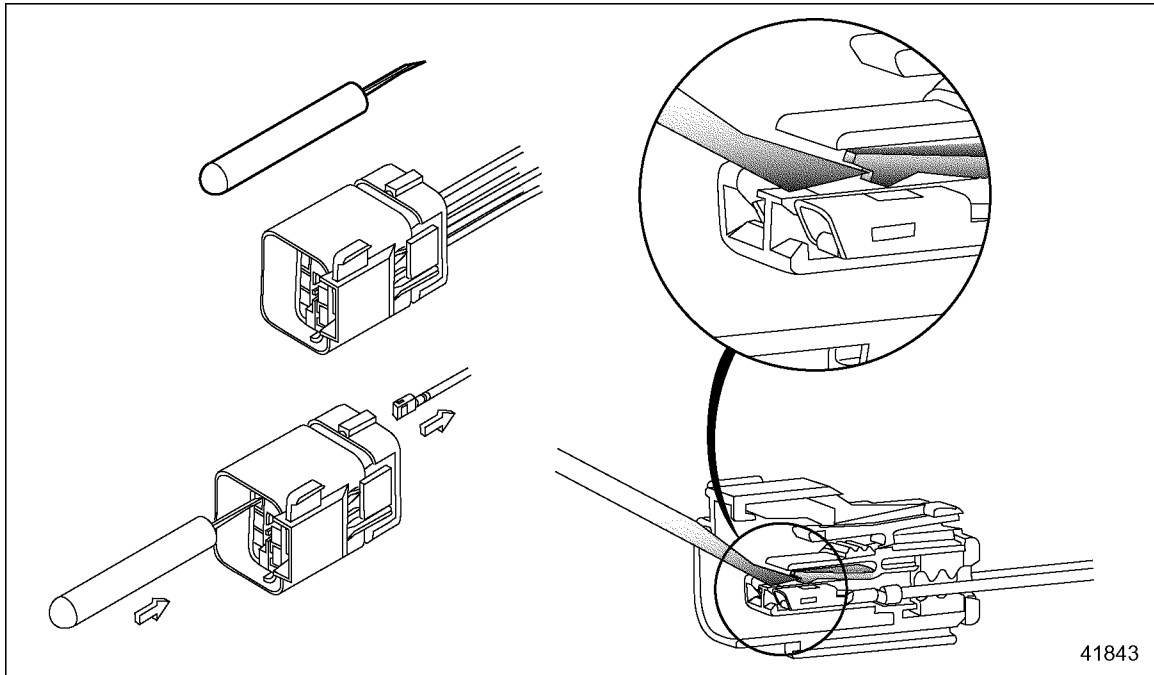


Figure 3-45 Pressing the Locking Tang

3. Pull the cable back through the connector (see Figure 3-44).

3.11.9 DEUTSCH TERMINAL INSTALLATION AND REMOVAL

The method of terminal installation and removal varies. The following sections cover Deutsch terminal installation and removal.

Deutsch Terminal Installation Guidelines

Deutsch connectors have cable seals molded into the connector. These connectors are push-to-seat connectors with cylindrical terminals. The diagnostic connector terminals are gold plated for clarity.

NOTICE:
Improper selection and use of crimp tools have varying adverse effects on crimp geometry and effectiveness. Proper installation of terminals require specialized tools. Do not attempt to use alternative tools.

The crimp tool to use in Deutsch terminal installation is J 34182 (Kent-Moore part number).

NOTICE:
Terminal crimps must be made with the Deutsch crimp tool P/N: HDT-48-00 to assure gas tight connections.

NOTICE:
If a separate seal is required, be sure to install the seal onto the wire before stripping the insulation.

Use the following instructions for installing Deutsch terminals:

1. Strip approximately .25 inch (6 mm) of insulation from the cable.
2. Remove the lock clip, raise the wire gage selector, and rotate the knob to the number matching the gage wire that is being used.
3. Lower the selector and insert the lock clip.
4. Position the contact so that the crimp barrel is 1/32 of an inch above the four indenters. See Figure 3-46. Crimp the cable.

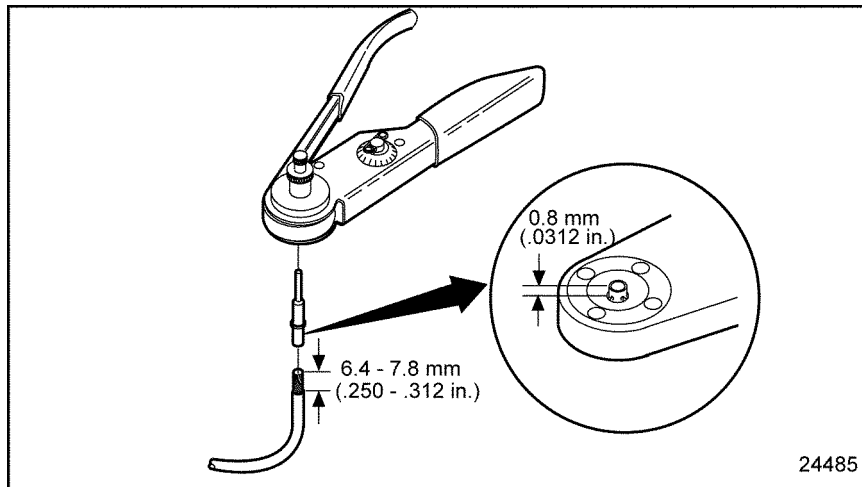


Figure 3-46 Setting Wire Gage Selector and Positioning the Contact

5. Grasp the contact approximately one inch behind the contact crimp barrel. Hold the connector with the rear grommet facing you. See Figure 3-47.

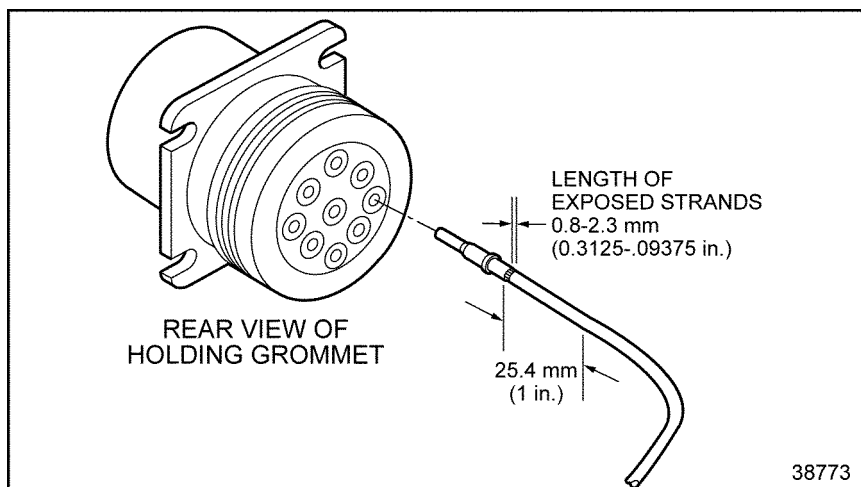


Figure 3-47 Pushing Contact Into Grommet

6. Push the contact into the grommet until a positive stop is felt. See Figure 3-47. A slight tug will confirm that it is properly locked into place. See Figure 3-48.

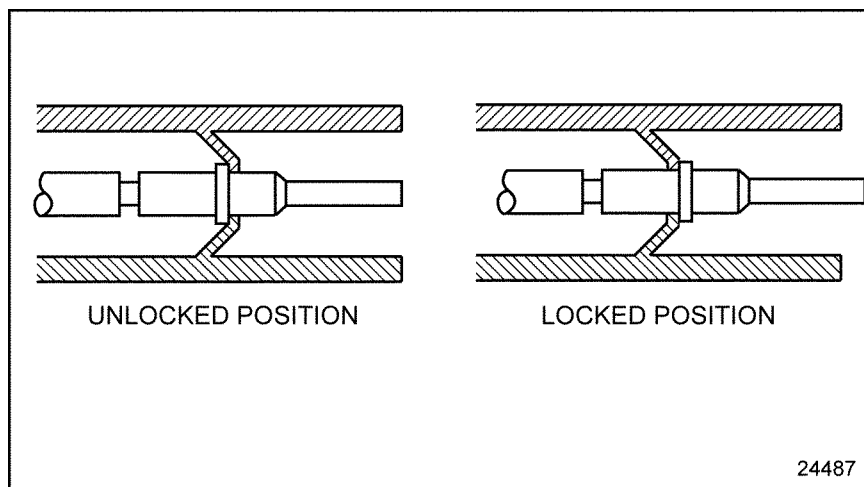


Figure 3-48 Locking Terminal Into Connector

Deutsch Terminal Removal

The appropriate size removal tool should be used when removing cables from connectors. The proper removal tools are listed in Table 3-43.

Tool	Kent-Moore Part Number
Removing (12 AWG)	J 37451
Removing (16-18 AWG)	J 34513-1

Table 3-43 Removal Tools for Deutsch Terminals

Remove Deutsch terminals as follows:

1. With the rear insert toward you, snap the appropriate size remover tool over the cable of contact to be removed. See Figure 3-49.

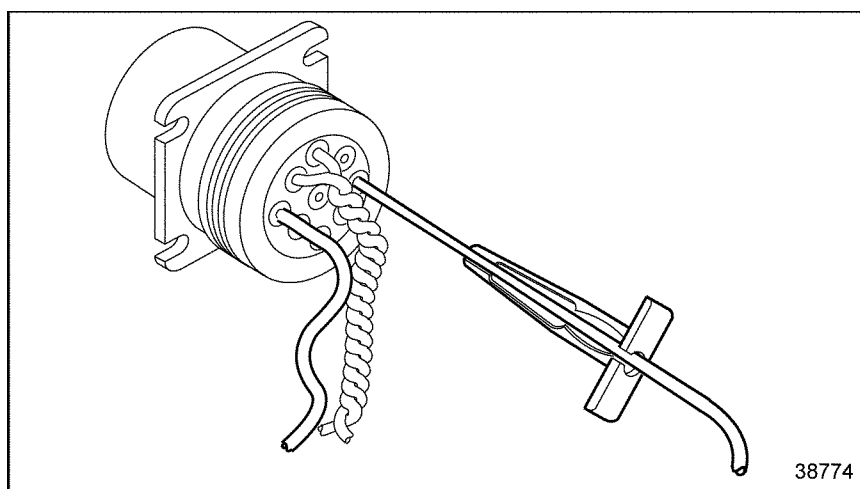


Figure 3-49 Removal Tool Position

2. Slide the tool along the cable into the insert cavity until it engages and resistance is felt. Do not twist or insert tool at an angle. See Figure 3-50.

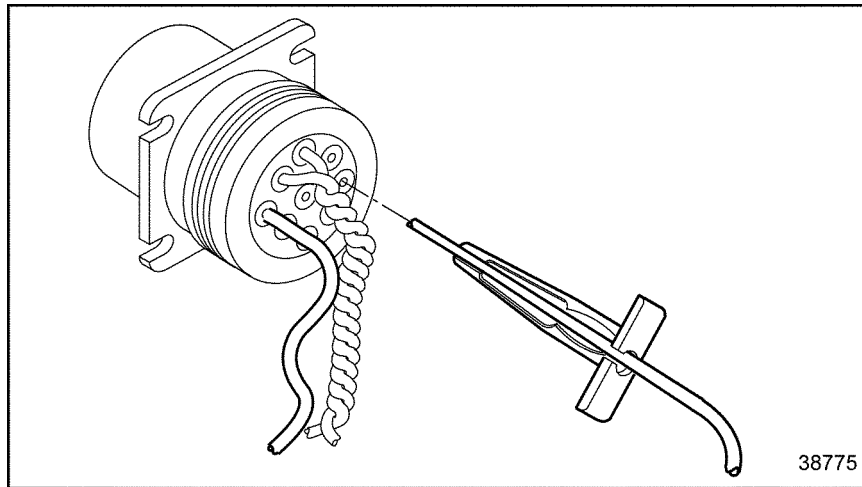


Figure 3-50 Removal Tool Insertion

3. Pull contact cable assembly out of the connector. Keep reverse tension on the cable and forward tension on the tool.

3.11.10 SPLICING GUIDELINES

The following are guidelines which may be used for splices. The selection of crimpers and splice connectors is optional. Select a high quality crimper equivalent to the Kent-Moore tool, J 38706, and commercially available splice clips.

The recommended technique for splicing and repairing circuits (other than power and ignition circuits) is a clipped and soldered splice. Alternatively, any method that produces a high quality, tight (mechanically and electronically sound) splice with durable insulation is considered to be acceptable.

Clipped and Soldered Splicing Method

The tools required are listed in Table 3-44.

Tool	Part Number
Heat Gun	--
Sn 60 solder with rosin core flux	--
Wire Stripper	Kent-Moore J 35615 or equivalent
Splice Clips (commercially available)	Wire size dependent
Heat Shrink Tubing	Raychem HTAT or equivalent

Table 3-44 Recommended Splicing Tools

**Criteria: Splicing Straight Leads**

No more than one strand in a 16 strand wire may be cut or missing.

Use Sn 60 solder with rosin core flux.

The exposed wire must be clean before the splice is soldered.

Soldering splice connectors is optional. To solder splice connectors:

1. Position the leads, so one overlaps the other. See Figure 3-51.

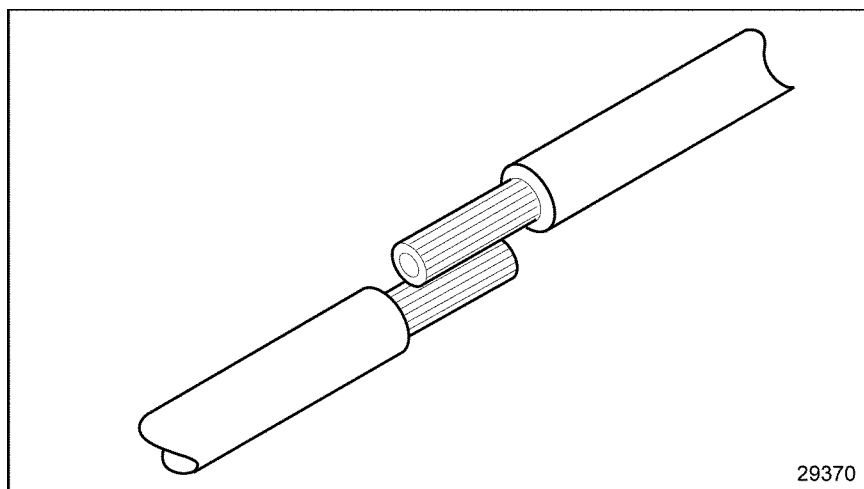


Figure 3-51 **Positioning the Leads**

2. Secure the leads with a commercially available clip and hand tool. See Figure 3-52.

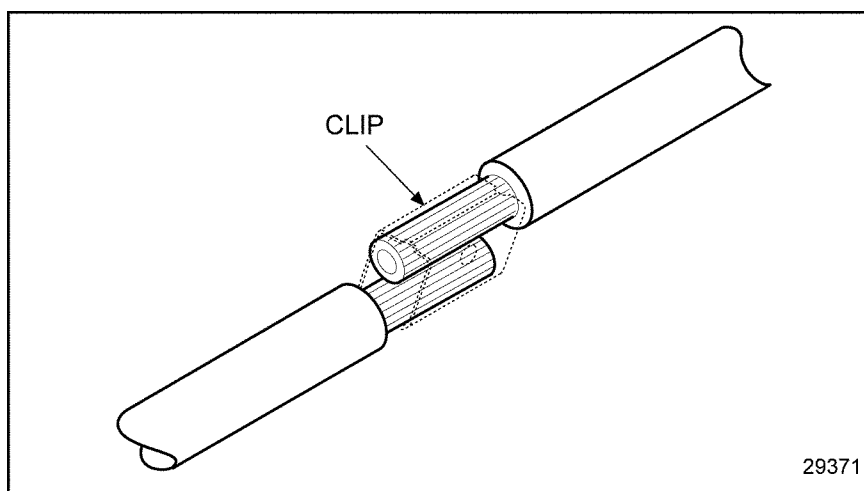


Figure 3-52 **Securing the Leads With a Clip**

3. Use a suitable electronic soldering iron to heat the wires. Apply the solder to the heated wire and clip (not to the soldering iron) allowing sufficient solder flow into the splice joint.
4. Pull on wire to assure crimping and soldering integrity. The criteria listed in Table 3-45 must be met.

Wire Gage	Must Withstand Applied Load
14 AWG	45 lb (200 N)
16 AWG	27 lb (120 N)
18 AWG	20 lb (90 N)

Table 3-45 Applied Load Criteria for Terminals

5. Loop the lead back over the spliced joint and tape. See Figure 3-53.

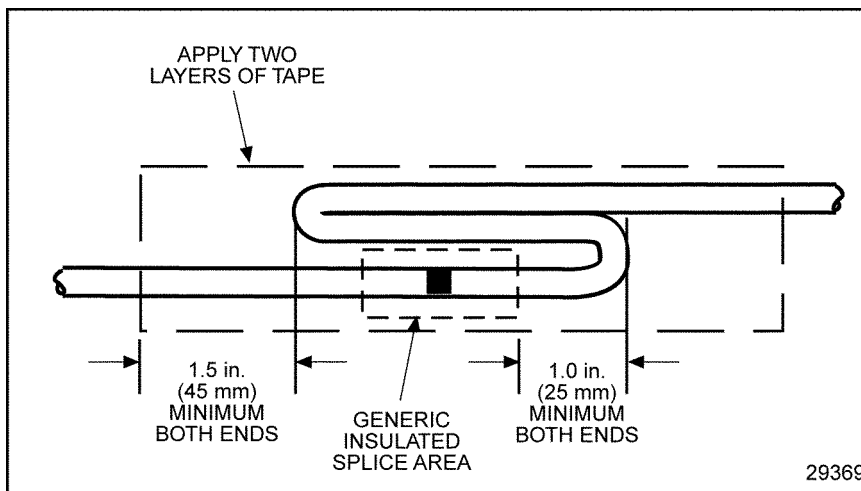


Figure 3-53 Recommended Strain Relief of Spliced Joint

Splicing and Repairing Straight Leads-Alternate Method 1

The tools required are listed in Table 3-46.

Tool	Part Number
Heat Gun	--
Wire Stripper	Kent-Moore J 35615 or equivalent
Splice Clips (commercially available)	Wire size dependent
Heat Shrink Tubing	Raychem HTAT or equivalent
Terminal Crimper for Metri-Pack 280 (12 AWG)	Kent-Moore J 38125-6
Terminal Crimper for Metri-Pack 280 (18 AWG)	Kent-Moore J 39848
Terminal Crimper for Weather Pack	Kent-Moore J 35606
Terminal Crimper for Deutsch	Kent-Moore J 34182
Terminal Crimper for Metri-Pack 150	Kent-Moore J 35123

Table 3-46 Recommended Splicing Tools



Criteria: Splicing Straight Leads

No more than one strand in a 16 strand wire may be cut or missing.

The recommended method to splice straight leads follows:

1. Locate broken wire.
2. Remove insulation as required; be sure exposed wire is clean and not corroded.
3. Insert one wire into the splice clip until it butts against the clip. Stop and crimp (see Figure 3-54, A).
4. Insert the other wire into the splice clip until it butts against the clip stop (see Figure 3-54, B).

NOTICE:

Any terminal that is cracked or ruptured is unacceptable as malfunctions may occur.

5. Visually inspect the splice clip for cracks, rupture, or other crimping damage. Remove and replace damaged clips before proceeding.
6. Pull on wire to ensure the splice integrity. The criteria listed in Table 3-47 must be met.

Wire Gage	Must Withstand Applied Load
14 AWG	45 lb (200 N)
16 AWG	27 lb (120 N)
18 AWG	20 lb (90 N)

Table 3-47 Applied Load Criteria for Terminals

7. Shrink the splice clip insulative casing with a heat gun to seal the splice (see Figure 3-54, C).

NOTICE:

Splices may not be closer than 12 in. (.3 m) apart to avoid degradation in circuit performance. Replace wire to avoid having splices closer than 12 in. (.3 m) apart.

8. Loop the lead back over the spliced joint and tape. See Figure 3-53.

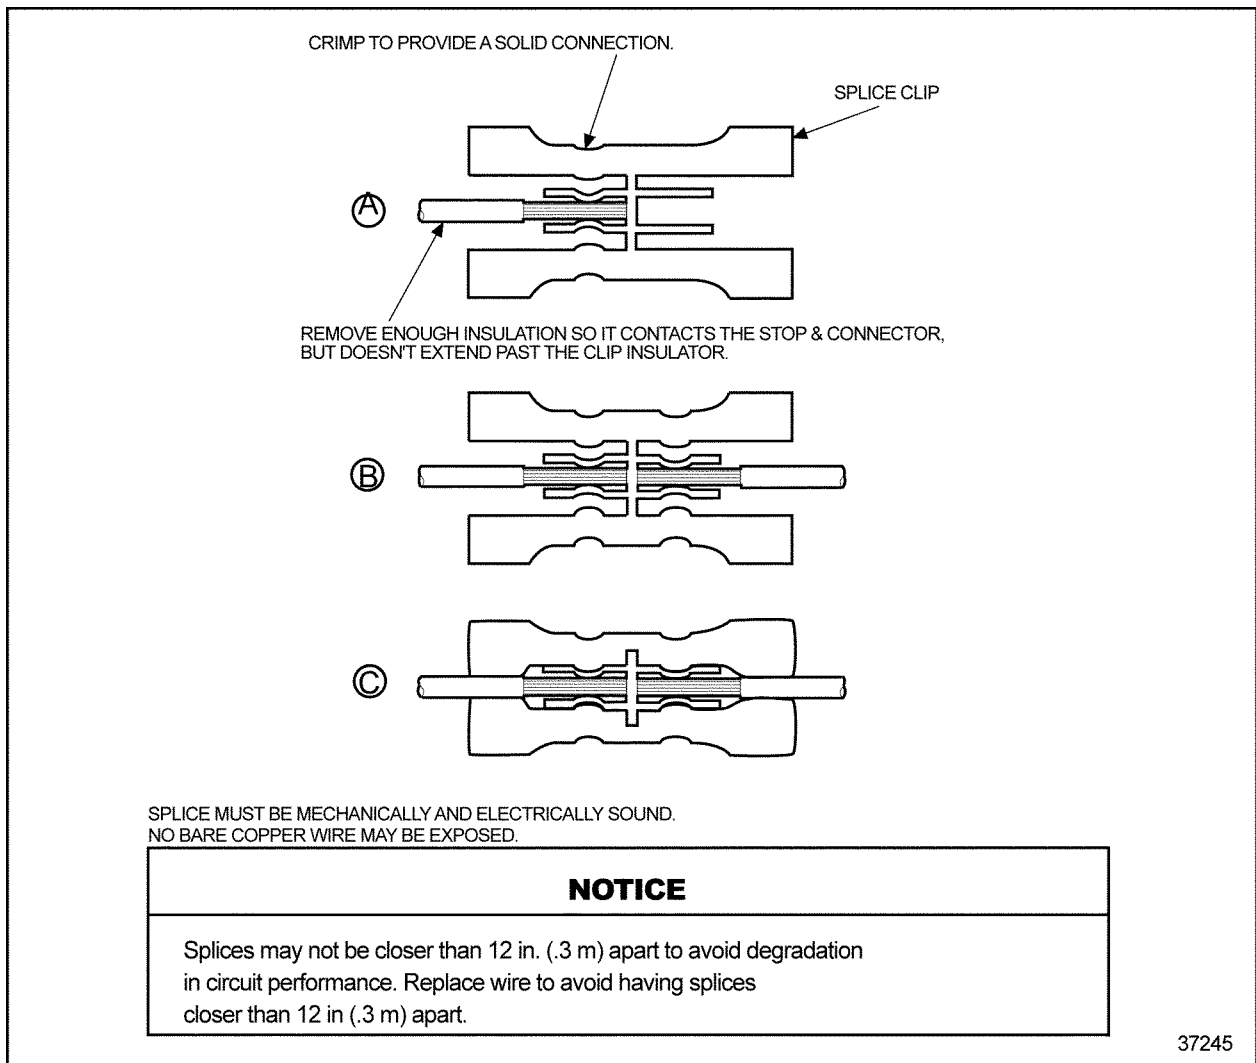


Figure 3-54 Splicing Straight Leads - Alternate Method 1

Splicing and Repairing Straight Leads - Alternate Method 2

This method is not allowed or recommended for power or ignition circuits. The tools required are listed in Table 3-48.

Tool	Part Number
Heat Gun	--
Wire Stripper	Kent-Moore J 35615 or equivalent
Splice Clips (commercially available)	Wire size dependent
Heat Shrink Tubing	Raychem HTAT or equivalent
Terminal Crimper for Metri-Pack 280 (12 AWG)	Kent-Moore J 38125-6
Terminal Crimper for Metri-Pack 280 (18 AWG)	Kent-Moore J 39848
Terminal Crimper for Weather Pack	Kent-Moore J 35606
Terminal Crimper for Deutsch	Kent-Moore J 34182
Terminal Crimper for Metri-Pack 150	Kent-Moore J 35123

Table 3-48 Recommended Splicing Tools



Criteria: Splicing Straight Leads

No more than one strand in a 16 strand wire may be cut or missing.

An acceptable option for splicing straight leads is:

1. Locate broken wire.
2. Remove insulation as required; be sure exposed wire is clean and not corroded.
3. Slide a sleeve of glue lined, shrink tubing (Raychem HTAT or equivalent) long enough to cover the splice clip on the wire and overlap the wire insulation, about .25 in. (6 mm) on both sides (see Figure 3-55, A).
4. Insert one wire into splice clip until it butts against the splice clip. Stop and crimp (see Figure 3-55, B).
5. Insert the remaining wires into the splice clip one at a time until each butts against the splice clip; stop and crimp (see Figure 3-55, B).

NOTICE:

Any terminal that is cracked or ruptured is unacceptable as malfunctions may occur.

6. Visually inspect the terminal for cracks, rupture, or other crimping damage. Remove and replace damaged terminal before proceeding.
7. Slide the shrink tubing over the crimped splice clip (see Figure 3-55, C).
8. Shrink tubing with a heat gun to seal the splice (see Figure 3-55, D).

NOTICE:

A minimum of two layers of heat shrink tubing must be applied to splices that have more than one lead in or out.

9. Loop the lead back over the spliced joint and tape. See Figure 3-53.

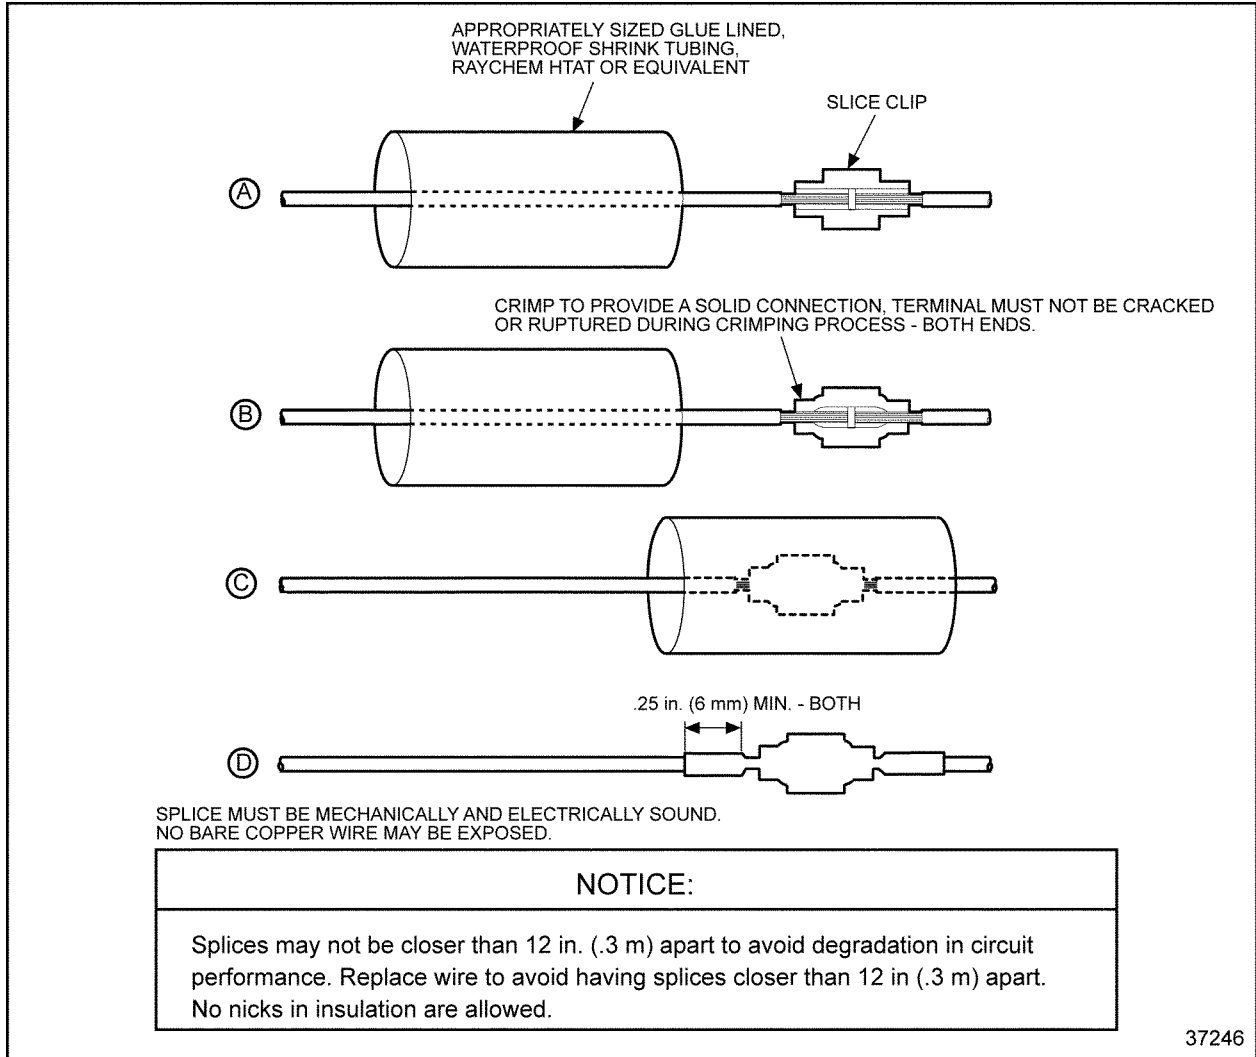


Figure 3-55 Splicing Straight Leads - Alternate Method 2

Shrink Wrap

Shrink wrap is required when splicing non insulated connections. Raychem HTAT or any equivalent heat shrink dual wall epoxy encapsulating adhesive polyolefin is required. Shrink wrap must extend at least .25 in. (6 mm) over wire insulation past splice in both directions.

Alpha Wire Corporation

711 Lidgerwood Ave

P.O. Box 711

Elizabeth, New Jersey 07207-0711

1-800-52ALPHA

www.alphawire.com**Tyco Electronics Corporation**

Raychem Cable Identification and Protection

300 Constitution Drive

Menlo Park, CA 94025

Phone: 1-800-926-2425

www.raychem.com

To heat shrink wrap a splice:

NOTICE:

The heat shrink wrap must overlap the wire insulation about .25 in. (6 mm) on both sides of the splice.

1. Select the correct diameter to allow a tight wrap when heated.
2. Heat the shrink wrap with a heat gun; do not concentrate the heat in one location, but apply the heat over the entire length of shrink wrap until the joint is complete.
3. Repeat step 2 to apply a second layer of protection (if required by splicing guidelines).

Staggering Wire Splices

Position spliced wires properly as follows:

NOTICE:

You must stagger positions to prevent a large bulge in the harness and to prevent the wires from chafing against each other.
--

1. Stagger the position of each splice (see Figure 3-56) so there is at least a 2.5 in. (65 mm) separation between splices.

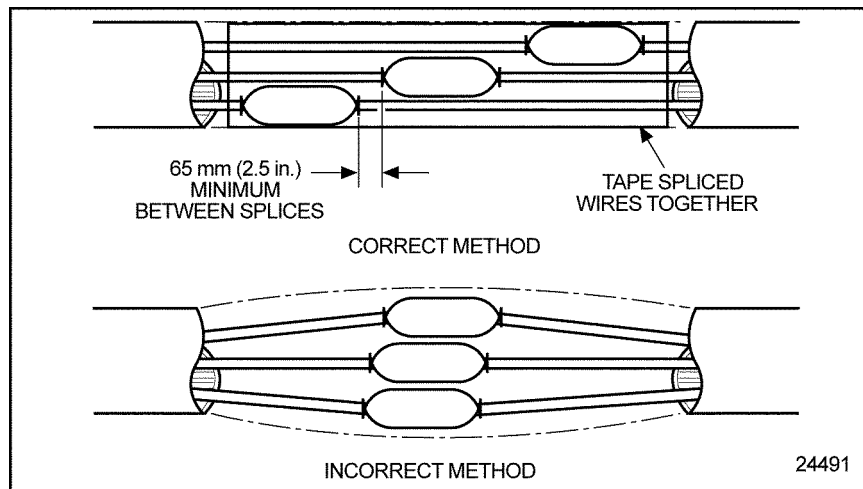


Figure 3-56 The Correct and Incorrect Method of Staggering Multiple Splices

NOTICE:

A minimum of two layers of heat shrink tubing extending .25 in. (6 mm) past the splice must be used to complete the splice.

2. Heat shrink a minimum of two layers of heat shrink tubing.
3. Tape the spliced wires to each other. Refer to section 3.12.

THIS PAGE INTENTIONALLY LEFT BLANK

3.12 CONDUIT AND LOOM

Conduit must be used to protect the harness cable and cable splices.

NOTICE:

The conduit must not cover any connectors, switches, relays, fuses, or sensors.

The following guidelines should be used when designing a harness:

NOTICE:

Wires should be sized and cut to near equal length prior to installing conduit.

- ☐ The distance between the back of the connector or other listed devices to the end of the conduit should not exceed:
 - ☐ 1.0 in. (25 mm) for a single connector/device
 - ☐ 3 in. (75 mm) for multiple connectors/devices
- ☐ All cable breakouts and conduit ends must be secured in place with conduit outlet rings or tape.



Criteria: Conduit and Loom

Due to the wide variety of operating conditions and environments, it is the responsibility of the OEM to select a conduit that will survive the conditions of the specific applications. Flame retardant convoluted polypropylene conduit or equivalent may be used for most installations. Heat retardant nylon conduit or oil, water, acid, fire, and abrasion resistant non-metallic loom conforming to SAE J562A* is also acceptable. The diameter of conduit should be selected based on the number of wires being protected.

* If non-metallic loom is used, secure the ends with tightly wrapped nylon straps to prevent unraveling.

Conduit should cover the wires without binding and without being excessively large.

THIS PAGE INTENTIONALLY LEFT BLANK

3.13 TAPE AND TAPING

Tape must be used when conduit is utilized. Be sure to follow the tape manufacturers' guidelines. The harness manufacturer may use tape under the harness covering (conduit or loom) to facilitate harness building. Tape must be tightly wrapped at all conduit interconnections with a minimum of two layers (refer to section 3.12). Be sure to firmly secure the start and finish ends of tape.



Criteria: Tape

NOTICE:
Black vinyl electrical tape should not be used in applications where the temperature exceeds 176°F (80°C).

In applications where the temperature doesn't exceed 176°F (80°C), black vinyl electrical tape that is flame retardant and weather resistant may be used.

In applications where temperature exceeds 176°F (80°C), vinyl electrical tape should not be used. For these applications, adhesive cloth backed, flame retardant polyethylene or fiber glass tape (Delphi #PM-2203, Polikan #165 or equivalent) is recommended.



Criteria: Taping

The tape must extend a minimum of 1 in. (25 mm) past the conduit.

The tape must be crossed over butted conduit ends.

The tape must be extended a minimum of 1 in. (25 mm) in each direction at all branches.

THIS PAGE INTENTIONALLY LEFT BLANK

3.14 SENSORS

The DDEC IV system is designed to operate with several types of sensors as listed in Table 3-49.

Sensor Type	Description
Variable Reluctance	Used to monitor the crankshaft position and the engine speed.
Thermistor	Used to monitor temperatures.
Variable Capacitance	Used to monitor barometric air, manifold, oil gallery and optional pump pressures.
Variable Resistance (Potentiometer)	Used to sense throttle position. The output should be between .5 and 4.5 V.
Switch	Used to signal coolant level, inlet air restriction, and oil level.
Magnetic Pick-up	Used to sense vehicle speed, accumulate trip distance, and to use several vehicle features.

Table 3-49 Sensor Types

3.14.1 FACTORY-INSTALLED SENSORS

The sensors integrated into the factory-installed Engine Sensor Harness are listed in Table 3-50.

Sensor	Function
(Intake) Air Temperature Sensor (ATS)	Senses intake air temperature for functions such as fan control and engine fueling.
Barometric Pressure Sensor	Senses barometric pressure for EGR control.
Coolant Temperature Sensor (CTS)	Senses coolant temperature for functions such as engine protection, fan control and engine fueling.
EGR Delta Pressure Sensor (EGR Delta P)	Senses EGR pressure for EGR control.
EGR Temperature Sensor	Senses EGR temperature for EGR control.
Fuel Restriction Sensor (FRS)*	Senses fuel filter restriction to warn of the condition of the fuel filter for maintenance purposes.
Fuel Temperature Sensor (FTS)	Senses fuel temperature for engine fueling.
Oil Level Sensor (OLS)*	Senses oil level for functions such as engine protection.
Oil Pressure Sensor (OPS)	Senses gallery oil pressure for functions such as engine protection.
Oil Temperature Sensor (OTS)	Senses oil temperature for functions such as reducing variation in fuel injection, fan control and engine protection.
Synchronous Reference Sensor (SRS)	Indicates a specific cylinder in the firing order.
Timing Reference Sensor (TRS)	Senses crankshaft position and engine speed for functions such as fuel timing strategy.
Turbo Boost Sensor (TBS)	Senses turbo boost for functions such as smoke control, fuel control, and engine protection.
Turbo Compressor Out Temperature Sensor	Senses turbo out air temperature for EGR cooler protection.
Turbo Speed Sensor (TSS)	Senses turbo speed for overspeed protection.

* Available with the Maintenance Alert System

Table 3-50 Function of Factory-installed Sensors

3.14.2 AIR TEMPERATURE SENSOR

The ATS (see Figure 3-57) is a thermistor type sensor that has a variable resistance, when exposed to different temperatures. The ATS provides necessary input for various functions such as varying hot idle speed, fan control, and injection timing which results in improved cold starts and reduced white smoke.

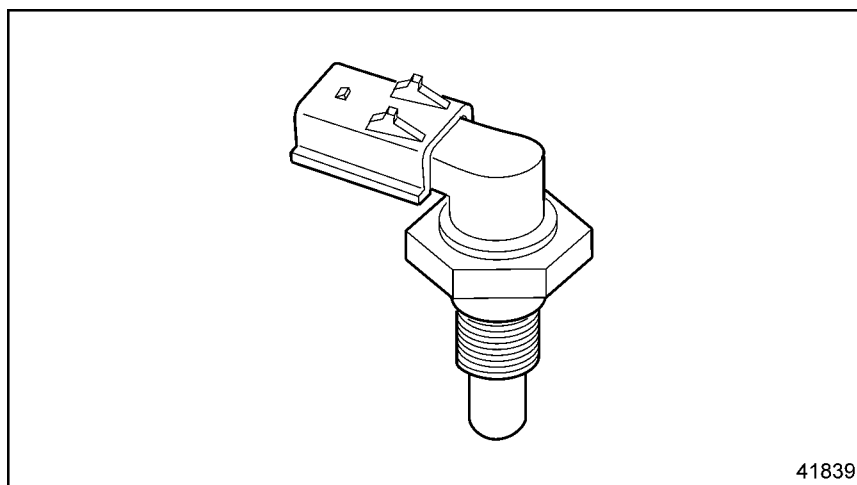


Figure 3-57 Air Temperature Sensor — Series 50 and Series 60

3.14.3 BAROMETRIC PRESSURE SENSOR

The Barometric Pressure Sensor (see Figure 3-58) senses barometric pressure for EGR control.

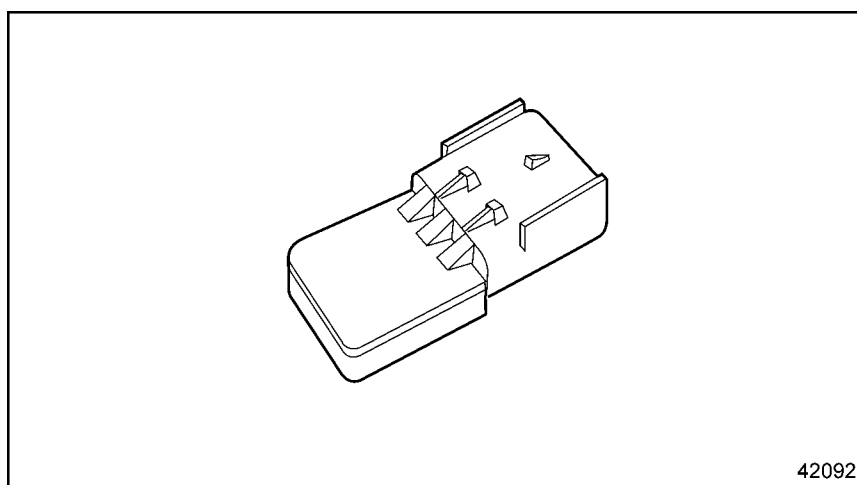


Figure 3-58 Barometric Pressure Sensor — Series 60 Only

3.14.4 COOLANT TEMPERATURE SENSOR

The CTS is a thermistor type sensor that has a variable resistance, when exposed to different temperatures. The CTS senses coolant temperature. See Figure 3-59 for the CTS used with the Series 60 engine and Figure 3-60 for the CTS used with the Series 50 engine.

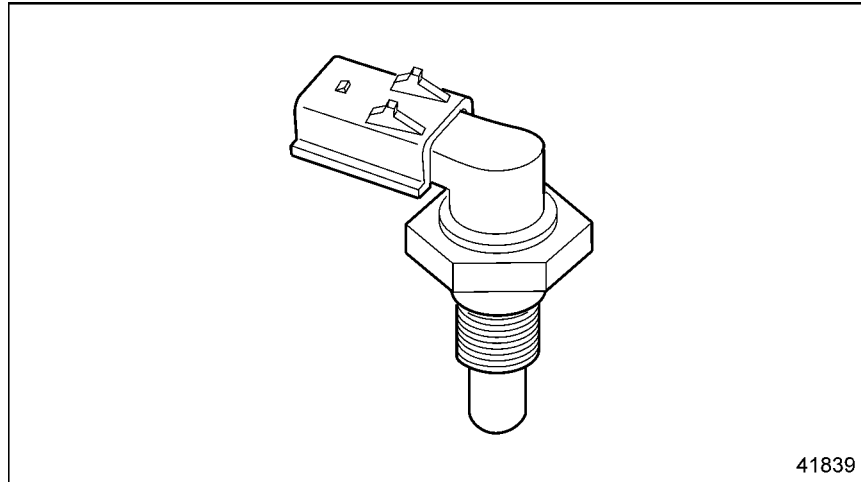


Figure 3-59 Coolant Temperature Sensor — Series 60

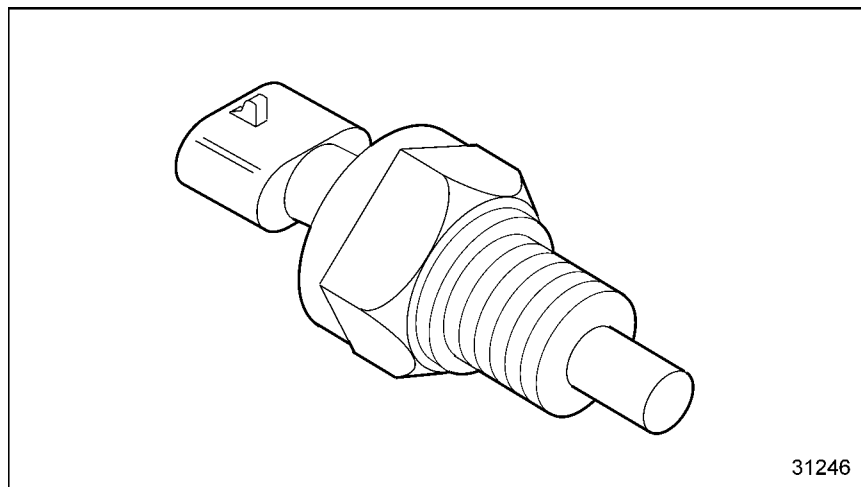


Figure 3-60 Coolant Temperature Sensor — Series 50

3.14.5 EGR DELTA PRESSURE SENSOR

The EGR Delta Pressure Sensor (EGR Delta P) senses EGR pressure for EGR control (see Figure 3-61).

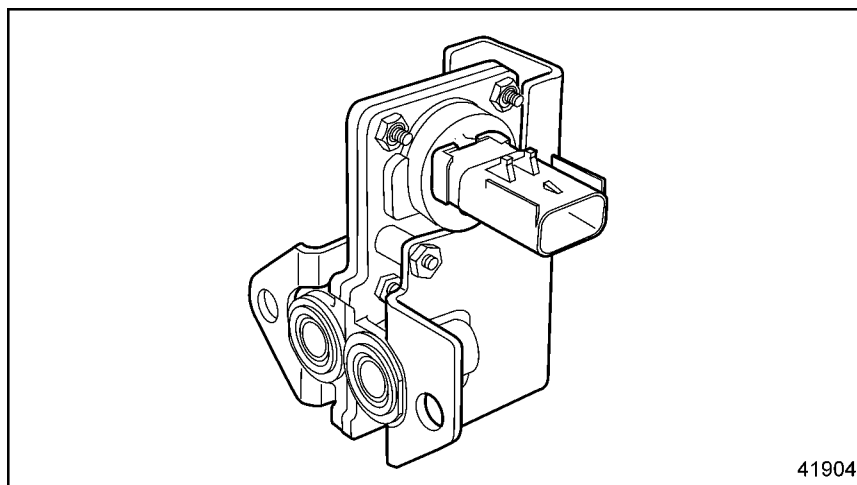


Figure 3-61 EGR Delta Pressure Sensor — Series 50 and Series 60

3.14.6 EGR TEMPERATURE SENSOR

The EGR Temperature Sensor senses EGR temperature for EGR control (see Figure 3-62).

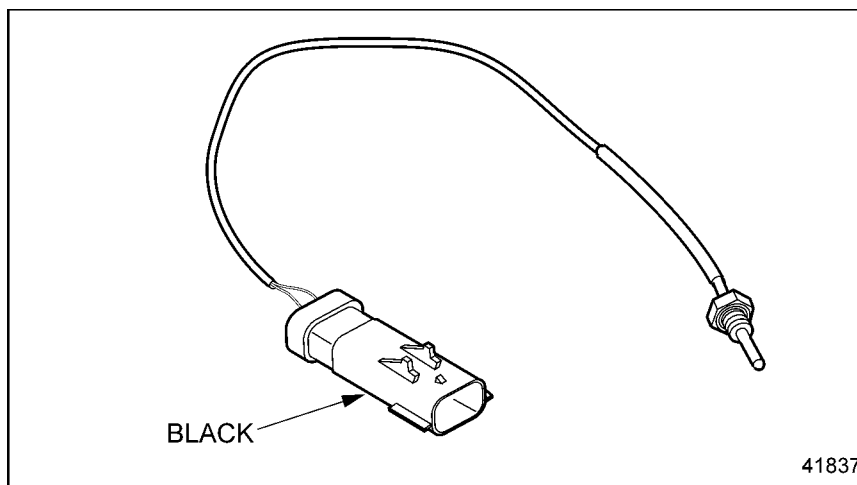


Figure 3-62 EGR Temperature Sensor — Series 50 and Series 60

3.14.7 FUEL RESTRICTION SENSOR

The FRS (see Figure 3-63) monitors the condition of the fuel filter. FRS is factory installed at DDC for applications which have the Maintenance Alert System (MAS).

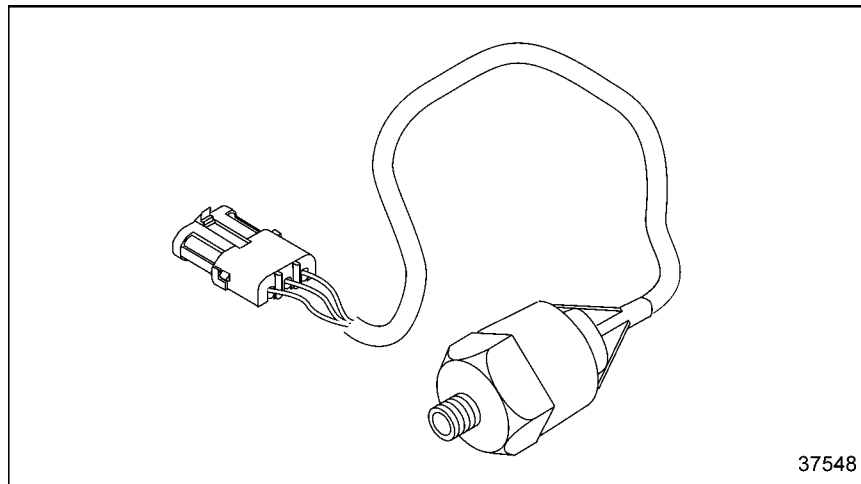


Figure 3-63 Fuel Restriction Sensor – Series 50 Only

3.14.8 FUEL TEMPERATURE SENSOR

The FTS (see Figure 3-64 and Figure 3-65) is a thermistor type sensor that has a variable resistance, when exposed to different temperatures. The FTS measures fuel temperatures necessary for fuel consumption calculations and fuel input compensation.

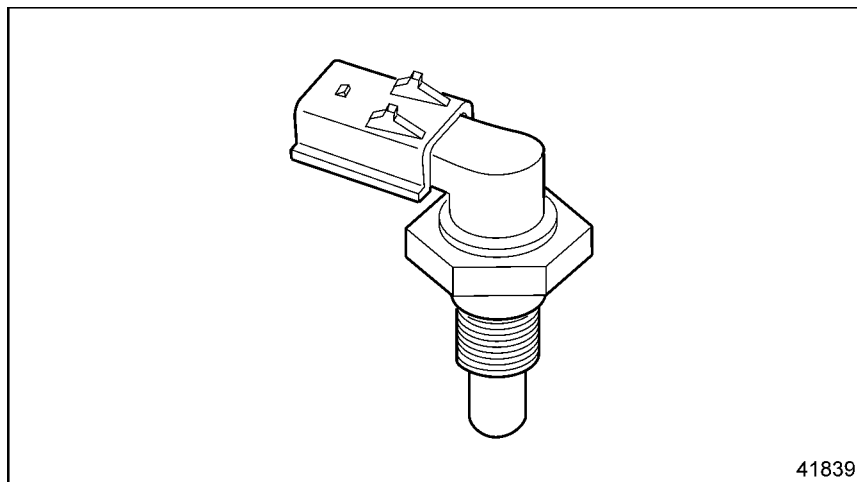


Figure 3-64 Fuel Temperature Sensor — Series 60

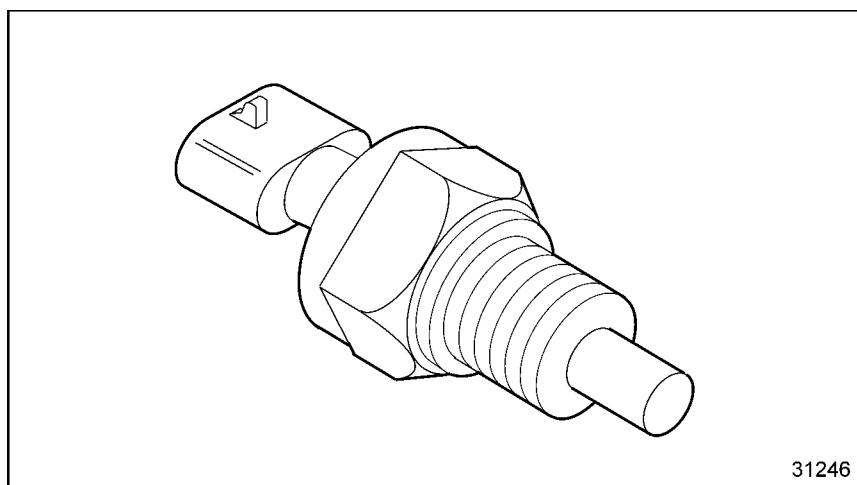


Figure 3-65 Fuel Temperature Sensor — Series 50

3.14.9 OIL LEVEL SENSOR

The OLS (see Figure 3-66) is factory-installed at DDC and is incorporated into the DDC Engine Sensor Harness for applications which have the Maintenance Alert System (MAS) for Series 50 only.

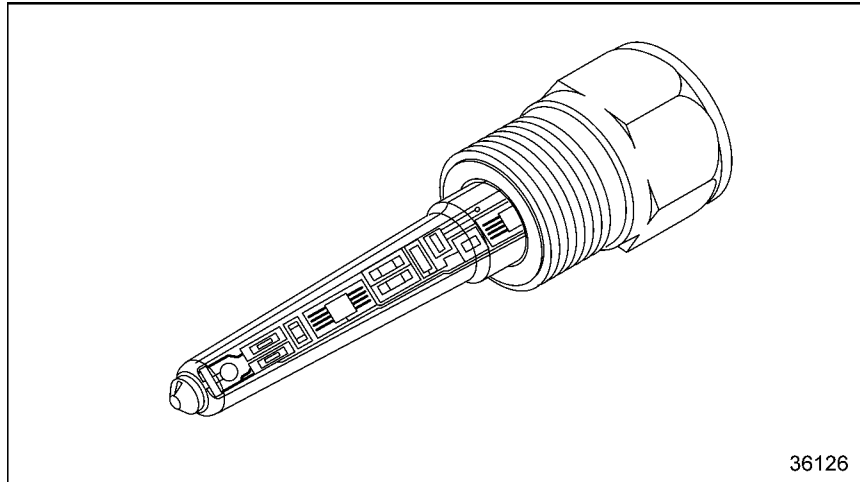


Figure 3-66 Oil Level Sensor – Series 50 Only

3.14.10 OIL PRESSURE SENSOR

The OPS is a variable capacitance sensor that produces a linear analog signal, indicating engine oil pressure.

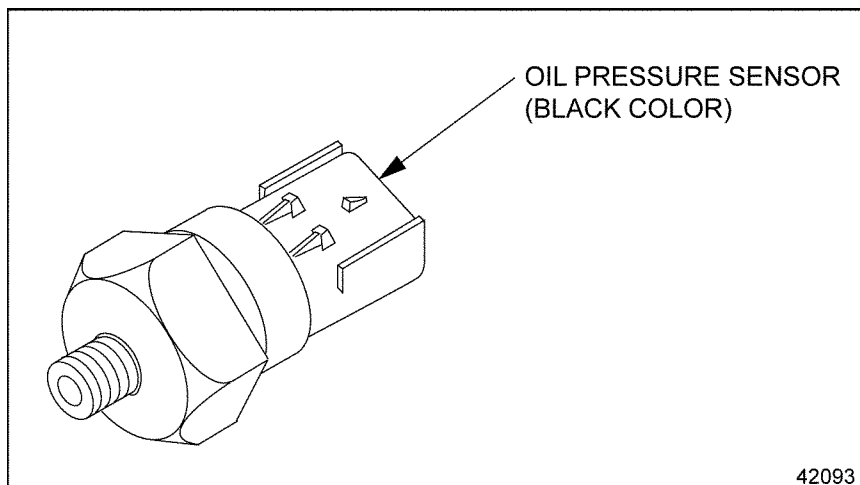


Figure 3-67 Oil Pressure Sensor — Series 50 and Series 60

3.14.11 OIL TEMPERATURE SENSOR

The OTS is a thermistor type sensor that has a variable resistance, when exposed to different temperatures.

See Figure 3-68 for the OTS used on the Series 60 engine and Figure 3-69 for the OTS used on the Series 50 engine.

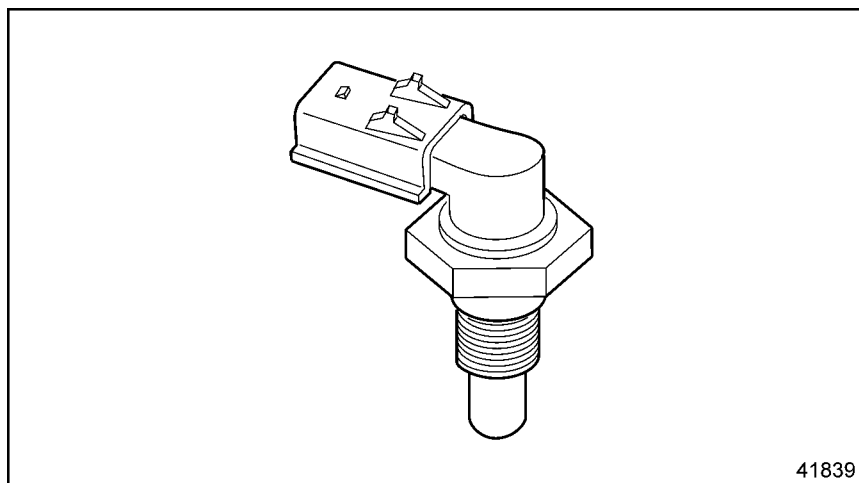


Figure 3-68 Oil Temperature Sensor - Series 60

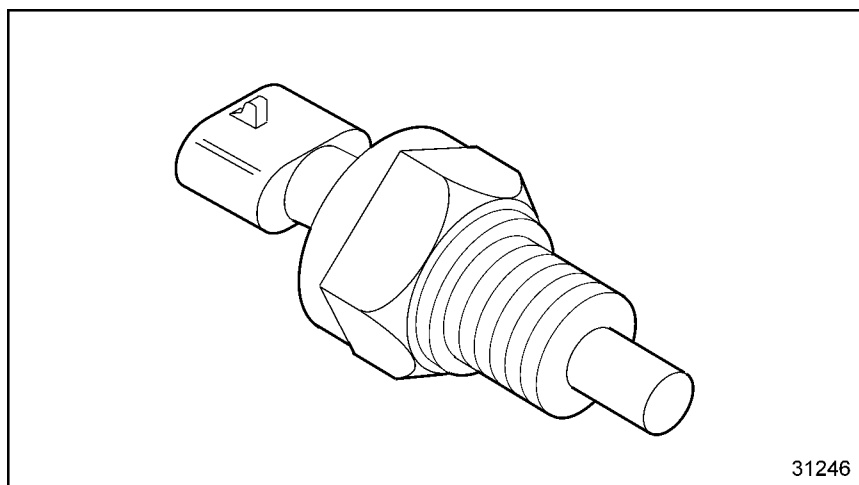


Figure 3-69 Oil Temperature Sensor — Series 50

The ECM uses the OTS signal to determine the quantity and timing of fuel required to optimize starting over a range of temperatures.

The OTS provides a signal to vary idle speed and injection timing resulting in improved cold starts and reduced white smoke. It also activates the engine protection, if the oil temperature exceeds the specified limits.

3.14.12 TIMING AND SYNCHRONOUS REFERENCE SENSORS

The Synchronous Reference Sensor (SRS) indicates a specific cylinder in the firing order.

The Timing Reference Sensor (TRS) is a variable reluctance type sensor that indicates crank position of every cylinder. The TRS tells the ECM where the position of the crankshaft is or when to fuel each cylinder.

See Figure 3-70 for the Series 60 engine TRS and SRS.

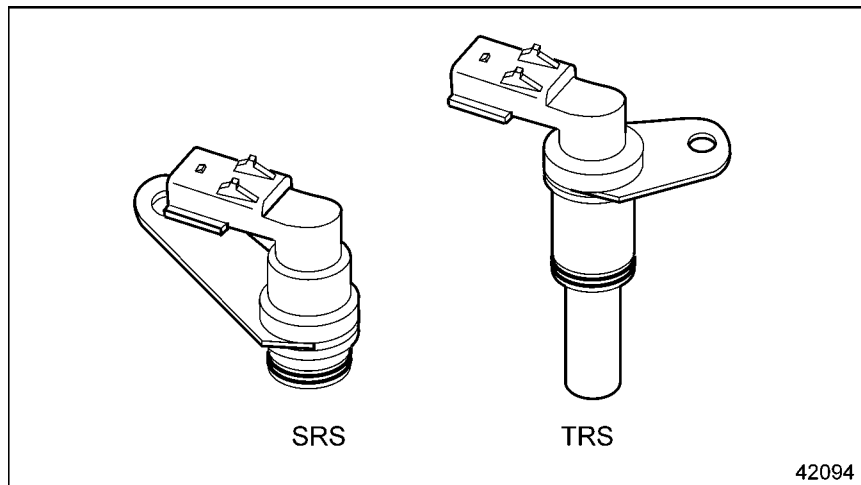


Figure 3-70 SRS and TRS — Series 60

See see Figure 3-71 for the Series 50 TRS and SRS.

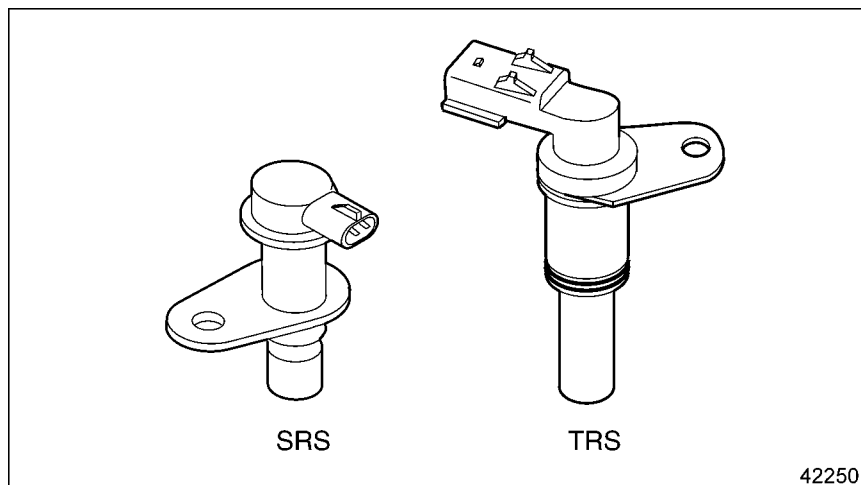


Figure 3-71 SRS and TRS — Series 50

3.14.13 TURBO BOOST SENSOR

The TBS provides data to the ECM for use in engine fueling (smoke control). See Figure 3-72 for the sensor used in on-highway applications.

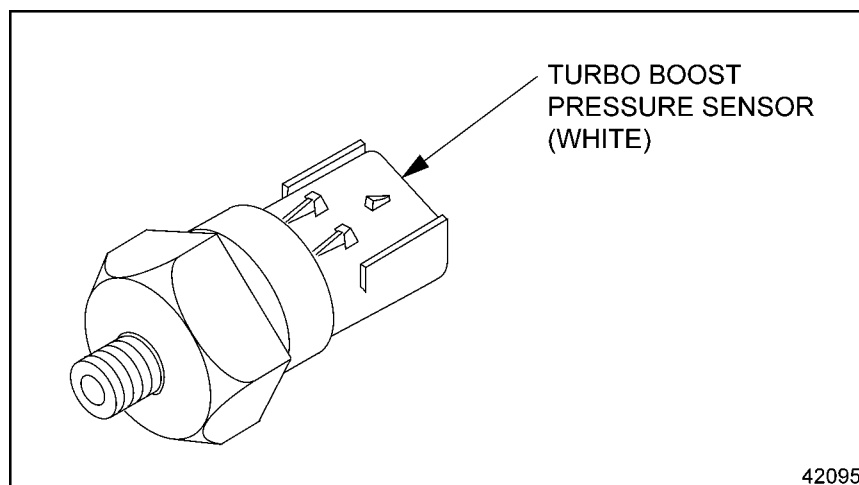


Figure 3-72 The Turbo Boost Pressure Sensor — Series 50 and Series 60

3.14.14 TURBO COMPRESSOR OUT TEMPERATURE SENSOR

The Turbo Compressor Out Temperature Sensor senses turbo out air temperature for EGR cooler protection. See Figure 3-73 for the sensor used with the Series 60 engine.

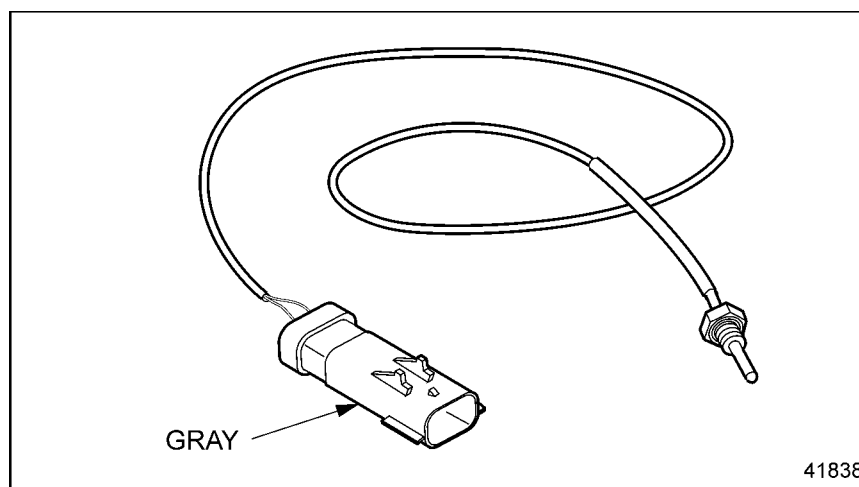


Figure 3-73 Turbo Compressor Out Temperature Sensor — Series 60

3.14.15 TURBO SPEED SENSOR

The Turbo Speed Sensor (TSS) senses turbo speed for overspeed conditions. See Figure 3-74.

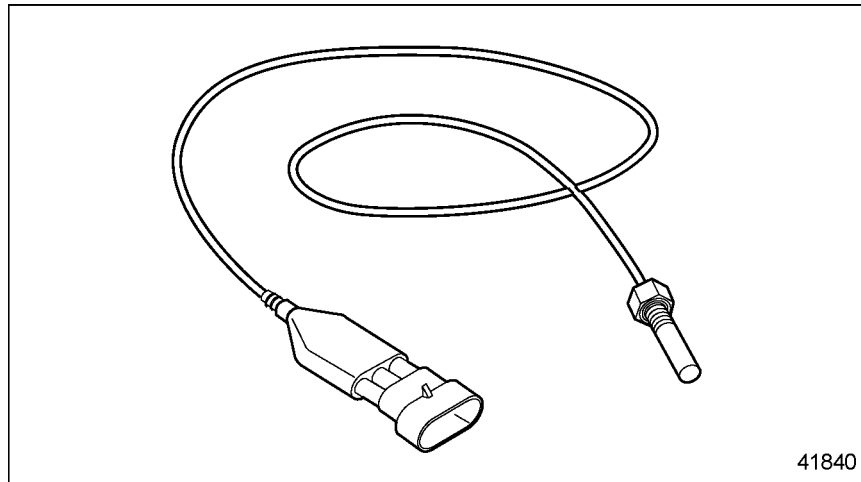


Figure 3-74 Turbo Speed Sensor — Series 50 and Series 60

3.14.16 OEM-INSTALLED SENSORS

All sensors must be of the proper type and continuously monitor vehicular and environmental conditions, so the ECM can react to changing situations.

The OEM is responsible for installing the sensors listed in Table 3-51. These sensors are application dependent.

Sensor	Part Number	Required or Optional	Function
Add Coolant Level Sensor (ACLS)*	23522855 23520830 23520381	Optional (Series 50 only)	Senses coolant level for engine maintenance. Refer to section 3.14.19.
Air Filter Restriction Sensor (AFRS)*	23526140	Optional (Series 50 only)	Senses the condition of the air inlet filter for engine maintenance. Refer to section 3.14.17.
Coolant Level Sensor (CLS)	23522855 23520380 23520381	Required	Senses coolant level for engine protection. Refer to section 3.14.18.
Exhaust Temperature Sensor*	23521882	Optional	Required for urban bus. Refer to section 3.14.21.
Fire Truck Pump Pressure Sensor *	23520795	Optional	Senses water pump pressure to maintain a constant fire truck pump pressure. Refer to section 3.14.22.
Optical Coolant Level Sensor*	23519175	Optional	Senses coolant level for engine protection in applications where electrical isolation from the chassis is required. Refer to section 3.14.20.
Relative Humidity/Turbo Compressor Inlet (TCI) Temperature Sensor*	23530572	Required (Series 60 and Natural Gas Applications)	Senses the temperature of the turbo compressor inlet and relative humidity. Refer to section 3.14.23.
Throttle Position Sensor (TPS)	--	Required	Senses operator's input to the ECM for throttle input. Refer to section 3.14.24.
Vehicle Speed Sensor (VSS)	--	Required	Senses vehicle speed for Cruise Control and PTO Control. Total distance accumulation required for ProDriver and a speedometer. Refer to section 3.14.25.

* Available in some applications

Table 3-51 Function and Guidelines for OEM-installed Sensors

NOTE:

The OEM harness must be securely fastened every 6 in. It is required that the harness be fastened within 6 in. of the sensor.

3.14.17 AIR FILTER RESTRICTION SENSOR — SERIES 50 ONLY

The AFRS is available only with the Maintenance Alert System (Release 27.0 or later software). The AFRS (see Figure 3-75) has two trip points, one at 18 in. of water and the second at 25 in. of water.

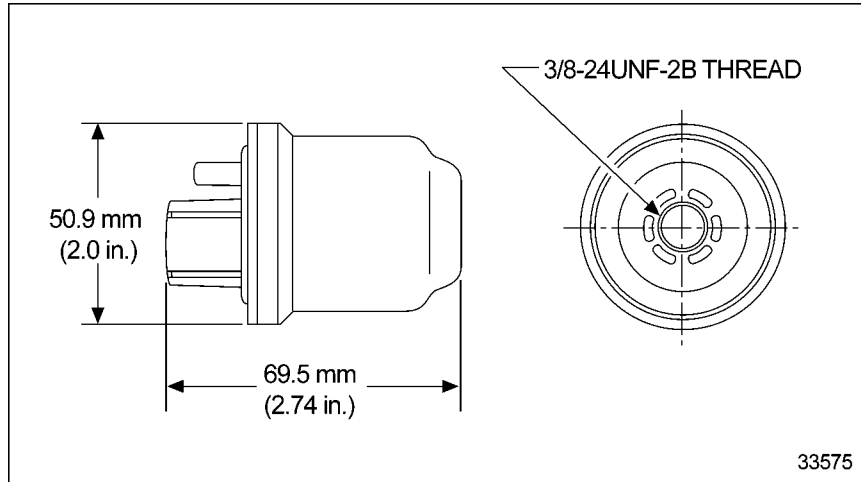


Figure 3-75 Air Filter Restriction Sensor

The AFRS is mounted downstream of the air filter and upstream of the turbocharger. The AFRS must be in a straight section of pipe or where the OEM mechanical unit is normally mounted. This sensor must be enabled with VEPS or the DDEC Reprogramming System (DRS). A pigtail on the DDC installed Engine Sensor Harness will be used to wire the sensor (see Figure 3-76).

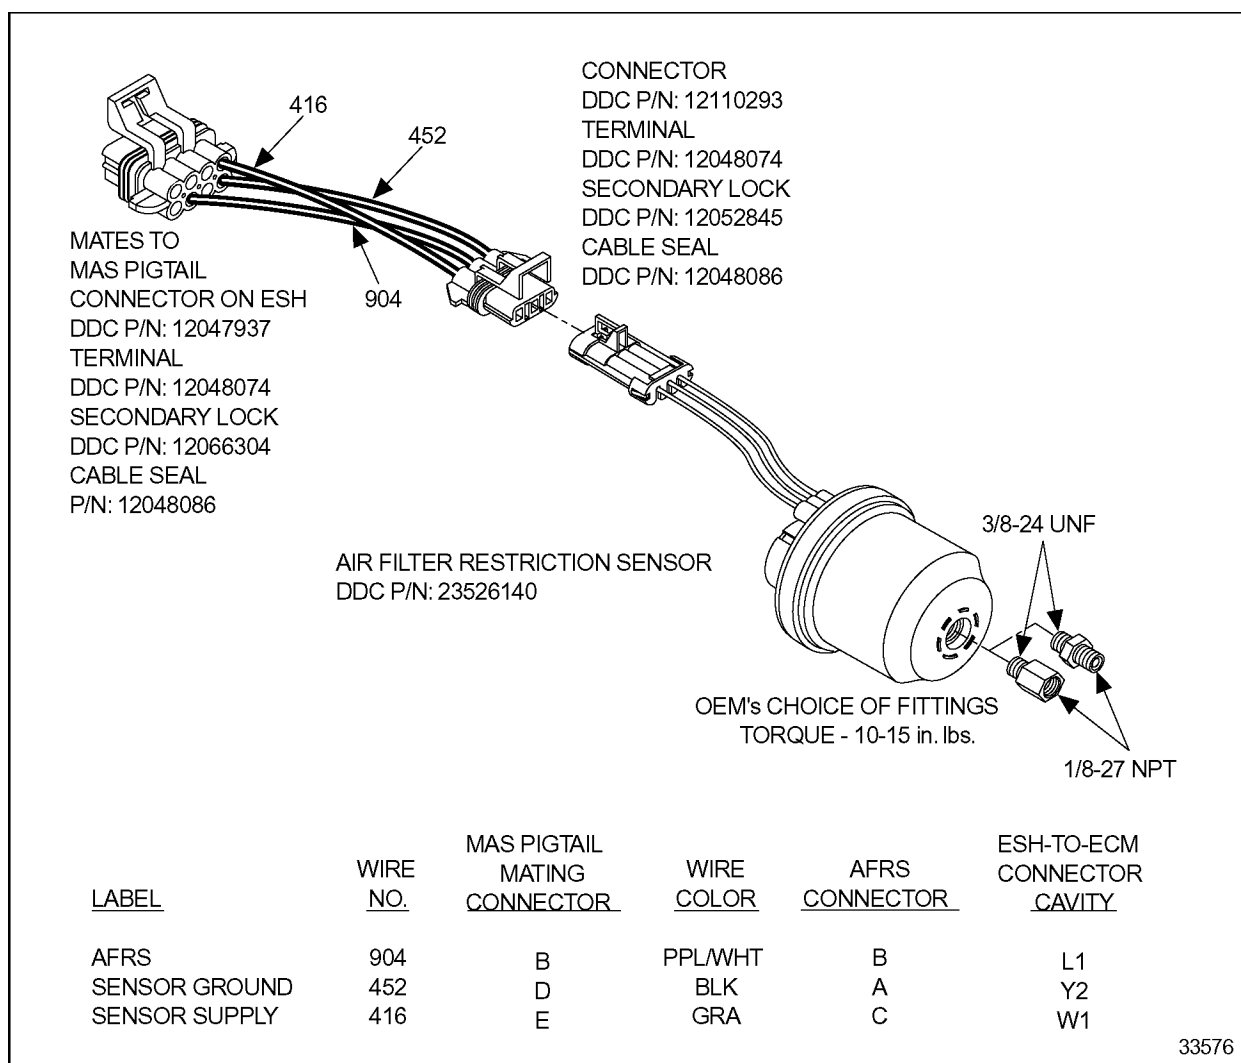


Figure 3-76 Air Filter Restriction Sensor Wiring Diagram

3.14.18 COOLANT LEVEL SENSOR

The CLS provides an input to the engine protection system that warns the operator if a low coolant level has been reached. Other non-DDC supplied coolant level sensors may be used but may require the use of a signal interface.

NOTE:

The CLS is required for DDEC IV installations.

The main component of the CLS consists of a conductivity probe, which connects to the ECM (see Figure 3-77).

NOTICE:

The probe has an operational temperature range of -40 to 257°F (-40 to 125°C). Exposure to temperatures beyond this range may result in unacceptable component life, or degraded sensor accuracy.

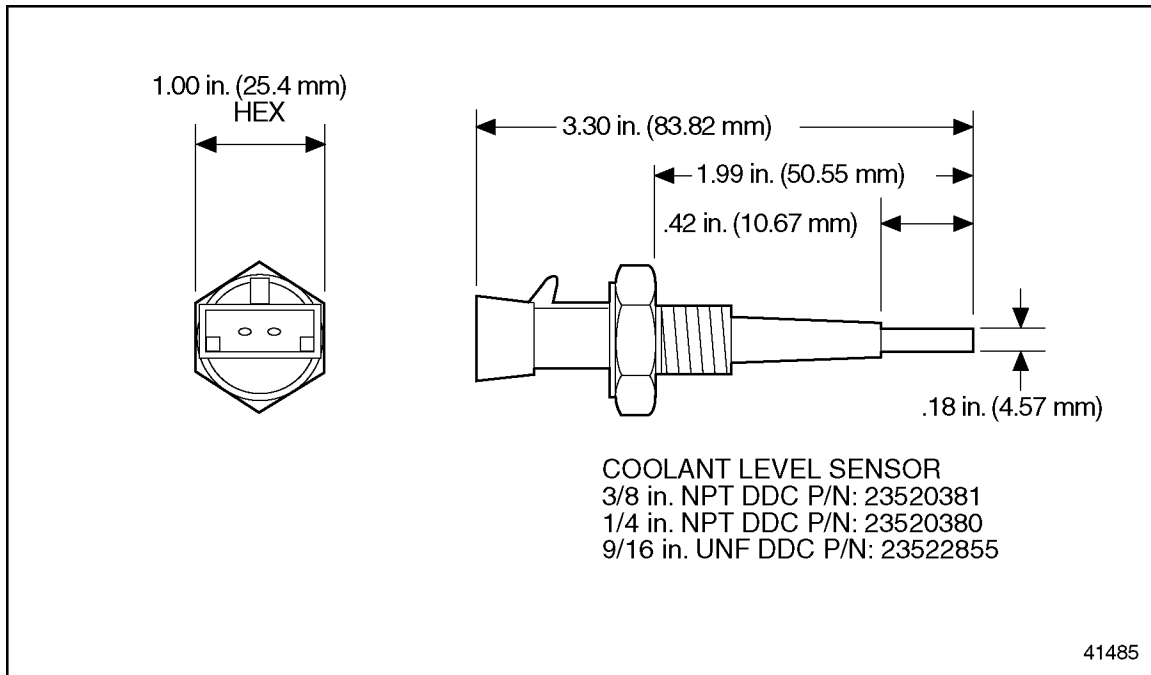


Figure 3-77 Coolant Level Sensor Specifications

The connector listed in Table 3-52 is a Metri-Pack 280 series push-to-seat connector.

Coolant Level Sensor Connector	
Connector	P/N: 15300027
Terminal	P/N: 12077411
Seal	P/N: 12015323
Secondary Lock	P/N: 15300014

Table 3-52 Metri-Pack 280 Connectors and Part Numbers

The OEM must connect the CLS probe as shown in the next illustration (see Figure 3-78). Polarity of the ground and signal must be correct for proper operation.

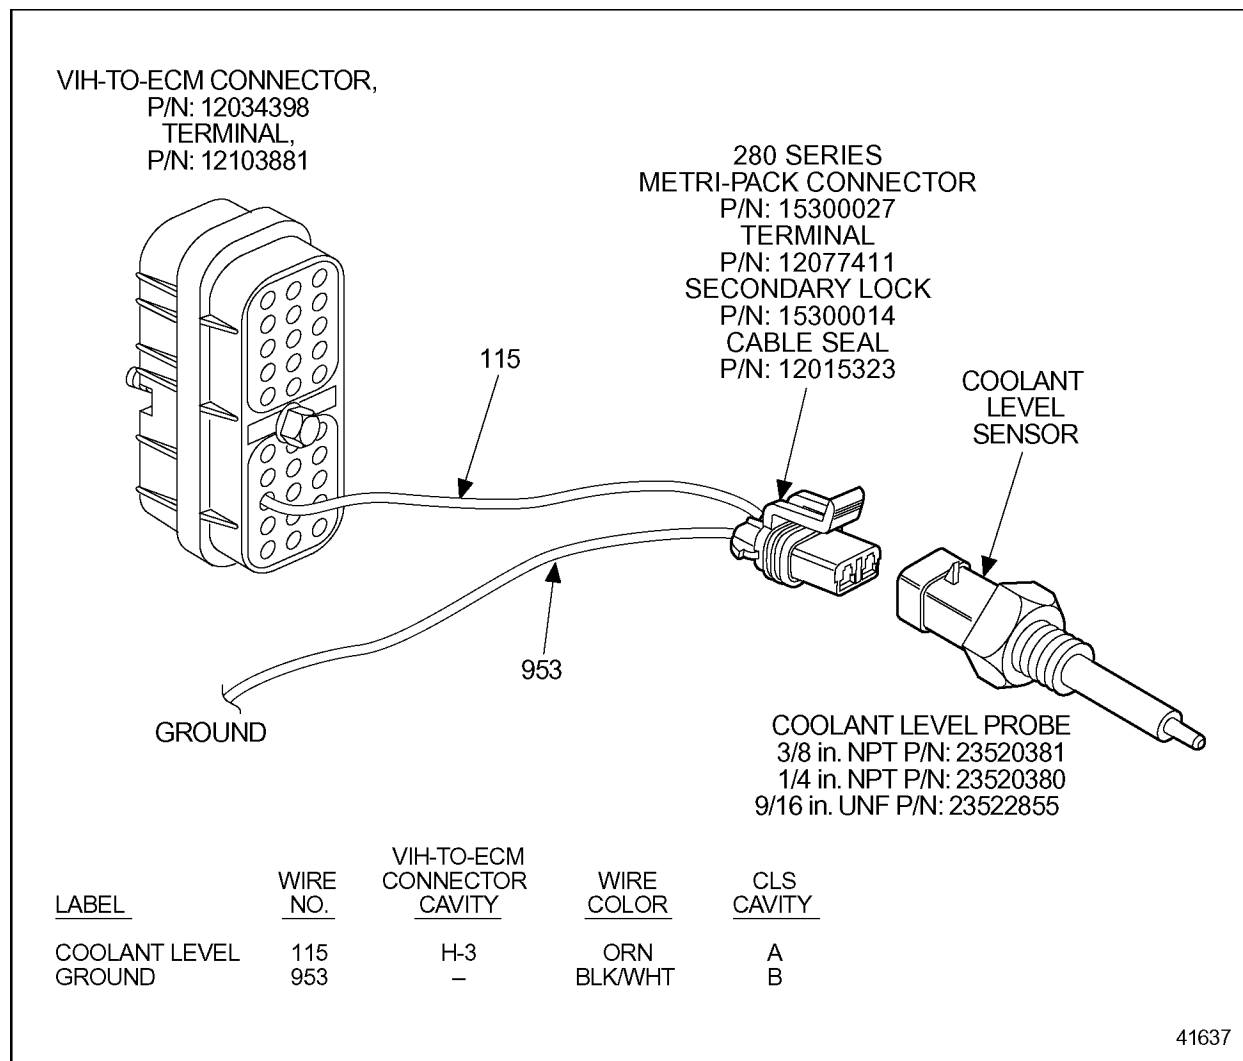


Figure 3-78 Coolant Level Sensor Installation

The probe should be located in either the radiator top tank or a remote mounted surge tank. It should be mounted horizontally in the center of the tank to minimize tilt operation sensitivity and must be in a position to signal low coolant before aeration occurs. Typically, this is a height representing 98% of the drawdown quantity. The probe should be located so that it is not splashed by deaeration line, stand pipe or coolant return line flows. The insulated portion of the probe should be inserted into the coolant .5 in. or more past the inside wall of the tank. See Figure 3-79.

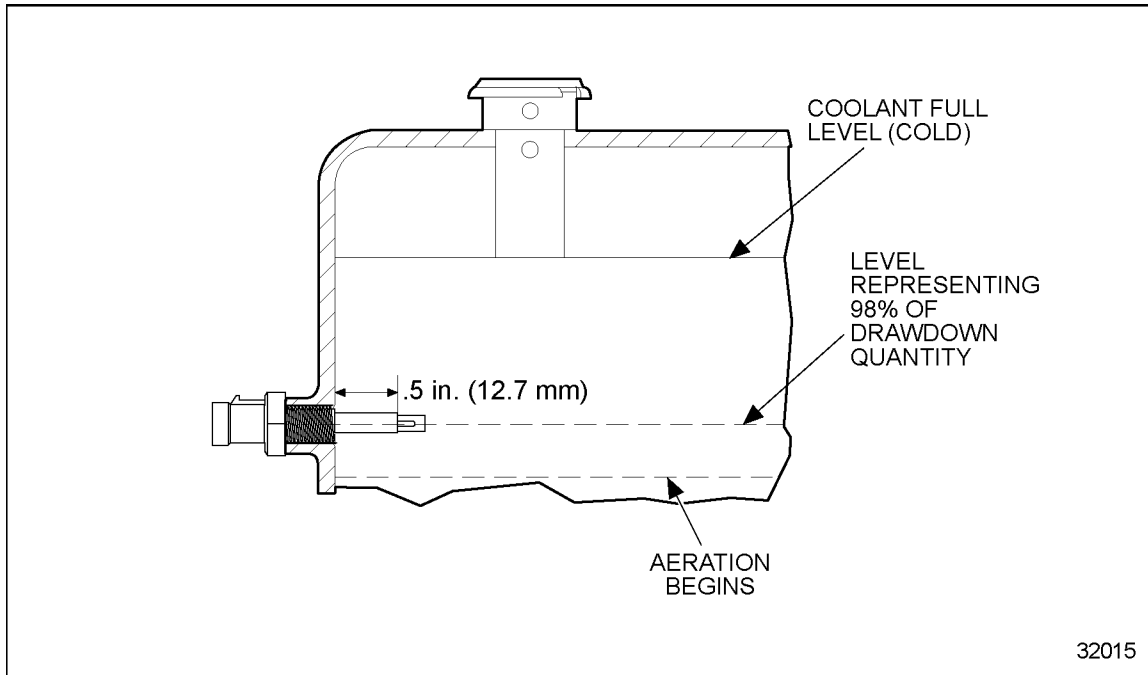


Figure 3-79 Coolant Level Sensor Location - Top of Radiator Tank

Determine proper location for low coolant level sensor while running the drawdown test. It *must* actuate a warning before the satisfactory drawdown level is reached.

The CLS components are OEM-supplied hardware and can be purchased as kits or individual components, depending on OEM requirements.

The following kits listed in Table 3-53 and Table 3-54 provide all the necessary hardware for proper installation of the CLS. Kits are available through the DDC parts distribution network.

Component	Part Number
CLS Probe	23520380
Metri-Pack Connector Kit	15300027
Metri-Pack Terminals	12077411
Secondary Lock	15300014
Cable Seal	12015323
Terminal	12103881

Table 3-53 CLS Installation Kit 1/4 in. NPTF P/N: 23515397

Component	Part Number
CLS Probe	23520381
Metri-Pack Connector Kit	15300027
Metri-Pack Terminals	12077411
Secondary Lock	15300014
Cable Seal	12015323
Terminal	12103881

Table 3-54 CLS Installation Kit 3/8 in. NPTF P/N: 23515398

3.14.19 ADD COOLANT LEVEL SENSOR — SERIES 50 ONLY

The ACLS is used to warn the driver that the coolant level is below the recommended level. If the tank is equipped with an "ADD" level, the sensor should be installed there. This sensor will be activated approximately mid-way between the cold full level and the level where the standard (engine protection) CLS is located (see Figure 3-80).

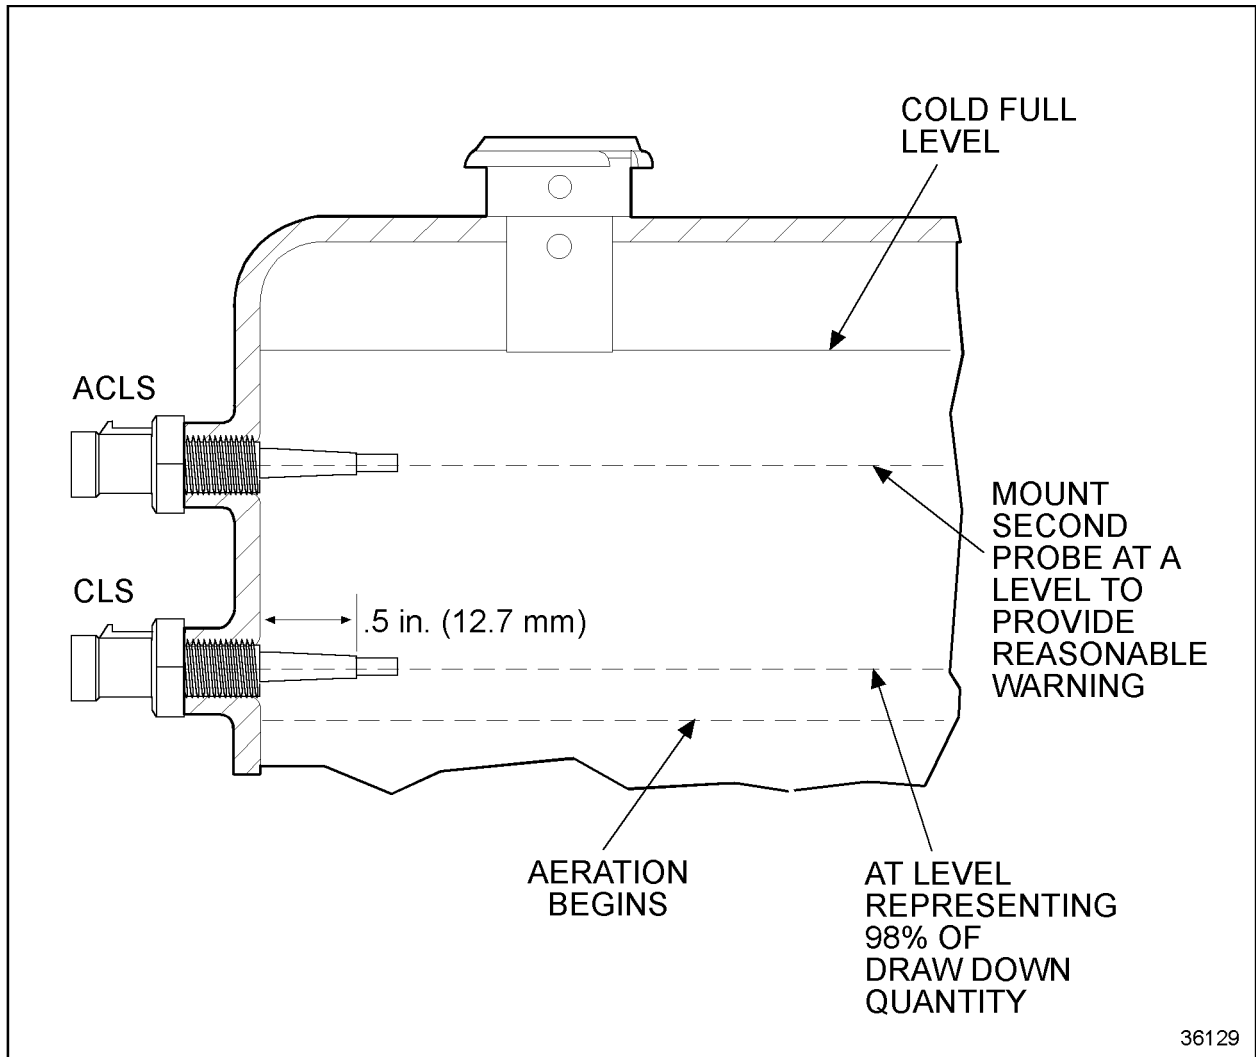


Figure 3-80 Add Coolant Level Sensor Location - Radiator Surge Tank

NOTE:

All ACLS components are OEM installed.

The ACLS must be enabled with VEPS or DRS. The ACLS will require an additional module (P/N: 23524054) to condition the sensor signal. The module output will be connected to the MAS pigtail on the supplied ESH. See Figure 3-81.

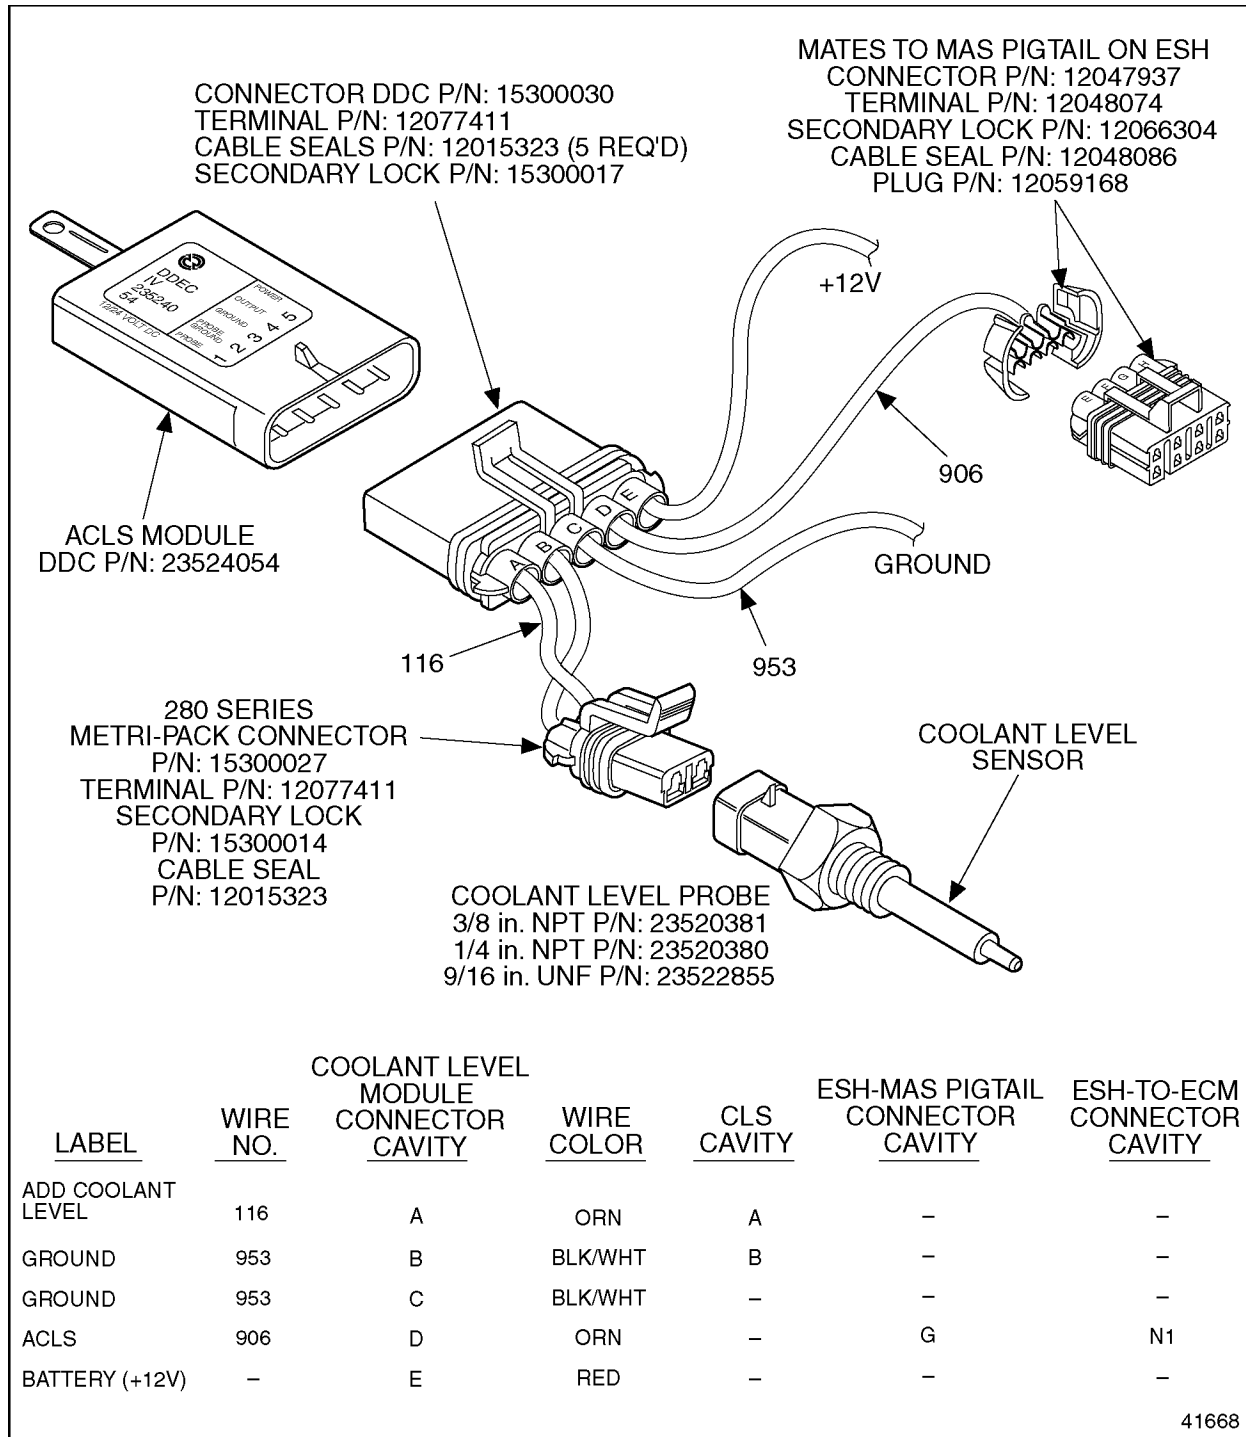


Figure 3-81 Add Coolant Level Sensor Installation – MAS

3.14.20 OPTICAL COOLANT LEVEL SENSOR

The optical CLS (see Figure 3-82) can be used in place of the standard coolant level sensor in applications where electrical isolation from the chassis is required.

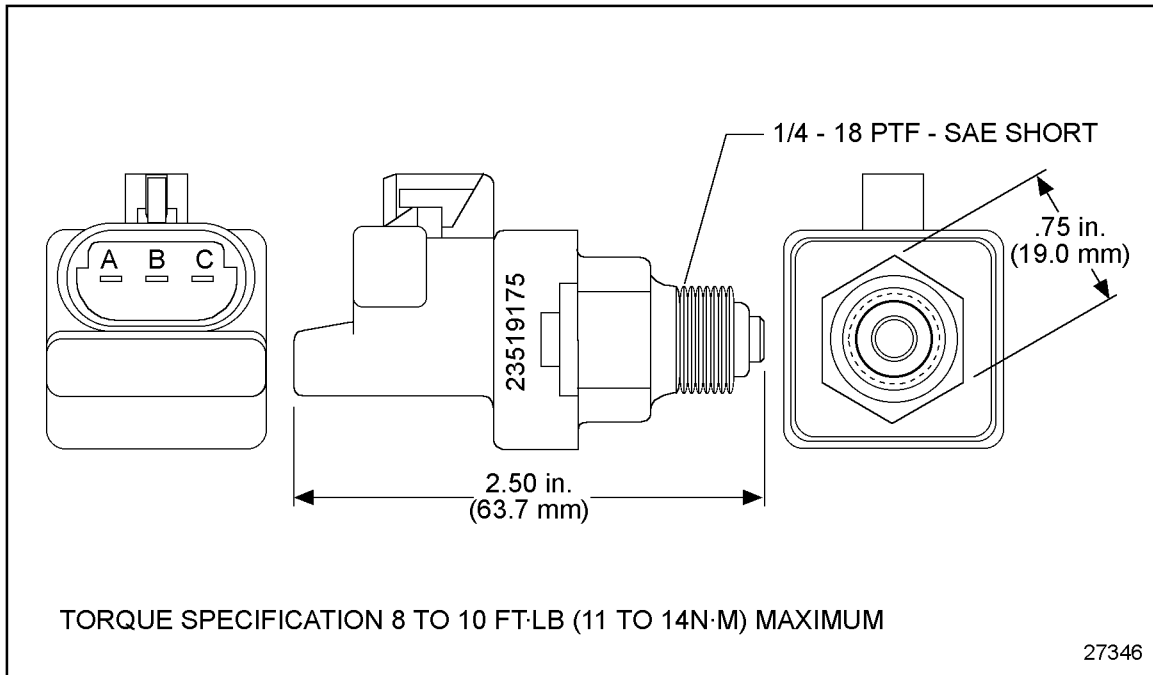


Figure 3-82 Optical Coolant Level Sensor Specifications

NOTE:

This sensor is optional.

The optical CLS does not have a connection to the chassis but uses the angle of refraction of light emitted from the probe to determine if the sensor is in or out of the coolant. See Figure 3-83 for a schematic of the optical CLS harness.

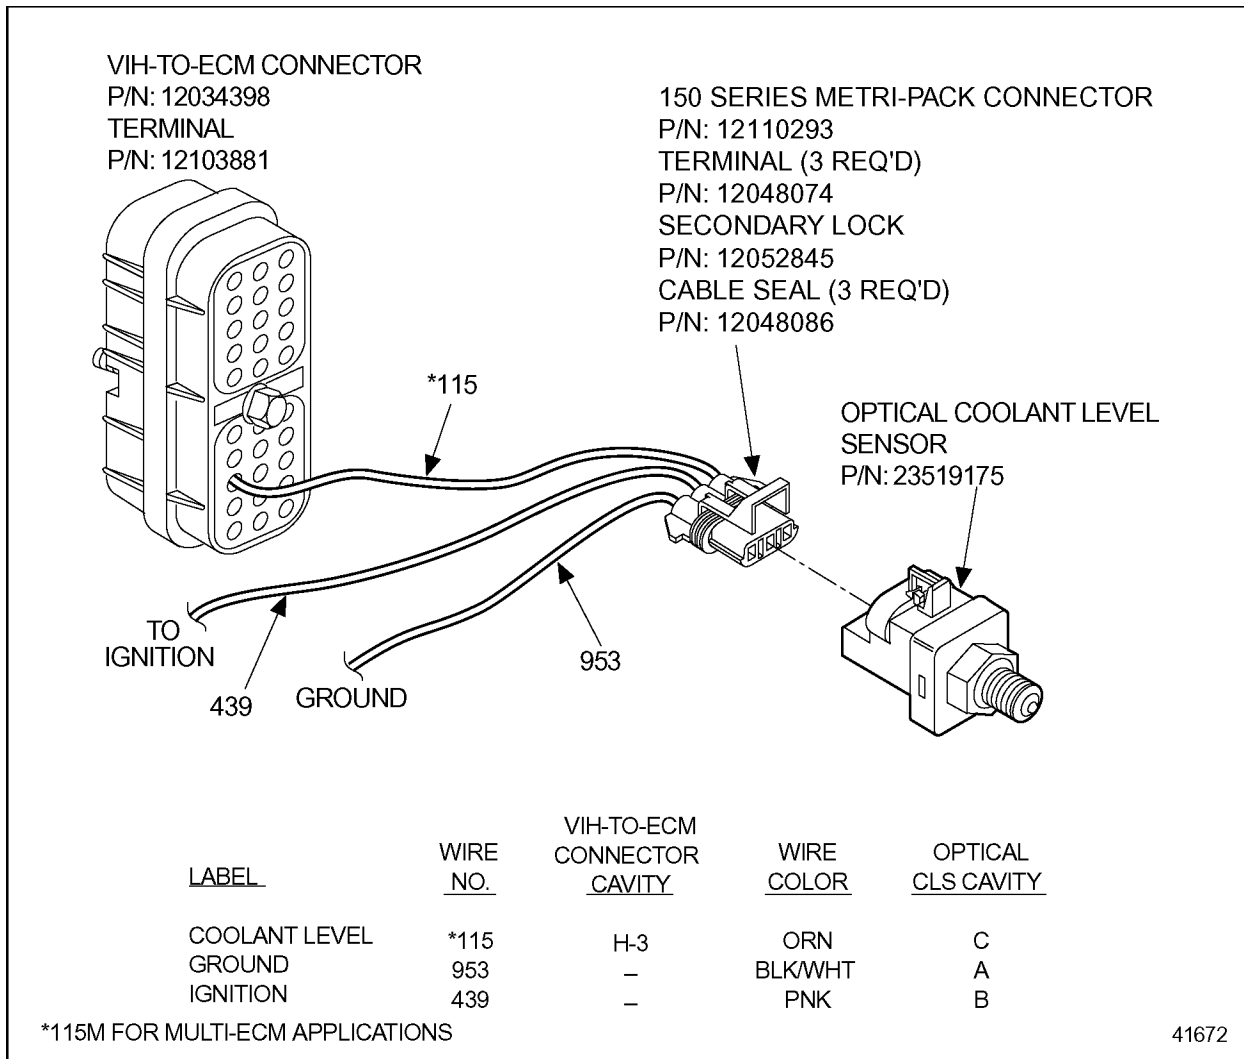


Figure 3-83 Optical Coolant Level Sensor Harness

The sensor part numbers are listed in Table 3-55.

Description	Part Number
Optical CLS	23519175
Connector	12110293
Terminals	12048074
Cable Seals	12048086
Secondary Lock	12052845

Table 3-55 Optical Coolant Level Sensor and Parts

3.14.21 EXHAUST TEMPERATURE SENSOR

Excessive exhaust temperature may indicate a concern with the fuel system or a mechanical fault. An Exhaust Temperature Sensor (see Figure 3-84) will provide early warning and prevent damage for certain applications. This sensor is configured by the Application Code System (ACS).

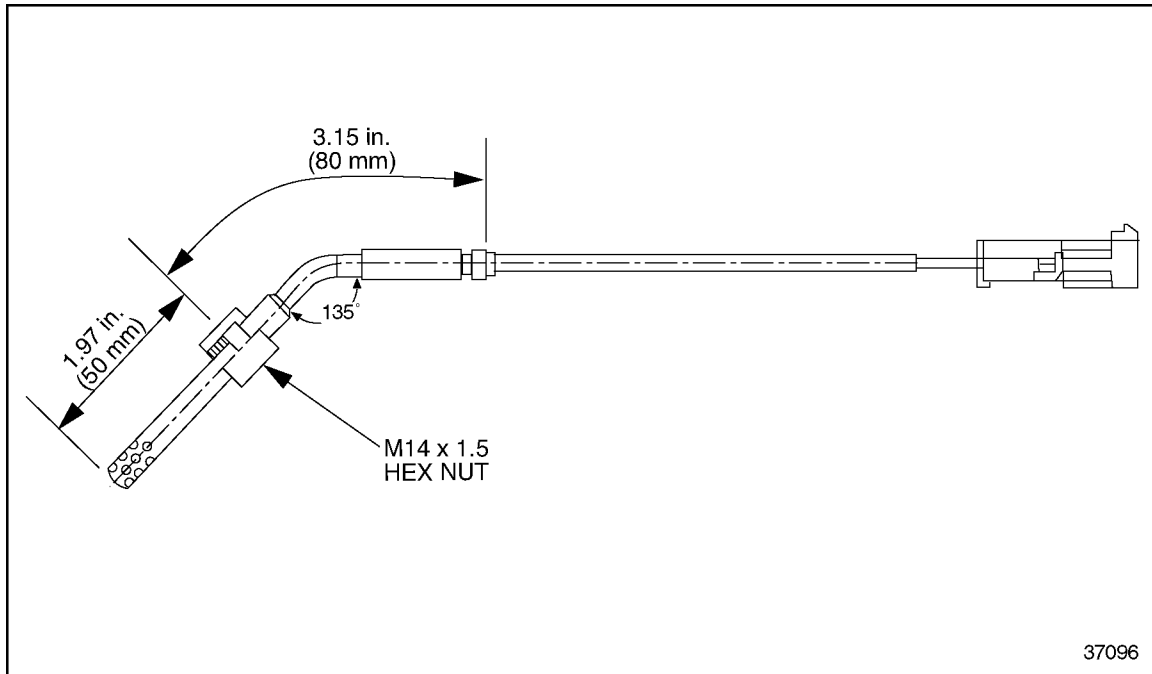


Figure 3-84 Exhaust Temperature Sensor

Exhaust Temperature Sensor Installation

Kits containing the Exhaust Temperature Sensor Harness and sensor are available from Canton Parts Distribution Center. The kits are listed in Table 3-56.

Kit Part Numbers	Description	Component Part Numbers
23531227	Harness - 232 in.*	23531076
	Exhaust Temperature Sensor	23521882
23531228	Harness - 170 in. length*	23531075
	Exhaust Temperature Sensor	23521882
23531229	Harness - 100 in. length*	23531074
	Exhaust Temperature Sensor	23521882

* Total length includes 72 in. lead on P/N: 23521882

Table 3-56 Exhaust Temperature Sensor and Harness Kits

To install the Exhaust Temperature Sensor (see Figure 3-85):

1. Unplug the connector from the TBS.
2. Plug the Exhaust Temperature Sensor Harness connector (P/N: 12162182) into the TBS.
3. Plug the TBS connector (from the ESH) you unplugged in step 1 into the 3-pin connector on the Exhaust Temperature Sensor Harness.
4. Route the harness along the ESH toward the ECM-VIH 30-pin connector. Remove the VIH 30-pin connector from the ECM.
5. Insert the single lead (circuit 749) into cavity D3 of the VIH 30-pin connector. Crimp the terminal on the lead and pull to seat.

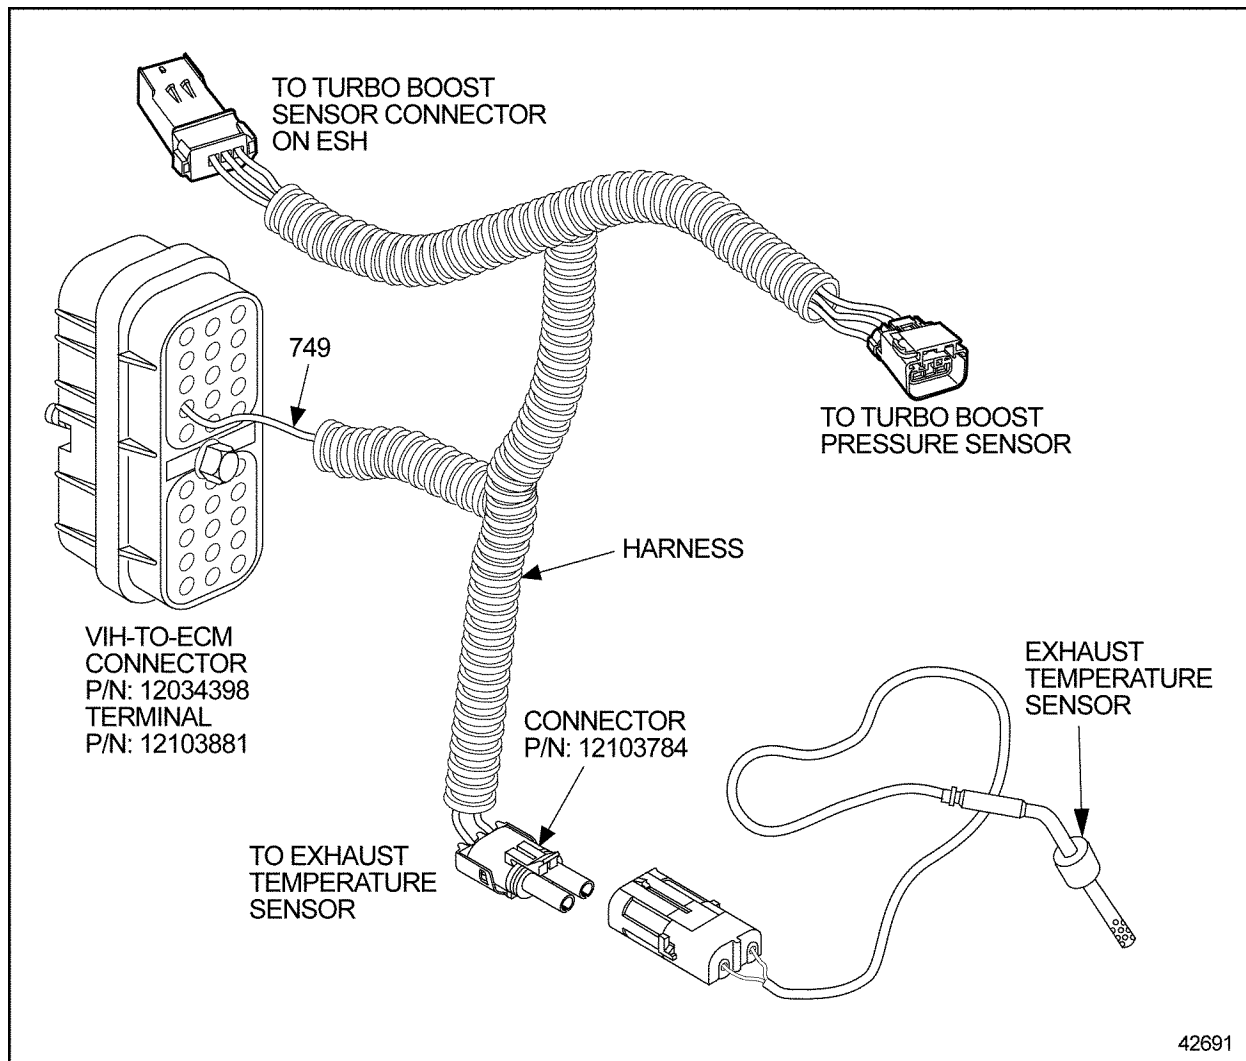


Figure 3-85 Exhaust Temperature Sensor Installation

6. Reinstall the VIH 30-pin connector.
7. Route the body of the harness to the location of the Exhaust Temperature Sensor and plug the connector (P/N: 12103784) into the sensor.

3.14.22 FIRE TRUCK PUMP PRESSURE SENSOR

The Fire Truck Pump Pressure Sensor is used with the DDEC IV pressure sensor governor. It provides a fire truck pump pressure signal to the ECM, which modulates engine fueling to maintain a constant fire truck pump pressure. See Figure 3-86. The Pressure Sensor is capable of reading up to 400 psia and is located in the water pump discharge manifold.

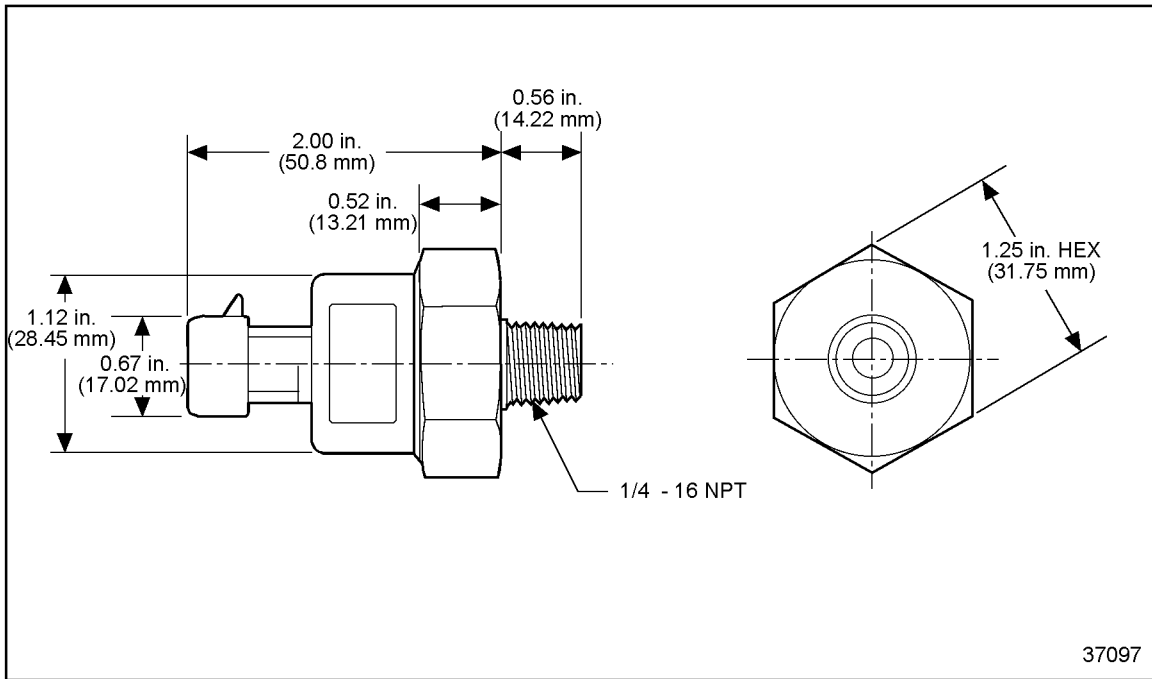


Figure 3-86 The Fire Truck Pump Pressure Sensor

NOTE:

This sensor is optional.

The Fire Truck Pump Pressure Sensor connector, listed in Table 3-57, is a Metri-Pack 150 series pull-to-seat connector.

Fire Truck Pressure Sensor (PSG)	
Connector	P/N: 12065287
Terminal	P/N: 12089289
Cable Seal	P/N: 12065285

Table 3-57 Fire Truck Pump Pressure Sensor Connector

See Figure 3-87 for the installation of the Fire Truck Pump Pressure Sensor.

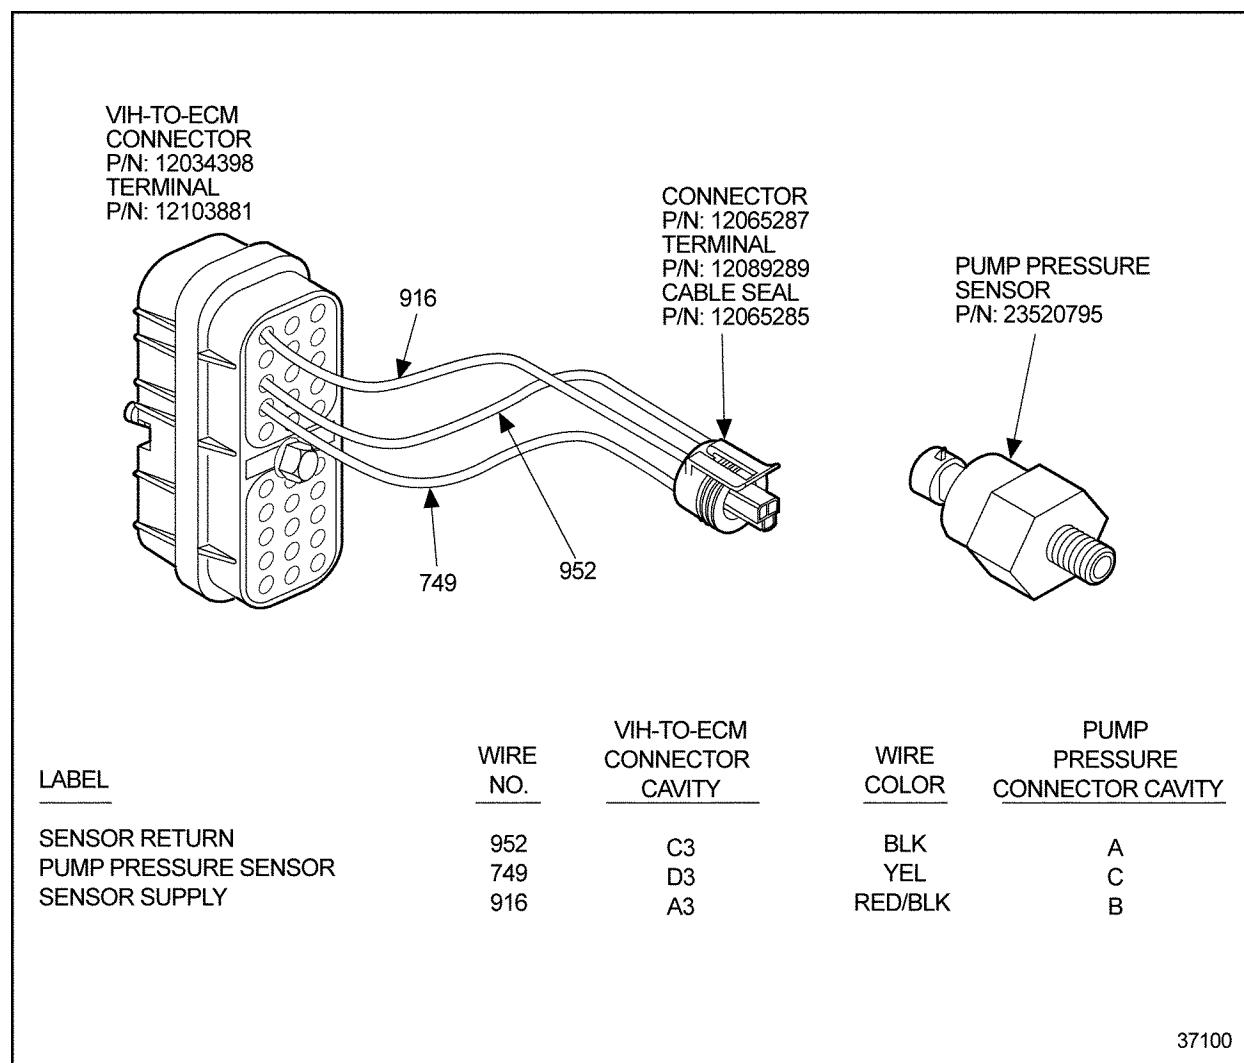


Figure 3-87 Fire Truck Pump Pressure Sensor Installation

3.14.23 RELATIVE HUMIDITY/TURBO COMPRESSOR INLET TEMPERATURE SENSOR

The Relative Humidity/Turbo Compressor Inlet (TCI) Temperature Sensor senses the temperature of the turbo compressor inlet and relative humidity. The maximum vibration for the sensor is 5 g. The sensor should be torqued between 15 ft·lb (20 N·m) and 25 ft·lb (34 N·m). See Figure 3-88 for the dimensions of the sensor. The harness must be fastened within 6 in. of the sensor.

NOTE:

The sensor is shipped with the engine.

NOTE:

This sensor is required for Series 60 and natural gas applications.

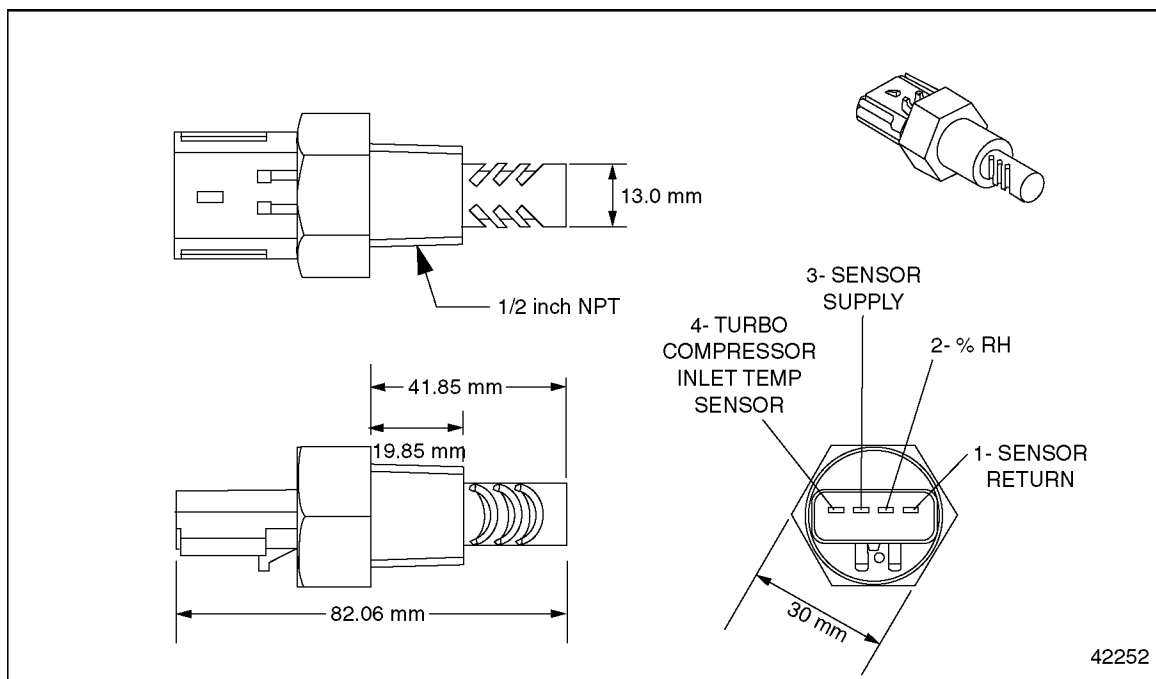


Figure 3-88 Relative Humidity/TCI Temperature Sensor Dimensions

Installation of Relative Humidity/TCI Temperature Sensor

The maximum operating temperature for this sensor is 185°F (85°C). The maximum vibration for the sensor is 5 g. The sensor should be mounted in the filtered air side of the air filter canister. Otherwise it must be mounted between the air cleaner and the turbocharger compressor inlet. The harness must be fastened within 6 in. of the sensor.

The OEM is responsible for wiring this sensor to the 10-pin OEM interface connector for Series 60 only. See Figure 3-89.

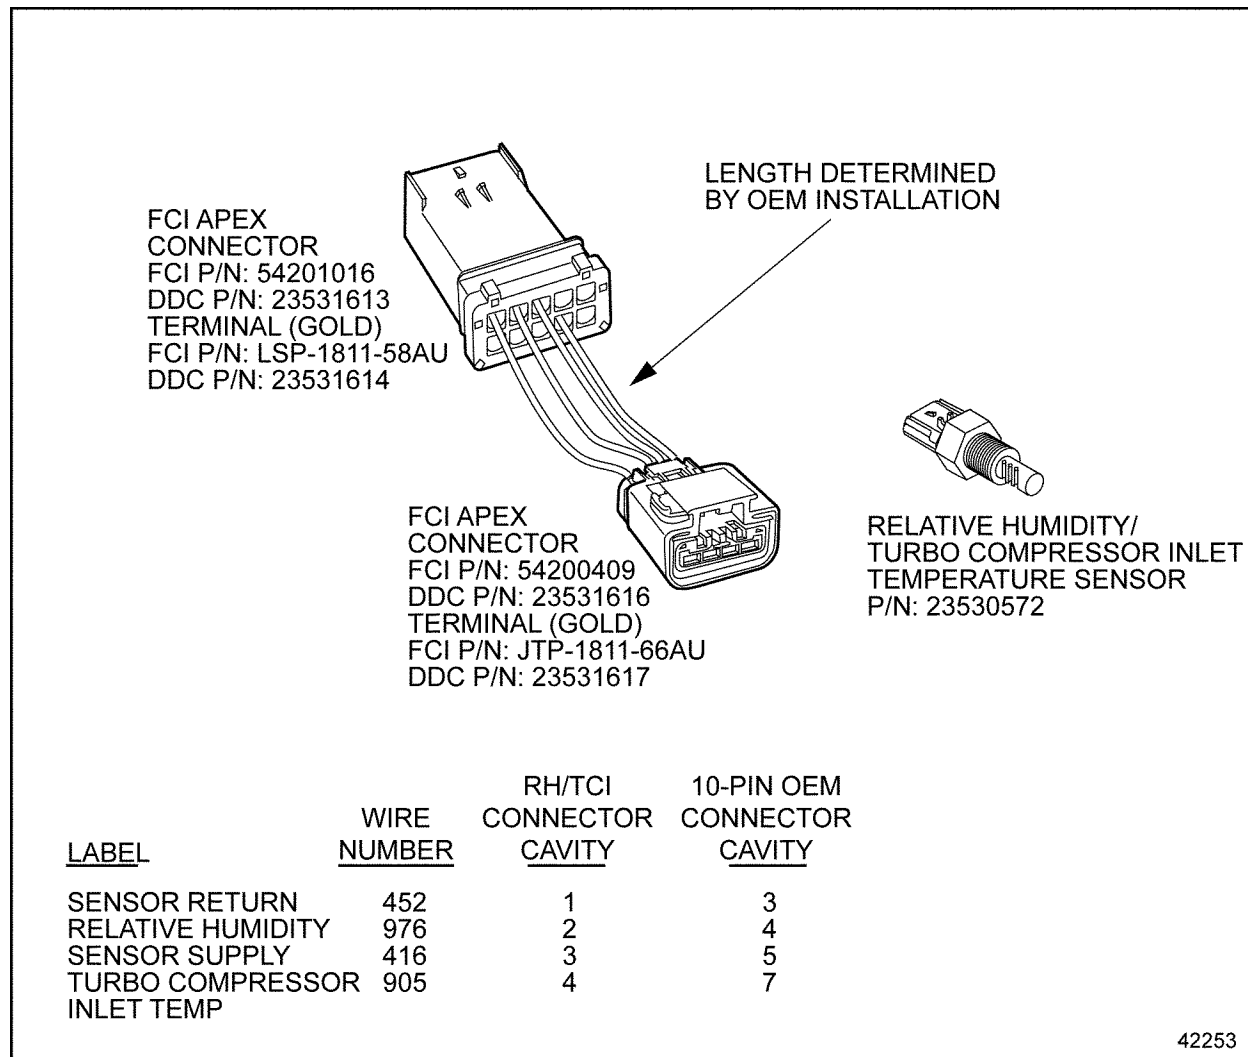


Figure 3-89 Relative Humidity/TCI Temperature Sensor Installation for Series 60 Only

For natural gas applications, the Relative Humidity/TCI Temperature Sensor is wired to the Vehicle Interface Harness. See Figure 3-90.

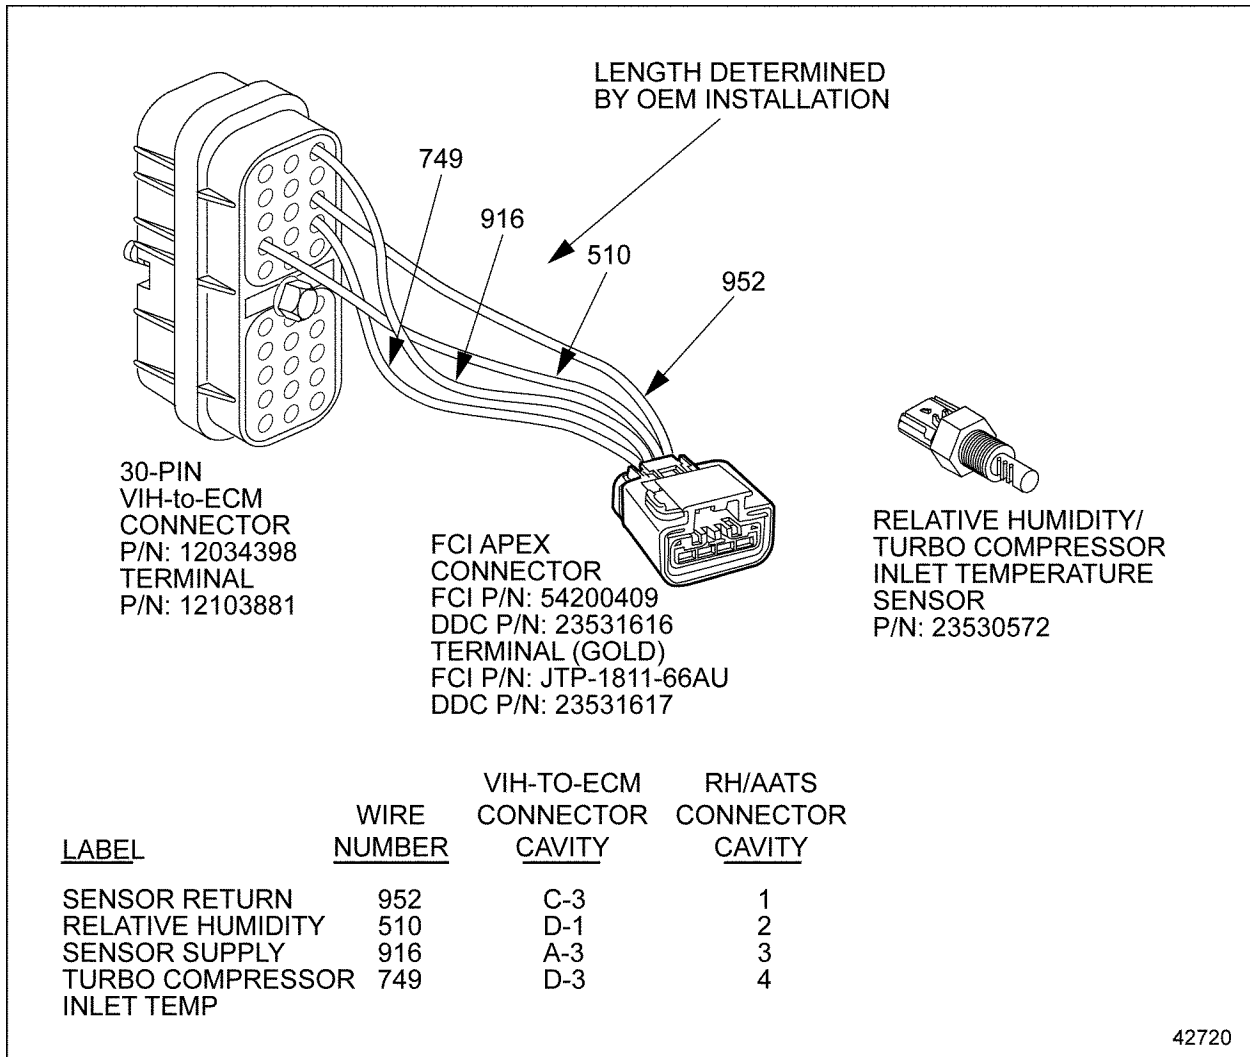


Figure 3-90 Relative Humidity/TCI Temperature Sensor Installation for Natural Gas Applications

The maximum operating temperature for this sensor is 185°F (85°C). The maximum vibration for the sensor is 5 g.

3.14.24 THROTTLE POSITION SENSOR

The EFPA contains the Throttle Position Sensor (TPS) which converts the operator's hand throttle and/or foot pedal input into a signal for the ECM. Refer to section 3.15.1 for additional information on the Electronic Foot Pedal Assembly.

NOTE:

This sensor is required.

3.14.25 VEHICLE SPEED SENSOR

The DDEC IV ECM can calculate vehicle speed providing that the ECM is properly programmed and interfaced with a vehicle speed signal that meets DDC requirements. The VSS (see Figure 3-91) provides a vehicle speed signal for use in Cruise Control and Vehicle Speed Limiting. The VSS signal type can be changed with the DDR, VEPS, or DRS.

NOTE:

DDC does not approve of the use of signal generator sensors.

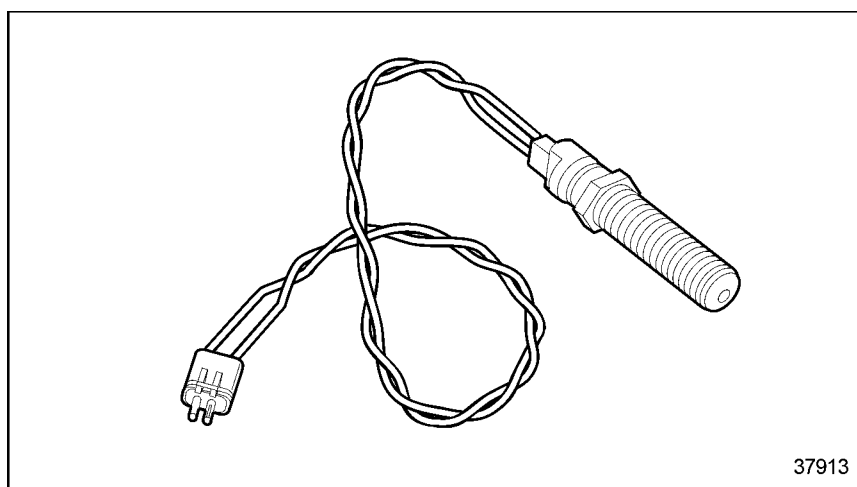


Figure 3-91 Vehicle Speed Sensor

To obtain accurate vehicle mileage, the parameters listed in Table 3-58 must be programmed with the DDR, DDDL, VEPS, DRS or at order entry.

Parameter	Description	Choice / Display
VSS ENABLED	Enables or disables the vehicle speed sensor input.	YES, NO
VSS TYPE	Type of vehicle speed sensor used	TAIL, WHEEL
VSS TEETH	Number of teeth on the vehicle speed sensor wheel.	0 to 250
VSS SIGNAL	Type of vehicle speed sensor signal.	SWITCHED, MAGNETIC
TIRE REVS/MI or REV/KM	Vehicle tire revolutions per mile.	100 to 999
AXLE RATIO	Indicates the rear axle ratio of the vehicle.	2.00 to 19.99
TOP GEAR RATIO	Indicates the vehicle transmission final drive ratio.	0.5 to 2.55

Table 3-58 Vehicle Speed Sensor Parameters

Magnetic Pickup

The magnetic pickup requirements are listed in Table 3-59. Magnetic Pickup size is determined by installation requirements. Both circuits 556 and 557 must be used.

Parameters	Range
Input Frequency Range	1 - 3000 Hz
Input Amplitude Range	800 mV — 100 V peak to peak

Table 3-59 Magnetic Pickup Vehicle Speed Sensor Requirements

See Figure 3-92 for the installation of magnetic pickup VSS.

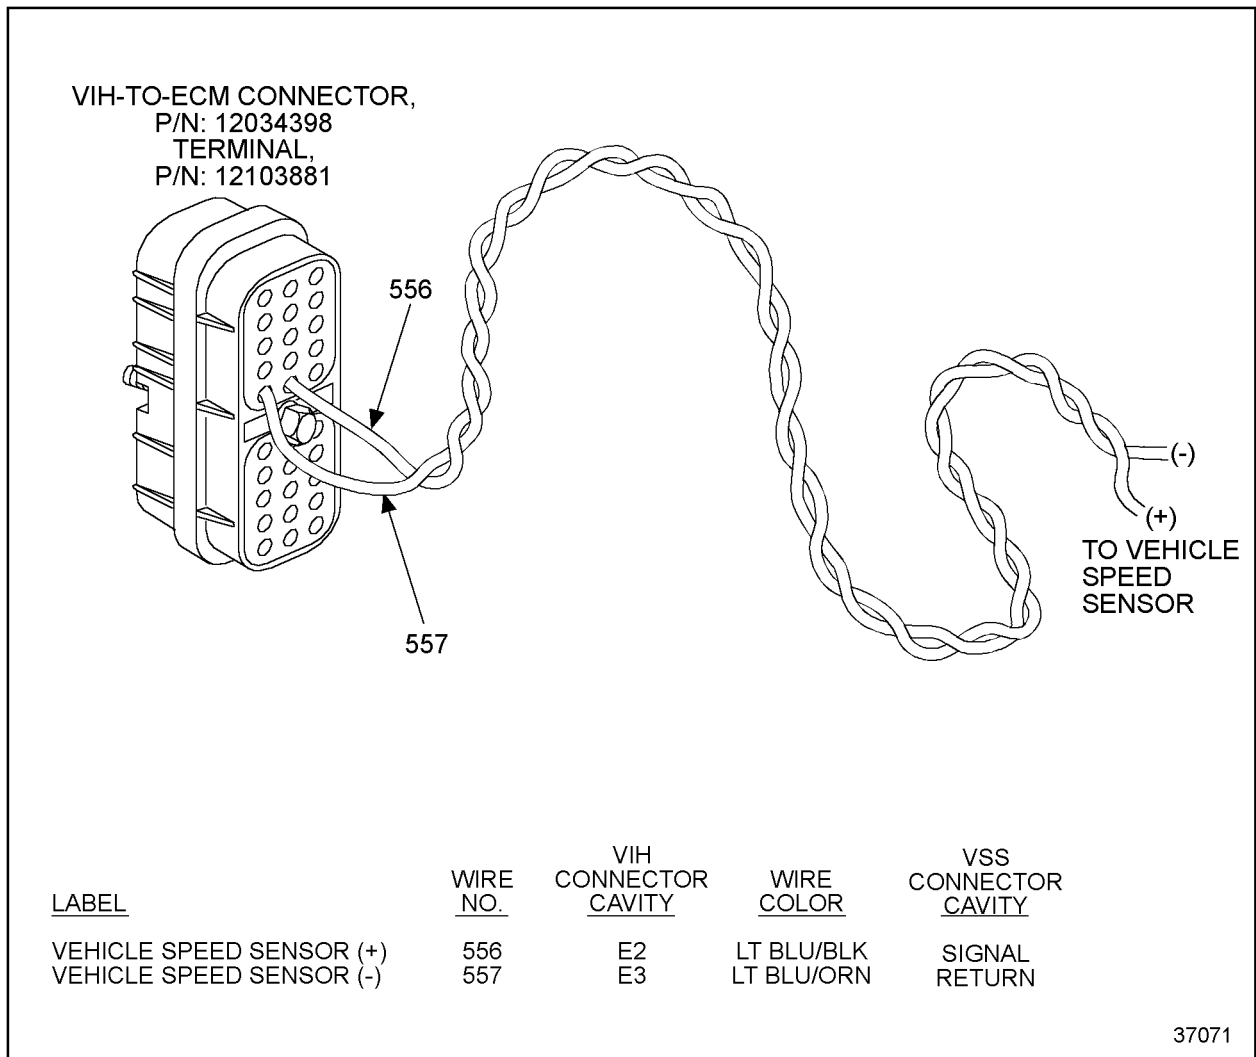


Figure 3-92 Magnetic Pickup Vehicle Speed Sensor Installation

Magnetic Vehicle Speed Sensors can be obtained from the following sources:

Wabash Technologies

1375 Swan Street
Huntington, Indiana
46750-0829
Tel: 260-356-8300
www.wabashtech.com

Airpax Instruments

150 Knotter Drive
Cheshire, Connecticut 06410
Tel: 800-643-0643

Invensys Electro Corporation

1845 57th Street
Sarasota, Florida 34231
Tel: 1-800-446-5762
Fax: 941-355-3120
www.electrocorp.com

Open Collector

The open collector input is defined as a single wire input that alternates between a high voltage of at least 4 V DC and a low voltage of 1.0 V DC or less. Typically, the input is connected to a transistor collector output whether open or through a pull up resistor. A pull up resistor is preferred as this eliminates the need to configure the signal type as open collector. See Figure 3-93 for open collector VSS installation.

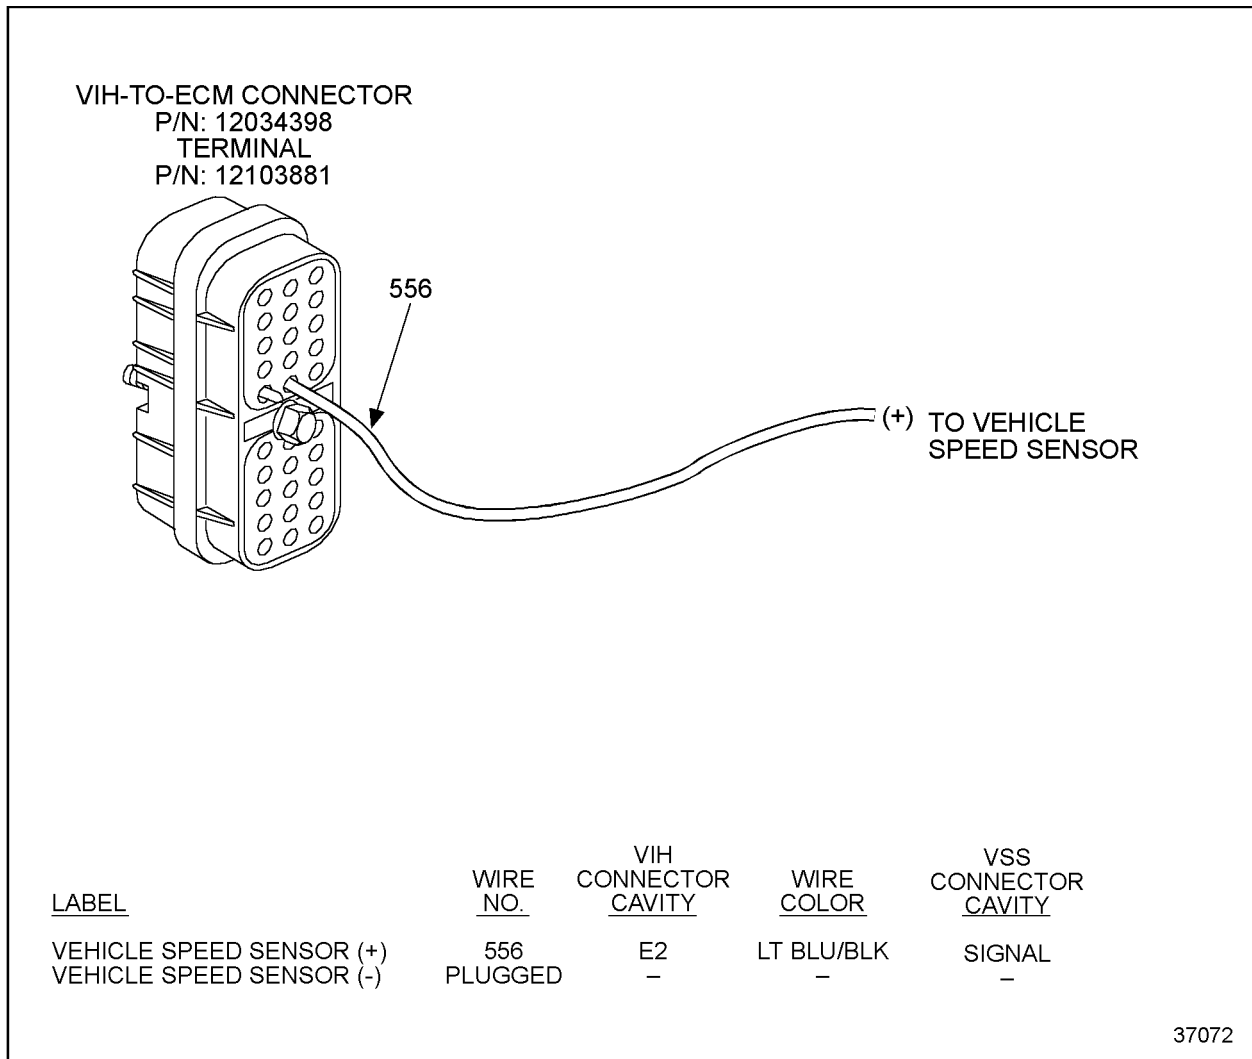


Figure 3-93 Open Collector Vehicle Speed Sensor Installation

Allison Transmission Electronic Controls have an open collector output. DDEC IV circuit #556 is connected to Allison circuit #205 (Allison Transmission Electronic Controls) or Allison circuit #157 (World Transmission). This device is an electrically operated switch that grounds or opens the input signal. The VSS frequency (pulses/mile) may range between 7,000 and 145,000 pulses/mile.

The open collector requirements are listed in Table 3-60. Only circuit 556 is used. 557 cavity must be empty.

Parameters	Range
High State	$4.0 < E_{in} < \text{Battery (+)}$ with $I_{leakage} < 0.2\text{mA}$
Peak to Peak Voltage Maximum	$-2.0 < E_{in} < 1.0 \text{ V}$ while $I_{source} < 5.0\text{mA}$
Input Frequency Range	1 - 3000 Hz

Table 3-60 Open Collector Vehicle Speed Sensor Requirements

SAE J1939 Data Link

A VSS wired to the ECM is not required if the transmission output shaft speed message is being transmitted over the SAE J1939 Data Link. To obtain accurate vehicle mileage, the parameters listed in Table 3-61 must be programmed with the DDR, DDDL, VEPS, DRS, or at order entry. The VSS type will automatically be set to SAE J1939 when the appropriate transmission type is selected (trans type = 16).

Parameter	Description	Choice / Display
VSS ENABLED	Enables or disables the vehicle speed sensor input.	YES, NO
VSS TYPE	Type of vehicle speed sensor used	J1939
TIRE REVS/MI or REV/KM	Vehicle tire revolutions per mile.	100 to 999
AXLE RATIO	Indicates the rear axle ratio of the vehicle.	2.00 to 19.99
TOP GEAR RATIO	Indicates the vehicle transmission final drive ratio.	0.5 to 2.55

Table 3-61 Vehicle Mileage Parameters

Two faults (SID 216 FMI 14 and PID 84 FMI 12) will be logged simultaneously if DDEC is calibrated to receive output shaft speed over a SAE J1939 Data Link and the data is not being received or the data is bad. This indicates that there is a problem with the sensor on the transmission or the transmission controller. If these faults are received in addition to a SAE J1939 Data Link failure (SID 231, FMI 12), then the problem is with the SAE J1939 Data Link itself.

VSS Anti-Tamper

If the sensor appears to be working improperly but the vehicle speed is not zero, VSS Anti-Tamper logs a VSS fault. The engine speed in all gears will be limited for the duration of the ignition cycle to the engine speed at the Vehicle Speed Limit in top gear. Refer to section 5.28 for more information on VSS Anti Tamper.

3.14.26 AFTERMARKET INSTALLED SENSORS

One sensor, the Exhaust Back Pressure Sensor, is installed aftermarket.

Exhaust Back Pressure Sensor

The Exhaust Back Pressure Sensor Kit components, used in conjunction with aftertreatment systems, provides diagnostic capability and engine protection in the event of excessive exhaust backpressure. This kit is required for Emitless particulate filter installations. It may be used as an option with catalytic converter installations.

For applications that use the Service Now Lamp, the dash light (CEL) will illuminate for all diagnostic faults EXCEPT for Exhaust Back Pressure High (PID 81, FMI 0). The light in the engine compartment will illuminate for ALL faults. The Exhaust Back Pressure High fault will latch active over ignition cycles, which will keep the engine compartment light on. This fault can be cleared with a DDR or DDDL (6.0 or later).

If the Exhaust Back Pressure fault is not addressed within 50 engine hours, the dash light will turn on and a Service Now Lamp Expired fault (SID 151, FMI 11) will be logged.

For installation requirements of the SNL, refer to section 3.16.3, "Service Now Lamp."

De-greening Process for Particulate Trap Filters

The "de-greening" process for a particulate trap filter begins upon an installation of a new filter on an engine. The feature is automatically enabled when the Exhaust Back Pressure Sensor (PID 81) is configured on an analog input. This is available with Rel 38.0 or later.

When a new particulate trap filter is installed (which requires the filter to go through the de-greening process), the exhaust back pressure limit for triggering of the excessive exhaust back pressure faults is increased. This increased threshold is applied for the first 4000 vehicle miles since the new particulate trap filter installation.

A "reset" to indicate that the particulate trap filter has been installed and that the de-greening process has started is indicated in one of the following two ways:

- ☐ With ignition on but the engine not running, press hard on the throttle foot pedal five times within five seconds.
- ☐ By using DDDL (Rel 6.2 or later) or DRS (rel 5.1 or later).

A user can recognize a successful reset based on the fact that CEL/SNL flashes for five seconds after the reset action has completed. At the point of the reset, DDEC stores the current total vehicle miles accumulated across ignition cycles.

Exhaust Back Pressure Sensor Installation

The Exhaust Back Pressure Sensor comes in the Exhaust Back Pressure Sensor Kit. This kit is intended for installation on Detroit Diesel Series 50 Diesel Bus/Coach engines with DDEC IV. See Figure 3-94.

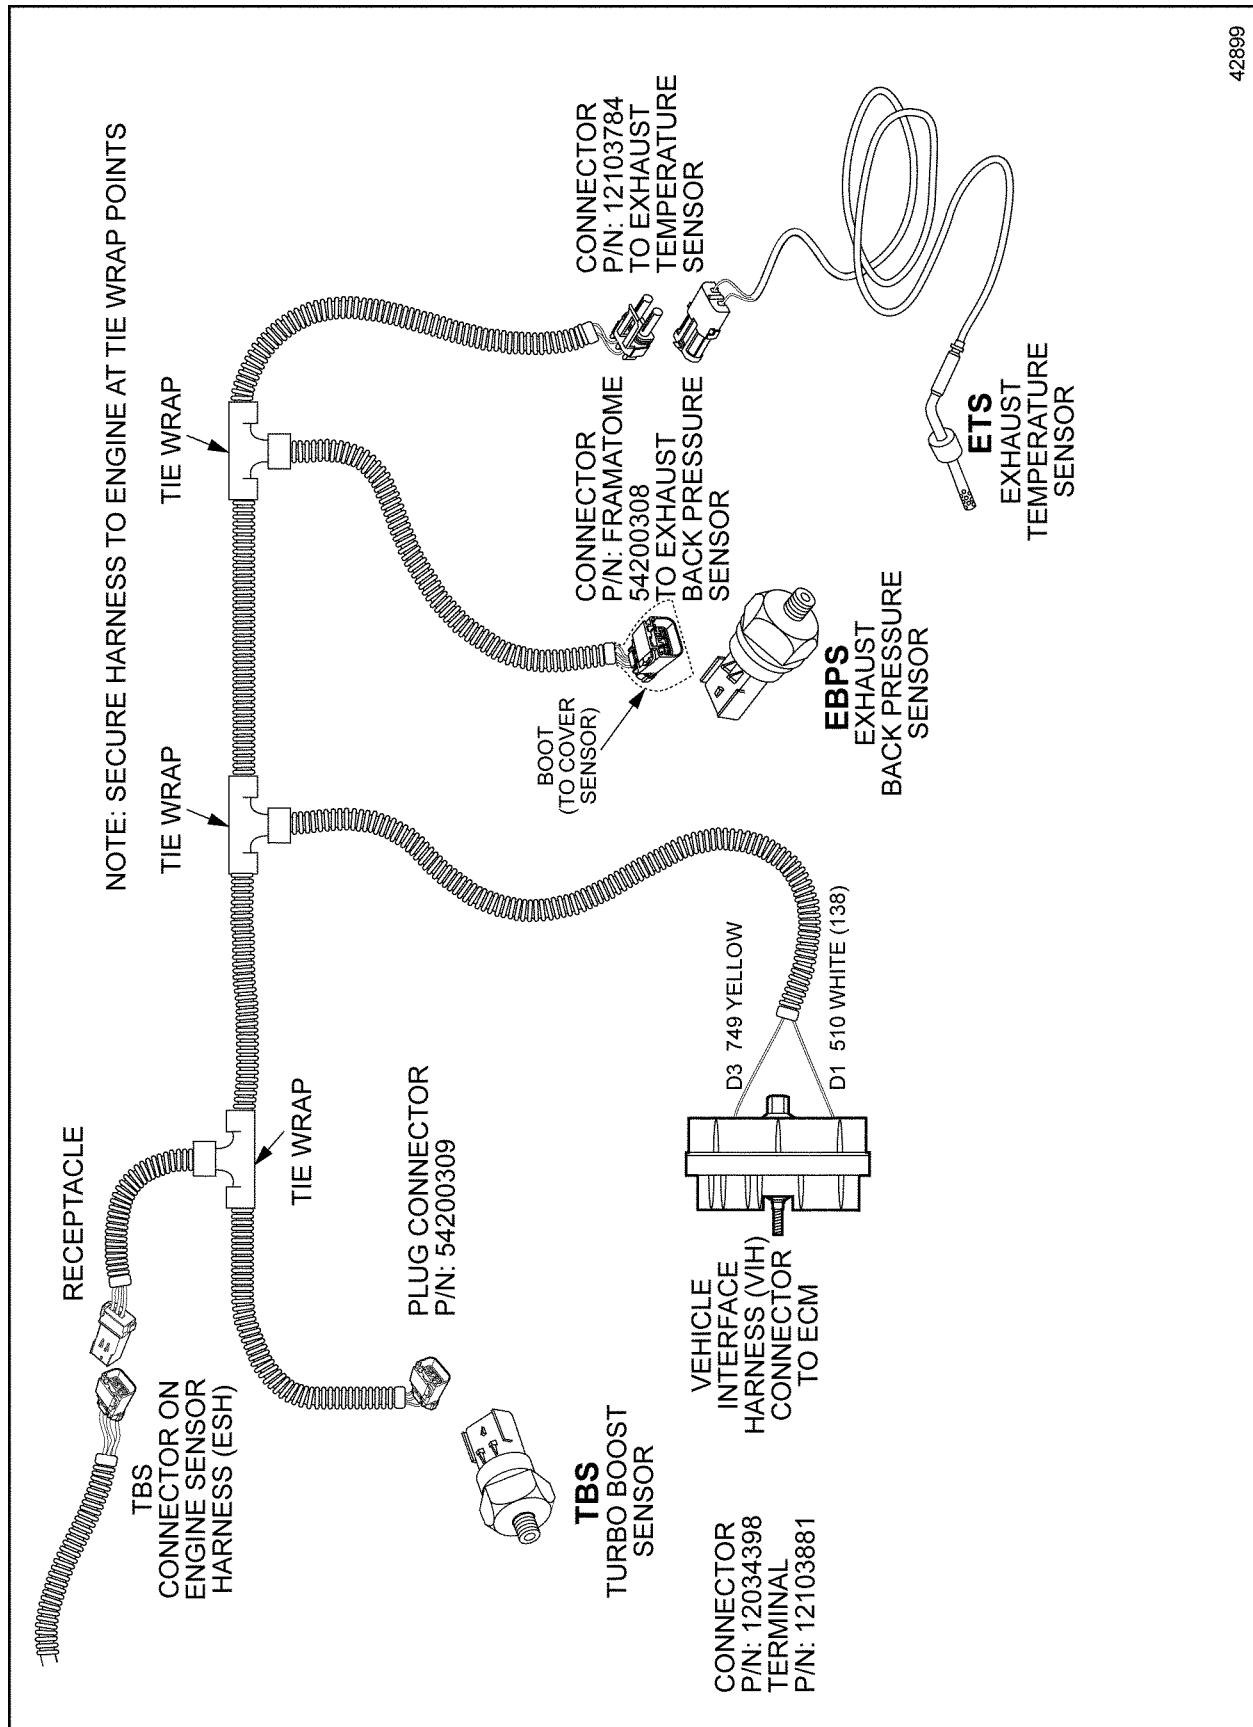


Figure 3-94 Exhaust Temperature and Pressure Sensor Harness

Three service kits with different length sensor harnesses are available. The parts to the three kits are listed in Table 3-62, Table 3-63, and Table 3-64.

NOTE:

Kits are assembled without an Exhaust Temperature Sensor to accommodate customers retrofitting engines have sensor P/N: 23521882 (with 182 cm/72 in. cable) previously installed. If an Exhaust Temperature Sensor was not previously installed, obtain one from an authorized Detroit Diesel distributor.

Part Number	Quantity	Description
23531079	1	Exhaust Temperature/Pressure Harness, 589 cm/232 in. in Length
23528948	1	Exhaust Back Pressure Sensor
23529151	1	Stainless Steel Braided hose, 91 cm/36 in. in Length
23529152	1	Sensor Mounting Bracket
23529150	1	Bulkhead Compression Fitting with Female 3/8 in. NPTF Pipe Thread
23528903	1	Compression Fitting with Weld End
11505299	2	Bolt, M10 X 1.5 X 30 (Flange Head)
11506101	2	Nut, M10 X 1.5 (Flange Head)
18SP561	1	Installation Instructions

Kits do not include an Exhaust Temperature Sensor

Table 3-62 Exhaust Back Pressure Sensor Kit with 589 cm/232 in. Harness, P/N: 23531230

Part Number	Quantity	Description
23531078	1	Exhaust Temperature/Pressure Harness 432 cm/170 in. Length
23528948	1	Exhaust Back Pressure Sensor
23529151	1	Stainless Steel Braided hose, 91 cm/36 in. Length
23529152	1	Sensor Mounting Bracket
23529150	1	Bulkhead Compression Fitting with Female 3/8 in. NPTF Pipe Thread
23528903	1	Compression Fitting with Weld End
11505299	2	Bolt, M10 X 1.5 X 30 (Flange Head)
11506101	2	Nut, M10 X 1.5 (Flange Head)
18SP561	1	Installation Instructions

Kits do not include an Exhaust Temperature Sensor

**Table 3-63 Exhaust Back Pressure Sensor Kit with 432 cm/170 in. Length
Harness, P/N: 23531231**

Part Number	Quantity	Description
23531077	1	Exhaust temperature/Pressure Harness, 254 cm/100 in. Length
23528948	1	Exhaust Back Pressure Sensor
23529151	1	Stainless Steel Braided hose, 91 cm/36 in. Length
23529152	1	Sensor Mounting Bracket
23529150	1	Bulkhead Compression Fitting with Female 3/8 in. NPTF Pipe Thread
23528903	1	Compression Fitting with Weld End
11505299	2	Bolt, M10 X 1.5 X 30 (Flange Head)
11506101	2	Nut, M10 X 1.5 (Flange Head)
18SP561	1	Installation Instructions

Kits do not include an Exhaust Temperature Sensor

**Table 3-64 Exhaust Back Pressure Sensor Kit with 254 cm/100 in. Length
Harness P/N: 23531232**

3.15 THROTTLE DEVICES

There are several types of throttle controls which may be used for engine control.

- ☐ Hand throttle
- ☐ Electronic Foot Pedal Assembly (EFPA)
- ☐ Cruise Control switches
- ☐ Fast Idle Switch
- ☐ Voltage dividers
- ☐ Frequency input

The throttle input device is OEM-supplied.

There are two types of engine governors that are used with throttle controls. The engine governors are:

- ☐ The Limiting Speed Governor (LSG) for torque control
- ☐ The Variable Speed Governor (VSG) for speed control

3.15.1 ELECTRONIC FOOT PEDAL ASSEMBLY

The EFPA contains the Throttle Position Sensor (TPS) which converts the operator's hand throttle and/or foot pedal input into a signal for the ECM. The EFPA and the TPS are shown in Figure 3-95.

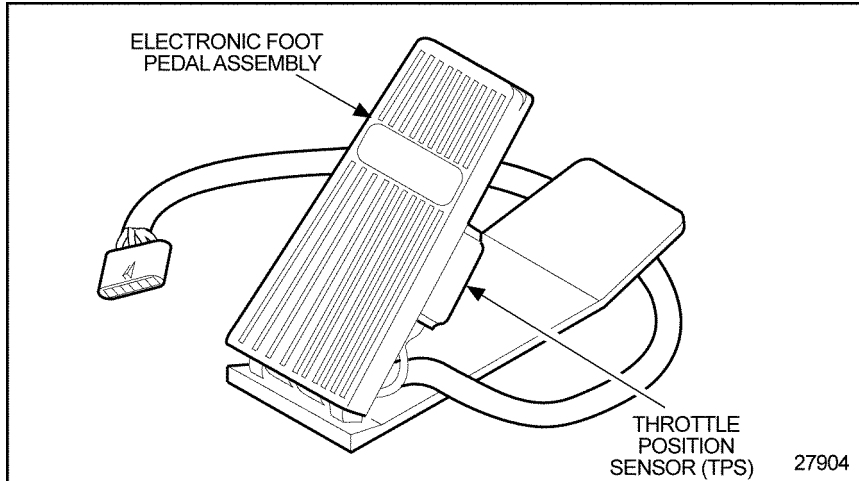


Figure 3-95 Typical EFPA Throttle Device (Shown with 6-pin Connector)

The EFPA sends the ECM an input signal which controls engine power on the LSG, proportional to the foot pedal position. This assembly is also referred to as the Throttle Position Sensor (TPS) assembly.

The system fault detection diagnostics will return the engine to idle speed in the event of a sensor or associated wiring malfunction. The fault detection diagnostics work with or without an idle validation switch on the EFPA. An idle validation switch provides redundancy to assure that the engine will be at idle in the event of an in-range malfunction. The connectors for the TPS are Weather Pack push-to-seat connectors and are listed in Table 3-65.

Throttle Position Sensor Harness Side		Throttle Position Sensor on the Sensor Side	
Connector	P/N: 12015793	Connector	P/N: 12010717
Terminal	P/N: 12089188	Terminal	P/N: 12034051
Seal	P/N: 12015323	Seal	P/N: 12015323

Table 3-65 Connectors for the Throttle Position Sensor

The EFPA can be used with both LSG and VSG.

3.15.2 CRUISE CONTROL SWITCHES

The Cruise Control switches can be used to control the VSG set speed. This feature is referred to as Cruise Switch VSG. For more information on Cruise Switch VSG, refer to section 5.3.3 and section 5.24.2.

3.15.3 HAND THROTTLE

A hand throttle (potentiometer) may be used to control engine speed on the VSG between the minimum and maximum VSG speed. The total resistance must be between 1k Ω and 10 k Ω .

When active, the hand throttle will control the engine speed on the VSG between the VSG minimum speed and the VSG maximum speed. For more information on the hand throttle, refer to section 5.24.2.

3.15.4 FAST IDLE SWITCH (ALTERNATE MINIMUM VSG)

The Alternate Minimum VSG option allows a customer to select an alternate idle speed when its digital input is switched to battery ground.

For more information on Alternate Minimum VSG/Fast Idle, refer to section 5.24.2.

3.15.5 VOLTAGE DIVIDERS

Voltage dividers can be used with the VSG input to provide a means to select a predetermined engine speed. Voltage dividers can be used to provide a fast idle operation or other engine operations where a fixed engine speed is desired.

For more information on voltage dividers, refer to section 5.24.2.

3.16 LIGHTS

The instrument panel warning lights, the Check Engine Light (CEL) and the Stop Engine Light (SEL), are supplied by the OEM. The functionality of each light along with the wiring requirements are covered separately in the following sections.

3.16.1 CHECK ENGINE LIGHT

The CEL is controlled by the DDEC ECM. The CEL remains ON:

- ☐ For approximately five (5) seconds at the start of every ignition cycle (a bulb check)
- ☐ When an electronic system fault occurs (This indicates the problem should be diagnosed as soon as possible.)

The CEL flashes:

- ☐ When the Diagnostic Request Switch is used to activate the CEL to flash inactive codes
- ☐ During last 90 seconds before Idle Shutdown if programmed for override
- ☐ When Idle Shutdown occurs or the Optimized Idle system shutdown occurs

The CEL is active with the PasSmart feature. When the Passing Speed Duration time expires, the CEL will begin to flash one minute prior to ramping the Vehicle Limit Speed (VLS) down to the normal limit. The rampdown event always takes five seconds regardless of the Passing Speed Increment programmed into the ECM. The rampdown alert can be distinguished from an engine fault warning in that the CEL flashes for the former and remains on constantly for the latter.

PasSmart still operates when there is an active engine fault. In this situation, the CEL goes from constant illumination to flashing one minute before rampdown from the VSL. At the end of the passing event when PasSmart is deactivated, the CEL returns to constant illumination if the engine fault is still active.

The CEL is also active with the DDEC Reports Periodic Maintenance Intervals. If a maintenance interval is within a specified percentage of expiration (default is 20%), the CEL flashes six times when the ignition is turned on. The ignition must have been off for less than 30 seconds prior to being turned on. If the off time has been greater than 30 seconds, no indication of maintenance interval status is given.

Check Engine Light Requirements and Guidelines

The following requirements and guidelines apply to the CEL:

- ☐ The CEL must be supplied by the OEM.
- ☐ A 12 or 24 volt light of less than 1.5 A (DC) is required depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance. A low-side digital output sinks 60 μ A when OFF.
- ☐ The CEL must be integrated into the instrument panel or placed in clear view of the equipment operator.
- ☐ The lens color must be amber.
- ☐ The words CHECK ENGINE must appear on or near the CEL lamp.

Check Engine Light Wiring

The CEL is connected to wire 419 in the VIH. See Figure 3-96 for the recommended CEL wiring.

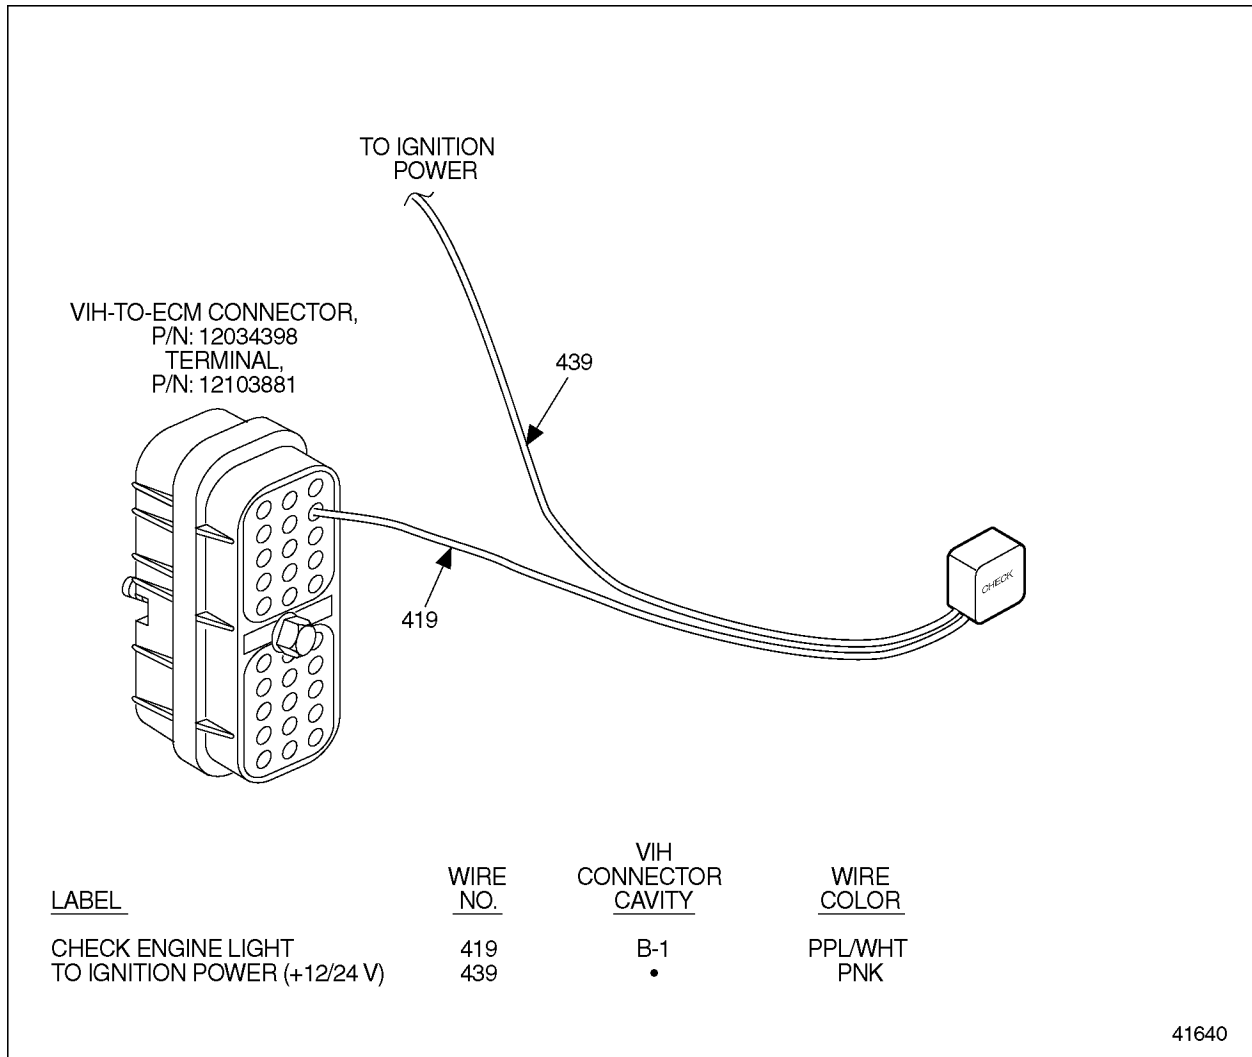


Figure 3-96 **Check Engine Light Wiring**

3.16.2 STOP ENGINE LIGHT

The SEL is controlled by the DDEC ECM. The SEL remains ON:

- ☐ For approximately five (5) seconds at the start of every ignition cycle (a bulb check)
- ☐ When a potentially engine damaging fault is detected

The SEL flashes:

- ☐ After Engine Protection Shutdown occurs
- ☐ When the Diagnostic Request Switch is used to activate the SEL to flash active codes

Stop Engine Light Requirements and Guidelines

The following requirements and guidelines apply to the SEL:

- ☐ The SEL must be incorporated into the VIH by the OEM.
- ☐ A 12 or 24 volt light of less than 1.5 A (DC) is required depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance. A low-side digital output sinks 60 μ A when OFF.
- ☐ The SEL must be integrated into the instrument panel or placed in clear view of the equipment operator.
- ☐ The lens color must be red.
- ☐ The words STOP ENGINE must appear on or near the SEL lamp.

Stop Engine Light Wiring

See Figure 3-97 for the recommended SEL wiring.

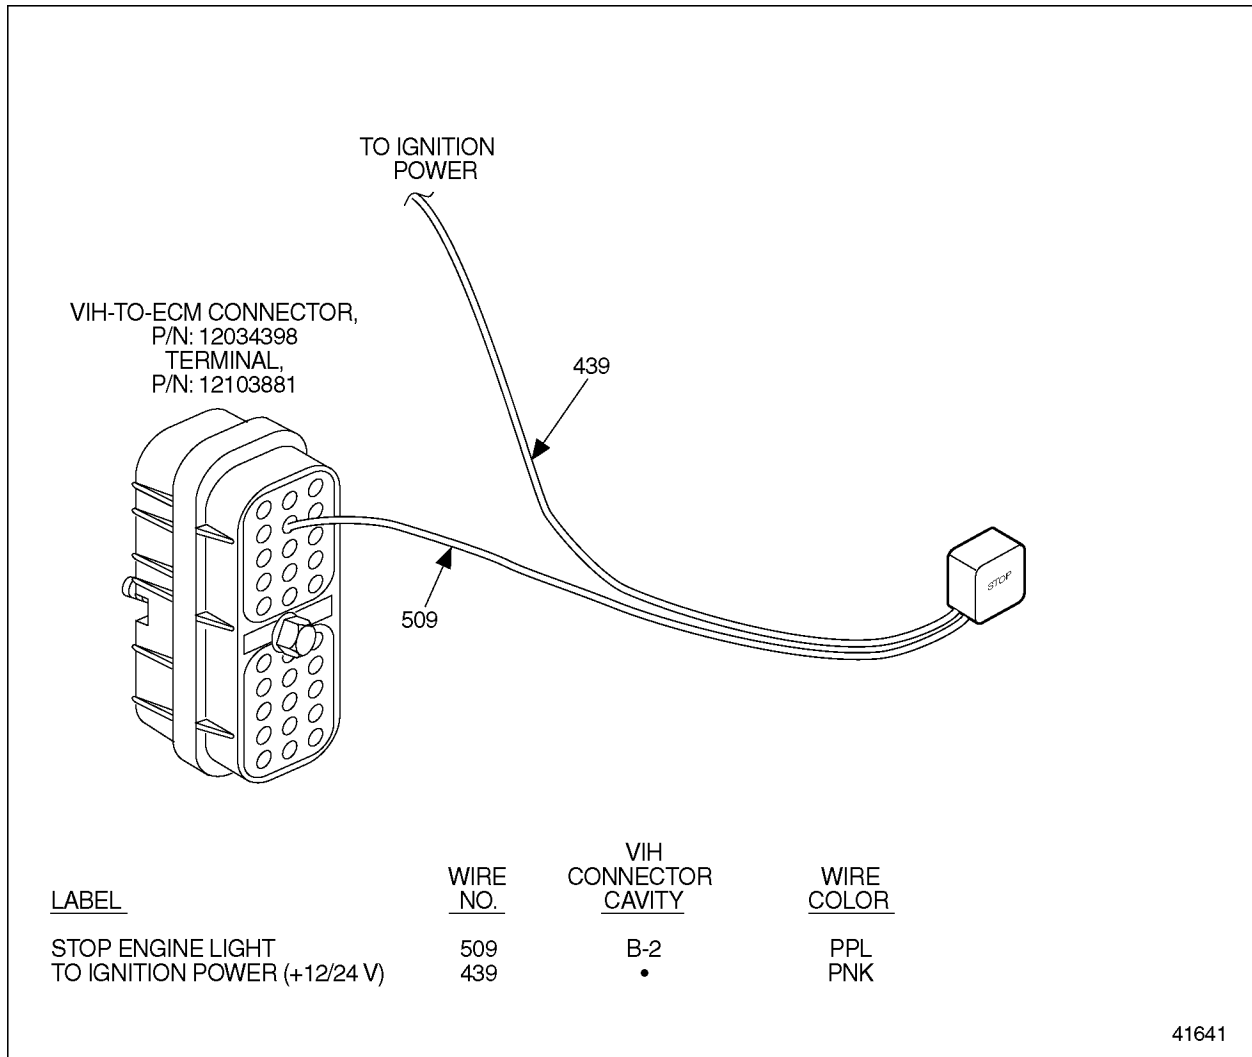


Figure 3-97 Stop Engine Light Wiring

3.16.3 SERVICE NOW LAMP

The Service Now Lamp (SNL) is available for Series 50 bus applications that have an Exhaust Back Pressure Sensor installed.

The dash light (CEL) will turn on for all diagnostic faults EXCEPT for Exhaust Back Pressure High (PID 81, FMI 0). The light in the engine compartment will turn on for ALL faults. The Exhaust Back Pressure High fault will latch active over ignition cycles, which will keep the engine compartment light on. This fault can be cleared with a DDR or DDDL (6.0 or later).

The SNL function must be configured on pin F3.

This feature is available with Rel 36.01 or later.

Installation

For new **OEM installations**, a light will be installed in the engine compartment and will be wired to the CEL circuit (pin B1). Another light (programmed as SNL) will be installed on the dash and wired to pin F3.

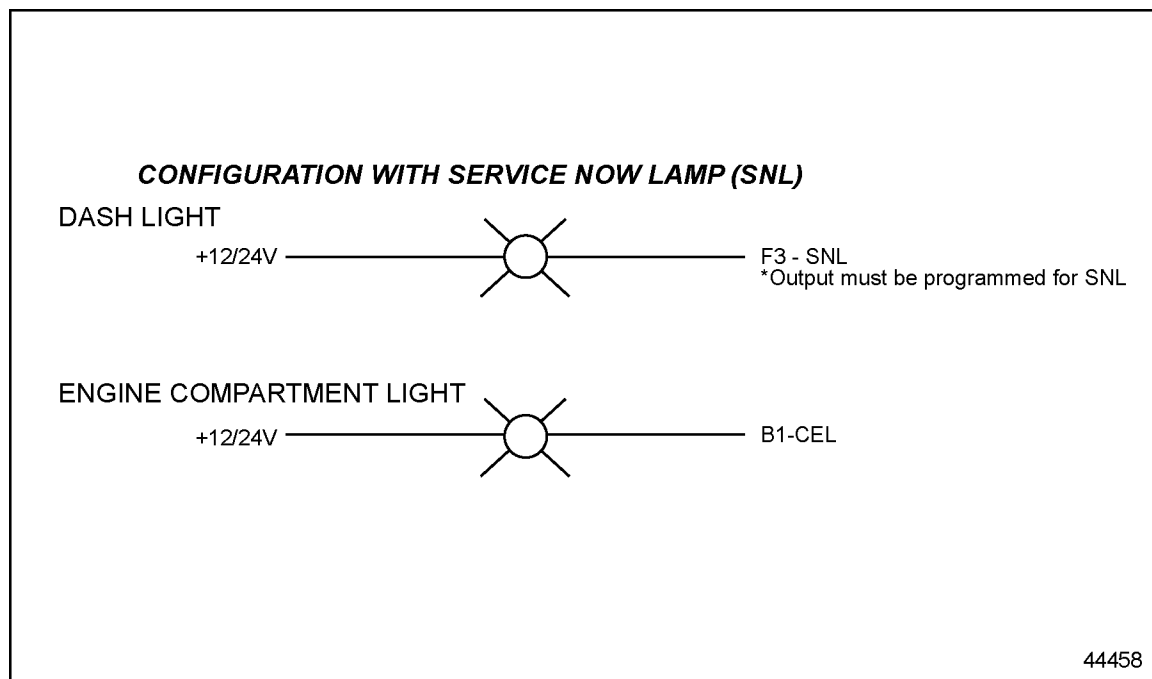


Figure 3-98 OEM Installation of the Service Now Lamp

For **Aftermarket installations**, the CEL on the dash must be rewired to pin F3. A new light must be installed in the engine compartment and wired to pin B1 - CEL. See Figure 3-99.

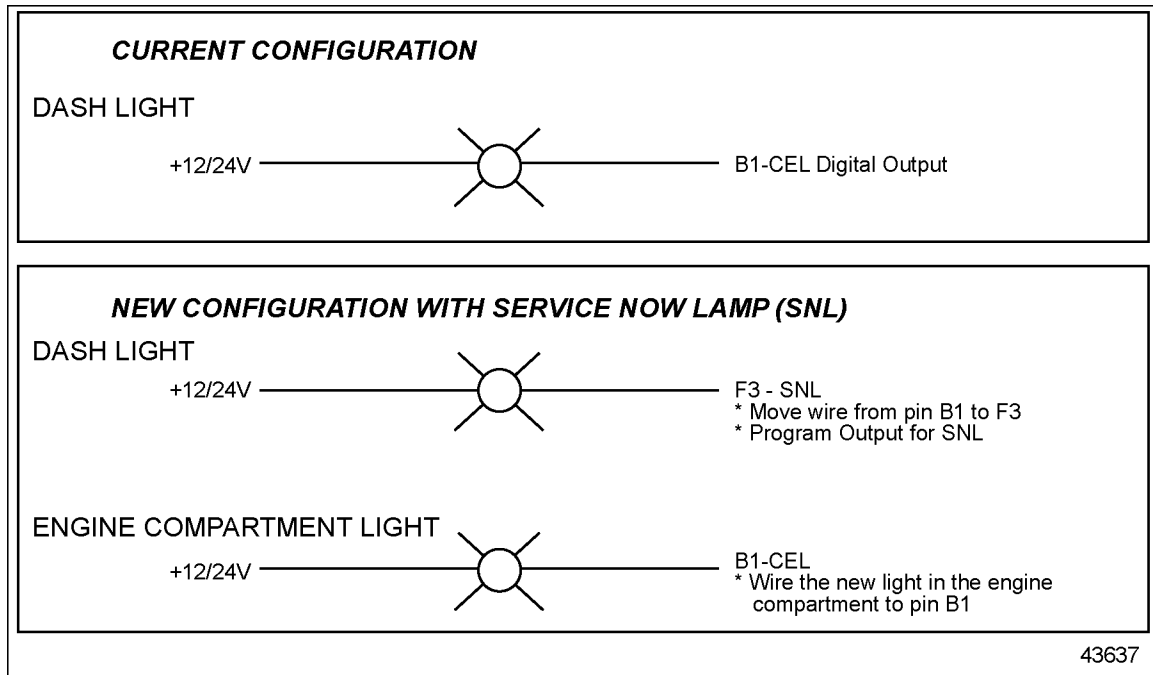


Figure 3-99 **Aftermarket Installation of the Service Now Lamp**

THIS PAGE INTENTIONALLY LEFT BLANK

4 DIGITAL INPUTS AND OUTPUTS

Section	Page
4.1 OVERVIEW	4-3
4.2 DIGITAL INPUTS	4-5
4.3 DIGITAL OUTPUTS	4-21

THIS PAGE INTENTIONALLY LEFT BLANK

4.1 OVERVIEW

DDEC IV has twelve digital input ports located on the Vehicle Interface Harness. The Application Code System (ACS) sets the default function number for each of the twelve ports. These digital inputs can be configured for various functions. These functions can be ordered at the time of engine order, configured by VEPS or the DDEC Reprogramming System (DRS). Some digital input features are further customized by programming the ECM with a DDR, DDDL, VEPS, or DRS. DDEC does not detect broken or shorted wires on digital inputs.

DDEC IV has three digital output ports located on the Vehicle Interface Harness and three digital output ports located on a pigtail off the Engine Sensor Harness.

The Application Code System (ACS) sets the default function number for each of the six ports. These digital outputs can be configured for various functions. These functions can be configured at the time of engine order, by VEPS or DRS.

THIS PAGE INTENTIONALLY LEFT BLANK

4.2 DIGITAL INPUTS

The digital input functions are listed in Table 4-1.

Feature	Digital Input	Function Number
Cruise Control (Uses up to five inputs) Refer to section 4.2.1, page 4-7.	Cruise Enable	23
	Clutch Released	18
	Service Brake Released	17
	Set/Coast On (decrease)	20
	Resume/Acceleration On (Increase)	22
Engine Brake Refer to section 4.2.2, page 4-9.	Engine Brake Disable	26
	Engine Brake Low	1
	Engine Brake Medium	2
	Konstantdrossel Switch	40
Engine Protection Refer to section 4.2.3, page 4-11.	Auxiliary Shutdown #1	3
	Auxiliary Shutdown #2	4
	Diagnostic Request Switch	15
	SEO/Diagnostic Request Switch	25
Engine Ratings Refer to section 4.2.4, page 4-13.	Limiting Torque Curve	14
	Rating Switch #1	12
	Rating Switch #2	13
Fan Control Refer to section 4.2.5, page 4-14.	Transmission Retarder Status	27
	Air Conditioner Status	29
	Fan Control Override	32
Pressure Sensor Governor (PSG) (Uses four inputs) Refer to section 4.2.6, page 4-15.	Pressure Sensor Governor Enable	24
	Pressure/RPM Mode Switch	8
	Set/Coast On (Decrease)	20
	Resume/Acceleration On	22
Throttle Control Refer to section 4.2.7, page 4-16.	Alternate Minimum VSG/Fast Idle	16
	Dual Throttle (LSG)	28
	Idle Validation Switch	6
	Throttle Inhibit	9
	VSG Station Change	33
	VSG Station Change Complement	34
	External Engine Synchronization/ Frequency Input Active	10
	VSG Inhibit (Release 28.0 or later)	42
Additional Functions Refer to section 4.2.8, page 4-18.	Auxiliary Coolant Level Switch	31
	Parking Brake Interlock	5
	Air Compressor Load Switch	35
	Throttle Kickdown	7
	RPM Freeze	11

Table 4-1 Digital Inputs Listed by Feature

Digital input functions are activated when the digital input wire is switched to battery ground (circuit 953), see Figure 4-1. The digital input can be controlled by either a switch or an OEM interlock depending on the function.

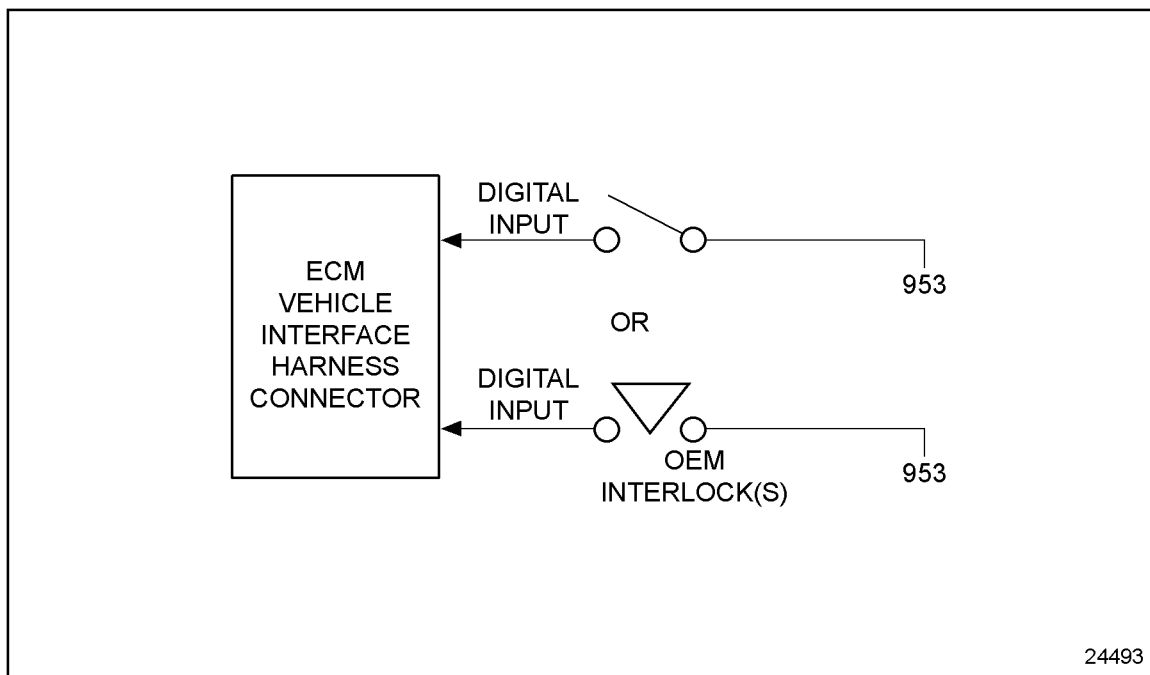


Figure 4-1 Two Methods to Activate a Digital Input

NOTE:

Digital input circuits are designed to source no more than 5 mA (DC).

For more information on the digital input configuration refer to section 3.10.1, "ECM Vehicle Harness Connectors - Single ECM." This section covers the location of the digital inputs on the Vehicle Interface Harness. Refer to chapter 8 for typical application dependent configurations.

The following sections contain a description of the available options.

4.2.1 CRUISE CONTROL

Up to five digital inputs are required (four for automatic transmission) for Cruise Control operation. Refer to section 5.3, "Cruise Control," for additional information. The Cruise Control inputs are described in the following sections.

Cruise Enable

Cruise Control is enabled, but not active when the Cruise Control Enable digital input is switched to battery ground.

Set / Coast On (Decrease)

Set: Cruise Speed is set by momentarily contacting the switch to the ON position (switching the digital input to battery ground). Cruise Control will become active and maintain the engine or vehicle speed present at the time.

Coast: When Cruise Control is active, the Set/Coast input can be used to reduce power and speed by toggling the switch. Momentarily toggling and releasing the Set/Coast switch will decrease the set point by 1 MPH increments for Vehicle Speed Cruise Control and 25 RPM increments for Engine Speed CruiseControl. Holding the Set/Coast will decrease the set point by 1 MPH per second (Vehicle Speed CC) or 25 RPM per seconds (Engine Speed CC). When released the Cruise Control set point will be at the new speed.

Resume / Accel On (Increase)

Resume: If Cruise Control has been disabled with the service brake or the clutch switch, momentary contact to the ON position (switching the input to battery ground) restores the previously set cruise speed.

Accel: When Cruise Control is active, the Resume/Accel input can be used to increase power and speed by toggling the switch. Momentarily toggling and releasing the Resume/Accel switch will increase the set point by 1 MPH increments for Vehicle Speed Cruise Control and 25 RPM increments for Engine Speed Cruise Control. Holding the Resume/Accel will increase the set point by 1 MPH per second (Vehicle Speed CC) or 25 RPM per seconds (Engine Speed CC). When released the Cruise Control set point will be at the new speed.

Clutch Released (Manual Transmissions)

This input indicates that the clutch is released and is used for suspending Cruise Control and Auto Resume.

When the clutch is released, the input is at battery ground. Cruise Control is suspended if the clutch is depressed once. If the clutch is depressed twice within three seconds, Cruise Control is automatically resumed.

NOTE:

When engine brake is configured and auto resume is enabled, the first time the clutch is depressed to suspend Cruise Control, the engine brakes will be delayed for three seconds.

The digital input logic for the Clutch Switch disables Cruise Control in the unlikely event of a broken clutch switch wire.

Service Brake Released (Automatic and Manual Transmissions)

This input indicates that the brake is released when switched to battery ground. If the brake is activated, then the input is not grounded and Cruise Control is suspended. Cruise Control is resumed by using the Resume/Accel Switch.

Programming Requirements and Flexibility

The digital inputs listed in Table 4-2 can be configured at the time of engine order, configured by VEPS or DRS. Auto resume (Clutch Released) can be disabled/enabled with a DDR, DDDL, or VEPS.

Description	Function Number
Cruise Enable	23
Service Brake Released	17
Clutch Released	18
Set/Coast On	20
Resume/Accel On	22

Table 4-2 Cruise Control Digital Inputs

Interaction with Other Features

The Set/Coast On and Resume/Accel On inputs are also used by the Pressure Sensor Governor and the Air Compressor Governor. The Set/Coast On and Resume/Accel On switches follow similar logic as the Pressure Sensor Governor switches (Increase and Decrease). Refer to section 4.2.6 for more information on the Pressure Sensor Governor digital inputs and section for more information on the Pressure Sensor Governor.

4.2.2 ENGINE BRAKE

The digital inputs associated with the engine brake option are described in the following sections. Refer to section 5.6, "Engine Brake Controls" for additional information.

Engine Brake Disable

Engine Brake Disable is a digital input which is switched to battery ground whenever a vehicle system such as a traction control device does not want engine braking to occur.

The ECM, which controls the engine brake directly, will not allow engine braking when the input is switched to battery ground. Allison Transmission requires that this input be used in all applications using engine brakes. This is to prevent engine brake operation when the transmission is in converter mode.

Engine Brake Low

The Engine Brake Low digital input selects Low Engine Brake when the input is switched to battery ground.

The No Engine Brake option occurs when the Engine Brake Low and Engine Brake Medium digital inputs are not switched to battery ground. This can be overridden by SAE J1939 communications, even if both switches are off.

To select High Engine Brake both the Engine Brake Low and the Engine Brake Medium digital inputs are switched to battery ground.

Engine Brake Medium

The Engine Brake Medium digital input selects Medium Engine Brake for Series 60 engines.

The No Engine Brake option occurs when the Engine Brake Low and Engine Brake Medium digital inputs are not switched to battery ground. This can be overridden by SAE J1939 communications, even if both switches are off.

To select High Engine Brake both the Engine Brake Low and the Engine Brake Medium digital inputs are switched to battery ground.

Konstantdrossel Switch

The Konstantdrossel (KD) digital input selects low engine brake when the input is switched to battery ground.

The No Engine Brake option occurs when this digital input is not switched to battery ground. This can be overridden by SAE J1939 communications, even if the switch is off.

Programming Requirements and Flexibility

These digital inputs may be ordered at the time of engine order, configured by VEPS or DRS. The digital inputs associated with Engine Brake and their function numbers are listed in Table 4-3.

Description	Function Number
Engine Brake Disable	26
Engine Brake Low	1
Engine Brake Medium	2
Konstantdrossel	40

Table 4-3 Engine Brake Digital Inputs

4.2.3 ENGINE PROTECTION

The digital inputs related to engine protection are described in the following sections.

Auxiliary Shutdown #1 and #2

The auxiliary shutdown digital inputs (auxiliary shutdown #1 and #2) are used by other vehicle systems when it is desirable to use the ECM's engine protection function. For example, the engine protection function may be used to protect a transmission or pump against failure. When a vehicle system needs the engine to shutdown, a digital input port configured as auxiliary shutdown is switched to battery ground.

The ECM can take three types of actions when an auxiliary shutdown digital input port is switched to battery ground: warning, rampdown or shutdown. Refer to section 5.7, "Engine Protection," for more information on engine protection.

Diagnostic Request Switch

The Diagnostic Request Switch is used to activate the CEL and SEL to flash codes. The SEL will flash the active codes and the CEL will flash the inactive codes. The inactive codes are flashed in numerical order and the active codes are flashed in the order they occur, most recent to least recent. The Diagnostic Request Switch can also be used as the Stop Engine Override (SEO) Switch.

The Diagnostic Request Switch is used to flash codes in the following circumstances:

- ☐ The engine is not running and ignition is ON
- ☐ The engine is idling

In both circumstances pressing and holding the Diagnostic Request Switch will flash out the engine codes. The codes are flashed out of the ECM connected to the switch. For multi-ECM installations, the Diagnostic Request Switch and SEO are combined on the master ECM. All receiver ECMs have a separate Diagnostic Request Switch.

Diagnostic Request Switch/Stop Engine Override Switch

A single digital input can be used as a Diagnostic Request Switch and a SEO Switch. The Diagnostic Request Switch is used to activate the CEL and SEL to flash codes. The SEL will flash the active codes and the CEL will flash the inactive codes. The inactive codes are flashed in numerical order and the active codes are flashed in the order they occur, most recent to least recent. The Diagnostic Request Switch is also used as the SEO Switch.

The Diagnostic Request Switch is used to flash codes in the following circumstances:

- ☐ The engine is not running and ignition is ON
- ☐ The engine is idling

In both circumstances activating and releasing the Diagnostic Request Switch will flash out the engine codes; activating the Diagnostic Request Switch a second time will stop the ECM from flashing the engine codes. Otherwise, the switch will act as a SEO Switch. The SEO Switch overrides an Engine Protection Shutdown sequence if Shutdown is enabled. Refer to section 5.7, "Engine Protection," for more information on the SEO Switch. The codes are flashed out of the ECM connected to the switch. For multi-ECM installations, the Diagnostic Request and SEO Switch are combined on the master ECM. All receiver ECMs have a separate Diagnostic Request Switch.

Programming Requirements and Flexibility

The type of engine protection, warning, rampdown or shutdown can be selected with the DDR, DDDL, VEPS, or DRS. The digital inputs listed in Table 4-4 can be configured at the time of engine order, by VEPS or DRS.

Description	Function Number
Diagnostic Request Switch	15
Stop Engine Override/Diagnostic Request Switch	25
Auxiliary Shutdown Protection #1	3
Auxiliary Shutdown Protection #2	4

Table 4-4 Engine Protection Digital Inputs

Diagnostics

When either Auxiliary Shutdown #1 or #2 is activated, the codes listed in Table 4-5 will be logged.

Fault Description	SID	FMI	Flash Code
Auxiliary Shutdown #1	25	11	26
Auxiliary Shutdown #2	61	11	26

Table 4-5 Auxiliary Shutdown Flash Codes

4.2.4 ENGINE RATINGS

The digital inputs related to engine ratings are described in the following sections.

Limiting Torque Curve

A digital input activates the limiting torque curve. The limiting torque curve limits the torque with respect to speed whenever this digital input is switched to battery ground. This torque curve is part of the engine rating. Refer to section 5.8, "Engine Ratings," for additional information.

Rating Switch #1 and #2

Engine rating switch(es) are digital inputs used to switch between multiple engine ratings stored in the ECM. The first rating is the default rating and does not need to be selected with the digital input switches. Rating Switch #1 selects the second engine rating when the input is switched to battery ground. Rating Switch #2 selects the third engine rating when the input is switched to battery ground. The inputs and their function number are listed in Table 4-6.

Description	Function Number
Rating Switch #1	12
Rating Switch #2	13
Limiting Torque Curve	14

Table 4-6 Rating Switches

To select fourth engine rating, typically the cruise-power rating, both Rating Switch #1 and Rating Switch #2 digital inputs are switched to battery ground. The higher rating will activate only if Cruise control is enabled.

Refer to section 5.8, "Engine Ratings," for more information.

Programming Requirements and Flexibility

Limiting torque curve tables are generated by Application Engineering and can either be selected at the time of engine order or selected after engine order by DDC Technical Service.

The rating switches function must be enabled with the DDR, DDDL or VEPS. The ECM can hold up to four different engine ratings that can be selected with a DDR or with the use of digital inputs, depending upon application. Engine ratings are determined at the time of engine order. The DDR will display the engine rating choices that can be selected.

The digital inputs Rating Switch #1, #2, and Limiting Torque Curve may be configured at the time of engine order, by VEPS, or DRS.

Diagnostics

The horsepower rating can be monitored on the DDR via the Engine Configuration menu. After a switch change, the DDR must be disconnected and then reconnected to see the hp change.

4.2.5 FAN CONTROL

The digital inputs related to fan control are described in the following sections. Refer to section 5.10 for further information on fan control.

Air Conditioner Status Operation

This digital input indicates that the air conditioner is inactive. When a digital input is configured for air conditioner status and the input is open then the fan is turned ON (A/C switch is open). If A/C input is configured and not used that input must remain grounded for proper fan operation. The digital input logic enables the fan in the event of a broken A/C status wire. The default on-time for the fan is 180 seconds. Vehicle speed over 20 MPH disables the air conditioner control of the fan.

Fan Control Override Operation

This digital input is used to activate the fan when the input is switched to battery ground.

Transmission Retarder Active Operation

This digital input indicates that the transmission retarder is active. When the digital input is grounded, the fan is turned off. When the digital input is open, the fan will be turned on. The fan will be ON for a minimum of 30 seconds. Refer to the transmission manufacturers documentation to determine where to connect the input.

Programming Requirements and Flexibility

The digital inputs listed in Table 4-7 can be configured at the time of engine order, by VEPS, or DRS.

Description	Function Number
Air Conditioner Status	29
Fan Control Override	32
Transmission Retarder Status	27

Table 4-7 Fan Control Digital Inputs

The fan on-time can be set with VEPS or DRS as listed in Table 4-8.

Parameter	Description	Choice
AC Fan Timer	The minimum duration of time the fan will remain ON after the AC status digital input has indicated that the A/C unit has turned OFF. The timer starts when the input is grounded after being open.	0-255 seconds

Table 4-8 Fan On-time Parameter

4.2.6 PRESSURE SENSOR GOVERNOR

The digital inputs related to PSG are described in the following sections. Refer to section 5.21, "Pressure Sensor Governor," for additional information.

Pressure Enable Switch

The PSG enable switch is a digital input switch used to enable the PSG when the digital input is switched to battery ground. If the PSG enable switch is moved to the OFF position (not at battery ground), the PSG will be interrupted.

Pressure/RPM Mode Switch

This digital input switch is used in the PSG to switch between RPM and pressure mode. When the digital input is switched to battery ground, pressure mode is selected.

Decrease (Set/Coast On)

The pressure or engine speed is set by momentarily contacting the switch to the decrease position (grounding the digital input). The pressure/RPM setting will decrease by 4 psi (approximately 27.6 kPa) or 25 RPM increments when the decrease switch is momentarily contacted.

Holding the switch in the decrease position (grounding the digital input) will decrease the pressure or engine speed. The pressure or engine speed will decrease by 4 psi (approximately 27.6 kPa) or 25 RPM increments at a rate of two increments per second. Releasing the switch sets the pressure/RPM to the lower setting.

Increase (Resume/Acceleration On)

Momentarily contacting the increase switch at the initiation of PSG operation will set the pressure/RPM setting. The pressure/RPM setting will increase by 4 psi (approximately 27.6 kPa) or 25 RPM increments by momentarily contacting the Increase switch.

Holding the switch in the Increase position (grounding the digital input), will increase the pressure or engine speed. The pressure or engine speed will increase by 4 psi (approximately 27.6 kPa) or 25 RPM increments at a rate of two increments per second. Releasing the switch sets the PSG to the higher setting.

Programming Requirements and Flexibility

The digital inputs listed in Table 4-9 can be configured at the time of engine order, by VEPS or DRS.

Description	Function Number
Pressure Sensor Governor Enable	24
Pressure/RPM Mode Switch	8
Set/Coast On (Decrease)	20
Resume/Acceleration On (Increase)	22

Table 4-9 Pressure Sensor Governor Digital Inputs

Interaction with Other Features

The Increase and Decrease input functions (Set/Coast On and Resume/Accel On) are also used for Cruise Control operation and the Air Compressor Governor. The Increase and Decrease switches follow similar logic as the Cruise Control switches (Set/Coast On and Resume/Accel On). Cruise Control cannot be used with the Pressure Sensor Governor.

4.2.7 THROTTLE CONTROL

This section discusses throttle control digital inputs.

Alternate Minimum VSG Speed/Fast Idle Operation

The Alternate Minimum VSG option (ALT MIN VSG) allows the use of a customer-selected high idle speed instead of the hot idle engine speed. The higher idle speed is called the alternate minimum VSG speed. A higher idle speed is useful in applications such as air compressors and generators.

The Alternate Minimum VSG speed is active when a digital input is switched to battery ground. The fast idle input is used instead of resistors on the VSG input to obtain a fast idle engine speed. When the digital input is switched to ground and the engine is running on the idle governor, the engine speed will be changed to the calibrated fast idle speed.

Dual Throttle (LSG) Operation

Some applications require Limiting Speed Governor controls at two stations. This special configuration is implemented with two EFPAs and a digital input. The digital input is switched to either ground potential or system voltage to indicate which EFPA is active. This configuration allows an EFPA to be at two locations with only one EFPA active at any one time. Refer to section 5.24, "Throttle Controls," for more information and a schematic.

External Engine Synchronization/Frequency Input Active

External Engine Synchronization provides a method of synchronizing the engine RPM of two or more engines using a frequency signal generated by an external vehicle controller or the tach drive output of another engine. This digital input is one of the required conditions. This also functions as an activation of open collector. Refer to section 5.24.2, "Variable Speed Governor - Nonroad."

Idle Validation Switch Operation

An idle validation switch provides redundancy to assure that the engine will be at idle in the event of a throttle malfunction. The idle validation switch is connected to a digital input on the ECM. When the idle validation switch on the EFPA is switched to battery ground, the engine speed will be at idle unless the vehicle is operating in Cruise Control or Cruise Switch VSG. There are fault detection diagnostics with the Idle Validation Switch and its wiring when compared to the Throttle Position Sensor (TPS) input.

Throttle Inhibit

This option disables the LSG whenever the throttle inhibit digital input is grounded. The operator can depress the throttle pedal, but the engine speed will remain unchanged as long as the digital input is grounded. Throttle inhibit is usually offered as a standard in coach calibrations to inhibit throttle input when the rear door is open, a wheelchair lift is operated, etc.

VSG Station Change and VSG Station Change Complement

The dual throttle Variable Speed Governor (VSG) feature provides the capability of having VSG throttles at two locations, with only one throttle active at any time. The dual throttle feature requires two digital inputs.

DDEC monitors the switch inputs and maintains the current engine RPM when a station switch occurs until the newly selected station is qualified by reducing the station position to idle and then increasing it to the current engine speed position. After qualification, the engine speed is controlled by the new station. If qualification does not occur within 30 seconds, the engine speed will be ramped down from its current value to VSG minimum speed. If the new station becomes qualified, the rampdown process will be stopped and the new station will have control. Refer to section 5.24, "Throttle Control/Governors."

VSG Inhibit (Release 28.0 or later)

This option disables the analog VSG (wire #510) and ALT MIN VSG whenever the VSG digital input is grounded. Grounding the VSG Inhibit digital input will reduce engine speed to idle. Frequency input and J1939 commands are not affected. The engine speed will remain unchanged as long as the digital input is grounded regardless of VSG request. When the ground is removed from the input, the throttle must be reset to zero before engine speed can be increased from idle.

Programming Requirements and Flexibility

The digital inputs listed in Table 4-10 can be configured at the time of engine order, by VEPS or DRS. VSG Inhibit can be set at the time of engine order, by WinVeps (Release 3.00 or later) or DRS.

Description	Function Number
Alternate Minimum VSG/Fast Idle	16
Dual Throttle (LSG)	28
External Engine Synchronization/Frequency Input Active	10
Idle Validation Switch	6
Throttle Inhibit	9
VSG Station Change	33
VSG Station Change Complement	34
VSG Inhibit (Release 28.00 or later)	42


Table 4-10 Throttle Control Digital Inputs

4.2.8 ADDITIONAL FUNCTIONS

The following digital inputs are used for special applications.

Auxiliary Coolant Level Switch

A digital coolant level switch can be connected to the ECM through a digital input. The digital switch is placed in the coolant tank (see Figure 4-2) to indicate low coolant and is located above the analog coolant level sensor.

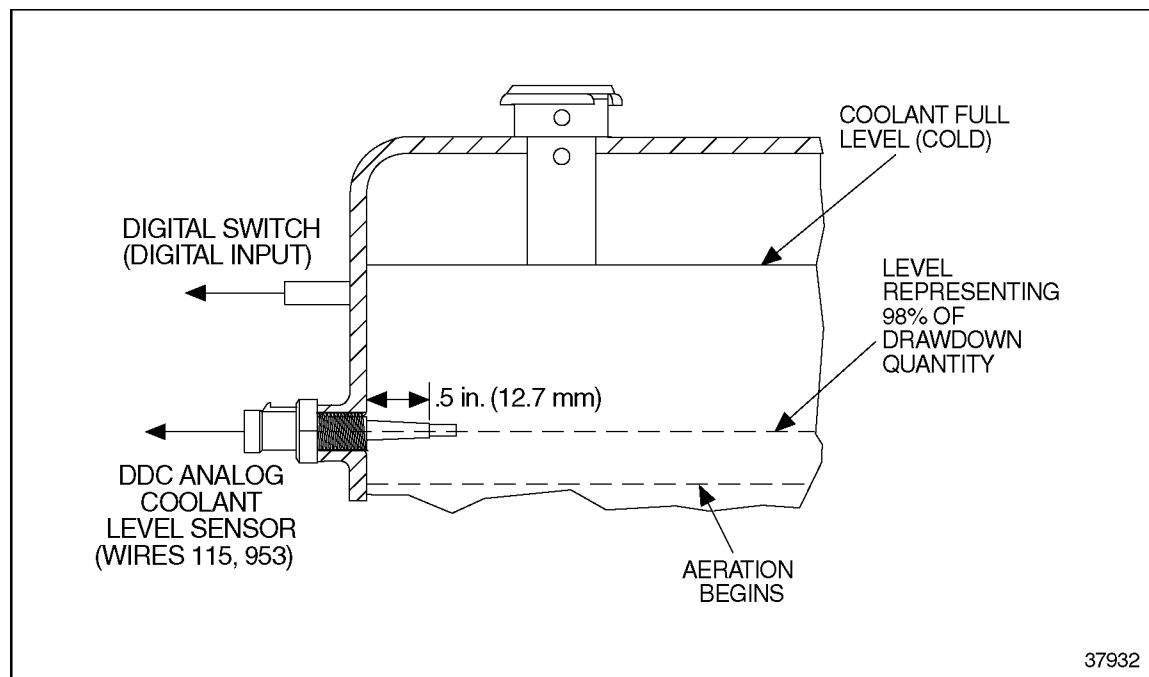**Figure 4-2 Coolant Level Switch Location**

When the digital switch is in coolant, the digital input to DDEC is at battery ground. When the coolant level is below the digital switch (digital input open) for a period of time (to ignore the effects of slosh) a digital output is switched to battery ground.

The digital output can be used to drive a coolant level low light to avoid a Stop Engine Light event. The light provides a warning that the coolant level is getting low before it gets below the analog Coolant Level Sensor. This will not activate the Maintenance Alert System Add Coolant Level Sensor and will not log a code. If the coolant is below the analog sensor, the engine may be programmed for CEL to come on. Refer to section 4.3, "Digital Outputs," for more information. DDC recommends that the auxiliary coolant level module be used to drive a dash light directly. Refer to section 3.14.19, "Coolant Level Sensor," for additional information.

Parking Brake Interlock Operation

Several DDEC functions need an indication that the vehicle is stopped before the function can be engaged. By using the parking brake to switch a digital input to battery ground when in use, the ECM can determine that the vehicle is stopped and engage the function.

Air Compressor Load Switch Operation

The air compressor load switch digital input is used to activate the air compressor control in the ECM. This digital input controls when the ECM will run the engine up to speed to maintain the setpoint pressure. Refer to section 5.1, "Air Compressor Control," for additional information.

Throttle Kickdown Operation

In determining the throttle position, DDEC IV first determines a throttle position offset to ensure that when the throttle is fully released, the throttle position value is zero, and that it is forced to zero in error conditions as a precaution. However, if the throttle position sensor is configured, the throttle kickdown switch is on, and the throttle position is greater than 94.90%, then the throttle position is automatically considered to be 100%.

RPM Freeze Operation

The RPM Freeze feature allows the operator to request that the VSG governor maintain the current engine RPM. Locking onto a fixed engine RPM is desirable in applications where the input is subjected to electrical noise which in turn causes the engine RPM to fluctuate.

The operator can request that the VSG governor maintain the current engine speed by switching this digital input to battery ground.

Programming Requirements and Flexibility

The digital inputs listed in Table 4-11 can be configured at the time of engine order, by VEPS or DRS.

Description	Function Number
Auxiliary Coolant Level Sensor	31
Parking Brake Interlock	5
Air Compressor Load Switch	35
Throttle Kickdown	7
RPM Freeze	11

Table 4-11 Additional Functions Digital Inputs

4.3 DIGITAL OUTPUTS

DDEC IV has three digital output ports (988,555,499) located on the Vehicle Interface Harness and three digital output ports (563, 564, 565) located on a pigtail off the Engine Sensor Harness. The digital output functions are listed in Table 4-12.

Digital Output Function	Function Number	Section
Air Compressor Load Solenoid	21	Refer to section 4.3.1, page 4-23
Coolant Level Low Light	10	Refer to section 4.3.2, page 4-24
Cruise Control Active Light (PSG Active Light)	11	Refer to section 4.3.3, page 4-24
Deceleration Light	15	Refer to section 4.3.4, page 4-25
Engine Brake Active	16	Refer to section 4.3.5, page 4-25
Engine Overspeed (Release 29.0 or later)	39	Refer to section 4.3.6, page 4-26
Ether Injection	24	Refer to section 4.3.7, page 4-26
External Engine Brake Enable	8	Refer to section 4.3.8, page 4-27
External Engine Synchronization/Frequency Input Active*	4	Refer to section 4.3.9, page 4-27
Fan Control #1 & Fan Control #2	13 & 14	Refer to section 4.3.10 page 4-28
High Coolant Temperature Light	20	Refer to section 4.3.11, page 4-29
High Crankcase Pressure Light	22	Refer to section 4.3.12, page 4-29
High Oil Temperature Light	19	Refer to section 4.3.13, page 4-30
Low Coolant Pressure Light	23	Refer to section 4.3.14, page 4-30
Low DDEC Voltage Warning Light	3	Refer to section 4.3.15, page 4-31
Low Oil Pressure Light	18	Refer to section 4.3.16, page 4-31
Optimized Idle Active Light	26	Refer to section 4.3.17, page 4-32
Pressure Sensor Governor Pressure Mode Light	5	Refer to section 4.3.18, page 4-32
Service Now Lamp	44	Refer to section 4.3.19, page 4-33
Starter Lockout	7	Refer to section 4.3.20, page 4-33
Top2 Shift Solenoid	30	Refer to section 4.3.21, page 4-33
Top2 Lockout Solenoid	31	Refer to section 4.3.22, page 4-35
Transmission Retarder	9	Refer to section 4.3.23, page 4-35
Vehicle Power Shutdown	6	Refer to section 4.3.24, page 4-36
VSG Active Indication	17	Refer to section 4.3.25, page 4-37

* Not supported by the Vehicle Electronic Programming System (VEPS)

Table 4-12 Digital Outputs

A digital output function is activated by the ECM when the digital output wire is switched to battery ground, except fan controls #1 and #2. See Figure 4-3.

NOTE:

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

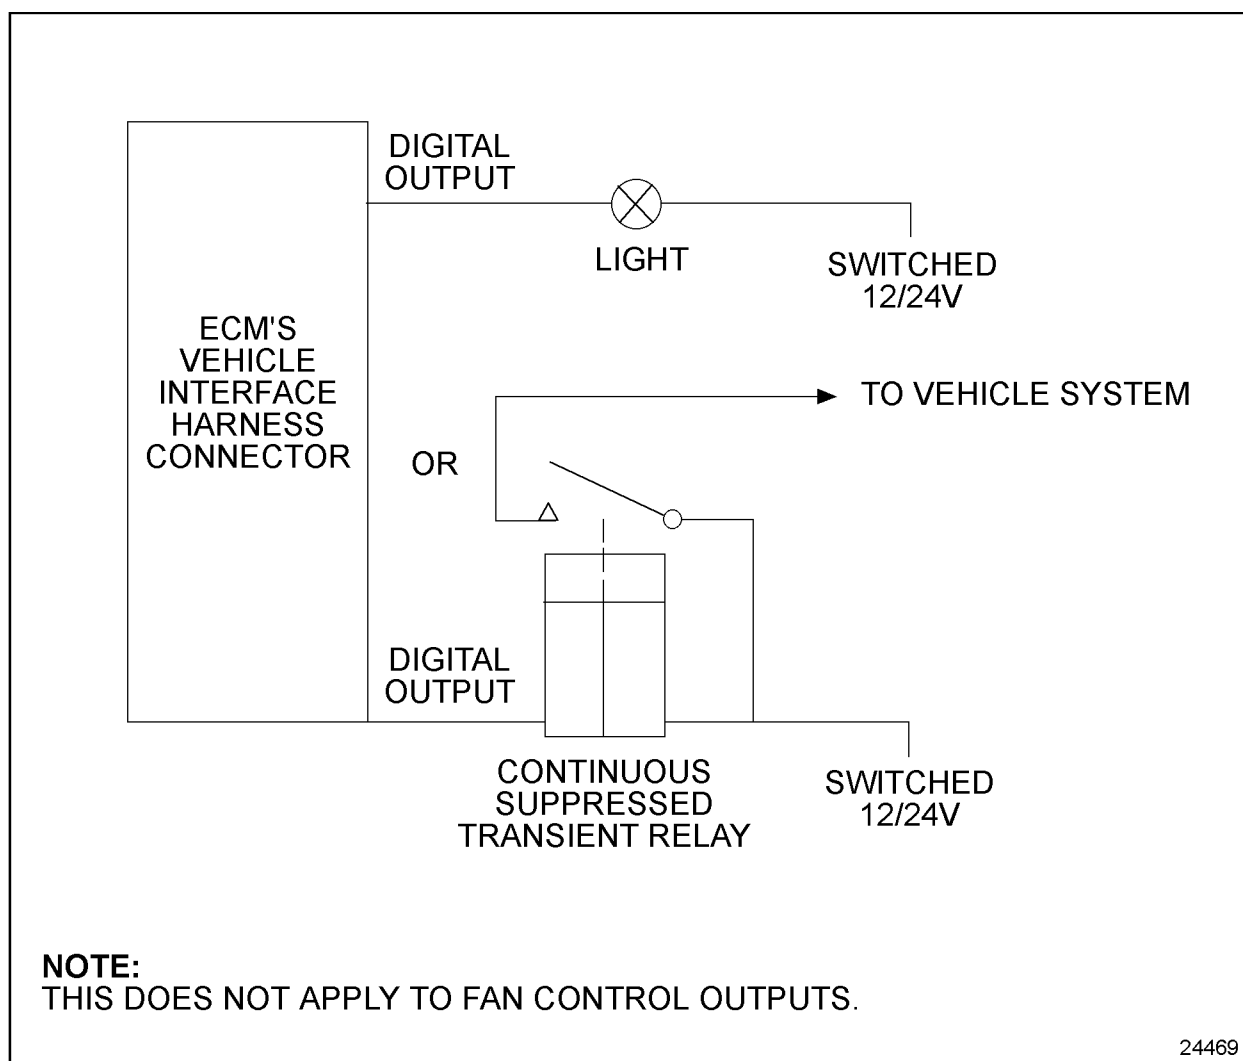


Figure 4-3 Two Methods to Use a Digital Output

4.3.1 AIR COMPRESSOR LOAD SOLENOID

The air compressor load solenoid digital output is switched to ground to open the air compressor outlet valve to begin loading the air compressor. The output is used to regulate the system pressure. When the output is open, the valve must be off. Refer to section 5.1, "Air Compressor Control," for additional information.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 21) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.2 COOLANT LEVEL LOW LIGHT

This digital output is switched to battery ground when the coolant falls below the Coolant Level Sensor (CLS) or a digital input configured for an Auxiliary Coolant Switch is open for 30 seconds. This output is typically used to drive a light to warn the operator. The CEL and the SEL will illuminate with this output when the coolant level falls below the CLS.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 10) may be ordered at the time of engine order or configured by VEPS or DRS. Polarity can be set at order entry or by DDC Technical Service or DRS.

Interaction with other Features

This digital output could be used with a digital input configured as a Auxiliary Coolant Level Switch. Refer to section 4.2, "Digital Inputs," for additional information. The Auxiliary CLS acts as a digital switch. When the coolant level is below the Auxiliary CLS or analog CLS, the Coolant Level Low Light will illuminate.

4.3.3 CRUISE CONTROL ACTIVE LIGHT (PRESSURE SENSOR GOVERNOR ACTIVE LIGHT)

A digital output is switched to battery ground when Cruise Control, Cruise-switch VSG or the Pressure Sensor Governor is active. This digital output could be used to drive a light indicating the active state of the above.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

The ACS sets the default function number and polarity for each of the six ports. This digital output (function number 11) may be ordered at the time of engine order or configured by VEPS or DRS.

Interaction with other Features

For VSG operation, use the VSG Active indicator instead of the Cruise Control Active Light.

4.3.4 DECELERATION LIGHT

The Deceleration Light option is a light in the back of a vehicle to warn that the vehicle is slowing down. This digital output could be used to drive a Deceleration Light or, more typically, a relay which drives the deceleration lights. This digital output is switched to battery ground whenever the percent throttle is zero and Cruise Control is inactive.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 15) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.5 ENGINE BRAKE ACTIVE

The Engine Brake Active digital output is switched to battery ground whenever the engine brake is active. This digital output could be used to drive an engine brake active light or give an engine brake active indication to another vehicle system.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

The ACS sets the default function number and polarity for each of the six ports. This digital output (function number 16) may be ordered at the time of engine order or configured by VEPS or DRS. Polarity can be set at order entry or by DDC Technical Service.

4.3.6 ENGINE OVERSPEED

The Engine Overspeed digital output is switched to ground when a calibrated engine overspeed enable speed is exceeded. The output remains closed until the engine speed reaches or drops below another calibrated engine overspeed disable speed.

An option is available to log a fault code when the engine speed meets or exceeds the minimum of the overspeed enable speed and rpm overspeed calibrations. The fault that will be logged is PID 190 FMI 14, Flash Code 85 – Engine Overspeed Signal.

Installation

A low-side digital output circuit is capable of sinking less than or equal to 1.5A and have less than 85 mH of inductance.

Programming Requirements & Flexibility

ACS Sets the default function number and polarity for each of the six ports. This digital output (function number 39) may be ordered at the time of engine order or configured by DRS.

The enable and disable overspeed values can be set at the time of engine order or by the Application Code System (ACS).

The fault code option can be turned on at the time of engine order, ACS or DRS.

4.3.7 ETHER INJECTION

The Ether Injection digital output is switched to battery ground when ether should be injected into the engine for cold start purposes.

Installation

The digital output must be wired to the Ether Start Relay Module. Refer to section 5.9, "Ether Start," for additional information.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 24) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

If the Ether Start digital output remains grounded for longer than a factory set time, the relay module will cause the inline fuse to blow. This prevents excess ether from being injected into the cylinders. If the output is shorted to battery (+), a code will be logged and the CEL will be illuminated.

4.3.8 EXTERNAL ENGINE BRAKE ENABLE

This output will be switched to battery ground when the retarder is enabled, Cruise Control is inactive, and the engine retarder level is not 0.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 8) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.9 EXTERNAL ENGINE SYNCHRONIZATION/FREQUENCY INPUT ACTIVE

When the engine is in external engine synchronization mode this digital output is switched to ground. The output is cycled on and off at 2 Hz if all conditions for external engine synchronization are satisfied except the Sync RPM is less than the minimum Sync RPM. Refer to section 5.24.2 , "Variable Speed Governor - Nonroad."

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 4) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.10 FAN CONTROL #1 & #2

Two digital outputs provide fan control for three different fan configurations: one single-speed fan, two separate single-speed fans, or one two-speed fan. For additional information, refer to section 5.10, "Fan Control."

The first configuration, one single-speed fan, uses Fan Control #1 output to turn a single fan on/off. Fan Control #1 is opened to activate the fan and switched to battery ground to turn the fan off.

The second configuration, two separate single-speed fans, uses Fan Control #1 and Fan Control #2 to operate two separate fans independently. The fans are activated by opening Fan Control #1 or #2. The fans are turned off by switching the outputs to battery ground. Fan Control #1 is typically activated by high coolant or oil temperature. Fan Control #2 is typically activated by high intake air temperature.

The third configuration, one two-speed fan, uses both fan outputs to drive a two-speed fan. When Fan Control #1 output is opened, the low speed mode is activated. The fan operates in the high speed mode if Fan Control #2 is opened.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function numbers 13 and 14) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.11 HIGH COOLANT TEMPERATURE LIGHT

This digital output is also switched to ground with the CEL and the SEL when the coolant temperature is above the stop engine code value and EOP is not enabled. This output will be grounded along with the CEL and the SEL when the ignition is cycled ON for the bulb check.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 20) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for high coolant temperature.

4.3.12 HIGH CRANKCASE PRESSURE LIGHT

This digital output is switched to ground with the CEL and the SEL when the crankcase pressure is above the stop engine code value. The output is grounded along with the CEL and the SEL when the ignition is cycled ON for the bulb check.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 22) may be ordered at the time of engine order or configured by VEPS or DRS. The stop engine pressure threshold is set by the application (6N4C) code.

Diagnostics

A code is logged for high crankcase pressure.

4.3.13 HIGH OIL TEMPERATURE LIGHT

This digital output is switched to battery ground with the CEL if Engine Overtemperature Protection (EOP) is enabled when the oil temperature is above the check engine code value. This digital output is also switched to ground with the CEL and the SEL when the oil temperature is above the stop engine code value and EOP is not enabled. This output will be grounded along with the CEL and the SEL when the ignition is cycled ON for the bulb check. The output will be switched to ground.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 19) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for high oil temperature.

4.3.14 LOW COOLANT PRESSURE LIGHT

This digital output is switched to battery ground with the CEL and the SEL when the coolant pressure is below the stop engine code value. The output is grounded along with the CEL and the SEL when the ignition is cycled ON for the bulb check.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 23) may be ordered at the time of engine order or configured by VEPS or DRS. The stop engine pressure threshold is set by the application (6N4C) code.

Diagnostics

A code is logged for low coolant pressure.

4.3.15 LOW DDEC VOLTAGE WARNING LIGHT

This digital output is switched to battery ground when the ECM battery voltage is below a factory set value. This digital output could be used to drive a low DDEC voltage light.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 3) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is generated when the ECM battery voltage falls below a factory set value.

4.3.16 LOW OIL PRESSURE LIGHT

This digital output is switched to battery ground with the CEL and SEL when the oil pressure is below the Stop Engine Code value. The output will be grounded along with the CEL and SEL when the ignition is cycled ON for the bulb check. The output will be switched to ground.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 18) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for low oil pressure.

4.3.17 OPTIMIZED IDLE ACTIVE LIGHT

The Optimized Idle active light digital output will flash at a rate of once every half second while the idle timer is counting down, after the system has initialized. The output will be grounded after the idle timer has timed out and Optimized Idle has become active. The output will be grounded along with the CEL and the SEL when the ignition is cycled ON for the bulb check. For more information on Optimized Idle, refer to section 5.18.

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 26) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for an open or shorted circuit.

4.3.18 PRESSURE SENSOR GOVERNOR PRESSURE MODE LIGHT

This digital output is switched to battery ground when the PSG pressure mode is activated. This digital output can be used to drive the pressure mode light. For more information, refer to section 5.21, "Pressure Sensor Governor."

Installation

If the output is to be used for a light, a 12 or 24 volt light of less than 1.5 A (DC) is needed depending on the ignition source. Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 5) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.19 SERVICE NOW LAMP

The dash-mounted Service Now Lamp (SNL) digital output (function number 44) is available for Series 50 bus applications with an Exhaust Back Pressure Sensor installed.

This dash light (CEL) will turn on for all diagnostic faults EXCEPT for Exhaust Back Pressure High (PID 81, FMI 0). The light in the engine compartment will turn on for ALL faults. The Exhaust Back Pressure High fault will latch active over ignition cycles, which will keep the engine compartment light on. The fault can be cleared with the DDR or DDDL (6.0 or later).

This feature is available with Rel 36.01 or later.

Installation

Digital Output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

The SNL function must be configured on pin F3.

For installation requirements, refer to section 3.16.3.

4.3.20 STARTER LOCKOUT

This digital output is used to disable/enable the starter. This signal is used to inhibit starter reengagement while the engine is running. A battery ground signal means that the starter cannot be reengaged when the engine speed is above a programmable speed (typically 500 RPM). An open circuit means that the starter could be reengaged when the engine is below a programmable speed (typically 60 RPM). The RPM values can be set to any value. These values can be changed by Detroit Diesel Technical Service or on the mainframe.

This digital output can also be used to indicate that the engine is running.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 7) may be ordered at the time of engine order or configured by VEPS or DRS. The RPM values can be set to any value. The values can be selected at time of engine order or selected after engine order by DDC Technical Service.

4.3.21 TOP2 SHIFT SOLENOID

The shift solenoid is used to command an automatic shift between the top two gears in a Eaton® Top2™ transmission. When the output is grounded, the shift solenoid commands a shift to the top gear position. When the output is not grounded, the shift solenoid commands a shift to the gear one lower than the top position. The correct transmission type must be selected when this digital output is programmed. For additional information on Top2, refer to section 5.25, "Transmission Interface."

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 30) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for an open or shorted circuit.

Eaton® and Top2™ trademarks of the Eaton Corporation.

4.3.22 TOP2 SHIFT LOCKOUT SOLENOID

The shift lockout solenoid is used to disable the driver splitter position switch in an Eaton Top2 transmission. When this output is grounded, the splitter position control is taken away from the driver and controlled by the ECM. The correct transmission type must be selected. For additional information on Top2, refer to section 5.25, "Transmission Interface."

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 31) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for an open or shorted circuit.

4.3.23 TRANSMISSION RETARDER

This digital output is switched to battery ground whenever the throttle is in at 0% position and cruise control is inactive. This signal in conjunction with a relay, may be used to control a transmission retarder. This output will also be enabled if a SAE J1922 or J1939 data link message is received requesting transmission retarder.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 9) may be ordered at the time of engine order or configured by VEPS or DRS.

4.3.24 VEHICLE POWER SHUTDOWN

This digital output actuates a relay that shuts down the rest of the electrical power to the vehicle. See Figure 4-4. This illustration provides a method to turn OFF the ignition when vehicle electrical power is shutdown. Refer to section 5.13, "Idle Timer and Vehicle Power Shutdown."

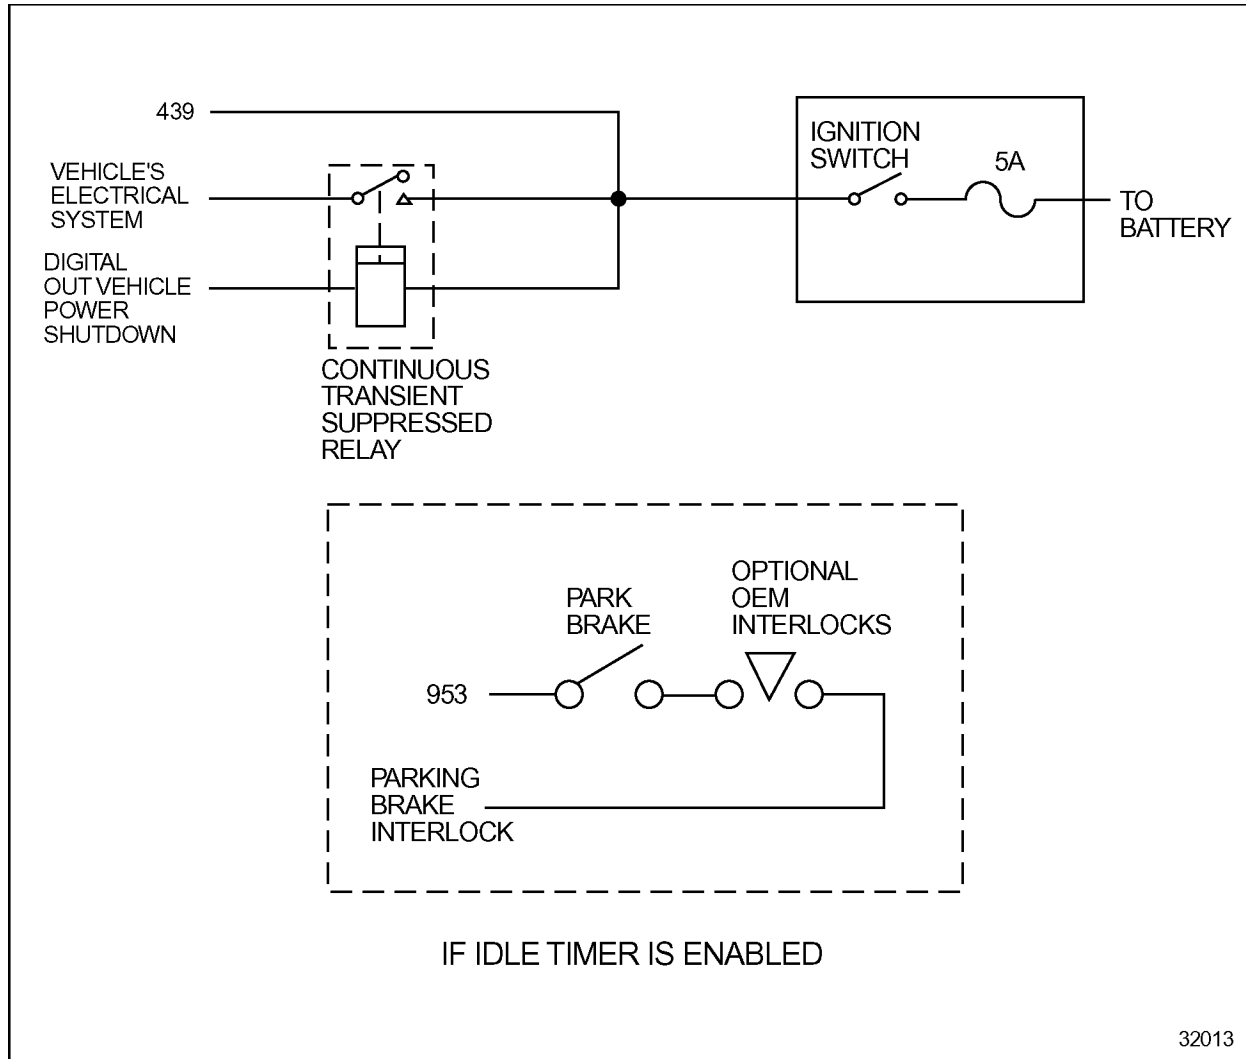


Figure 4-4 Vehicle Power Shutdown

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 6) may be ordered at the time of engine order or configured by VEPS or DRS.

Diagnostics

A code is logged for an open or shorted circuit.

Interaction with Other Features

Vehicle Power Shutdown is used with Idle Timer Shutdown, Optimized Idle (required), or Engine Protection Shutdown.

4.3.25 VSG ACTIVE INDICATION

The VSG Active indication is used for electric drive vehicles. This digital output is used to keep the vehicle from creeping by disconnecting the wheel motor contacts while the vehicle is stopped and the engine is operating. When the ECM detects that the VSG counts are greater than 140, the output is switched to battery ground. If the VSG counts drop below 100, the output is opened.

Installation

Digital output circuits are designed to sink no more than 1.5 A (DC) current and have less than 85 mH of inductance.

Programming Requirements and Flexibility

ACS sets the default function number and polarity for each of the six ports. This digital output (function number 17) may be ordered at the time of engine order or configured by VEPS or DRS.

Interaction with Other Features

For Cruise Control state, use the Cruise Control Active Light instead of this output.

THIS PAGE INTENTIONALLY LEFT BLANK

5 DDEC FEATURES

Section	Page
5.1 AIR COMPRESSOR CONTROL	5-5
5.2 ANTI-LOCK BRAKE SYSTEMS	5-11
5.3 CRUISE CONTROL	5-15
5.4 DIAGNOSTICS	5-23
5.5 ELECTRONIC FIRE COMMANDER	5-27
5.6 ENGINE BRAKE CONTROLS	5-31
5.7 ENGINE PROTECTION	5-37
5.8 ENGINE RATINGS	5-49
5.9 ETHER START	5-53
5.10 FAN CONTROL	5-57
5.11 FUEL ECONOMY INCENTIVE	5-73
5.12 HALF ENGINE IDLE	5-75
5.13 IDLE SHUTDOWN TIMER AND VEHICLE POWER SHUTDOWN	5-77
5.14 IRIS	5-83
5.15 LOW GEAR TORQUE LIMITING	5-95
5.16 MAINTENANCE ALERT SYSTEM	5-97
5.17 MANAGEMENT INFORMATION PRODUCTS	5-117
5.18 OPTIMIZED IDLE	5-139
5.19 PASSMART	5-145
5.20 PASSWORDS	5-149
5.21 PRESSURE SENSOR GOVERNOR	5-153
5.22 PROGRESSIVE SHIFT	5-159
5.23 TACHOMETER DRIVE	5-165

5.24	THROTTLE CONTROL/GOVERNORS	5-167
5.25	TRANSMISSION INTERFACE	5-185
5.26	TRANSMISSION RETARDER	5-201
5.27	VEHICLE SPEED LIMITING	5-203
5.28	VEHICLE SPEED SENSOR ANTI-TAMPER	5-205

NOTE:

Your engine is equipped with DDEC software. This software generally assures optimal engine performance. The installation of software upgrades may cause minor changes in features and engine performance.

THIS PAGE INTENTIONALLY LEFT BLANK

5.1 AIR COMPRESSOR CONTROL

Air Compressor Control is an optional DDEC feature that allows DDEC to regulate engine speed and load/unload a valve in order to maintain a requested compressor outlet air pressure for air compressor applications.

5.1.1 OPERATION

The ECM monitors the air outlet pressure while varying the engine speed and operating load/unload a valve. The valve will be opened or closed. The desired operating pressure may be varied by the operator, within limits preset by the OEM.

The ECM will activate the Air Compressor Governor Controls when the digital input "Air Compressor Load Switch" is grounded. Engine speed is governed based on the actual air compressor outlet pressure versus the desired output pressure. The Air Compressor Pressure Sensor provides a pressure signal to the ECM.

The engine response to various pressure conditions is listed in Table 5-1.

Pressure Set Point	Result
Current outlet pressure is below the pressure set point	Engine speed increases as required up to PTO maximum speed*
Pressure in the system continues to increase and a threshold pressure is exceeded	The air compressor solenoid digital output is enabled† (opened)
Current outlet pressure is above the pressure set point	Engine speed decreases as required down to the minimum PTO speed.

* The engine will continue to run at PTO maximum speed until the outlet pressure matches the sensor pressure.

† DDEC will open and close the loading valve as a function of pressure with hysteresis. When the pressure reaches a programmable limit above the pressure set point the DDEC digital output will be grounded. This output may be used to either open an air compressor vent or close the air inlet. Once the air pressure has dropped to a lower programmable limit, the digital output will be open circuited which will either close the vent or open the air inlet.

Table 5-1 Engine Operation with Air Compressor Controls

Each horsepower rating has an associated pressure range. Horsepower ratings are defined at time of order entry. The minimum and maximum pressure setting for each of the horsepower curves is set with the DDDL/DDR, Vehicle Electronic Programming System (VEPS), or DRS. The initial pressure set point is saved between ignition cycles.

Increase (Resume/Acceleration On)

Momentarily toggling and releasing the Increase Switch (grounding the "Resume/Acceleration On" digital input) increases set point pressure by a configured air compressor pressure increment (4% default) of the pressure range. Holding the switch in the increase position (grounding the digital input), will increase the set point pressure at a rate of two increments per second. Releasing the switch sets the compressor controls to the higher setting.

Decrease (Set/Coast On)

Momentarily toggling and releasing the decrease switch decreases set point pressure by a configured air compressor pressure increment (4% default) of the pressure range. Holding the switch in the decrease position (grounding the digital input), will decrease the set point pressure at a rate of two increments per second. Releasing the switch sets the compressor controls to the lower setting.

Air Compressor Load Switch

Closing (grounding) the air compressor load switch digital input activates the air compressor control system. Opening the air compressor load switch digital input deactivates the air compressor control system.

Air Compressor Solenoid

When the pressure reaches a programmable limit above the pressure set point the DDEC digital output will be grounded. This output may be used to either open an air compressor vent or close the air inlet. Once the air pressure has dropped to a lower programmable limit, the digital output will be open circuited which will either close the vent or open the air inlet.

Air Compressor Shutdown

DDEC will respond to a proprietary immediate engine shut down message sent over the SAE J1587/J1708 data link by the Electronic Display Module (EDM). This feature requires both an EDM and an Auxiliary Information Module (AIM).

Multiple Pressure Ratings

The pressure ranges are linked to the engine ratings. A pressure range can be associated with each rating. The maximum number of engine ratings and pressure ranges is three. Choosing the rating, with the DDR/DDDL or rating switches will automatically select the associated pressure range. The proper 6N4D group with multiple 6N4M groups must be specified. For additional information, contact your DDC Applications Engineer.

5.1.2 INSTALLATION

See Figure 5-1 for the Air Compressor Control Harness.

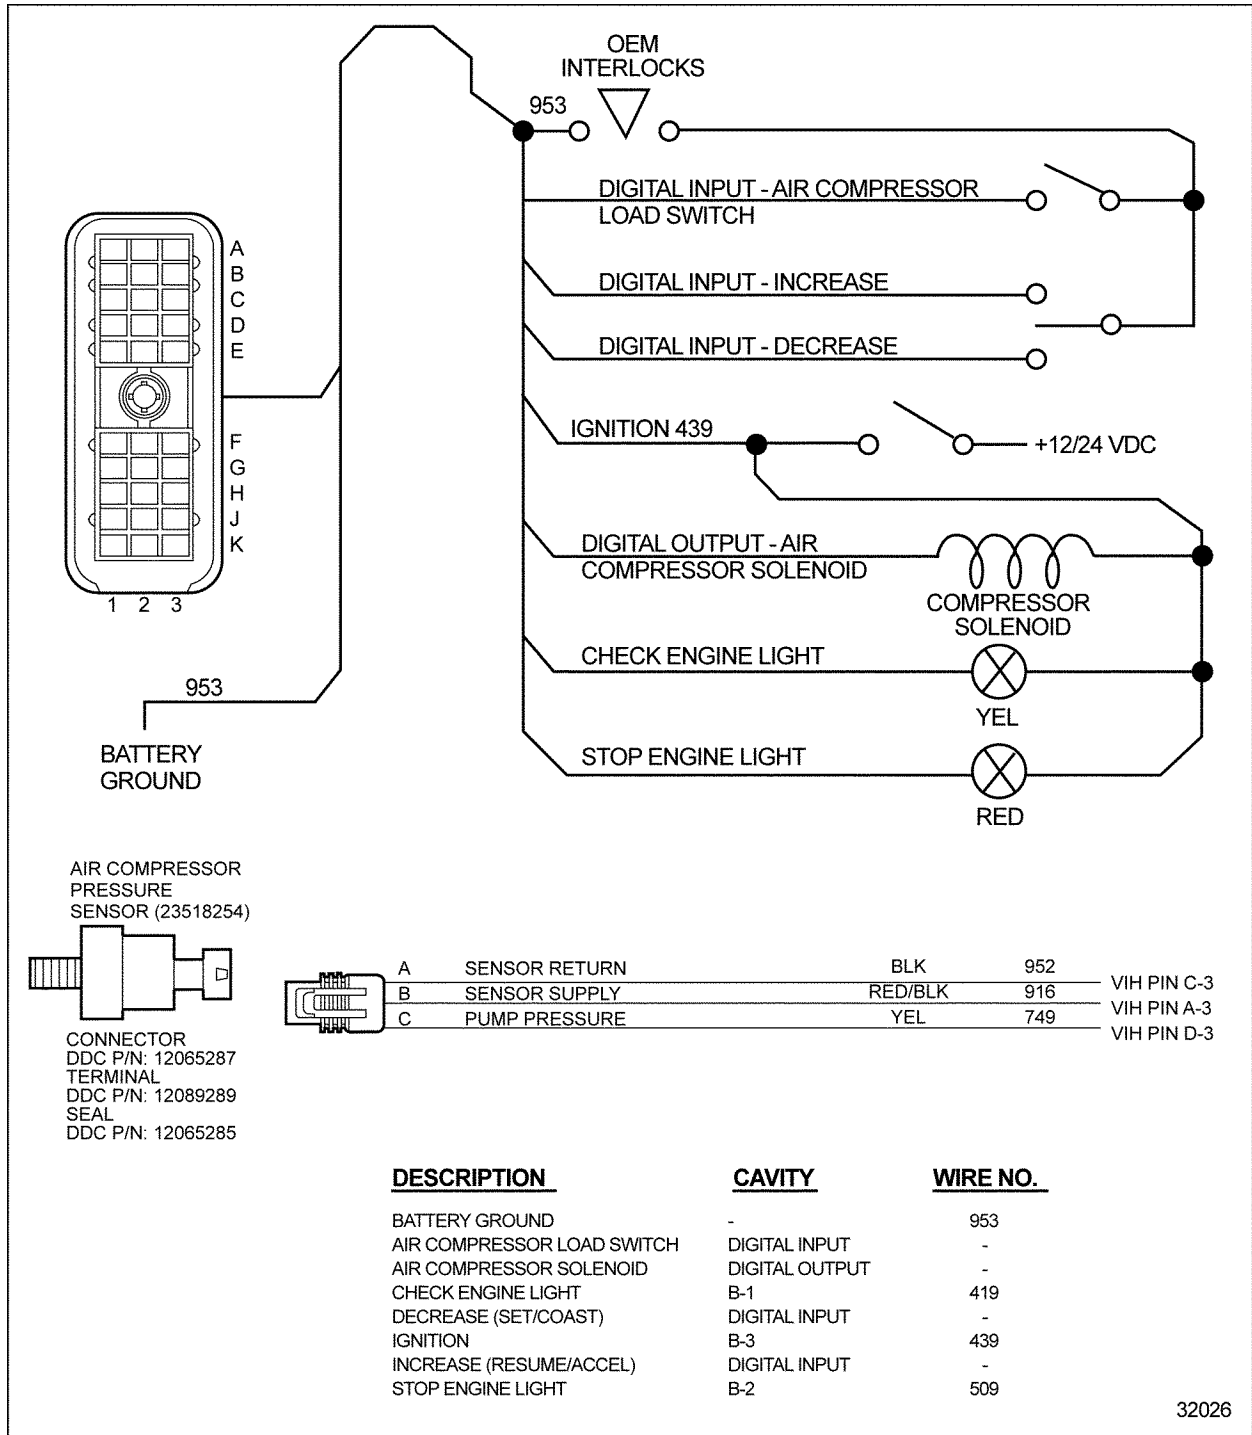


Figure 5-1 Air Compressor Control Harness

5.1.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

Air Compressor Controls must be specified at the time of engine order or added to the ECM calibration by Detroit Diesel Technical Service. An Application Code (6N4C) Group must be selected that is configured for Air Compressor Control at order entry or by contacting Detroit Diesel Technical Service.

The digital outputs and inputs listed in Table 5-2 are required for Air Compressor Controls and must be configured by order entry, VEPS, or the DRS.

Description	Type	Function Number
Set/Coast On (Decrease)	Digital Input	20
Resume/Acceleration On (Increase)	Digital Input	22
Air Compressor Load Switch	Digital Input	35
Air Compressor Solenoid	Digital Output	21

Table 5-2 Air Compressor Control Required Digital Inputs and Outputs

At order entry, the Application Code System (ACS) sets the default values for the parameters listed in Table 5-3. These parameters may be modified using either VEPS or DRS.

Parameter	Description	Choice/Display
Air Compressor Integral Gain	Integral Gain	0-128 RPM/(PSI x SEC)
Air Compressor Proportional Gain	Proportional Gain	0-128 RPM/PSI
Air Compressor Pressure Increment	Percent Pressure Increment	0-50% (of fuel scale pressure range)

Table 5-3 Air Compressor Control Parameters

Multiple pressure ratings can be selected with the use of rating switches. The proper 6N4D groups with multiple 6N4M groups must be specified at engine order or by Detroit Diesel Technical Service. The digital inputs listed in Table 5-4 are required.

Description	Type	Function Number
Rating Switch #1	Digital Input	12
Rating Switch #2	Digital Input	13

Table 5-4 Multiple Pressure Ratings Required Digital Inputs

The VSG maximum and minimum RPM can be set with VEPS, DRS, DDR or DDDL as listed in Table 5-5.

Parameter	Description	Choice/Display
VSG Minimum RPM	Sets the VSG minimum speed.	Idle to VSG, Maximum RPM
VSG Maximum RPM	Sets the VSG maximum speed.	VSG Minimum RPM to (Rated Speed + LSG Droop)

Table 5-5 Variable Speed Governor Maximum and Minimum RPM

The minimum and maximum pressure is set with the DDDL/DDR, DRS or VEPS as listed in Table 5-6. There is a minimum and maximum pressure setting for each of the horsepower curves.

Parameter	Description	Range
LOAD PSI	Indicates the delta value above the current air pressure set point that will initiate the air compressor governor to reload the system.	0 to UNLOAD PSI
UNLOAD PSI	Indicates the delta value above the current air pressure set point that will initiate the air compressor governor to unload the system.	LOAD PSI to 31 PSI
MAX RAT#1 PSI	Indicates the maximum allowable air pressure set point for engine rating #1	MIN RAT#1 to 999 PSI
MIN RAT#1 PSI	Indicates the minimum allowable air pressure set point for engine rating #1.	0 to MAX RAT#1
MAX RAT #2 PSI	Indicates the maximum allowable air pressure set point for engine rating #2.	MIN RAT#2 to 999 PSI
MIN RAT#2 PSI	Indicates the minimum allowable air pressure set point for engine rating #2.	0 to MAX RAT#2
MAX RAT#3 PSI	Indicates the maximum allowable air pressure set point for engine rating #3.	MIN RAT#3 to 999 PSI
MIN RAT #3 PSI	Indicates the minimum allowable air pressure set point for engine rating #3.	0 to MAX RAT#3

Table 5-6 Air Compressor Parameters

5.1.4 INTERACTION WITH OTHER FEATURES

Air Compressor Control may not be used with Cruise Control or the Pressure Sensor Governor. A proprietary immediate engine shut down message for immediate air compressor shutdown is sent over the SAE J1587/J1708 data link by the EDM. This feature requires both an EDM and an AIM.

THIS PAGE INTENTIONALLY LEFT BLANK

5.2 ANTI-LOCK BRAKE SYSTEMS

Anti-lock Brake Systems (ABS) are electronic systems that monitor and control wheel speed during braking. The systems are compatible with standard air brake systems. The system monitors wheel speed at all times, and controls braking during emergency situations. Vehicle stability and control are improved by reducing wheel lock during braking.

5.2.1 OPERATION

The ECM transmits engine data via SAE J1587, SAE J1922, or SAE J1939. Anti-lock brake systems monitor data on one or more of these communication links. In the event that an excessive wheel spin is detected, the ECM receives a message from the ABS requesting a 0% output torque limit. The message is transmitted on SAE J1922 or SAE J1939.

SAE J1922 and SAE J1939 both implement the same message set. The difference being hardware and performance. SAE J1922 transmits and receives data at 9.6 K baud while SAE J1939 transmits/receives data at 250 K baud. SAE J1939 has a much higher bit rate so messages reach their destination very quickly nearly eliminating the latency found with SAE J1922.

SAE J1922 is enabled on all DDEC IV ECMs. SAE J1939 is enabled on all DDEC IV ECMs (Release 24.0 or later). ECMs prior to Release 24.0 must be configured if SAE J1939 is required.

See Figure 5-2 and Figure 5-3 for interface with Meritor/WABCO and Bosch respectively.

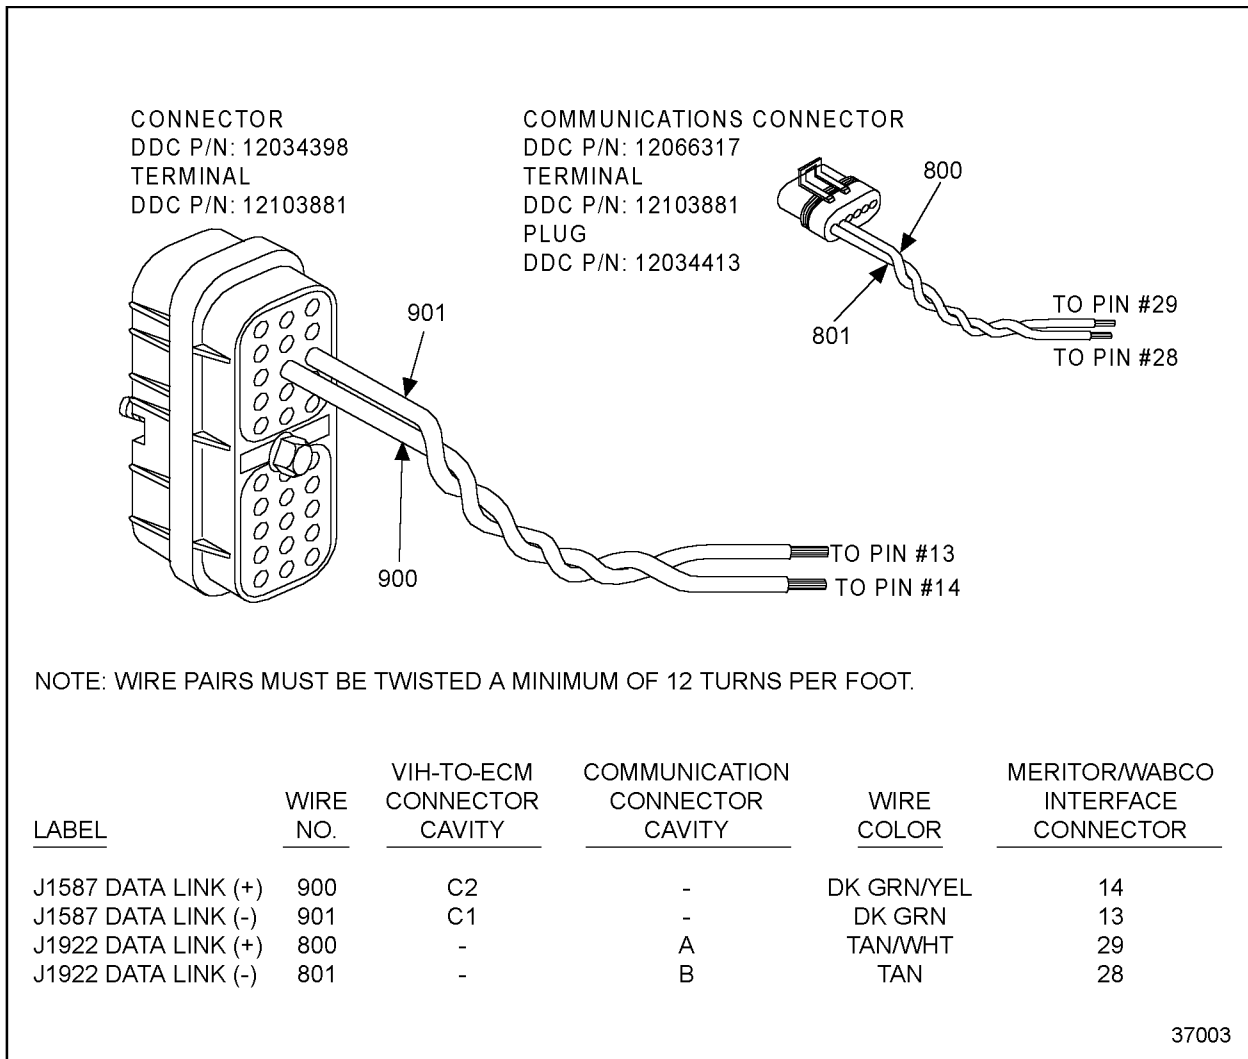


Figure 5-2 Meritor/WABCO ABS/ATC Interface

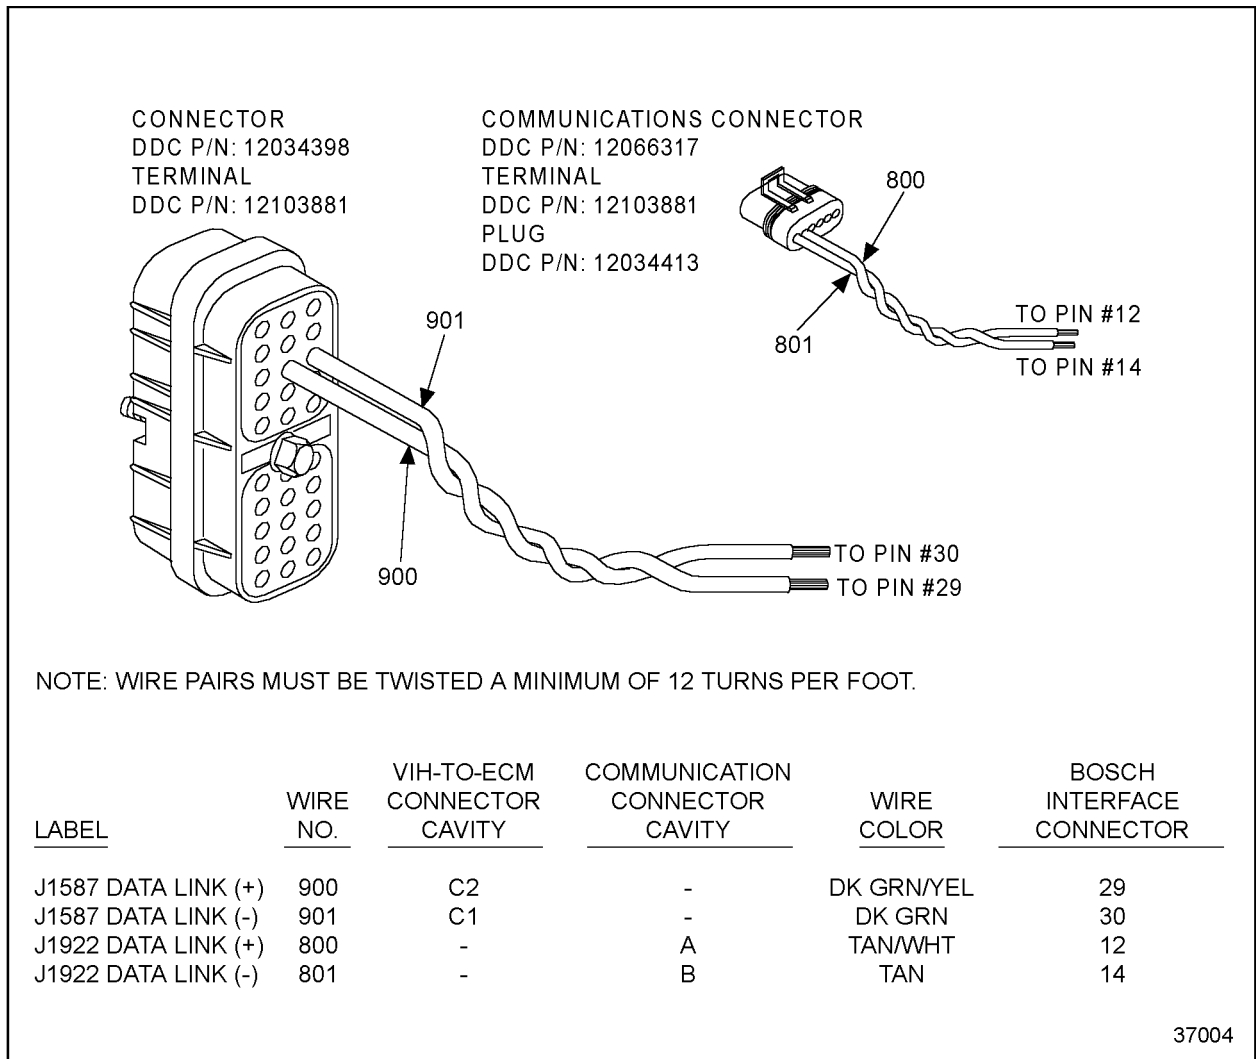


Figure 5-3 Bosch ABS/ATC Interface

THIS PAGE INTENTIONALLY LEFT BLANK

5.3 CRUISE CONTROL

Cruise Control is available with any DDEC engine. Cruise Control will operate in either Engine or Vehicle Speed Mode and maintain a targeted speed (MPH or RPM) by increasing or decreasing fueling. The targeted speed can be selected and adjusted with dash-mounted switches. Up to five digital inputs are required (four for automatic transmission) for Cruise Control operation and a digital output is optional (refer to section 4.2.1 for additional information on digital inputs). A Vehicle Speed Sensor (VSS) is required for Vehicle Speed Cruise Control.

5.3.1 OPERATION

There are two types of Cruise Control: Engine Speed Cruise Control and Vehicle Speed Cruise Control. Vehicle Speed Cruise Control is available only to applications using a Vehicle Speed Sensor (VSS).

Engine Speed Cruise Control

Power is varied under Engine Speed Cruise Control to maintain constant engine speed. Vehicle speed will vary depending on powertrain components. Engine Speed Cruise Control does not need a VSS. Engine Speed Cruise Control cannot be used with automatic transmissions.

Vehicle Speed Cruise Control

Vehicle Speed Cruise is enabled when "Enable Cruise" and a Vehicle Speed Sensor (VSS) are installed. Engine speed and power are varied under Vehicle Speed Cruise Control to maintain the set vehicle speed. The maximum Cruise Control speed cannot exceed the programmed maximum Vehicle Speed Limit (when programmed). The vehicle speed must be above 20 MPH and the engine speed above 1,000 RPM.

This type of Cruise Control is required when either of the following conditions exists:

- ☐ Vehicle Speed Limiting -- Vehicle Speed Cruise Control is mandatory if the vehicle speed limit is programmed and Cruise Control is desired. This will prevent the ECM from fueling the engine at speeds greater than the vehicle speed limit.
- ☐ Automatic Transmissions -- Vehicle Speed Cruise Control must be selected if the vehicle is equipped with an automatic transmission. This will ensure proper transmission upshifts while in Cruise Control. Refer to the transmission manufacturer's manual for more information and see the Vehicle Interface Harness schematic.

Cruise Control can be overridden at any time with the foot pedal if the vehicle is not operating at the programmed Vehicle Speed Limit. For additional information about Vehicle Speed Limiting, refer to section 5.27.

Smart Cruise

The Eaton® Smart Cruise® system will send a "heart beat" message on the SAE J1939 Data Link. Manual Cruise Control and Smart Cruise will be disabled if the message is not received over the data link or the message indicates that there is a failure in Smart Cruise. To regain manual control, the driver must toggle the Cruise Master Switch twice within 10 seconds. Release 31.0 or later software will not illuminate the CEL for Smart Cruise faults.

This feature is available with Release 27.0 or later. Smart Cruise must be configured by VEPS (Release 27.0 or later), WinVeps (Release 2.0 or later) or the DRS. For additional information on Smart Cruise, contact Eaton Corporation.

Auto Resume

The Auto Resume feature will resume Vehicle Speed Cruise Control if the clutch has been pushed twice and released within three (3) seconds.

Cruise Pause

Cruise Pause saves the current Cruise Control Set Point (vehicle speed) when the Cruise Control Enable input is opened. The set point is saved for 10 seconds. This feature is intended toward transmissions with shift knobs that do not have to be moved to shift every gear and have the Cruise Control switches on the knob. the Resume/Accel Switch must be momentarily switched to sensor return to resume the saved vehicle speed after the Cruise Enable is switched to sensor return again.

Cruise Power

Cruise Power is an optional engine rating which operates on a higher horsepower during Cruise Control. The ECU automatically switches to the cruise power rating when Cruise Control is turned on. This extra power gives the driver incentive to run in Cruise Control whenever possible and gain the additional fuel economy it provides. Cruise Power can be selected with DDDL, VEPS, or with an engine rating switch provided it is part of the engine rating package. Refer to section 4.2.4.2 for additional information on engine rating switches.

Cruise Enable

Cruise Control is enabled, but not active when the Cruise Control Enable digital input is switched to battery ground.

Set / Coast On

- Set:** Cruise Speed is set by momentarily contacting the switch to the ON position (switching the digital input to battery ground). Cruise Control will become active and maintain the engine or vehicle speed present at the time.
- Coast:** When Cruise Control is active, the Set/Coast input can be used to reduce power and speed by toggling the switch. Momentarily toggling and releasing the Set/Coast switch will decrease the set point by 1 MPH increments for Vehicle Speed Cruise Control and 25 RPM increments for Engine Speed Cruise Control. Holding the Set/Coast will decrease the set point by 1 MPH per second (Vehicle Speed CC) or 25 RPM per seconds (Engine Speed CC). When released the Cruise Control set point will be at the new speed.

Resume / Accel On

Resume: If Cruise Control has been disabled with the service brake or the clutch switch, momentary contact to the ON position (switching the input to battery ground) restores the previously set cruise speed.

Accel: When Cruise Control is active, the Resume/Accel input can be used to increase power and speed by toggling the switch. Momentarily toggling and releasing the Resume/Accel switch will increase the set point by 1 MPH increments for Vehicle Speed Cruise Control and 25 RPM increments for Engine Speed Cruise Control. Holding the Resume/Accel will increase the set point by 1 MPH per second (Vehicle Speed CC) or 25 RPM per seconds (Engine Speed CC). When released the Cruise Control set point will be at the new speed.

Clutch Released (Manual Transmissions)

This input indicates that the clutch is released and is used for suspending Cruise Control and Auto Resume.

When the clutch is released, the input is at battery ground. Cruise Control is suspended if the clutch is depressed once. If the clutch is depressed twice within three seconds, Cruise Control is automatically resumed.

NOTE:

When engine brake is configured and auto resume is enabled, the first time the clutch is depressed to suspend Cruise Control, the engine brakes will be delayed for three seconds.

The digital input logic for the Clutch Switch disables Cruise Control in the unlikely event of a broken clutch switch wire.

Service Brake Released (Automatic and Manual Transmissions)

This input indicates that the brake is released when switched to battery ground. If the brake is activated, then the input is not grounded and Cruise Control is suspended. Cruise Control is resumed by using the Resume/Accel Switch.

The input logic for the Brake Switch disables Cruise Control in the unlikely event of a broken brake switch wire.

5.3.2 INSTALLATION

The following is a list of switches that are required for Cruise Control operation.

- ☐ Cruise Enable Switch
- ☐ Brake Switch
- ☐ Clutch Switch -- optional for automatic transmissions
- ☐ Set/Coast Switch
- ☐ Resume/Accel Switch
- ☐ Cruise Active Light -- optional

See Figure 5-4 for a diagram of the Cruise Control circuit.

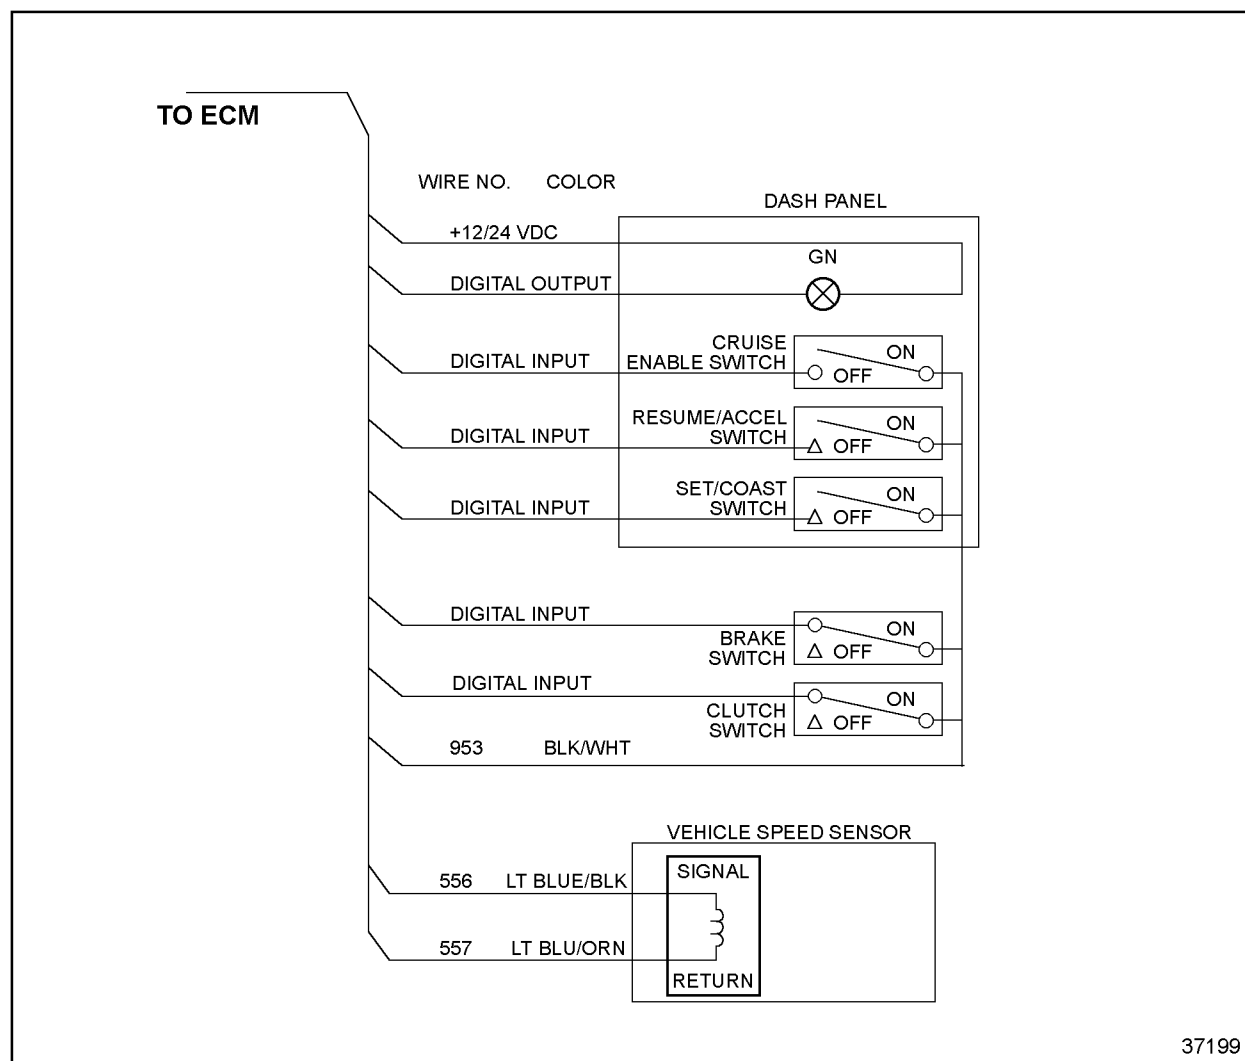


Figure 5-4 Cruise Control Circuit

5.3.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

To configure an engine for Cruise Control, the digital inputs, output and VSS settings listed in Table 5-7 must be selected either with the Vehicle Electronic Programming System (VEPS), the DDEC Reprogramming System (DRS) or on engine order entry. The required and optional digital inputs and outputs are listed in Table 5-7.

Description	Type	Function Number
Service Brake Released	Digital Input	17
Set/Coast	Digital Input	20
Resume/Accel	Digital Input	22
Cruise Control Enable	Digital Input	23
Clutch Released (required for manual transmissions)	Digital Input	18
Cruise Control Active Light (optional for Cruise Control)	Digital Output	11

Table 5-7 Cruise Control Related Digital Input and Output Signals

A Vehicle Speed Sensor must be configured for Vehicle Speed Cruise Control. Refer to section 3.14.25, "Vehicle Speed Sensor," for additional information.

If Eaton Smart Cruise is installed on the vehicle, the feature as listed in Table 5-8 must be enabled by VEPS or DRS.

Parameter	Description	Choice
Adaptive Cruise Control (Smart Cruise)	Enables or disables the Smart Cruise Control feature.	YES, NO

Table 5-8 Smart Cruise Parameter

The Cruise Control parameters listed in Table 5-9 can be set by order entry, DDR, DDDL, the DRS, or VEPS.

Parameter	Description	Range
CRUISE CONTROL	Enables or disables the vehicle speed Cruise Control feature.	YES, NO
MIN CRUISE SPEED	Sets the maximum cruise speed in MPH or KPH.	20 MPH to MAX CRUZ SPD
MAX CRUISE MPH or KPH	Sets the maximum cruise speed in MPH or KPH.	MIN CRUZ to Vehicle Speed Limit or 127 mph if VSL = NO
AUTO RESUME	Enables or disables the automatic Cruise Control set speed resume feature.	YES, NO
CRUISE SWITCH VSG	Enables or disables the cruise switch VSG set speed feature.	YES, NO
INITIAL VSG SET SPEED	Sets the cruise switch VSG initial set speed.	VSG MIN RPM to VSG MAX RPM
RPM INCREMENT	Sets the cruise switched VSG RPM increment.	1 to 255 RPM
CRUISE/ENGINE BRAKE FEATURE	Enables or disables the feature that allows the engine brake to be used while on Cruise Control if the vehicle exceeds the cruise set speed.	YES, NO
CRUISE/ENGINE BRAKE ACTIVATION SPEED	Sets the additional speed before the engine brake is applied to slow down the vehicle. The engine brake is activated at low level unless the operator has turned off the engine brakes with the dash board switches.	0 to 10 MPH
ENG BRAKE INCREMENT MPH or KPH	Sets the additional incremental speed that must be reached before the engine brake will activate the medium and/or high level of retardation.	1 to 5 MPH
MAX OVERSPEED LIMIT	Sets the vehicle speed above which a diagnostic code will be logged if the driver fuels the engine and exceeds this limit. Entering a 0 will disable this option.	0 to 127 MPH
MAX SPEED NO FUEL	Sets the vehicle speed above which a diagnostic code will be logged if the vehicle reaches this speed without fueling the engine. Entering a 0 will disable this option.	0 to 127 MPH

Table 5-9 Cruise Control Parameters

5.3.4 DIAGNOSTICS

Two faults (SID 216 FMI 14 and PID 86 FMI 14) will be logged simultaneously if Smart Cruise is enabled and the data is not being received, the received data is bad or the Smart Cruise unit has been removed.

If these faults are received in addition to an SAE J1939 Data Link failure (SID 231 FMI 12), then the problem is with the SAE J1939 Data Link itself.

5.3.5 INTERACTION WITH OTHER FEATURES

The Cruise Control logic is also used with the DDEC Pressure Sensor Governor in fire trucks. Both systems cannot be configured on the same engine. Refer to section 5.21 for more information on the Pressure Sensor Governor. DDEC can be configured to allow the engine brakes to activate during Cruise Control operation.

NOTE:

Cruise Control maximum speed cannot exceed the vehicle speed limit.

THIS PAGE INTENTIONALLY LEFT BLANK

5.4 DIAGNOSTICS

Diagnostics is a standard feature of the DDEC system. The purpose of this feature is to provide information for problem identification and problem solving in the form of a code. The ECM continuously performs self diagnostic checks and monitors the other system components. Information for problem identification and problem solving is enhanced by the detection of faults, retention of fault codes and separation of active from inactive codes.

5.4.1 OPERATION

The engine-mounted ECM includes control logic to provide overall engine management. System diagnostic checks are made at ignition on and continue throughout all engine operating modes.

Sensors provide information to the ECM regarding various engine and vehicle performance characteristics. The information is used to regulate engine and vehicle performance, provide diagnostic information, and activate the engine protection system.

Instrument panel warning lights (see Figure 5-5) the Check Engine Light (CEL) and the Stop Engine Light (SEL) warn the engine operator. The CEL is an amber light and the SEL is a red light.

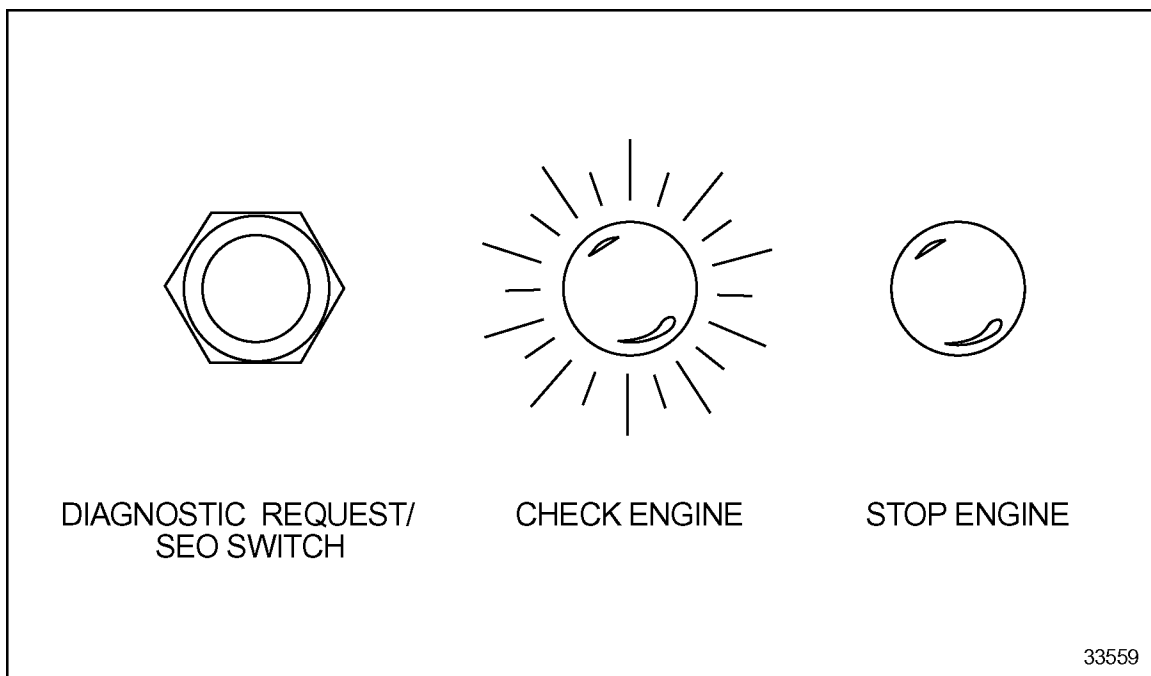


Figure 5-5 Typical Diagnostic Request/SEO Switch and Warning Lights

The CEL is illuminated and a code is stored if an electronic system fault occurs. This indicates the problem should be diagnosed as soon as possible. The ECM illuminates the CEL and SEL and stores a malfunction code if a potentially engine damaging fault is detected. These codes can be accessed in one of four ways:

- ☐ Using the Diagnostic Data Reader (DDR)
- ☐ Flashing the CEL and SEL with the Diagnostic Request Switch (may be combined with Stop Engine Override switch, see Figure 5-5)
- ☐ Using the Detroit Diesel Diagnostic Link™ (DDDL) PC software package
- ☐ By ProDriver®, Electronic Fire Commander®, Electronic Display Module (EDM), or other display

There are two types of diagnostic codes:

- ☐ An *active code* - a fault present at the time when checking for codes
- ☐ An *inactive code* - a fault which has previously occurred; inactive codes are logged into the ECM and time stamped with the following information:
 - ☐ First occurrence of each diagnostic code in engine hours
 - ☐ Last occurrence of each diagnostic code in engine hours
 - ☐ Total time in seconds that the diagnostic code was active

Diagnostic Request Switch

The Diagnostic Request Switch is used to activate the CEL/SEL to flash codes. Active codes are flashed on the SEL and inactive codes are flashed on the CEL (see Figure 5-6). Inactive codes are flashed in numerical order, active codes are flashed in the order received, most recent to least recent. The Diagnostic Request Switch can also be used as the Stop Engine Override (SEO) Switch. The codes are flashed out of the ECM connected to the switch.

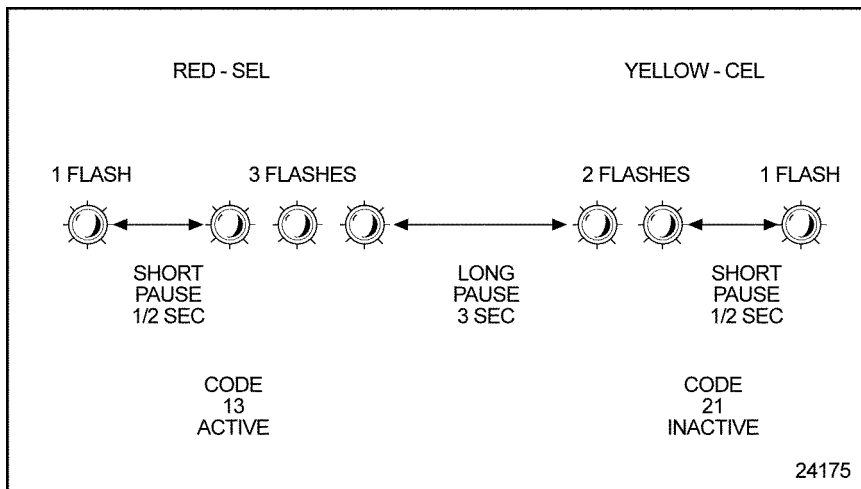


Figure 5-6 Flash Codes

NOTE:

For multi-ECM installations, the Diagnostic Request Switch and SEO are combined on the master ECM. All receiver ECMs have a separate Diagnostic Request Switch.

The Diagnostic Request Switch is used to flash codes in the following circumstances:

- ☐ The engine is not running and ignition is ON
- ☐ The engine is idling

In both circumstances, activating and holding the Diagnostic Request Switch will flash out the diagnostic codes.

Diagnostic Request Switch/Stop Engine Override

If no separate Diagnostic Request Switch is configured, the SEO Switch serves as both a Diagnostic Request Switch and an SEO Switch.

The Diagnostic Request/Stop Engine Override Switch is used to flash codes in the following circumstances:

- ☐ The engine is not running and ignition is on
- ☐ The engine is idling

In both circumstances, activating and releasing the switch will flash out the diagnostic codes; activating and releasing the switch a second time will stop the ECM from flashing the diagnostic codes. Codes will also cease flashing if the engine is no longer at idle. The codes are flashed out of the ECM connected to the switch.

NOTE:

For multi-ECM installations, the Diagnostic Request Switch and SEO Switch are combined on the master ECM. All receiver ECMs have a separate Diagnostic Request Switch.

5.4.2 DEFINITIONS AND ABBREVIATIONS

Parameter Identification Character (PID): A PID is a single byte character used in SAE J1587 messages to identify the data byte(s) that follow. PIDs in the range 0-127 identify single byte data, 128-191 identify double byte data, and 192-253 identify data of varying length.

Subsystem Identification Character (SID): A SID is a single byte character used to identify field-repairable or replaceable subsystems for which failures can be detected or isolated. SIDs are used in conjunction with SAE standard diagnostic codes defined in SAE J1587 within PID 194.

Failure Mode Identifier (FMI): The FMI describes the type of failure detected in the subsystem and identified by the PID or SID. The FMI and either the PID or SID combine to form a given diagnostic code defined in SAE J1587 within PID 194.

Flashing Codes: Provides a two digit number (see Figure 5-6). This code may cover several specific faults. It is provided to advise the operator of the general severity of the fault so the operator can decide if engine operation can continue without damaging the engine.

Refer to Appendix A for a list of codes, the code number when flashed, the SAE J1587 number and a description of each code.

5.5 ELECTRONIC FIRE COMMANDER

The Detroit Diesel Electronic Fire Commander® (EFC) is designed to support DDEC IV engines in the fire fighting and emergency services market. It combines the DDEC Pressure Sensor Governor (PSG), a system monitor, and a pump panel display for vital engine operating parameters into one compact, durable package (see Figure 5-7).

Refer to *Electronic Fire Commander Installation and Troubleshooting* (6SE476) for additional information.

EFC replaces the PSG switches, as well as many pump panel gauges as it provides complete control and monitoring of DDEC IV systems on the fire truck.

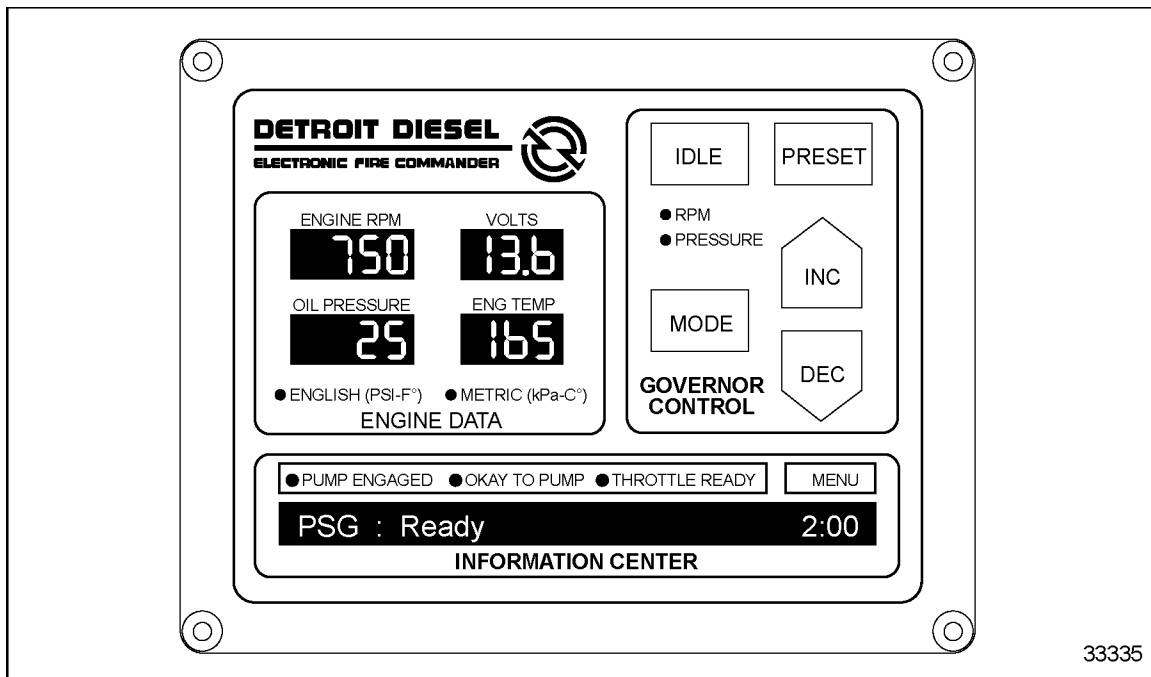


Figure 5-7 Electronic Fire Commander Pump Panel Display

RPM, Oil Pressure, Oil or Coolant Temperature, and ECM Voltage are displayed continuously in the Engine Data section of the EFC.

Messages and any known diagnostic code accompanying a Check Engine or Stop Engine condition will be displayed on the Information Center message display. The external alarm output will also be activated when the engine is running. The EFC displays the PSG status in the Information Center whenever the OEM interlocks are met. The real time of day will also be displayed. The EFC logs the time that the pump is engaged and that time can be displayed using the Information Center.

5.5.1 OPERATION

The Electronic Fire Commander has two modes of operation:

- ☐ RPM Mode (engine speed)
- ☐ Pressure Mode (water pump pressure, psi)

RPM Mode controls engine speed to a desired RPM and Pressure Mode controls engine speed to maintain a desired discharge manifold pressure.

The operating modes are selectable and may be changed by pressing the MODE button providing the appropriate interlocks have been met. The engine will continue to run at the same speed when the mode switch is toggled between the RPM and Pressure modes.

The maximum preset pressure for EFC is 200 psi.

5.5.2 INSTALLATION

The Electronic Fire Commander Harness schematic shows the minimum requirements for the PSG to operate (see Figure 5-8). Additional functions and interlocks may be used. Refer to the *Electronic Fire Commander Installation and Troubleshooting* manual (6SE476).

EFC may be powered from a 12/24 volt supply.

5.5.3 ORDERING EFC

The hardware listed in Table 5-10 is needed for Pressure Governor installation with EFC.

Component	Part Number
Electronic Fire Commander	23519655
Pressure Sensor	23520795
Electronic Fire Commander Harness (see Figure 5-8)	OEM Supplied
OEM Interlocks	OEM Supplied

Table 5-10 Electronic Fire Commander and Pressure Sensor

Hardware available from the DDC Parts Distribution Center for installation of Electronic Fire Commander (EFC) is listed in Table 5-10 as a complete kit. The 6N4C group must be specified at engine order entry or through Detroit Diesel Technical Service.

Component	Part Number
Electronic Fire Commander Kit (contains Electronic Fire Commander and the pressure sensor)	23520139

Table 5-11 Electronic Fire Commander Kit

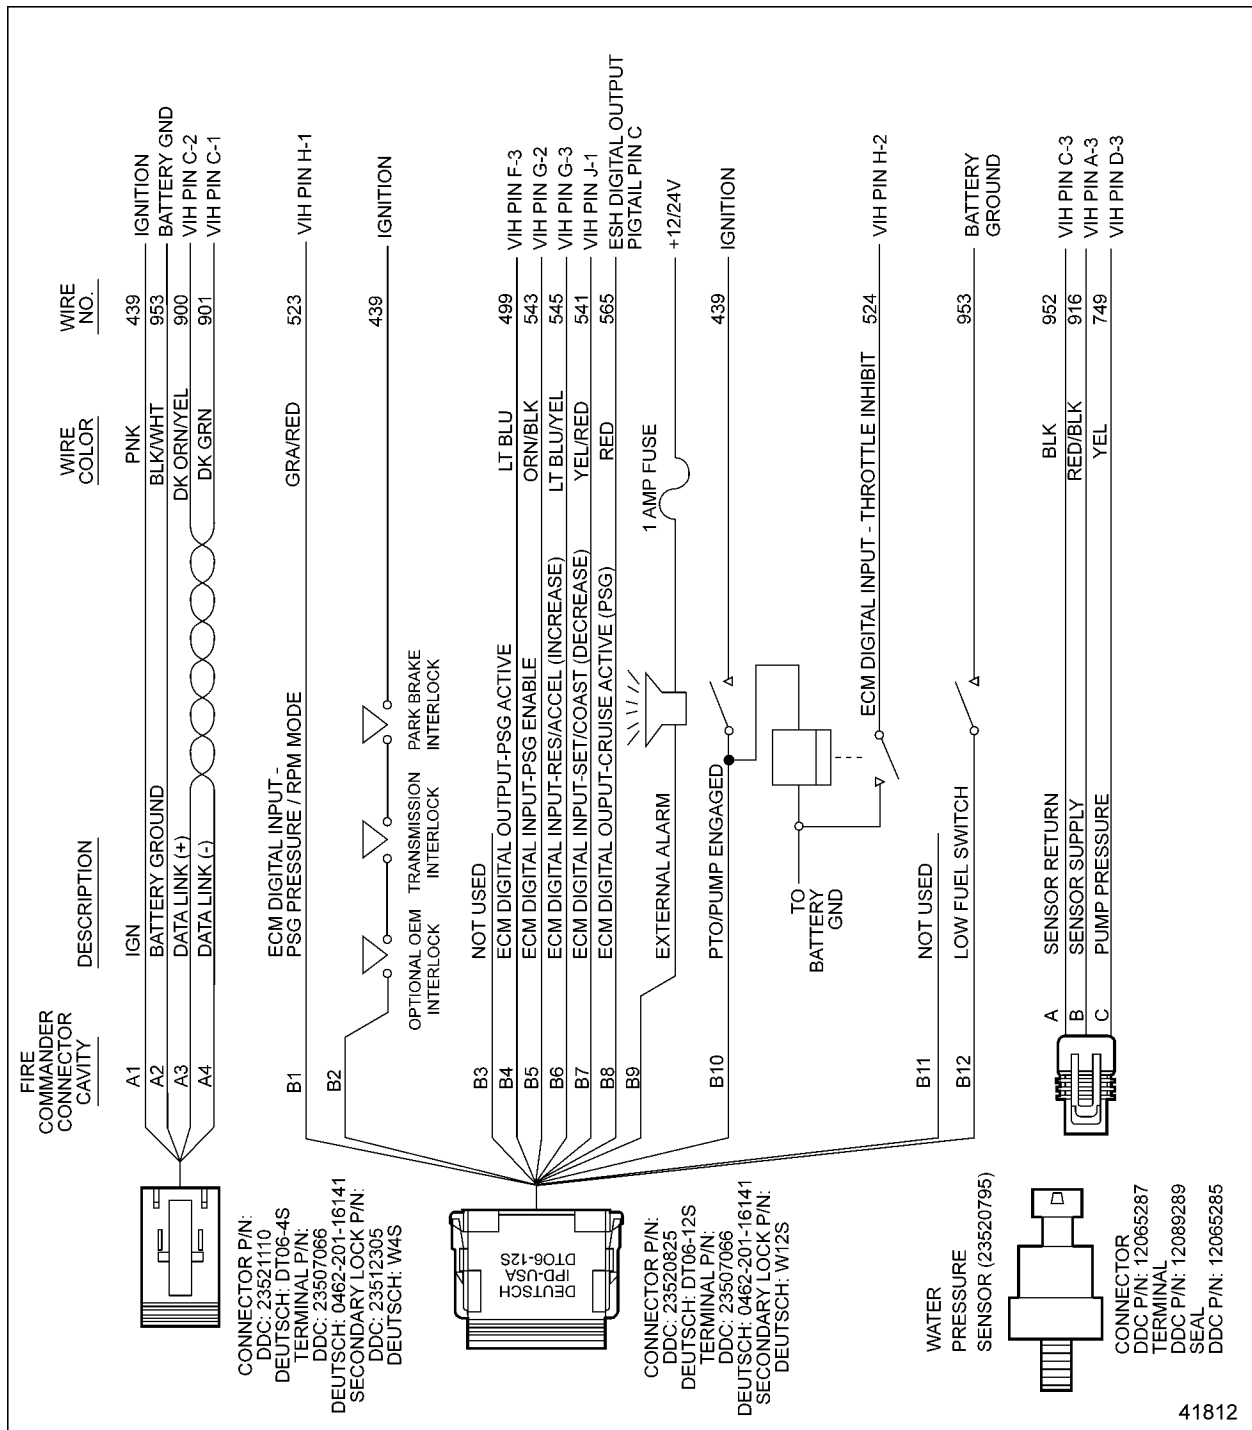


Figure 5-8 Electronic Fire Commander Harness

5.5.4 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The digital inputs listed in Table 5-12 are required for use with EFC and can be configured at order entry, by VEPS, or DRS. Refer to section 4.2, "Digital Inputs," for additional information.

Description	Function Number	Circuit Number*	VIH-to-ECM Connector Assignment*
Pressure/RPM Mode	8	523	H1
PSG Enable	24	543	G2
Resume/Accel On (increase)	22	545	G3
Set/Coast On (decrease)	20	541	J1

* DDC circuit numbers and port assignments shown are default settings but can differ from application to application.

Table 5-12 Required Digital Inputs for EFC

The digital outputs required for use with EFC are listed in Table 5-13 and can be configured at order entry, by VEPS, or DRS. Refer to section 4.3, "Digital Outputs," for additional information.

Description	Function Number	Circuit Number*	Connector Assignment*
PSG Active	5	499	VIH-to-ECM Connector - Cavity F3
Cruise Active	11	565	Pigtail off the Engine Sensor Harness - Cavity Y3

* DDC circuit numbers and port assignments shown are default settings but can differ from application to application.

Table 5-13 Required Digital Outputs for EFC

The correct 6N4C group must be specified at engine order entry or through Detroit Diesel Technical Service. More information is available in the manual *Electronic Fire Commander Installation and Troubleshooting* (6SE476).

5.6 ENGINE BRAKE CONTROLS

The Engine Brake option converts a power-producing diesel engine into a power-absorbing air compressor. This is accomplished by opening the cylinder exhaust valves near the top of the normal compression stroke and releasing the compressed cylinder charge to exhaust. The release of the compressed air to atmospheric pressure prevents the return of energy to the engine piston on the expansion stroke, the effect being a net energy loss. Fueling is cut off when this occurs.

5.6.1 OPERATION

A dash mounted On/Off Switch is used to enable the Engine Brake option. DDEC IV will directly control the engine brake solenoids using an intensity switch to select three or six cylinders to produce low, medium, or high braking power on a Series 60. The engine brakes are engaged every time the foot pedal is brought back to the idle position and Cruise Control is not active.

The following are seven options for Engine Brake:

- ☐ Cruise Control with Engine Brake
- ☐ Engine Brake Disable
- ☐ Engine Brake Active
- ☐ Engine Fan Braking
- ☐ Clutch Released Input
- ☐ Service Brake Control of Engine Brakes
- ☐ Min. MPH for Engine Brakes

Cruise Control with Engine Brake

The Engine Brake option can also provide Engine Brake capability when the vehicle is in Cruise Control. For example, if the vehicle is going down hill in Cruise Control while the engine brake is selected, the ECM will control the amount of Engine Brake with respect to the Cruise Control set speed. The level of Engine Brake (low, medium, high) selected with the dash switches will be the maximum amount of engine braking the ECM allows. Cruise Control with Engine Brake can be set with DDDL/DDR, VEPS, and DRS.

Engine Brake Disable

The Engine Brake Disable option uses a digital input which is switched to ground whenever a vehicle system, such as a traction control device, does not allow engine braking to occur. This option is required for most automatic transmissions.

Engine Brake Active

The Engine Brake Active option uses a digital output that can be used to drive an Engine Brake Active Light. This output is switched to battery ground whenever the engine brake is active.

Engine Fan Braking

The Engine Fan Braking option turns on the cooling fan when the engine brake level is high and DDEC fan control is enabled. This creates about 20 to 40 hp additional engine braking power depending on the size of the cooling fan. This option is selected at the time of engine order or set by DDDL/DDR, VEPS or DRS. For additional information, refer to section 5.10, "Fan Controls."

Clutch Released Input

The Clutch Released digital input will prevent the engine brakes from being turned on when the clutch is pressed. This input is required for use with manual transmissions. Refer to section 4.2, "Digital Inputs," for additional information.

Service Brake Control of Engine Brakes

This option will allow the dash-mounted engine brake switch to be set to the ON position but not engage the engine brakes until the service brake pedal is pressed. A digital input must be programmed for service brake. Refer to section 4.2, Digital Inputs for additional information. VEPS, DDR/DDDL or DRS can set this function.

Min MPH for Engine Brakes

This option will disable the engine brakes until a minimum vehicle speed is reached. This parameter can be configured by VEPS, DRS, or DDR/DDDL. A Vehicle Speed Sensor is required. Refer to section 3.14.25, "Vehicle Speed Sensor," for additional information.

5.6.2 INSTALLATION

See Figure 5-9 for a schematic of the internal engine brake for the DDEC IV ECM and see Figure 5-10 for a schematic of the internal engine brake for the DDEC IV ECM World Transmission interface.

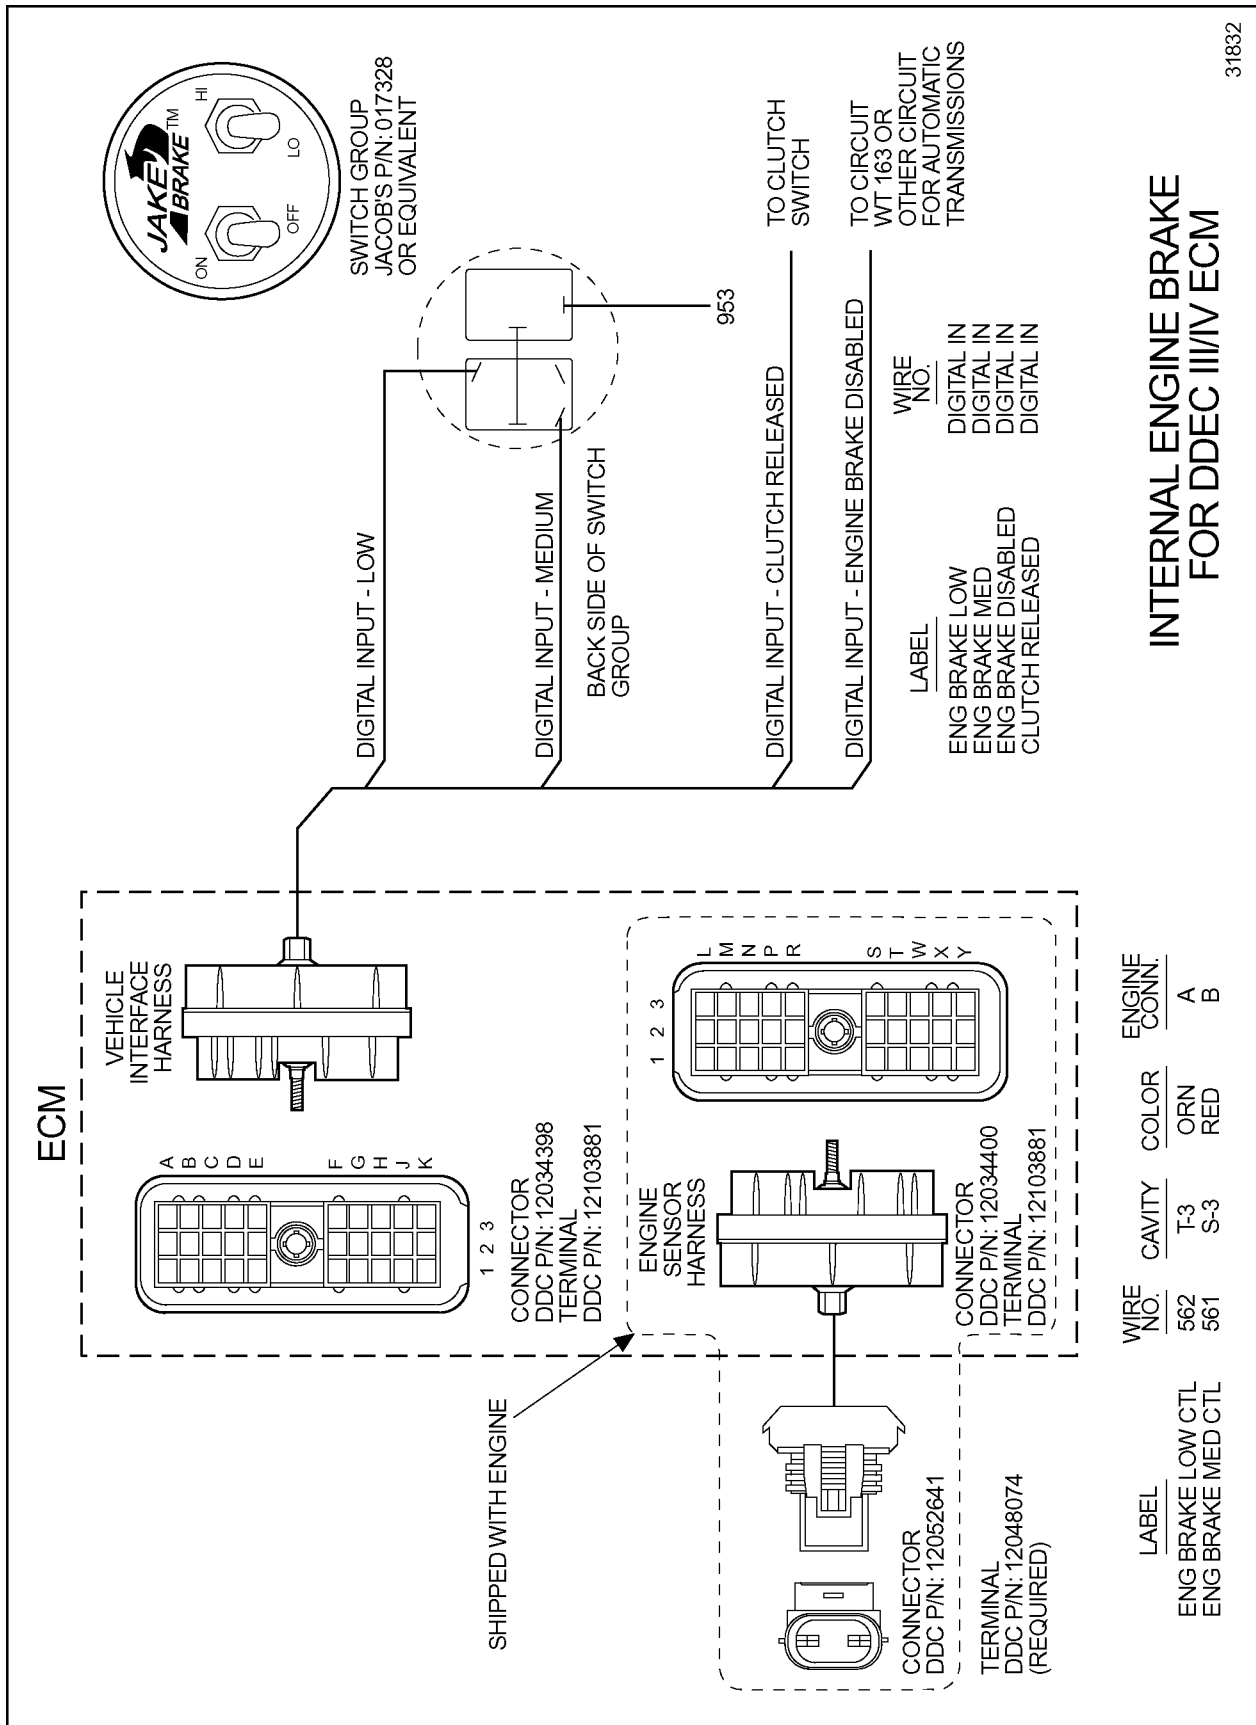


Figure 5-9 Internal Engine Brake for DDEC IV ECM



Internal Engine Brake for DDEC IV ECM World Transmission Interface

5.6.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

Engine Brake must be specified at the time of engine order or by contacting Detroit Diesel Technical Service. This enables the two digital outputs required.

The digital inputs listed in Table 5-14 must be configured by order entry, VEPS, DRS:

Description	Function Number
Engine Brake Low	1
Engine Brake Medium	2
Engine Brake Disable (required for most automatic transmissions)	26
Clutch Switch (required for manual transmissions)	18

Table 5-14 Required Digital Inputs for Engine Brake Controls

The parameters listed in Table 5-15 can be set by order entry, VEPS, DDDL/DDR or DRS for the Cruise Control Engine Brake option.

Parameter	Description	Choice / Display
CRUISE CONTROL ENGINE BRAKE	Enables or disables the feature that allows the engine brake to be used while on cruise control if the vehicle exceeds the cruise set speed.	YES, NO
CRUISE ENGINE BRAKE ACTIVATION SPEED	Sets the delta speed that the engine brake should be applied to slow the vehicle while in cruise control.	1 to 10 MPH
ENGINE BRAKE INCREMENT	Sets the additional incremental speed that must be reached before the engine brake will activate the medium and/or high level of retardation.	1 to 5 MPH

Table 5-15 Cruise Control Engine Brake Parameters

The optional digital output listed in Table 5-16 can be configured by order entry, VEPS or DRS. It can be used to drive an Engine Brake Active Light.

Description	Type	Function Number
Engine Brake Active	Digital Output	16

Table 5-16 Optional Digital Output for Engine Brakes

The Engine Fan Braking option as shown in Table 5-17 can be configured at the time of engine order, VEPS, DDR, DDDL or DRS.

Parameter	Description	Choice/Display
DYNAMIC BRAKING	Provides additional engine braking by activating the DDEC controlled fan whenever the engine brakes are active in high. This function requires both DDEC engine brake controls and DDEC fan controls.	YES, NO

Table 5-17 Optional Fan Braking for Engine Brakes

The parameter listed in Table 5-18 can be set by order entry, VEPS, DDDL/DDR or DRS for the Service Brake Control of the Engine Brakes option.

Parameter	Description	Choice / Display
SERVICE BRAKE ENABLE	When this function is enabled, an input from the service brake is required in order to activate the engine brake.	YES, NO

Table 5-18 Service Brake Control of Engine Brakes Parameter

The parameter listed in Table 5-19 can be configured by order entry, VEPS, DDR, and DDDL for the Minimum Vehicle Speed for engine braking to occur.

Parameter	Description	Choice/Display
ENGINE BRAKE MIN MPH	The minimum vehicle speed required before engine braking will occur.	0-40 MPH

Table 5-19 Minimum MPH for Engine Brakes Option

5.6.4 INTERACTION WITH OTHER FEATURES

DDEC will respond to requests from other vehicle systems via SAE J1939 data link or SAE J1922 data link to disable the engine brakes.

5.7 ENGINE PROTECTION

The DDEC engine protection system monitors all engine sensors and electronic components, and recognizes system malfunctions. If a critical fault is detected, the Check Engine Light (CEL) and Stop Engine Light (SEL) illuminate. The malfunction codes are logged into the ECM's memory.

The standard parameters which are monitored for engine protection are:

- ☐ Low coolant level
- ☐ High coolant temperature
- ☐ Low oil pressure
- ☐ High oil temperature

5.7.1 OPERATION

Engine protection is a vital part of ECM programming and software. The ECM monitors coolant level, various pressures and temperatures, and compares these parameters against the allowable limits to determine when a critical fault is reached. The CEL is illuminated and a code logged if there is an electronic system fault. This indicates the problem should be diagnosed as soon as possible. The ECM illuminates the CEL and SEL and stores a malfunction code if a potentially engine damaging fault is detected. Once a critical fault is reached, the CEL and SEL are illuminated and a 30 second timer starts a countdown to the desired level of protection. Temperature and pressure limits are established in the engine's calibration and may differ slightly from one engine model to another.

Engine protection consists of different protection levels:

- ☐ Warning Only
- ☐ Rampdown
- ☐ Shutdown

Warning Only

The CEL and SEL will illuminate if a fault is detected. There is no power and/or speed reduction when "Warning Only" is selected. The resulting engine protection is at the discretion of the engine operator.

NOTE:

The operator has the responsibility to take action to avoid engine damage.

NOTE:

A diagnostic switch is not required but applications using one, must have a separate diagnostic switch for each ECM on the engine.

The Diagnostic Request switch is used to activate the CEL and SEL to flash codes.

Rampdown

The CEL and SEL will illuminate if a fault is detected. The ECM reduces torque and/or speed over a 30 second period after the SEL illuminates. The initial torque/speed, which is used for reduction, is the operating torque or speed prior to the SEL fault condition. See Figure 5-11.

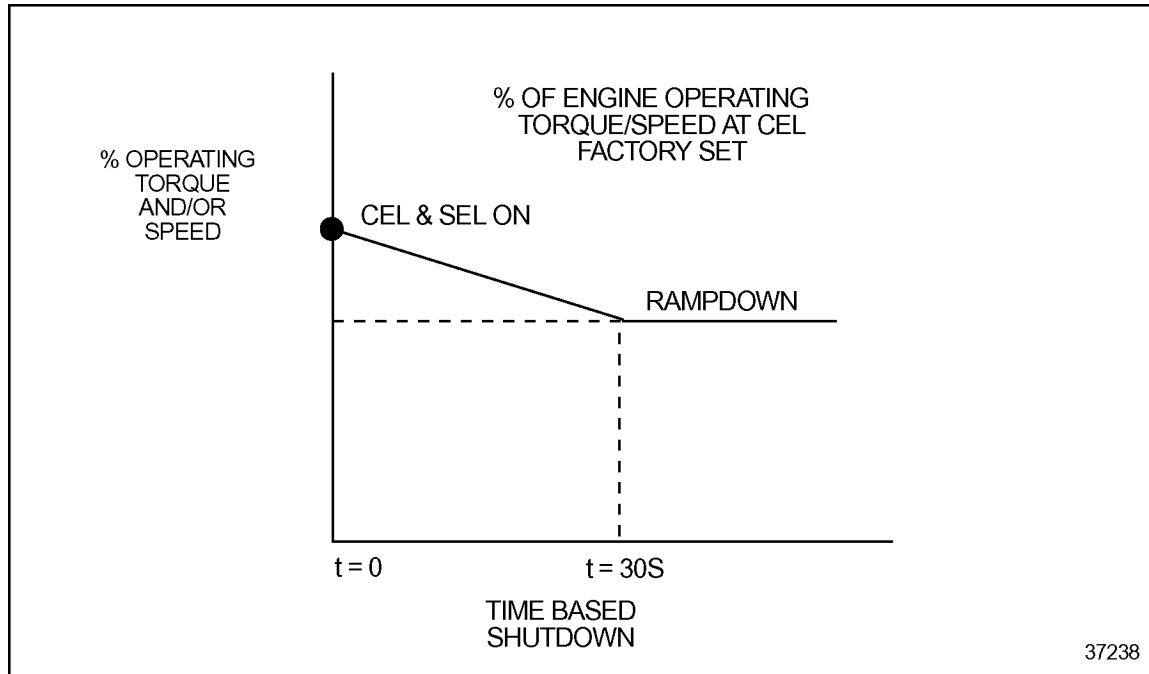


Figure 5-11 Rampdown

A Stop Engine Override (SEO)/Diagnostic Request switch is required when this engine protection option is selected. The SEO options are available to prevent engine shutdown at the operator's discretion.

Shutdown

This option operates in the same manner as rampdown, except the engine shuts down 30 seconds after the SEL is illuminated (see Figure 5-12). (The initial torque and/or speed which is used for reduction, is the torque and/or speed which occurred immediately prior to the fault condition.) The Stop Engine Override options are available to prevent engine shutdown at the operator's discretion.

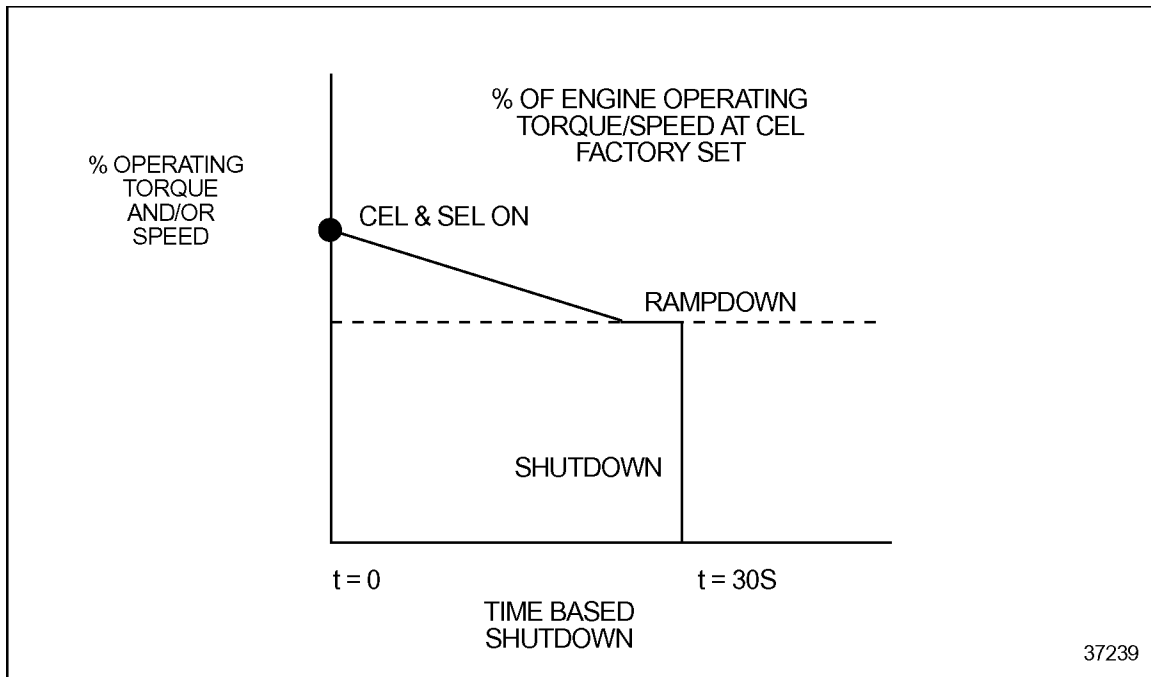


Figure 5-12 Engine Shutdown

A SEO/Diagnostic Request Switch is required when this engine protection option is selected. Refer to section 5.7.3. The SEO options are available to prevent engine shutdown at the operator's discretion.

5.7.2 ENGINE OVERTEMPERATURE PROTECTION

Engine Overtemperature Protection (EOP) is additional logic programmed into the ECM and used in conjunction with standard temperature protection. When EOP is part of the engine calibration, engine torque and/or speed is reduced as a function of temperature. The CEL illuminates and a fault code is logged when the EOP calibrated temperature is reached. If the temperature does not decrease as torque/speed is reduced, the SEL will illuminate when a still higher temperature is reached.

The subsequent action taken by the ECM depends on customer selection of one of the following:

- ☐ Warning only (see Figure 5-13)
- ☐ 30 second rampdown (see Figure 5-14)
- ☐ Shutdown (see Figure 5-15)

Torque reduction is based on the average torque/speed in use prior to the fault condition.

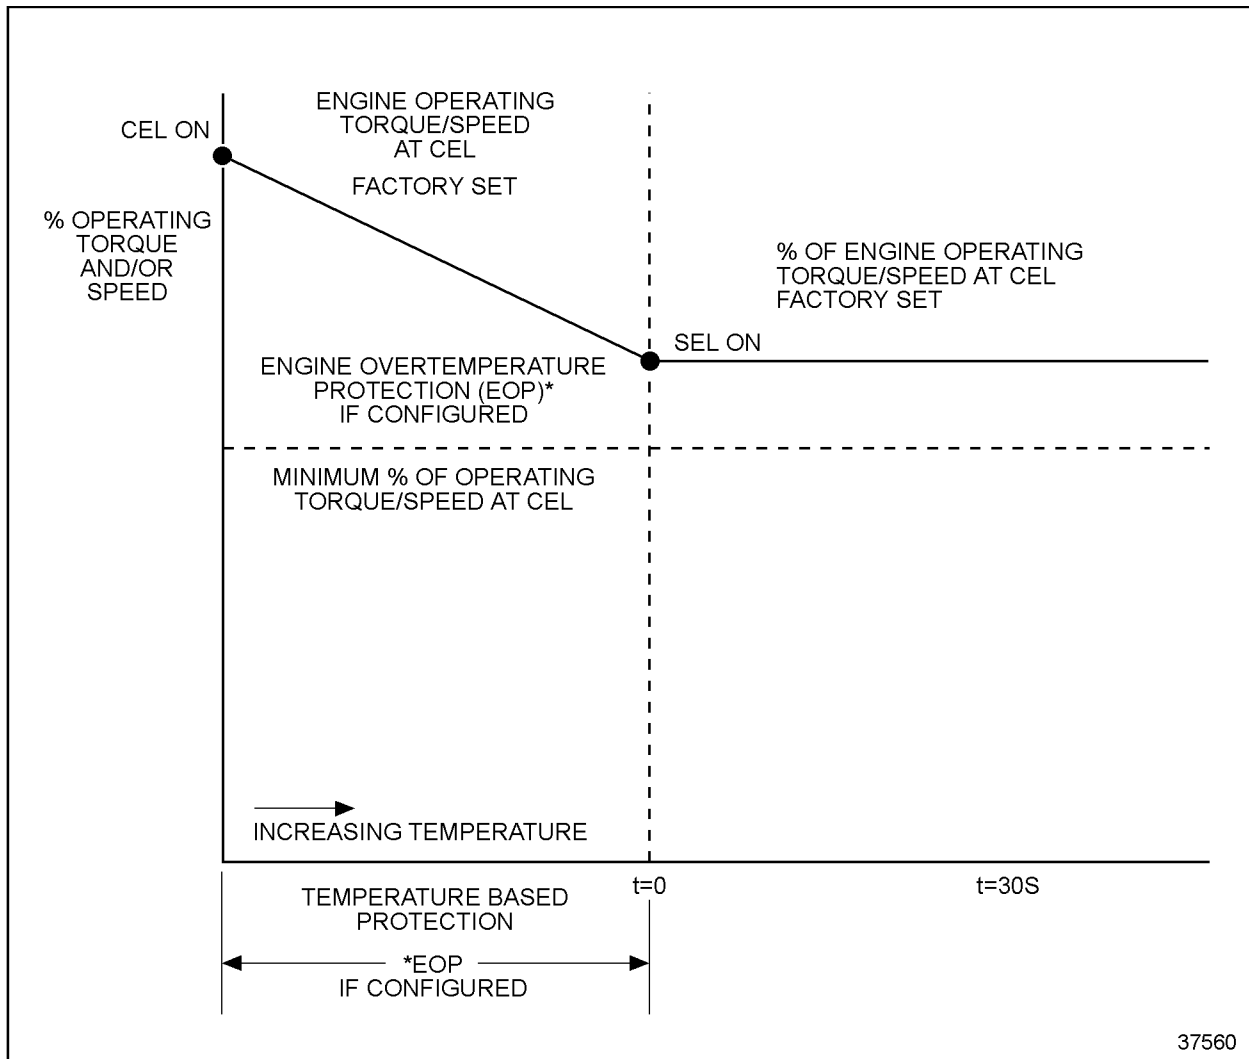


Figure 5-13 Engine Overtemperature Protection and Warning Only

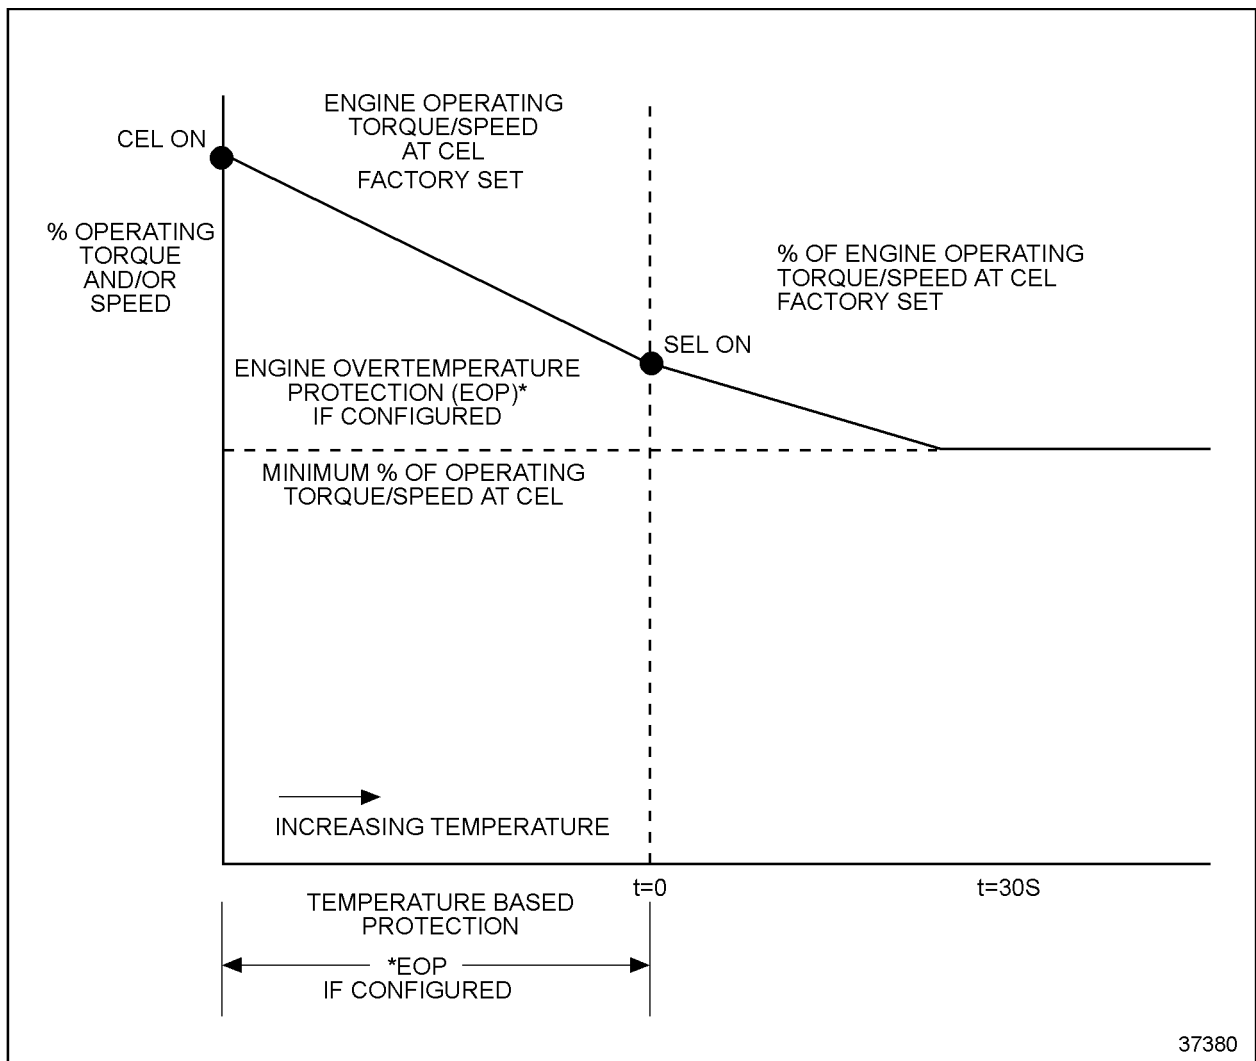


Figure 5-14 Engine Overtemperature Protection and Rampdown

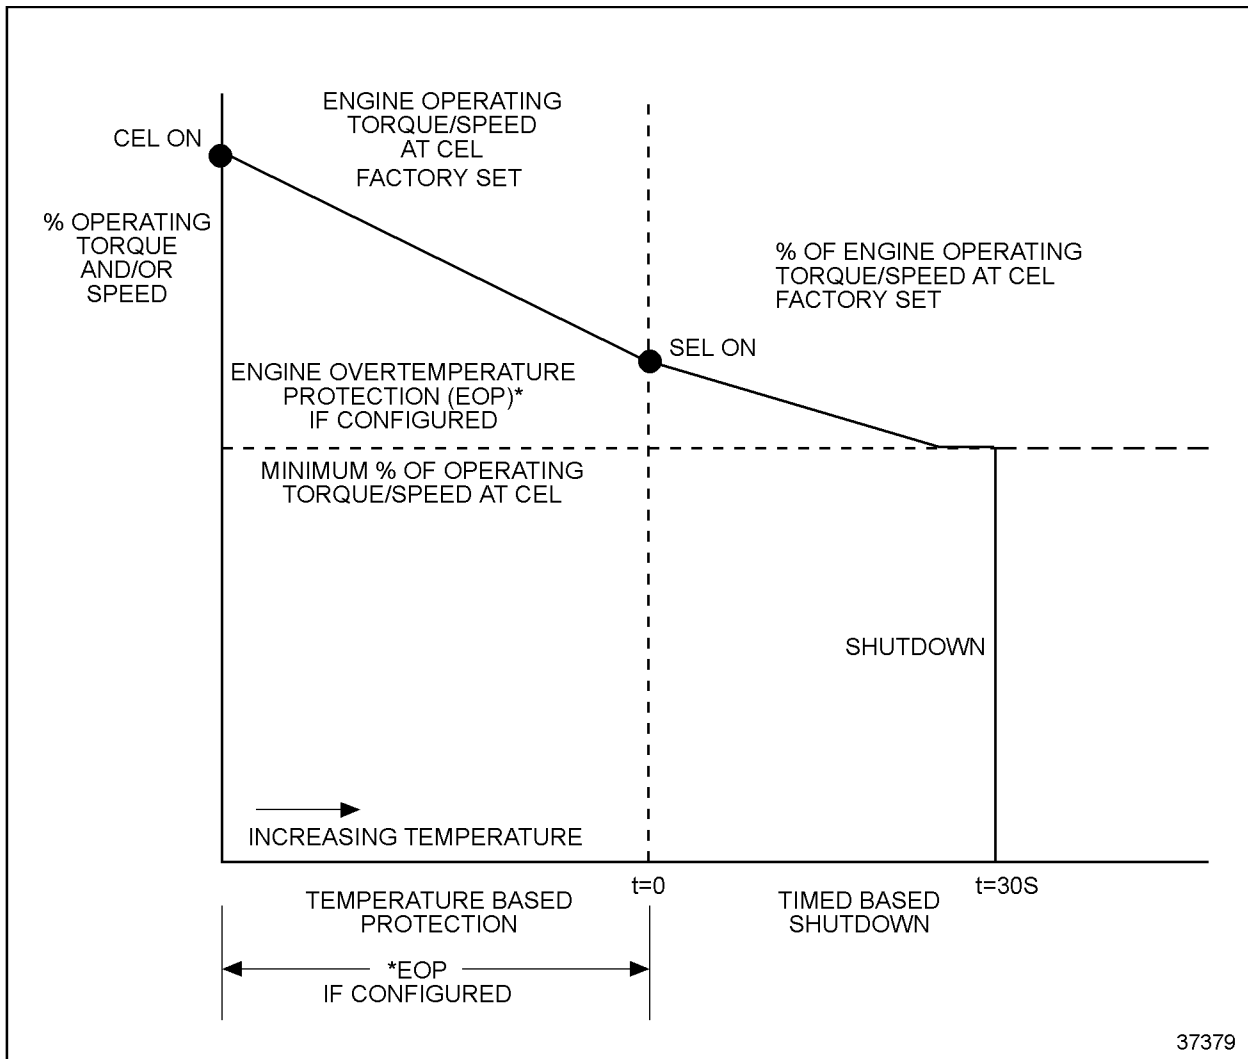


Figure 5-15 Engine Overtemperature Protection and Shutdown

Series 60 engines have additional logic to start the overtemperature torque reduction logic earlier without alerting the driver. Engine torque and/or speed is reduced as a function of temperature. A code will be logged and torque reduction will begin when the first EOP calibrated temperature is reached. The CEL will illuminate and a fault code is logged when the second higher temperature limit is reached. If the temperature does not reduce as torque/speed is reduced, the SEL will illuminate when a still higher temperature is reached.

The subsequent action taken by the ECM is the 30 second rampdown (see Figure 5-16) or shutdown (see Figure 5-17) depending on the customer selection. Torque reduction is based on the average torque/speed in use prior to the fault condition.

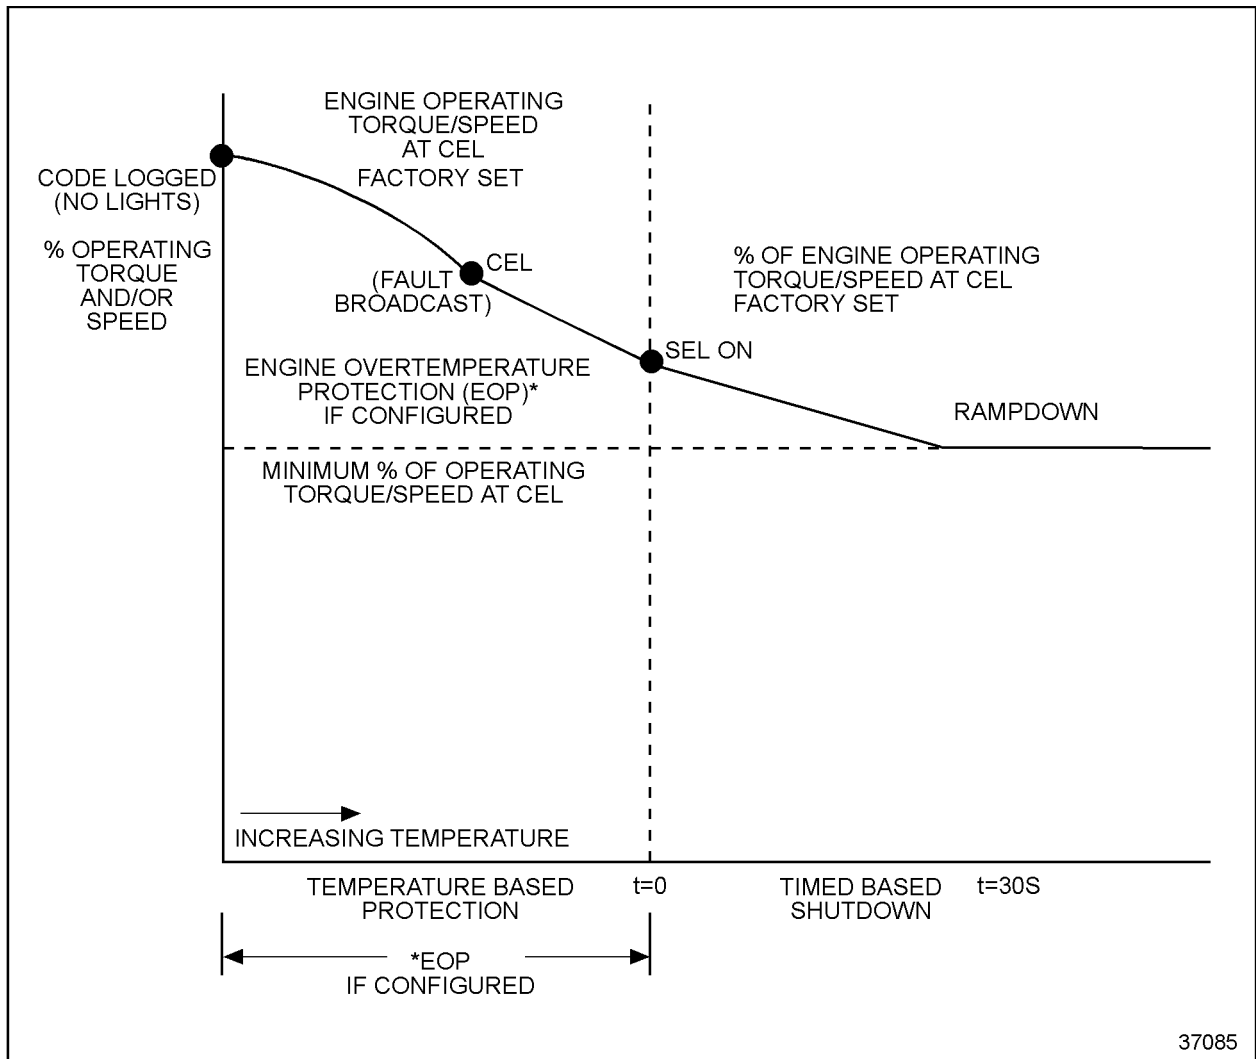


Figure 5-16 Series 60 Engine Overtemperature Protection and Rampdown

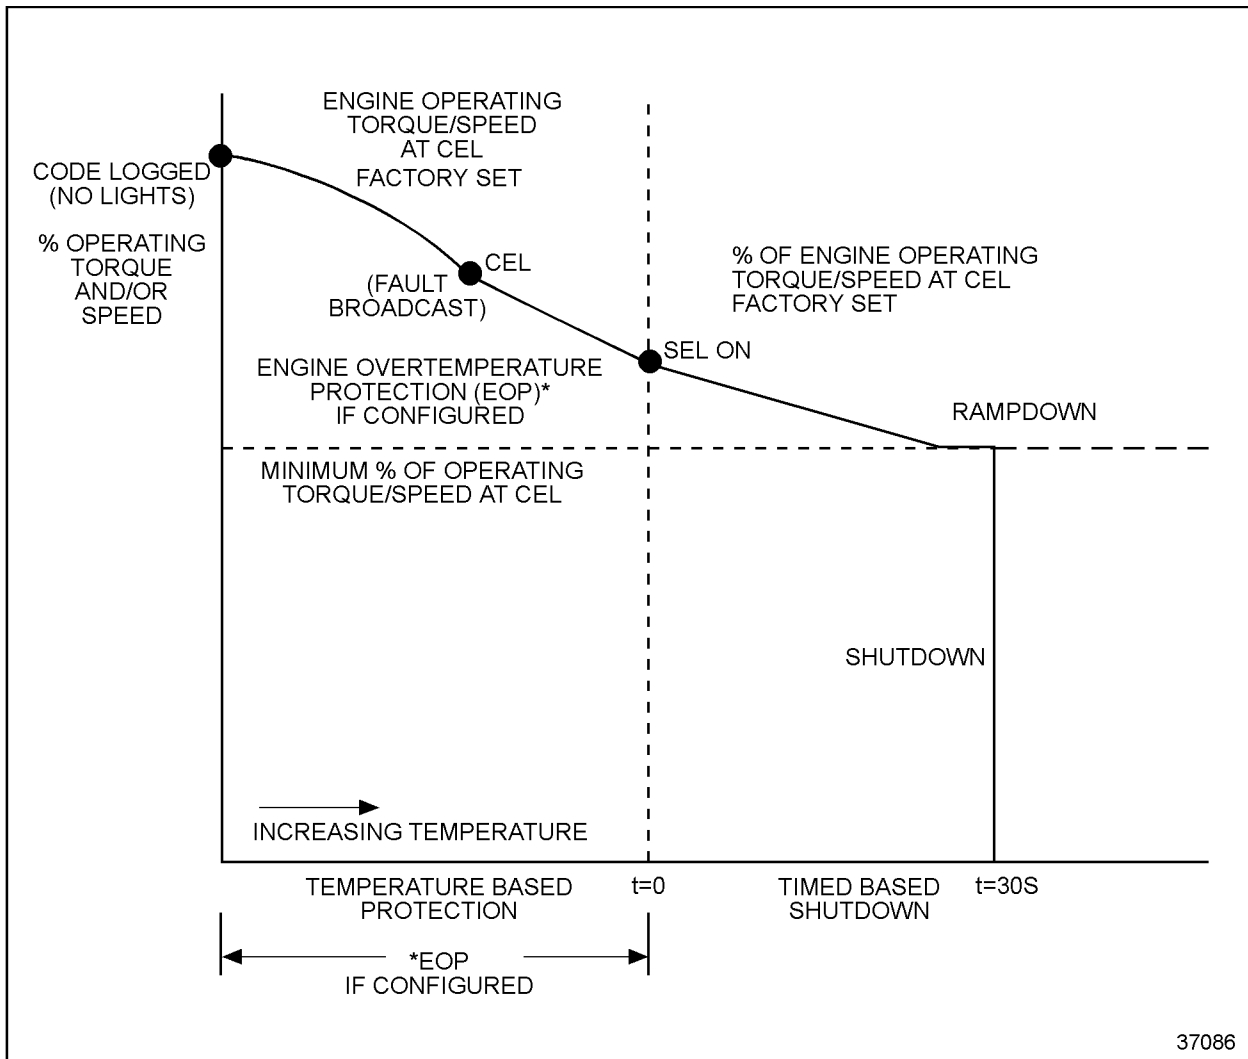


Figure 5-17 Series 60 Engine Overtemperature Protection and Shutdown

5.7.3 ENGINE PROTECTION SWITCHES

The SEO/Diagnostic Request switch can be combined. A separate Diagnostic Request switch is an option.

NOTE:

EOP is active even if engine protection is configured for Warning only for the Series 60 and Series 50, and engines.

Diagnostic Request Switch

The Diagnostic Request switch is used to activate the CEL and SEL to flash codes (see Figure 5-18). The SEL will flash the active codes and the CEL will flash the inactive codes. Refer to section 4.2.3.

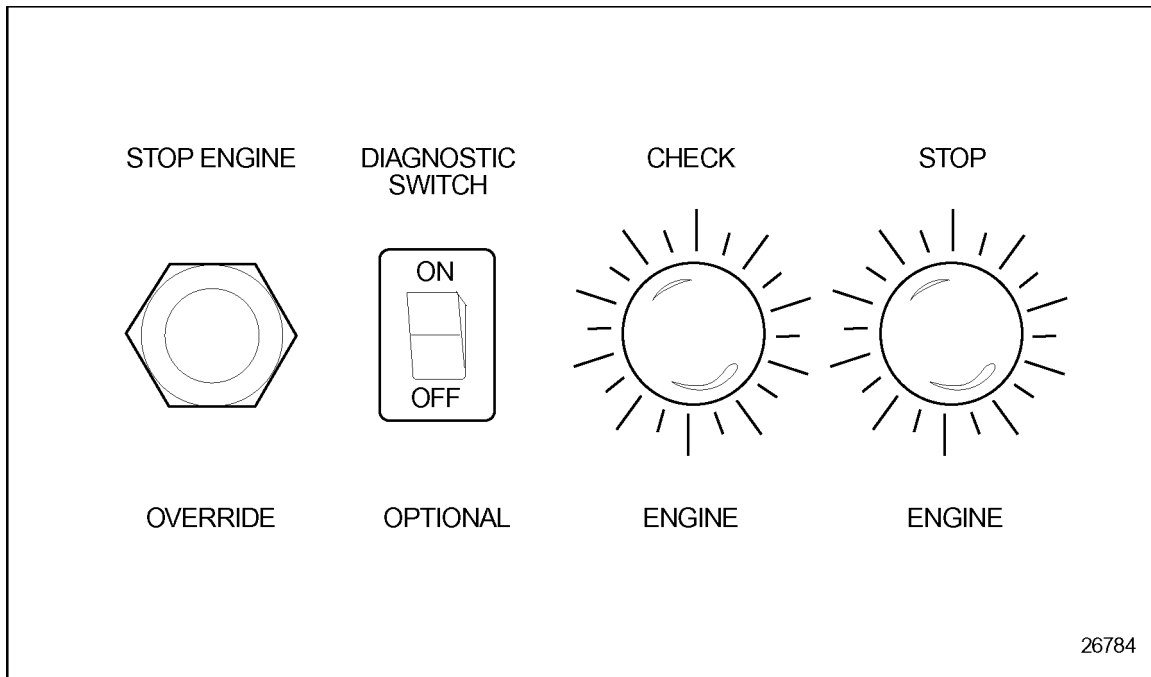


Figure 5-18 Typical SEO Switch, Diagnostic Request Switch and Warning Lights

The Diagnostic Request switch is used to flash codes when:

- ☐ The engine is not running and ignition is on
- ☐ The engine is idling and not in an "engine protection" condition

Activating and releasing the switch will flash out the diagnostic codes for either condition. Activating and releasing the switch a second time will stop the ECM from flashing the diagnostic codes. Codes will also cease flashing if the engine is no longer at idle.

The codes are flashed out of the ECM connected to the switch. For multi-ECM installations, the Diagnostic Request Switch and SEO switch are combined on the master ECM. All receiver ECMs use a separate Diagnostic Request Switch.

5.7.4 STOP ENGINE OVERRIDE OPTIONS

Two types of stop engine overrides are available, Momentary Override and Continuous Override. Continuous Override has two options. These types are dependent upon specific engine applications. The ECM will record the number of times the override is activated after a fault occurs.

Momentary Override - An SEO switch is used to override the shutdown sequence. This override resets the 30 second shutdown timer, restoring power to the level when the SEL was illuminated. The switch must be recycled after five seconds to obtain a subsequent override. See Figure 5-19.

NOTE:

The operator has the responsibility to take action to avoid engine damage.

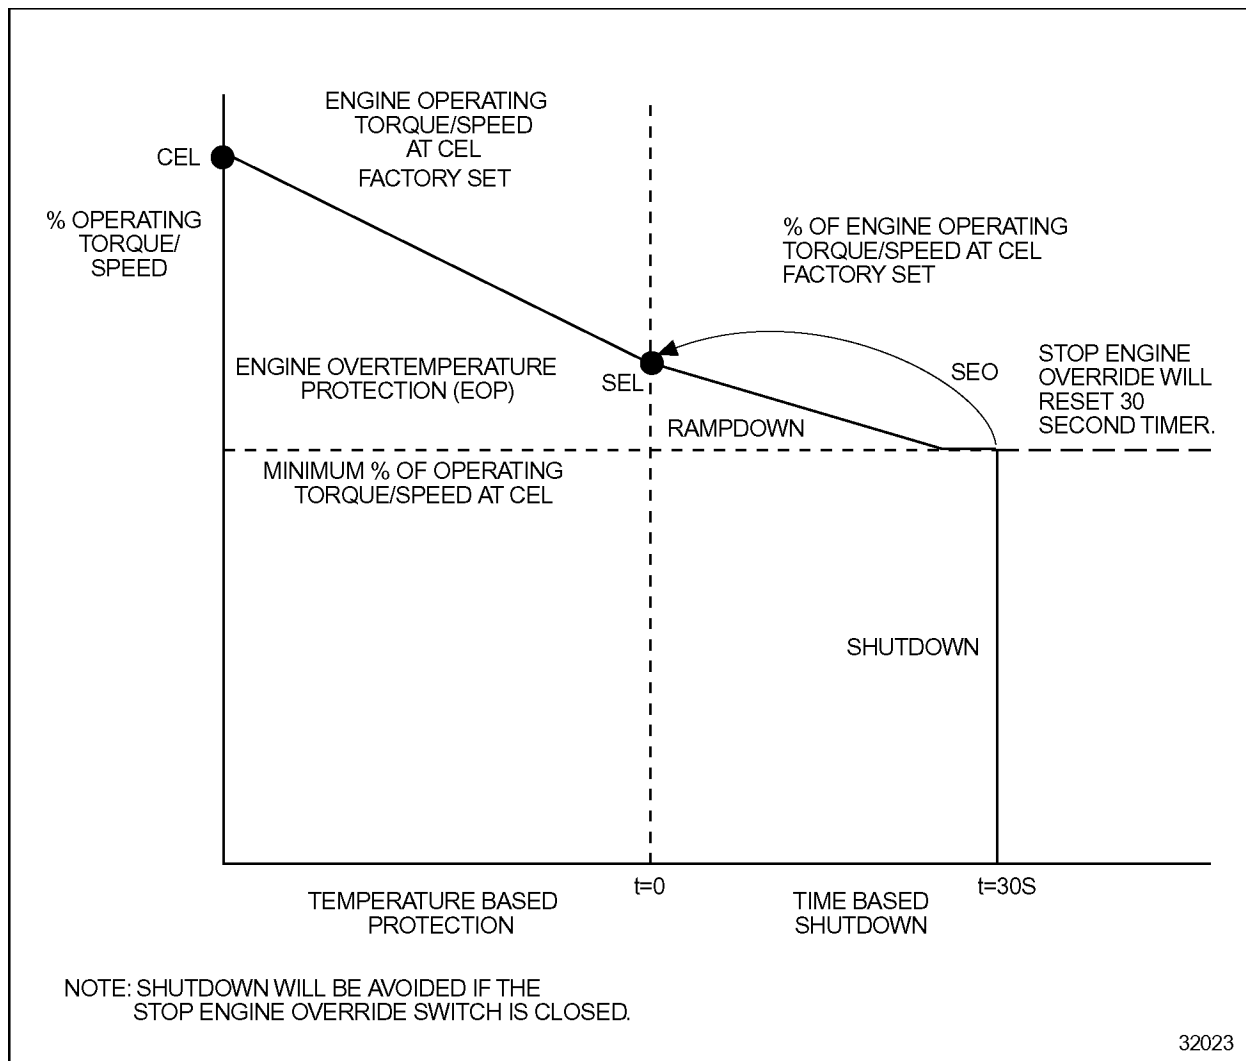


Figure 5-19 Engine Overtemperature Protection and Shutdown Protection with Stop Engine Override

Continuous Override, Option 1 - This option is used when the vehicle needs full power during a shutdown sequence. Full torque capability is maintained as long as the override switch is pressed. This is intended for Coach applications only.

Continuous Override, Option 2 - This option is used for a one time continuous override of the shutdown sequence. This is primarily used in construction and industrial applications. Further engine protection is disabled until the ignition key is cycled. See Figure 5-20.

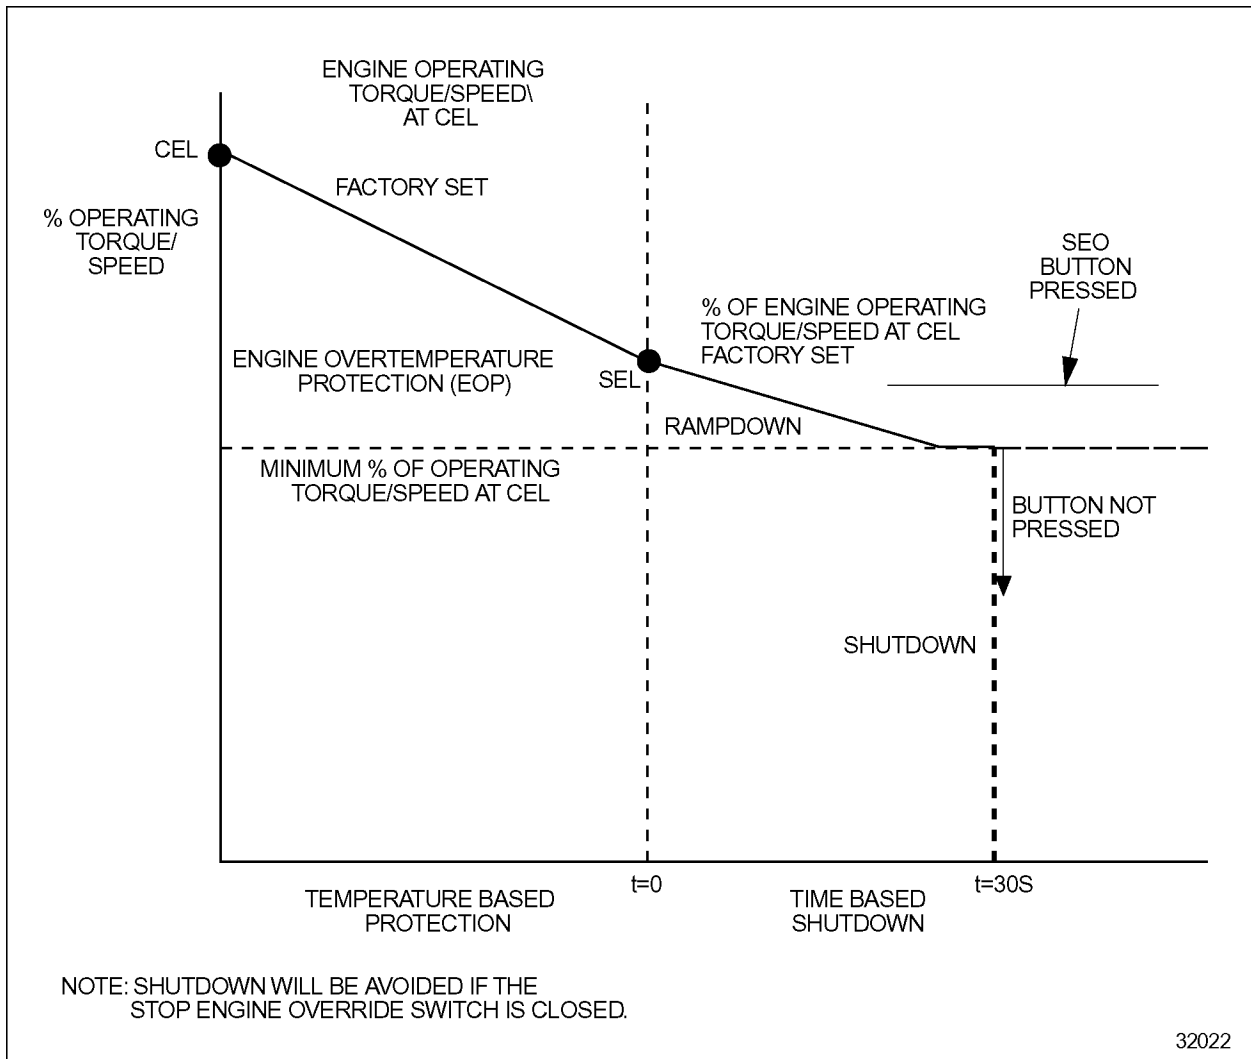


Figure 5-20 Engine Overtemperature Protection and Shutdown Protection with Continuous Override, Option 2

5.7.5 INSTALLATION

Some application require two sets of warning lights (CEL and SEL) at different control stations.

5.7.6 PROGRAMMING FLEXIBILITY

All ECMs are programmed with pressure, temperature, and level protection limits. The level of protection can be any of the three engine protection features (Warning, Rampdown, or Shutdown) for each parameter monitored by the ECM. These can be set at time of order entry or with any of the available service tools, VEPS, DRS, DDR, or DDDL.

The DDEC engine protection system monitors all engine sensors and electronic components, and recognizes system malfunctions. The choices listed in Table 5-20 are available for reprogramming Engine Protection.

Parameter	Definition	Range
OIL PRESSURE	Determines the type of engine protection with low oil pressure. N/A will be displayed if the sensor is not present.	N/A; WARN, RAMP,SHTDWN
OIL LEVEL	Determines the type of engine protection with low oil level. N/A will be displayed if the sensor is not present.	N/A; WARN, RAMP,SHTDWN
COOLANT LEVEL	Determines the type of engine protection with low coolant level. N/A will be displayed if the sensor is not present.	N/A; WARN, RAMP,SHTDWN
OIL TEMP	Determines the type of engine protection with high oil temperature. N/A will be displayed if the sensor is not present.	N/A; WARN, RAMP,SHTDWN
COOLANT TEMP	Determines the type of engine protection with high coolant temperature. N/A will be displayed if the sensor is not present.	N/A; WARN, RAMP,SHTDWN
AUXILIARY SHUTDOWN #1	Determines the type of engine protection with an active auxiliary switch #1 input. N/A will be displayed if auxiliary switch #1 has not been configured as a switch input.	N/A; WARN, RAMP,SHTDWN
AUXILIARY SHUTDOWN #2	Determines the type of engine protection with an active auxiliary switch #2 input. N/A will be displayed if auxiliary switch #2 has not been configured as a switch input.	N/A; WARN, RAMP,SHTDWN

Table 5-20 Engine Protection

5.7.7 INTERACTION WITH OTHER FEATURES

Cruise Control operation, Optimized Idle, and PSG are disabled when the SEL is illuminated. For Applications with LSG and VSG, the governor will revert to the primary governor when Engine Protection is enabled.

5.8 ENGINE RATINGS

Engine ratings are designated by horsepower rating and engine speed. For on-highway applications, three independent engine ratings and an additional dependent rating (cruise power) are provided. For construction and industrial applications, up to three independent ratings are provided. Although multiple ratings are stored in the ECM, only one rating is in operation at any time.

5.8.1 OPERATION

The engine rating may be selected with the DDR, DDDL or OEM supplied rating switches. Detroit Diesel's method of designating engine ratings is listed in Table 5-21.

Example #1		Example #2	
430 bhp @ 2100 RPM	Rating #0	470 bhp @ 2100 RPM	Rating #0
400 bhp @ 2100 RPM	Rating #1	470 bhp @ 1800 RPM	Rating #1
370 bhp @ 2100 RPM	Rating #2	430 bhp @ 1800 RPM	Rating #2
370/430 bhp @ 2100 RPM	Rating #3	430/370 bhp @ 1800 RPM	Rating #3

Table 5-21 Examples of Engine Ratings

Detroit Diesel can provide additional security to prevent the ECM rating selection from being modified with the DDR or DDDL. The additional security is not available with the use of rating switches. The Maximum Rating Security or the Rating Password (if configured) will protect DDEC IV engine ratings.

Engine Rating Switches

Engine rating switches may be used to select any of the individual ratings (maximum of three) and the dependent rating. Engine rating switches are only offered on select horsepower group ratings. The rating switches must be used in conjunction with up to two digital inputs, Rating Switch #1 and Rating Switch #2.

Rating Switch #1 selects between Engine Rating #0 and Engine Rating #1 when used without Rating Switch #2 as listed in Table 5-22.

Rating	Switch #1 Position
Engine Rating #0	OFF
Engine Rating #1	ON

Table 5-22 Rating Selections with One Rating Switch

Rating Switch #2, in conjunction with Rating Switch #1, is used to select any of the four engine ratings (three independent and one dependent) as listed in Table 5-23.

Rating	Switch #1	Switch #2
Engine Rating #0	OFF	OFF
Engine Rating #1	ON	OFF
Engine Rating #2	OFF	ON
Engine Rating #3	ON	ON

Table 5-23 Rating Selections with Two Rating Switches

Cruise Power

Cruise Power is an optional engine rating which operates on a higher horsepower curve during Cruise Control operation. The ECM provides the higher horsepower when Cruise Control is ON and not being overridden with the foot pedal. The additional power provides an incentive for the driver to operate in Cruise Control.

Limiting Torque Curve Option (Digital Torque Limiting)

The Limiting Torque Curve option provides the ability to operate the engine on a reduced torque curve when the appropriate digital input is enabled. Limiting torque curve tables are generated by Applications Engineering and can either be selected at the time of engine order or selected after engine order by DDC Technical Service.

The Limiting Torque Curve option use is shown in the following examples:

- ☐ Articulated Coach - The Limiting Torque Curve option is used to limit torque in an extreme articulated condition, which could occur during reverse operation.
- ☐ Transmission - The Limiting Torque Curve option provides a customized reduced torque curve during conditions which would otherwise exceed the maximum allowable torque limit set by the transmission manufacturer.
- ☐ Locomotive - The Limiting Torque Curve option provides a reduced torque to reduce wheel slip at low vehicle speed.

The following must be considered when using the Limiting Torque Curve option:

- ☐ The DDEC system cannot detect or display a malfunction of the digital input wiring.
- ☐ Limiting vehicle speed is best accomplished by utilizing DDEC's Vehicle Speed Limiting feature. Refer to section 5.27.
- ☐ The % Load display on the DDR / DDDL is a function of the main rating torque curve.
- ☐ LSG Droop is added to the speed limit.

5.8.2 INSTALLATION

The rating switches must be used in conjunction with up to two digital inputs, Rating Switch #1 and Rating Switch #2. Refer to section 4.2, "Digital Inputs," for additional information. See Figure 5-21 for an installation using one rating switch.

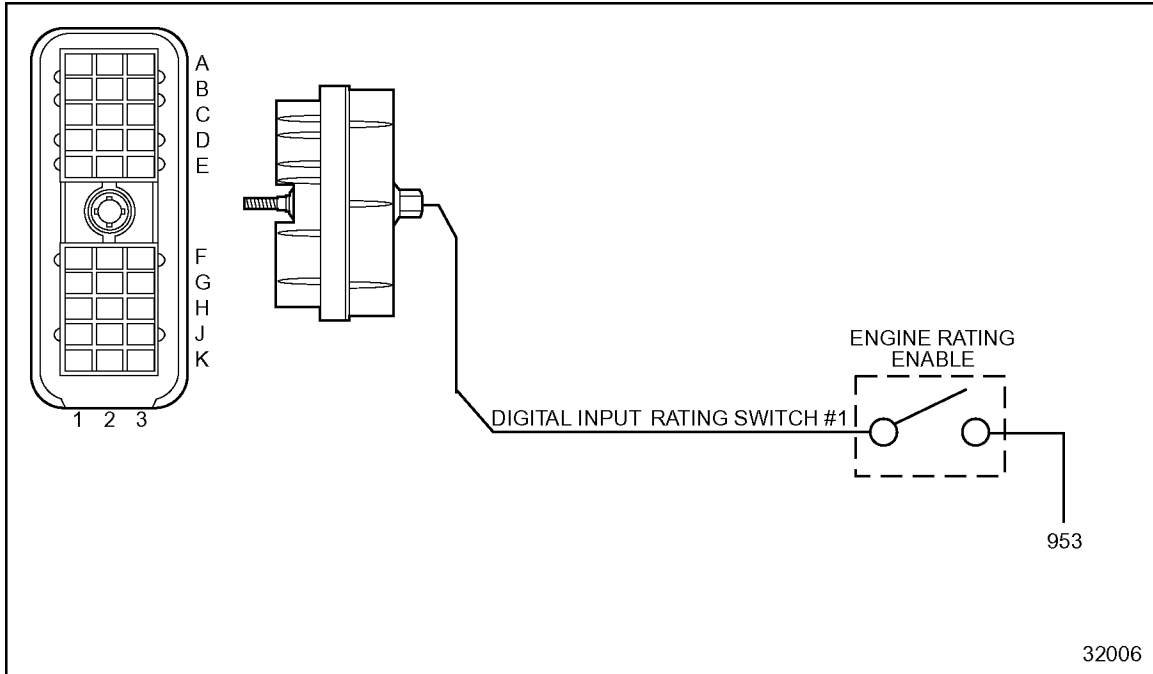


Figure 5-21 Simple Engine Rating Switch

See Figure 5-22 for an installation using two rating switches.

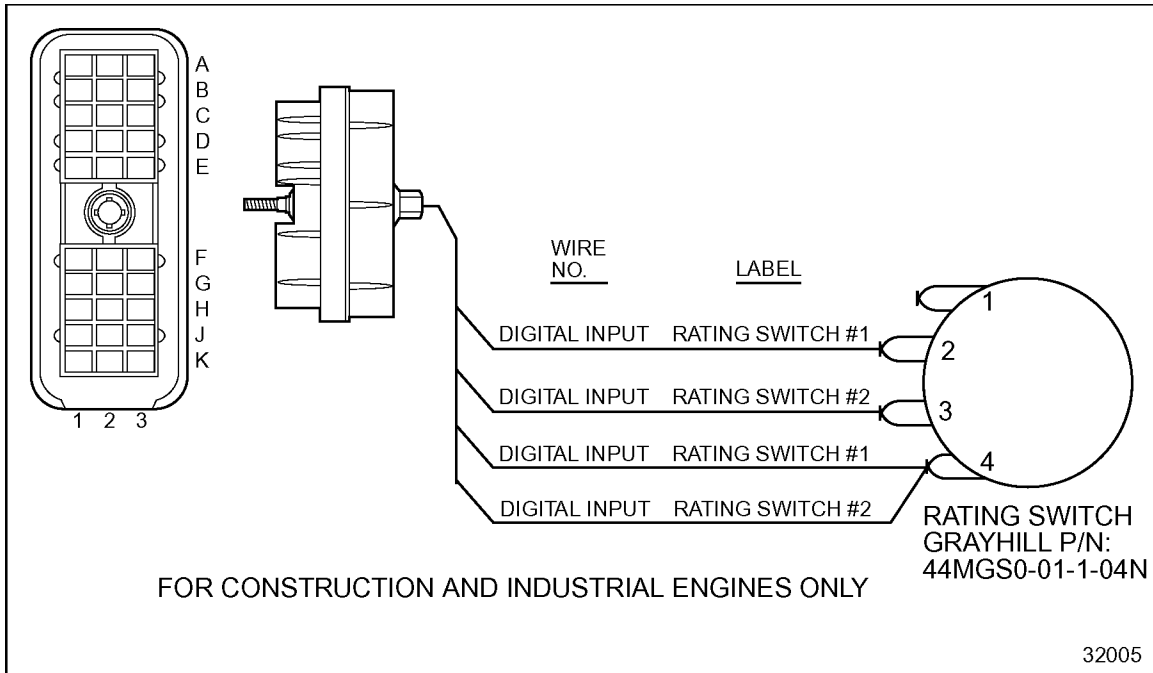


Figure 5-22 Rotary Switch for Multiple Engine Ratings

5.8.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The Maximum Rating Security to protect DDEC IV engine rating must be enabled at the time of engine order. Maximum Rating Security locks out all other ratings and will only operate on the rating selected at order entry. The DDR or DDDL cannot change a rating selection if the rating is maximum security protected.

The Rating Password is a four digit alphanumeric password that may be set at the time of engine order, by the DDR, DDDL, or VEPS. This offers additional protection above and beyond the standard DDR, DDDL password protection.

Rating Switches

The Rating Switches option and the digital inputs listed in Table 5-24 must be configured by order entry, VEPS, or DRS.

Description	Type	Function #
Rating Switch #1	Digital Input	12
Rating Switch #2	Digital Input	13

Table 5-24 Rating Switches Digital Input Requirements

Cruise Power

Cruise Power may be selected at the time of engine order, by VEPS, DDR, DDDL or using the engine rating switches.

Limiting Torque Option

Limiting Torque Curves must be selected at the time of engine order or selected after engine order by Technical Service.

The digital input listed in Table 5-25 must be configured by order entry, VEPS, or DRS.

Description	Type	Function Number
Limiting Torque Curve	Digital Input	14

Table 5-25 Limiting Torque Curve Option Digital Input Requirements

5.9 ETHER START

The DDEC Ether Start® System is a fully-automatic engine starting fluid system used to assist a Series 50 or Series 60 diesel engine in cold starting conditions. The amount of ether is properly controlled to optimize the starting process and prevent engine damage. DDEC will control ether injection using standard sensors to control the ether injection hardware.

5.9.1 OPERATION

Ether Start will occur in two modes, preload (before cranking) and block load (during and after cranking). The mode and duration of injection is determined by DDEC based on engine speed and coolant, air and oil temperatures. Since excessive preloading could be harmful to engine components, DDEC will not allow multiple preloads. The engine speed must exceed 1500 RPM to reset the preload.

The system is composed of the DDEC ECM, Ether Injection Relay Module, ether canister, Dieselmatic valve, injection nozzle, metering orifice, nylon tubing, harness and miscellaneous hardware (see Figure 5-23).

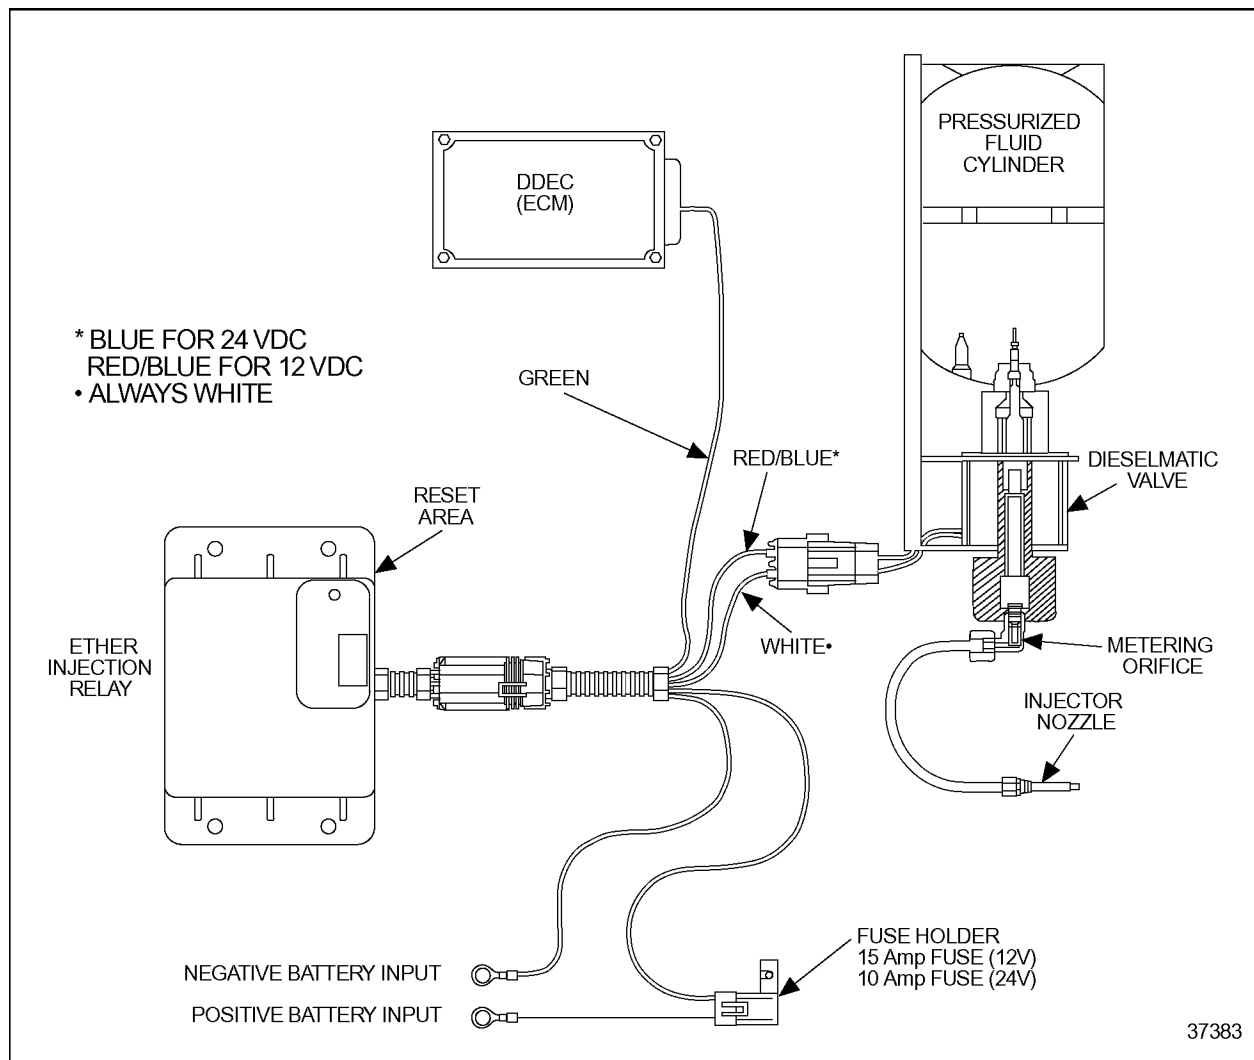


Figure 5-23 DDEC Ether Start System

It will be necessary to configure a DDEC digital output to control the relay module. Battery power and ground must also be supplied to the module.

 CAUTION:
To avoid injury from flames, explosion, and toxicants when using ether, the following precautions must be taken:
☐ Do not smoke when servicing ether system.
☐ Work in well-ventilated area.
☐ Do not work near open flames, pilot flames (gas or oil heaters), or sparks.
☐ Do not weld or carry an open flame near the ether system if you smell ether or otherwise suspect a leak.
☐ Always wear goggles when testing.
☐ If fluid enters the eyes or if fumes irritate the eyes, wash eyes with large quantities of clean water for 15 minutes. A physician, preferably an eye specialist, should be contacted.
☐ Contents of cylinder are under pressure. Store cylinders in a cool dry area. Do not incinerate, puncture or attempt to remove cores from cylinders.

The relay module performs a number of important functions. The module will not allow ether injection unless it receives a signal from DDEC, it will prevent ether injection in the event of a faulty signal, and it will illuminate a light on the module when the ether canister is 90% consumed.

If the digital output remains grounded for longer than a factory set time, the relay module will cause an inline fuse to blow to prevent excessive ether from being injected into the cylinders. If the output is shorted to ground, a code will be logged by DDEC and the CEL will be illuminated. The system does not operate without the fuse in place. The cause of the digital output short must be fixed before replacing the fuse.

5.9.2 INSTALLATION

The injector nozzle is installed in the intake manifold (see Figure 5-24).

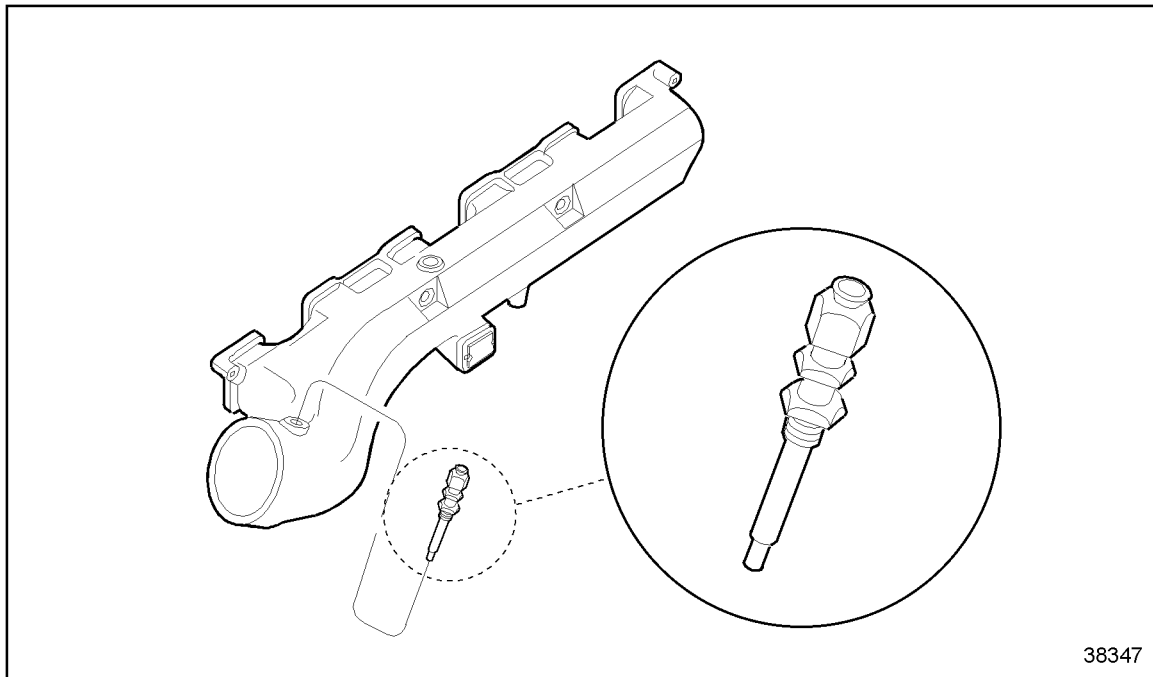


Figure 5-24 Series 60 Intake Manifold - Injector Nozzle Location

A red dot indicates the direction of spray, which should be pointed against the airflow. The cylinder assembly should be mounted vertically in an accessible location away from extreme heat such as the exhaust system and protected from road dirt, ice and snow. If protected, it can be mounted in the engine compartment on the firewall, frame or any other convenient location. The Ether Injection Relay (EIR) should be located near the valve and cylinder assembly.

The DDEC Ether Start system requires a harness (see Figure 5-25) to supply battery power, receive a signal from DDEC and control the ether injection valve. A fuse is required on the battery input (15 amp for 12 V systems, 10 amps for 24 V systems). Circuit breakers cannot be used.

For complete information on installing Ether Start and other details of the Ether Start system, refer to the *DDEC Ether Start Installation Manual* (7SA0727).

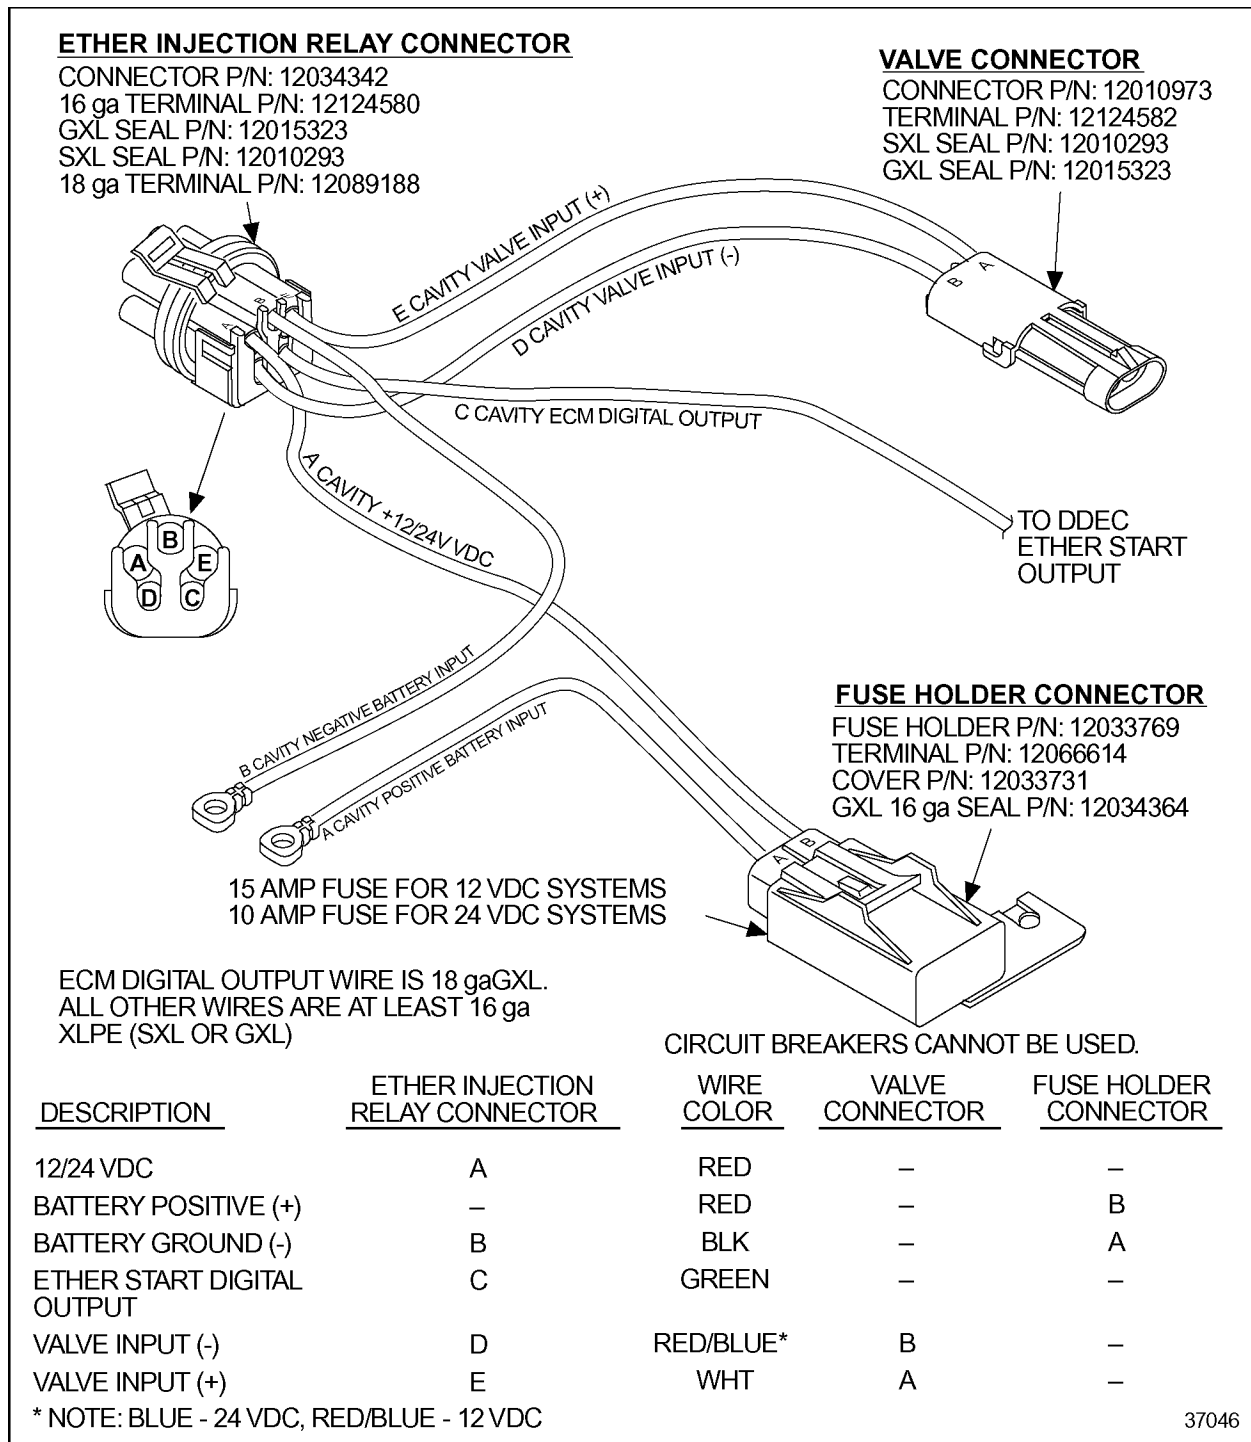


Figure 5-25 DDC Ether Start Harness

Programming Requirements and Flexibility

To configure an engine for Ether Injection, digital output function # 24 must be selected with VEPS, DRS, or on order entry. This feature does not have any reprogrammable parameters.

5.10 FAN CONTROL

The purpose of the Fan Control feature is to electronically control engine cooling fan activation and to provide a load for vehicle retardation, when required. DDEC Fan Controls are designed to optimally control the engine cooling fan(s) based on engine cooling requirements. Fan Controls are designed to use other system inputs such as A/C pressure switches, transmission retarder status, and operator requested fan operation. Transmission Retarder Status may be received via the Transmission Retarder Digital Input or on demand by a data link.

NOTE:

Fan Controls are required for some on-highway truck and on-highway bus applications.

5.10.1 OPERATION

The DDEC IV ECM continuously monitors and compares the coolant, oil, and air temperature, engine torque, engine operation mode, and various optional inputs to calibrated levels stored within the ECM. These limits are factory configured based on application.

When these temperature levels exceed the preset fan ON temperature value, the ECM will enable the fan control digital output(s) that activate the fan. The fan will remain on, cooling the engine with the increased air flow until the temperature levels reach the preset fan OFF temperature. At this point, the ECM will switch fan control to battery ground, which will deactivate the fan, effectively maintaining the coolant temperature between the two preset levels.

DDEC IV provides fan control for four different fan configurations:

- ☐ Single fan (refer to section 5.10.3, page 5-58)
- ☐ Dual fans (refer to section 5.10.4, page 5-63)
- ☐ Two-speed fan (refer to section 5.10.5, page 5-65)
- ☐ Variable speed single fan (PWM) (refer to section 5.10.6, page 5-69)

In accordance with the proposed Truck Maintenance Council (TMC) Standard, the minimum fan-on time for on-highway applications is 30 seconds.

5.10.2 INSTALLATION

This section provides a schematic of the specific connection from the ECM to the fan. See Figure 5-26 and Figure 5-27 for the input and outputs used for fan control.

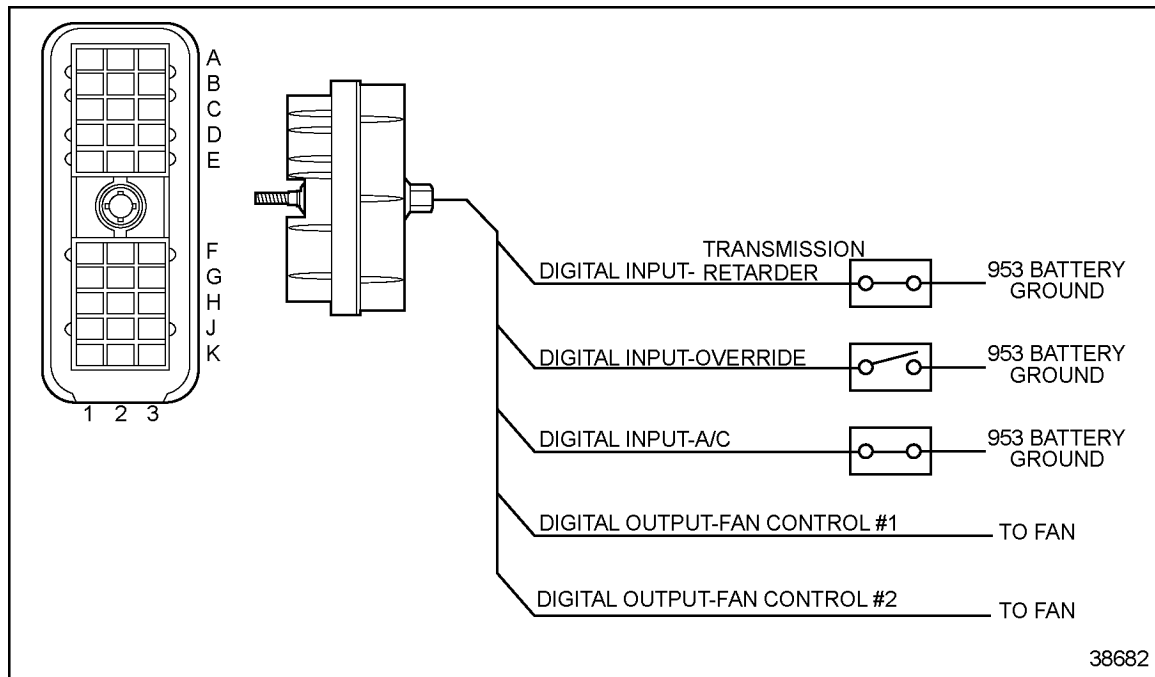


Figure 5-26 Fan Control Inputs with Two Digital Outputs

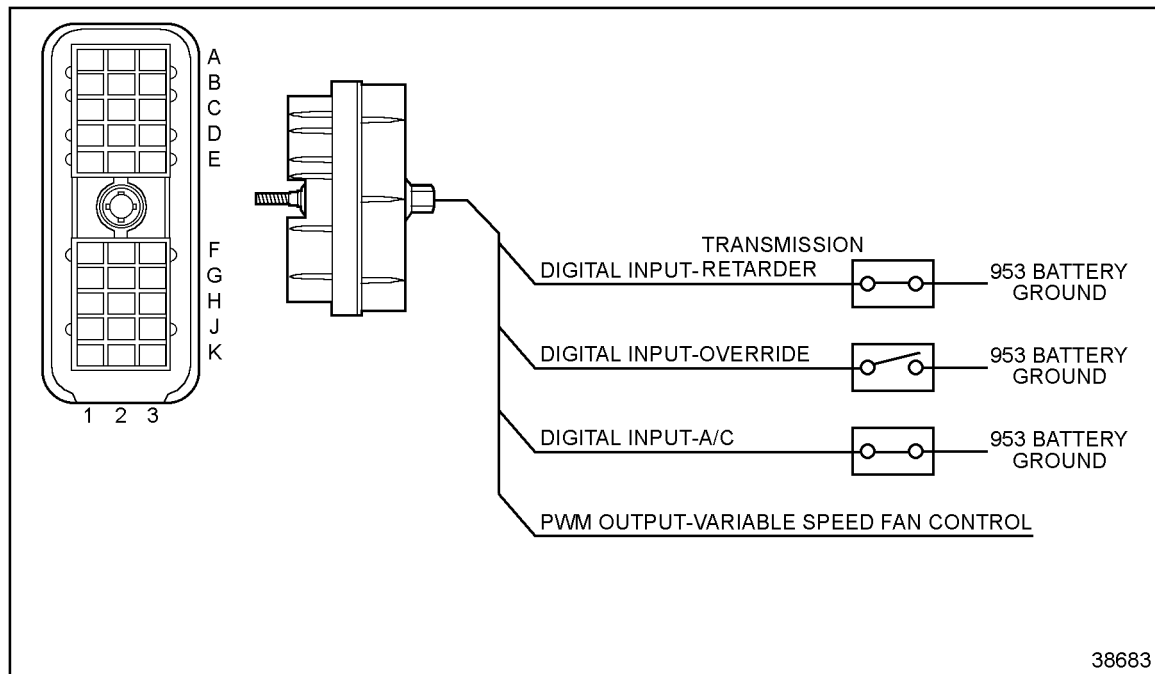


Figure 5-27 Fan Control Inputs with PWM Output for Variable Speed Fan Control

Compatible fans may be obtained from several vendors.

5.10.3 SINGLE FAN

The single-fan control uses one digital output to drive a single-speed fan. The digital output is called Fan Control #1. Fan Control #1 is deactivated to turn the fan OFF. The fan remains ON for 30 seconds when turned ON. The fan output will not be enabled until five seconds after the engine has started.

NOTE:

Digital output circuits are designed to sink no more than 1.5 A (DC) current.

Fan Control #1 is enabled (opened) when at least one of the following conditions occur:

- ☐ Oil or coolant temperature above DDC factory set levels
- ☐ Air temperature and engine torque above DDC factory set levels
- ☐ Air conditioner is active (OEM supplied A/C switch is opened), the fan remains ON for three minutes (the default) after the switch is grounded if vehicle speed is less than 20 MPH
- ☐ Oil, coolant, or air temperature sensor fails
- ☐ Fan engine brake enabled and engine brake is active at high level for a minimum of five seconds and air temperature is above factory set levels
- ☐ Transmission retarder is active and coolant temperature above DDC factory set level
- ☐ Fan Control Override Switch is enabled
- ☐ Pressure Sensor Governor is active

NOTE:

If either the A/C or transmission retarder inactive digital input is configured, the input must be grounded to prevent continuous fan operation.

The digital inputs and outputs for a single fan are listed in Table 5-26.

Fan State	Fan Control Output 1	A/C Input	Override Input	Jake Brake Status	Primary Control
On	Open	Grounded	Open	Not in High Mode	Engine Temperature Sensors
Off	Grounded	Grounded	Open	Not in High Mode	Engine Temperature Sensors
On	Open	Open	Don't Care	Not in High Mode	OEM A/C Switch
On	Open	Don't Care	Grounded	Not in High Mode	OEM Override Switch
On	Open	Don't Care	Don't Care	High Mode	Jake Brake in High Mode and Air Temperature Above Limit
On	Open	Don't Care	Don't Care	Not in High Mode	Transmission Retarder Active and Coolant Temperature Above Limit

Table 5-26 Single Fan Digital Inputs and Outputs

Installation

See Figure 5-28 for the specific connection from the ECM to the fan.

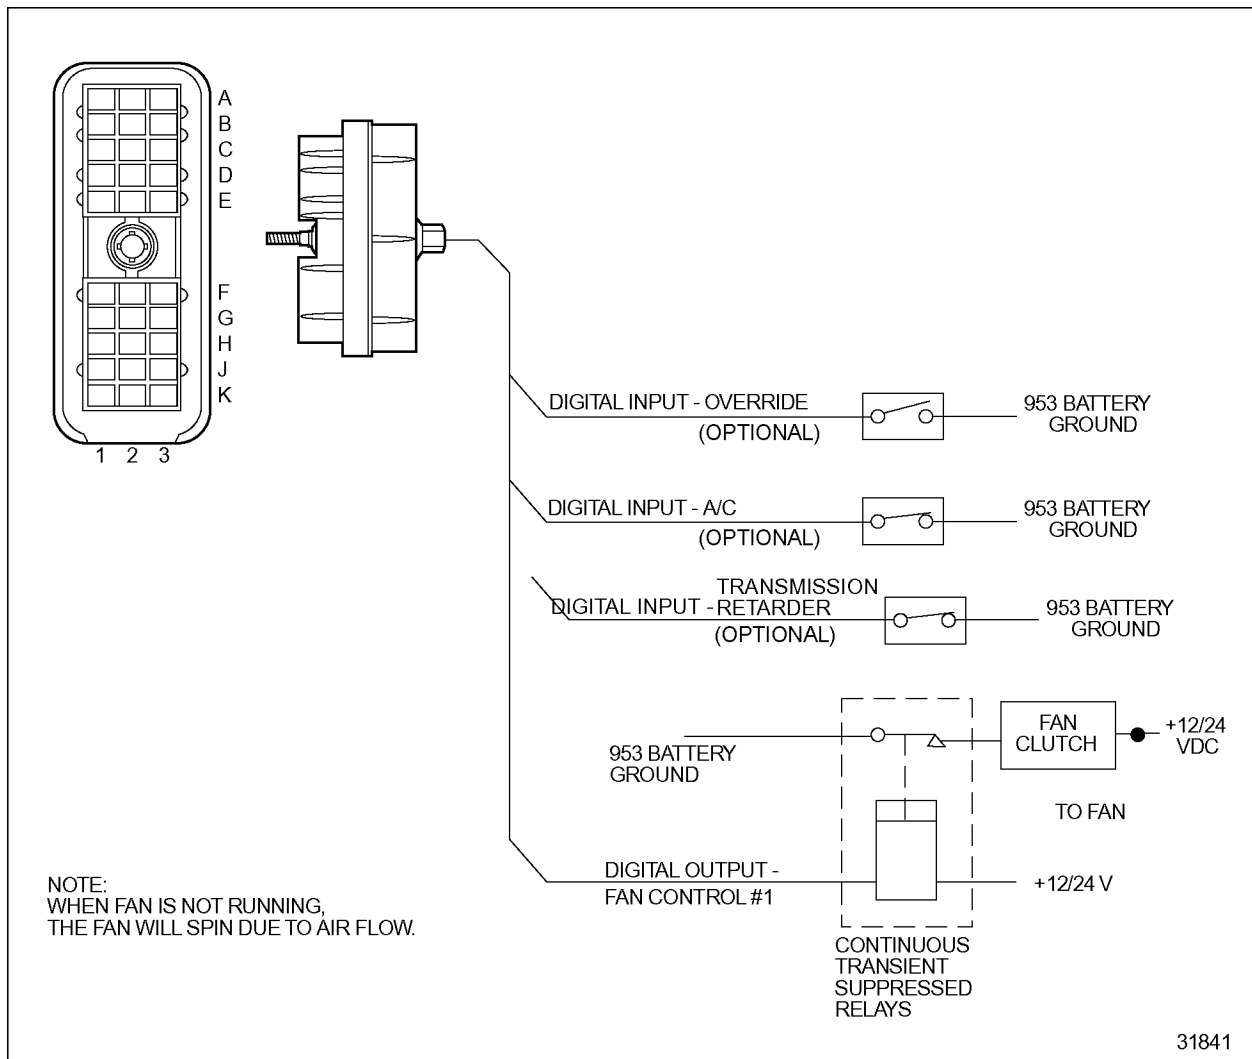


Figure 5-28 Fan Control Inputs and Outputs Electro Magnetic Single-Speed Digital Fans (Linnig)

For additional information, contact the fan vendor:

Linnig Corp.
5131 S. Royal Atlanta Drive
Tucker, GA 30084
Phone: (770) 414-9499
www.linnig.com

See Figure 5-29 for the specific connection from the ECM to the fan.

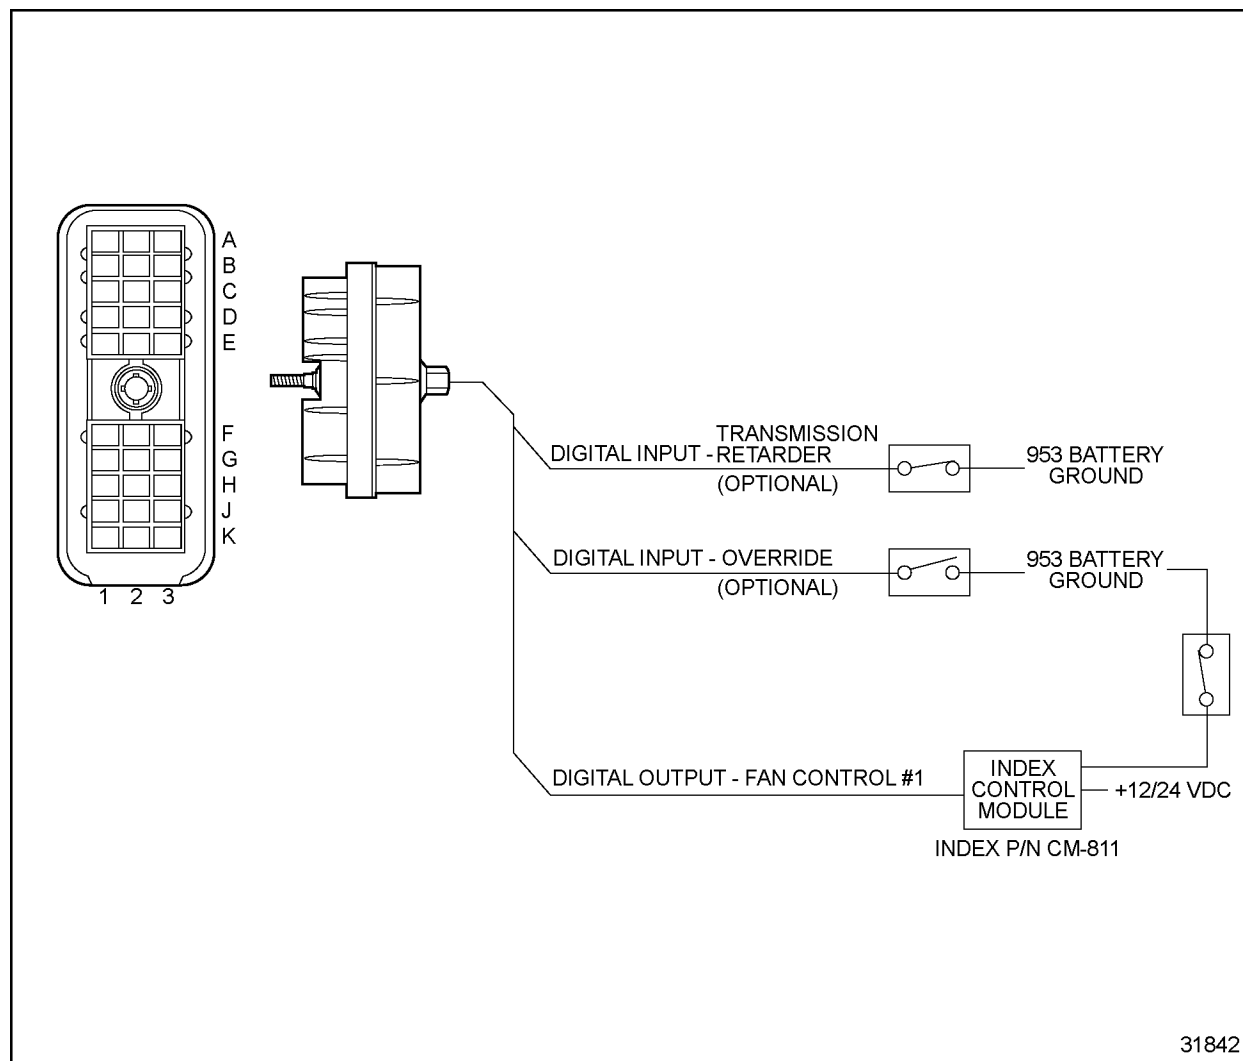


Figure 5-29 Fan Control Inputs and Outputs Index Control Module

For additional information, contact the fan vendor:

Index Sensors and Controls, Inc.

7112 265th St NW
 Stanwood, WA 98292
 Phone: 1-800-726-1737
 Fax: 360-629-0838
www.indexsensors.com

See Figure 5-30 for the specific connection from the ECM to the control module.

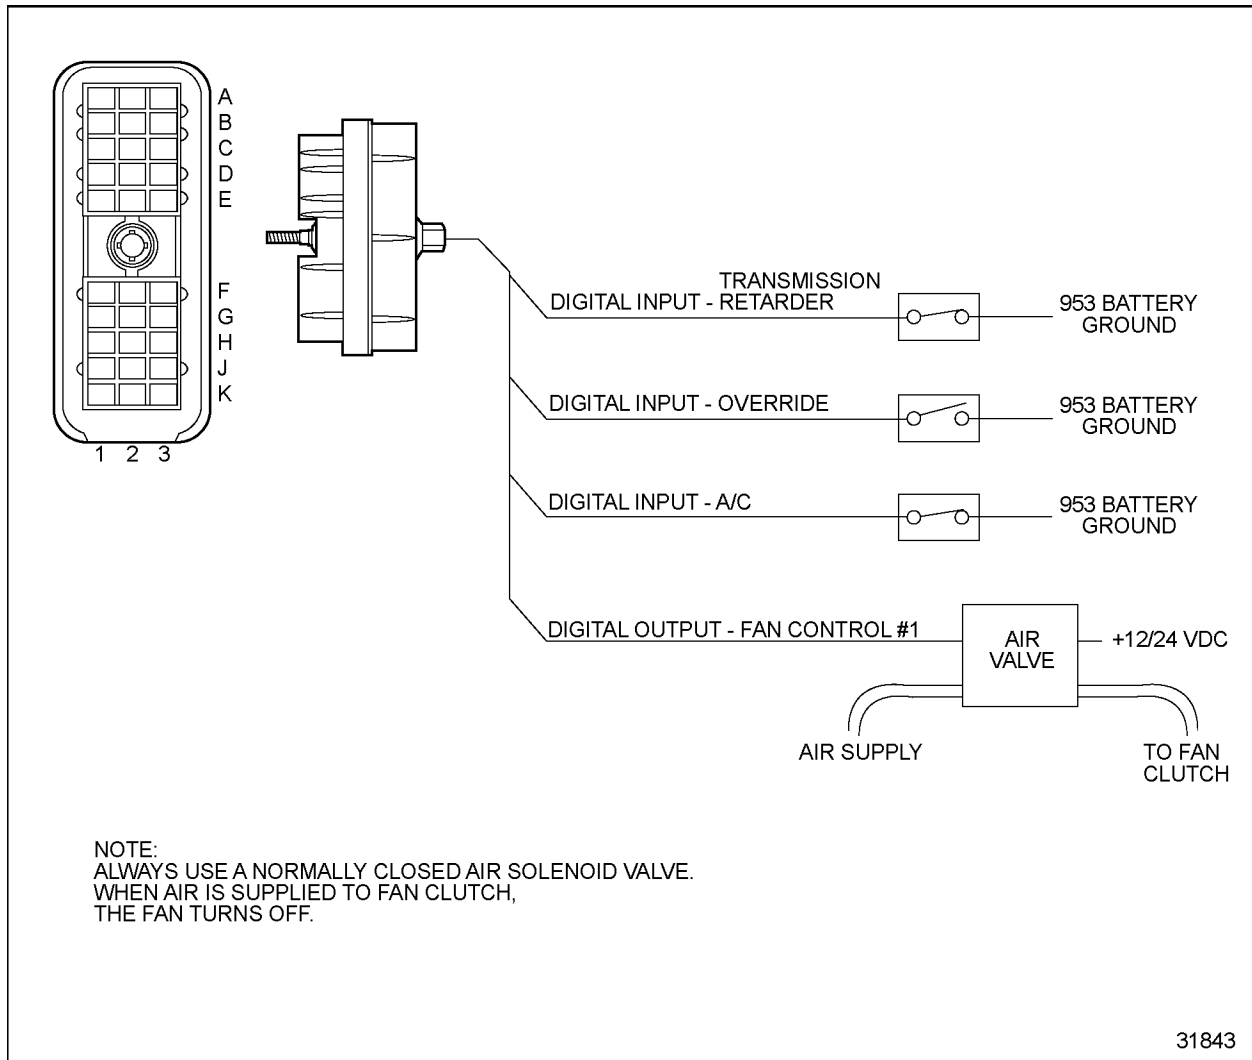


Figure 5-30 Fan Control Inputs - Normally Closed Air Solenoid Single-Speed Fan (BorgWarner®, Bendix®)

For additional information, contact the fan vendors:

Borg Warner

Phone: 1-800-828-8127
www.bwinstruments.com

Bendix Commercial Vehicle Systems

901 Cleveland Street
Elyria, OH 44035
Phone: 1-800-AIR-BRAKE
www.bendix.com

5.10.4 DUAL FANS

This configuration uses two digital outputs, Fan Control #1 and Fan Control #2, to drive two separate single-speed fans. Fan Control #1 and Fan Control #2 are opened (switched to battery ground) to turn OFF each fan respectively. The fan remains on for 30 seconds whenever it is turned ON. The fan outputs will not be enabled until five seconds after the engine has started.

The two fans are independent of one another and are controlled by different conditions. Both fans will be activated when either the Fan Control Override is enabled or when the conditions are met for Fan Engine Brake.

Fan Control #1 is enabled (opened) when at least one of the following conditions occur:

- ☐ Air temperature and engine torque above DDC factory set levels
- ☐ Air temperature sensor fails
- ☐ Air conditioner is active (OEM supplied A/C switch is opened), the fan remains ON for three minutes (the default) after the switch is grounded if vehicle speed is less than 20 MPH
- ☐ Fan engine brake enabled and engine brake level is active at high level and air temperature is above DDC factory set levels
- ☐ Fan control override switch is enabled
- ☐ Pressure governor system is active

Fan control #2 is enabled (opened) when one of the following conditions occur:

- ☐ Oil or coolant temperature above DDC factory set levels
- ☐ Oil or coolant temperature sensor fails
- ☐ Fan engine brake enabled and engine brake level is active at high level and air temperature is above DDC factory set levels
- ☐ Fan control override switch is enabled
- ☐ Transmission retarder is active and coolant temperature above DDC factory set level

NOTE:

If either the A/C or transmission retarder inactive digital input is configured, the input must be grounded to prevent continuous fan operation.

The digital inputs and outputs for dual fans are listed in Table 5-27.

Fan State	Fan Control Output 1	Fan Control Output 2	A/C Input	Override Input	Jake Brake® Status	Primary Control
1-On 2-On	Open	Open	Grounded	Open	Not in High Mode	Engine Temperature Sensors
1-On 2-Off	Open	Grounded	Grounded	Open	Not in High Mode	Engine Temperature Sensors
1-Off 2-On	Grounded	Open	Grounded	Open	Not in High Mode	Engine Temperature Sensors
1-Off 2-Off	Grounded	Grounded	Grounded	Open	Not in High Mode	Engine Temperature Sensors
1-On 2-Off	Open	Grounded	Open	Don't Care	Not in High Mode	OEM A/C Switch
1-On 2-Off	Open	Grounded	Don't Care	Grounded	Not in High Mode	Override Switch
1-On 2-Off	Open	Grounded	Don't Care	Don't Care	High Mode	Jake Brake in High Mode
1-Off 2-On	Open	Grounded	Don't Care	Don't Care	High Mode	Transmission Retarder Active and Coolant Temperature Above Limit

Table 5-27 Dual Fans Digital Inputs and Outputs

Installation - Dual Fans

The compatible fan manufacturers are the same as the manufacturers for the single fan. Follow the wiring diagrams for single fans for the first fan. See Figure 5-31 for the specific connection from the ECM to the second fan.

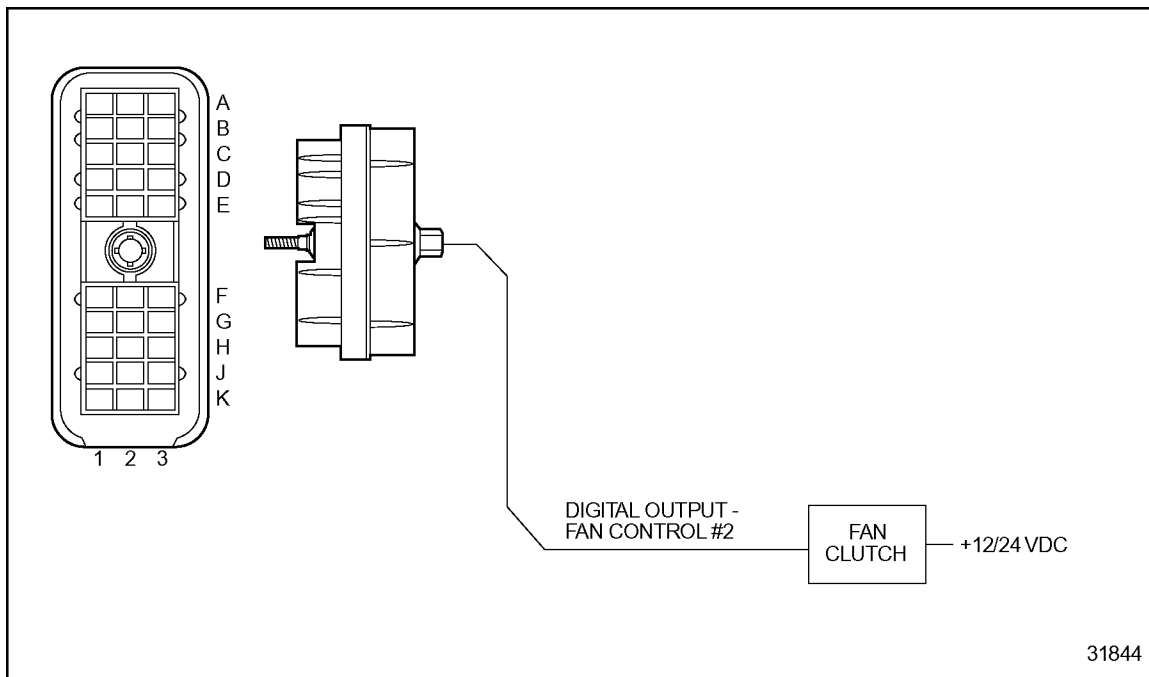


Figure 5-31 Fan Control Inputs and Outputs - Second Fan

5.10.5 TWO-SPEED FAN

This configuration uses two digital outputs, Fan Control #1 and Fan Control #2, to drive a two-speed fan. When Fan Control #1 output is opened, the fan operates in low-speed mode. When Fan Control #1 and Fan Control #2 are both open, the fan operates in high-speed mode.

Fan Control #1 is enabled (opened) when at least one of the following conditions occur:

- ☐ Oil or coolant temperature above DDC factory set levels
- ☐ Air temperature and engine torque above DDC factory set levels

Fan control #2 is enabled (opened) when one of the following conditions occur:

- ☐ Oil or coolant temperature above DDC factory set levels
- ☐ Air temperature and engine torque above DDC factory set levels
- ☐ Oil, coolant, or air temperature sensor fails
- ☐ Air conditioner is active (OEM supplied A/C switch is opened), the fan remains ON for three minutes (the default) after the switch is grounded when vehicle speed is less than 20 MPH
- ☐ Fan engine brake enabled and engine brake level is active at high level and air temperature is above DDC factory set levels
- ☐ Fan control override switch is enabled
- ☐ Pressure governor system is active
- ☐ Transmission retarder is active and coolant temperature above DDC factory set level

Once the fan has been enabled due to the Transmission Retarder, the fan will remain on high speed until the Transmission Retarder is deactivated. The Fan will remain on high speed for a minimum of 30 seconds.

NOTE:

If either the A/C or transmission retarder inactive digital input is configured and not used, they should be deconfigured.

The digital inputs and outputs for a two-speed fan are listed in Table 5-28.

Fan State	Fan Control Output 1	Fan Control Output 2	A/C Input	Override Input	Jake Brake® Status	Primary Control
Off	Grounded	Grounded	Grounded	Open	Not in High Mode	Engine Temperature Sensors
Low	Open	Grounded	Grounded	Open	Not in High Mode	Engine Temperature Sensors
High	Open	Open	Grounded	Open	Not in High Mode	Engine Temperature Sensors
High	Open	Open	Open	Don't Care	Not in High Mode	OEM A/C Switch
High	Open	Open	Don't Care	Grounded	Not in High Mode	Override Switch
High	Open	Open	Don't Care	Don't Care	High Mode	Jake Brake in High Mode
High	Open	Open	Don't Care	Don't Care	Not in High Mode	Transmission Retarder Active and Coolant Temperature Above Limit

Table 5-28 Two-speed Fan Digital Inputs and Outputs

Installation -Two-speed Fans

See Figure 5-32 for the specific connection from the ECM to the fan.

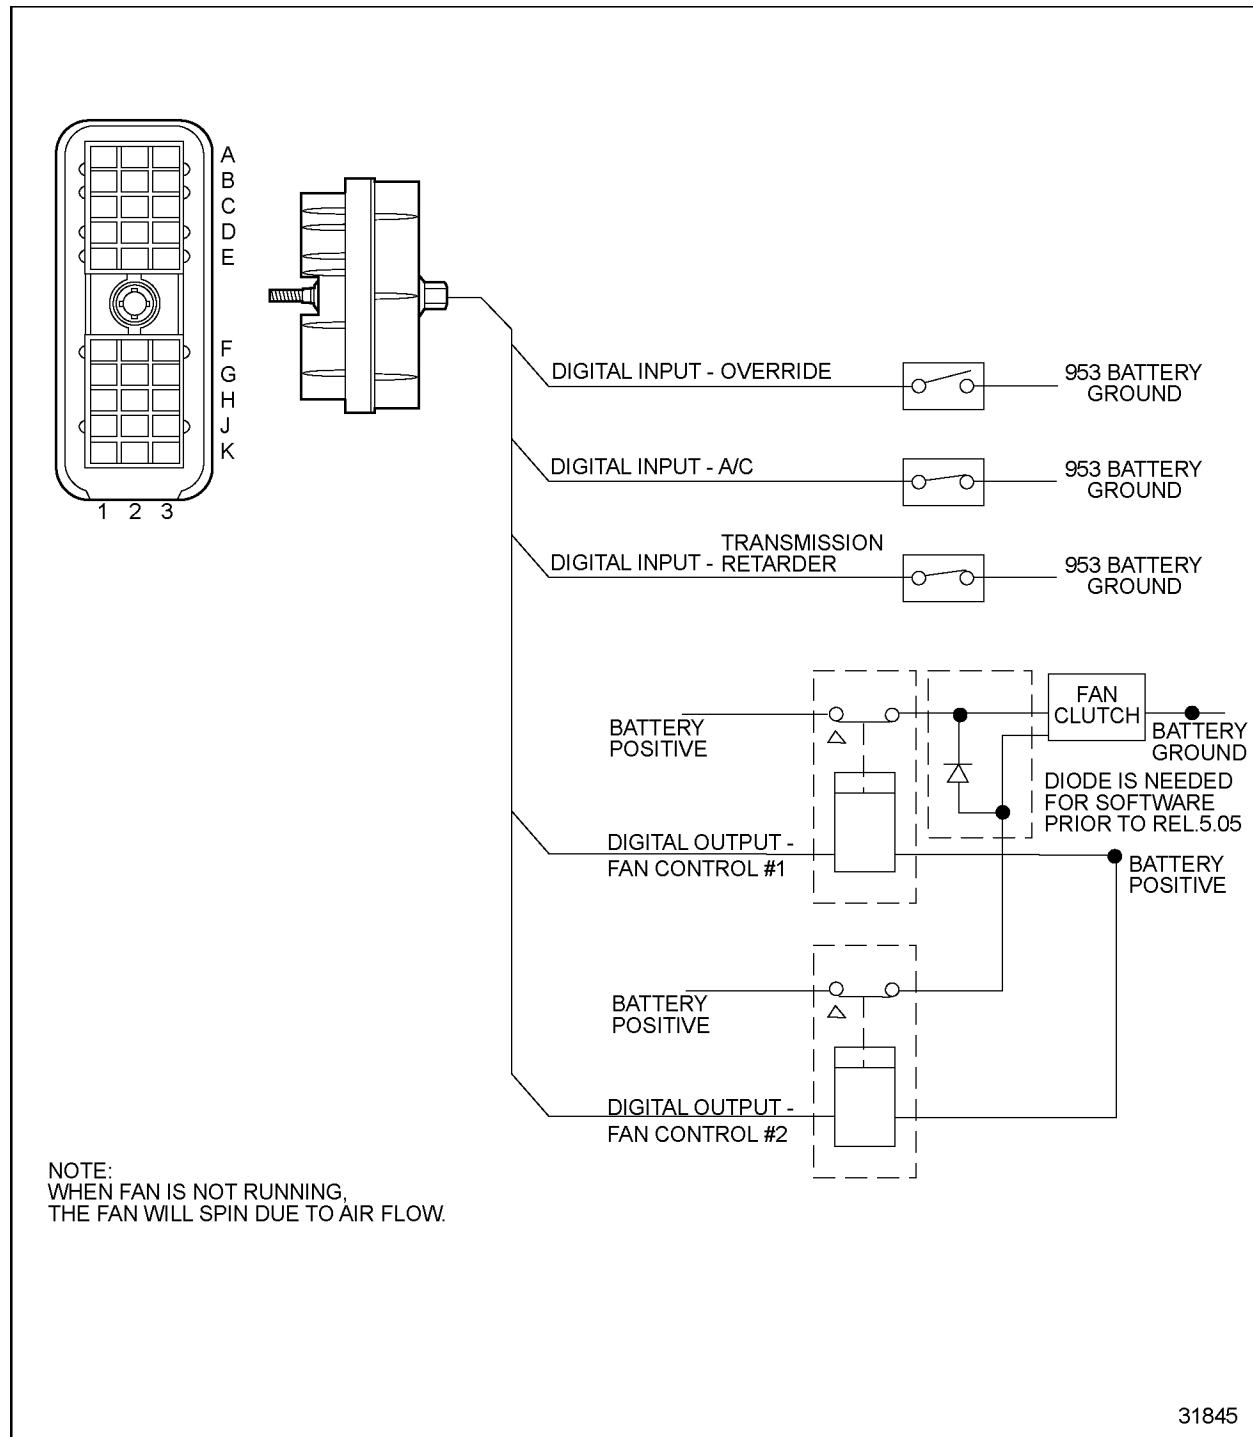


Figure 5-32 Fan Control Inputs and Outputs - Electro Magnetic Two-Speed Fans (Linnig)

For additional information, contact the fan vendor:

Linnig U.S.A.

5131 S Royal Atlantic Drive
Tucker, GA 30084
Phone: (770) 414-9499
www.linnig.com

5.10.6 VARIABLE SPEED SINGLE-FAN

DDEC uses a pulse width modulated (PWM) output to drive a variable speed fan. Presently available PWM outputs and specifications are listed in Table 5-29.

Engine Series	PWM Output	Frequency	Duty Cycle @ Minimum Fan Speed	Duty Cycle @ Maximum Fan Speed
Series 60	PWM #1	50 Hz	90%	10%
Series 50*	PWM #1 (908 – J3)	50 Hz	90%	10%
Series 50*	PWM #2 (909 – Y1)	50 Hz	90%	10%

* Output is dependent in 6N4C group. PWM #2 is used for variable speed fan when PWM #1 is required for older generation transmissions.

Table 5-29 PWM Outputs and Specifications

The fan may be enabled by specific engine temperature sensors and various other inputs. The fan will ramp up to the requested speed in order to reduce noise, shock-loading, and belt slippage. If the fan is turned on for any reason other than high temperature, it will ramp up to the full fan speed (i.e. 5% or 10% duty cycle, application dependent). The ramp rate is set by the Application Code System (ACS). A decrease in fan speed will occur after a short time delay and will step down to the value dictated by the highest sensor request. If the A/C switch is opened, the fan will increase speed at the ramp rate until it is at a maximum. After the A/C switch is grounded the fan will remain on for a short time delay and then turn off.

The PWM output is initiated when at least one of the following conditions occur:

- ☐ Air, oil or coolant temperatures above DDC factory set limits
- ☐ Air conditioner is active (OEM supplied A/C switch is opened), the fan remains on for 3 minutes (the default) after the switch is grounded when vehicle speed is less than 20 mph
- ☐ Oil, coolant or air temperature sensor fails
- ☐ Fan Control Override Switch is enabled

NOTE:

If A/C input is configured and not used, that input must be deconfigured.

The digital inputs and outputs for PWM fan control are listed in Table 5-30.

Fan State	PWM Output	A/C Input	Override Input	Jake Brake® Status	Primary Control
On	Modulated	Grounded	Open	Not in High Mode	Engine Temperature Sensors
Off	Open	Grounded	Open	Not in High Mode	Engine Temperature Sensors
Full On	Grounded	Open	Don't Care	Not in High Mode	OEM A/C Switch
Full On	Grounded	Don't Care	Grounded	Not in High Mode	OEM Override Switch
Full On	Grounded	Don't Care	Don't Care	High Mode	Jake Brake in High Mode and Air Temperature Above Limit
Full On	Grounded	Don't Care	Don't Care	Not in High Mode	Transmission Retarder Active and Coolant Temperature Above Limit

Table 5-30 PWM Fan Control Digital Inputs and Outputs

5.10.7 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

To have fan control for single, dual, or two-speed fans, fan control must be enabled and a fan type defined at engine order entry or by DDC Technical Service.

For single, dual, and two-speed speed fans the digital inputs and outputs listed in Table 5-31 may be required based on the fan vendor's requirements. The digital inputs and outputs can be configured by order entry, VEPS or DRS.

Function Number	Type	Description
13	Digital Output	Fan Control #1
14	Digital Output	Fan Control #2
27	Digital Input	Transmission Retarder
32	Digital Input	Fan Control Override
29	Digital Input	Air Conditioner Status

Table 5-31 Fan Control Digital Input and Outputs - Single and Dual Speed Fans

For variable speed fans, the PWM output is enabled at the time of engine order or by ACS. The digital inputs and outputs listed in Table 5-32 may be required based on fan vendor's requirements. The digital inputs and outputs can be configured by order entry, VEPS or DRS.

Function Number	Type	Description
27	Digital Input	Transmission Retarder
32	Digital Input	Fan Control Override
29	Digital Input	Air Conditioner Status

Table 5-32 Fan Control Digital Input and Outputs - Variable Speed Fans

VEPS or the DRS can set the A/C Fan time. The default for the parameter listed in Table 5-33 is three minutes.

Parameter	Description	Choices
AC Fan Timer	The minimum duration of time the fan will remain ON after the AC status digital input has indicated that the AC unit has turned OFF. The timer starts when the input is grounded after being open.	0-255 seconds

Table 5-33 Fan Timer Parameter

THIS PAGE INTENTIONALLY LEFT BLANK

5.11 FUEL ECONOMY INCENTIVE

Fuel Economy Incentive is a standard DDEC feature for on-highway Detroit Diesel engines. The purpose of this feature is to allow the fleet manager to set a target fuel economy while providing the driver an incentive to meet the target.

5.11.1 OPERATION

Using the Fuel Economy Incentive option, a fleet manager can set a target fuel economy for each engine. If this fuel economy is exceeded, the driver will be given a slightly increased vehicle speed limit.

Target fuel economy, road speed limit, maximum MPH increase, conversion factor for MPH/MPG and the option of total average fuel economy or trip fuel economy are all calibrated using the DDR, DDDL, VEPS, DRS or at engine order entry. The feature is enabled by setting the Maximum MPH to a non-zero value.

In this example the following limits are set as listed in Table 5-34.

Item	Set Limit
Vehicle Speed Limit	60 MPH
Maximum MPH - the maximum allowable increase in vehicle speed	5 MPH
Conversion Factor	20 MPH/MPG
Target Fuel Economy	7 MPG

Table 5-34 Fuel Economy Limits

If the driver has an average fuel economy of 7.1 MPG then the new vehicle speed limit is 62 MPH. $(60 \text{ MPH} + (7.1 - 7.0 \text{ MPG}) \times (20 \text{ MPH/MPG}) = 62 \text{ MPH})$

The maximum vehicle speed obtainable regardless of the fuel economy is 65 MPH.

5.11.2 PROGRAMMING FLEXIBILITY

The parameters listed in Table 5-35 can be set using the DDR, DDDL, VEPS, or DRS.

Parameter	Definition	Choice
MINIMUM ECONOMY	Indicates the minimum economy for fuel economy incentive.	5 to 10 MPG, 50.8 to 23.3 L/100 K
MAXIMUM MPH or MAXIMUM KPH	Indicates customer set maximum speed increase for vehicle.	0 to 10 MPH, 0.0 to 16.1 KPH
CONVERT FACTOR MPH/MPG or CONVERT FACTOR KPH/KPL	The miles per hour you want to allow for each full mile per gallon above the minimum MPG.	0.1 to 20 MPH/MPG, 0.4 to 75.8 KPH/KPL
CALC TYPE	FILT ECON bases the calculations on the fuel information, by periodic sampling of fuel consumption, recorded in the ECM. TRIP ECON bases the calculation on the trip portion of the fuel usage information.	TRIP ECON, FILT ECON

Table 5-35 Fuel Economy Incentive Parameters

5.11.3 INTERACTION WITH OTHER FEATURES.

Fuel Economy Incentive will increase the Cruise Control and vehicle speed limits.

A vehicle can be have with both PasSmart and Fuel Economy Incentive, but the extra speed increments provided by the two features do not add together. For example, if Fuel Economy Incentive is set for 7 MPH of extra speed when the driver hits the maximum fuel economy target and the same vehicle has a 5 MPH PasSmart increase, the resulting speed increase is 7 MPH, not 12 MPH.

5.12 HALF ENGINE IDLE

Half Engine Idle (HEI) mode allows the engine to run on half the cylinders. Running in HEI significantly reduces white smoke in cold engine operation, after startup or during extreme cold weather operation. The HEI logic continuously reviews several engine conditions to determine if it should be deactivated such as higher engine torque.

5.12.1 OPERATION

HEI can be disabled or enabled-cold. If HEI is set to "enabled-cold" mode, the conditions necessary for operation are listed in Table 5-36.

Engine	DDR Configuration Allowed	Parking Brake Required	Vehicle Speed Limit	Intake Air Temperature	Max torque
Series 60	Yes	Yes	<5 MPH	<12.5°C	<~25%

Table 5-36 Conditions for HEI

HEI will be deactivated when any of the above conditions are not met.

5.12.2 INSTALLATION

Series 60 engines require a park brake input to run in HEI.

5.12.3 PROGRAMMING FLEXIBILITY

DDDL/DDR may configure HEI mode (enabled-cold/disabled). The rest of the parameters are factory set and cannot be changed. VEPS is not capable of setting the HEI mode.

5.12.4 DIAGNOSTICS

The DDR or DDDL display will tell the user if the engine is running in HEI. This display is part of the Data List menu.

THIS PAGE INTENTIONALLY LEFT BLANK

5.13 IDLE SHUTDOWN TIMER AND VEHICLE POWER SHUTDOWN

The Idle Shutdown Timer will shutdown the engine if it remains idling for a specified period of time. There are five options that can operate with Idle Shutdown Timer.

- ☐ Idle Shutdown Override
- ☐ Vehicle Power Shutdown
- ☐ Variable Speed Governor (VSG) Shutdown
- ☐ Ambient Air Temperature Override Disable
- ☐ Ambient Air Temperature Automatic Override

5.13.1 OPERATION

There are two types of idle shutdown:

- ☐ The engine has been idling for a specified time period.
- ☐ The engine has been idling for a specified time period and the ambient air temperature is within a specified range.

Certain conditions must be met for the entire time-out period for shutdown to occur. These conditions include:

- ☐ Engine temperature above 104°F (40°C)
- ☐ Engine operation at idle or VSG minimum
- ☐ The parking brake interlock digital input switched to battery ground
- ☐ OEM supplied interlocks enabled
- ☐ Ignition ON (Circuit 439)

Fueling is stopped after the specified idle time; the ignition circuit 439 remains active after the engine shuts down. The ignition switch must be cycled to OFF (wait 10 seconds) and back to ON before the engine will restart, if shutdown occurs. The CEL will blink until the ignition is turned off to indicate shutdown has occurred. If the ignition is not turned off within 20 minutes, the ECM will begin its low power mode. This will cause the CEL to turn off. In low power mode, the ignition cycle will be considered over. All steps which normally occur after the ignition cycle was turned off will take place even though the ignition switch is still on. This prevents excessive battery drain by the ECM.

A Park Brake Switch must be installed (see Figure 5-33). Idle Shutdown Timer operates with a digital input configured as a park brake and switched to battery ground. The time can range from 1 to 100 minutes in one minute intervals. An optional digital output can be programmed for vehicle power shutdown. This is used with idle timer shutdown or the engine protection shutdown features to shut off any electrical loads on the vehicle.

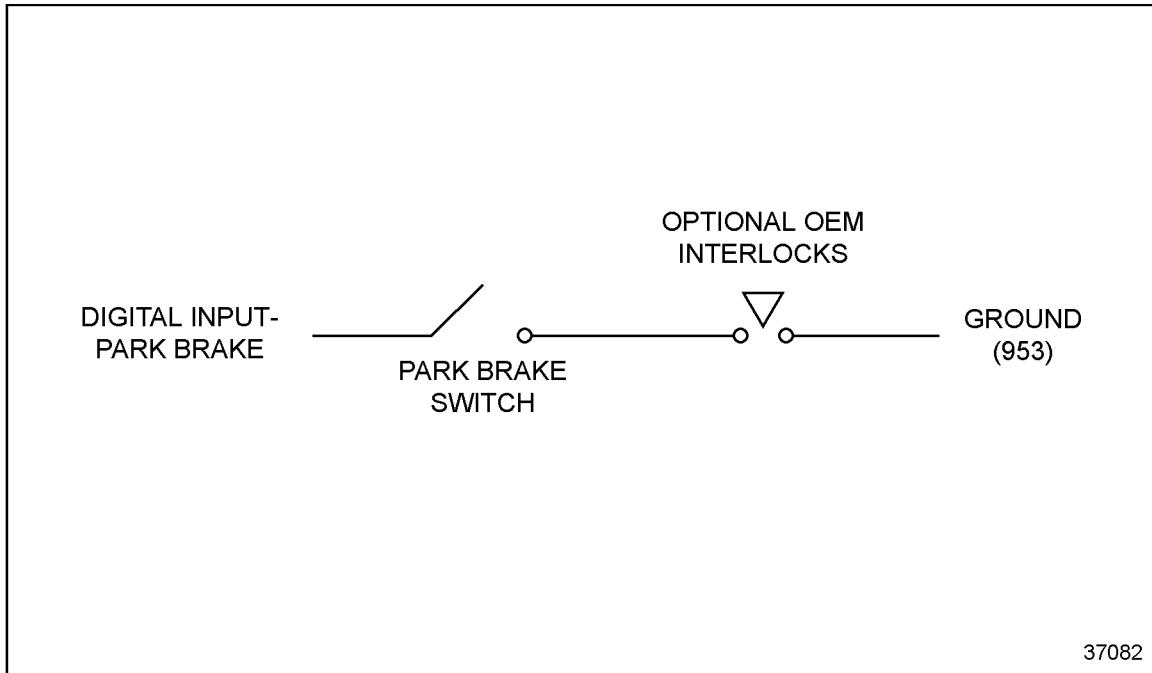


Figure 5-33 Park Brake Digital Input

Idle Shutdown Override - Optional

Idle Shutdown Override allows the operator to override the idle shutdown to keep the engine idling if this feature is enabled.

Ninety seconds before the specified idle time is reached, the CEL will begin flashing. The idle timer can be disabled if the percent throttle is increased to greater than 1%. This will allow the idle timer to be overridden if longer engine idling is desired. The timing sequence can be re-initiated by disengaging and reapplying the parking brake, by cycling the ignition OFF (waiting 10 seconds) and back to ON or by once again increasing the percent throttle greater than 1%.

Vehicle Power Shutdown - Optional

Vehicle Power Shutdown is used with Idle Timer Shutdown or Engine Protection Shutdown. After the idle timer times out or engine protection shuts the engine down, the Vehicle Power Shutdown relay shuts down the rest of the electrical power to the vehicle.

A Vehicle Power Shutdown relay can be installed to shutdown all electrical loads when the engine is shutdown (see Figure 5-34). This figure also provides a method to turn OFF the ignition while the idle timer is active. The engine will shutdown after the specified idle time and will reset the relay (ignition circuit).

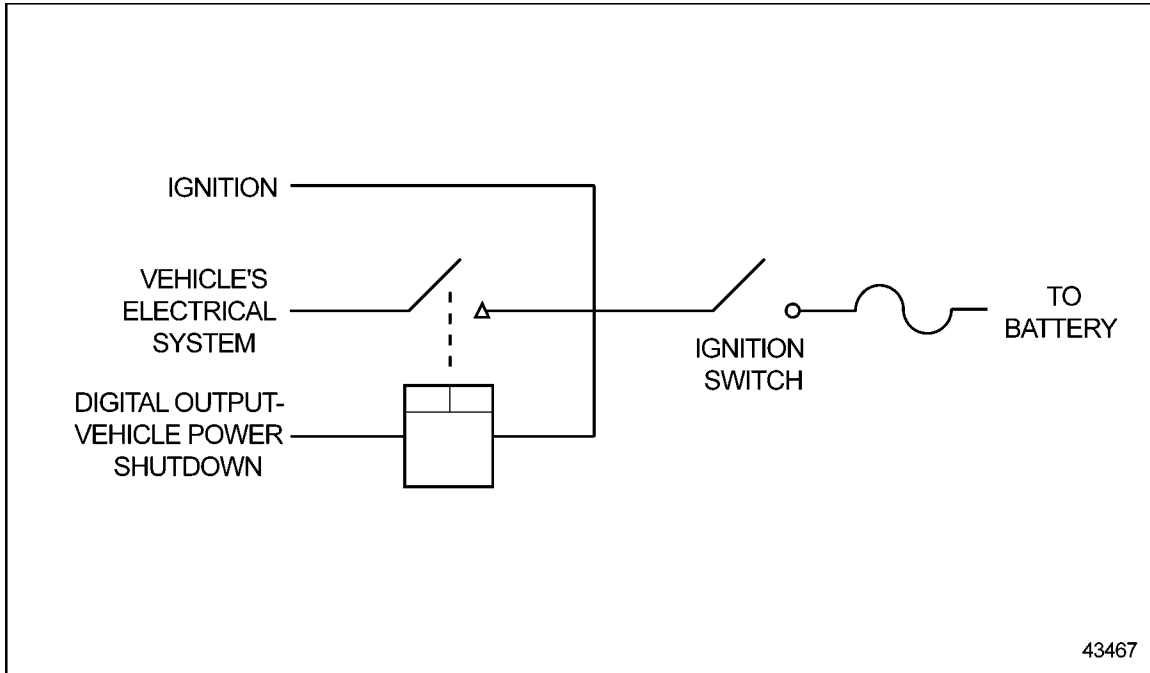


Figure 5-34 Vehicle Power Shutdown Relay

All electrical loads that should be turned OFF when the engine shuts down should be wired through this relay.

Refer to section 4.3, "Digital Outputs" for additional information.

Enabled on Variable Speed Governor (VSG) - Optional

This option, when enabled, allows the engine to be shutdown when operating on the VSG when the conditions are met for the Idle Timer Shutdown.

Ambient Air Temperature Override Disable - Optional

This option allows the override to be disabled based on ambient air temperature. If the upper and lower temperature limits are set and the ambient air temperature is within the specified limits, the override will be disabled and the engine will be shutdown after the specified time limit is met. If the ambient air temperature is outside the specified range, the override would be allowed by increasing the percent throttle to greater than 1%. To disable this feature, the upper and lower limits must be set to 167°F.

For example, if the upper limit is set to 80°F and the lower limit is set to 65°F, the override would be disabled if the ambient air temperature was between 65°F and 80°F (see Figure 5-35).

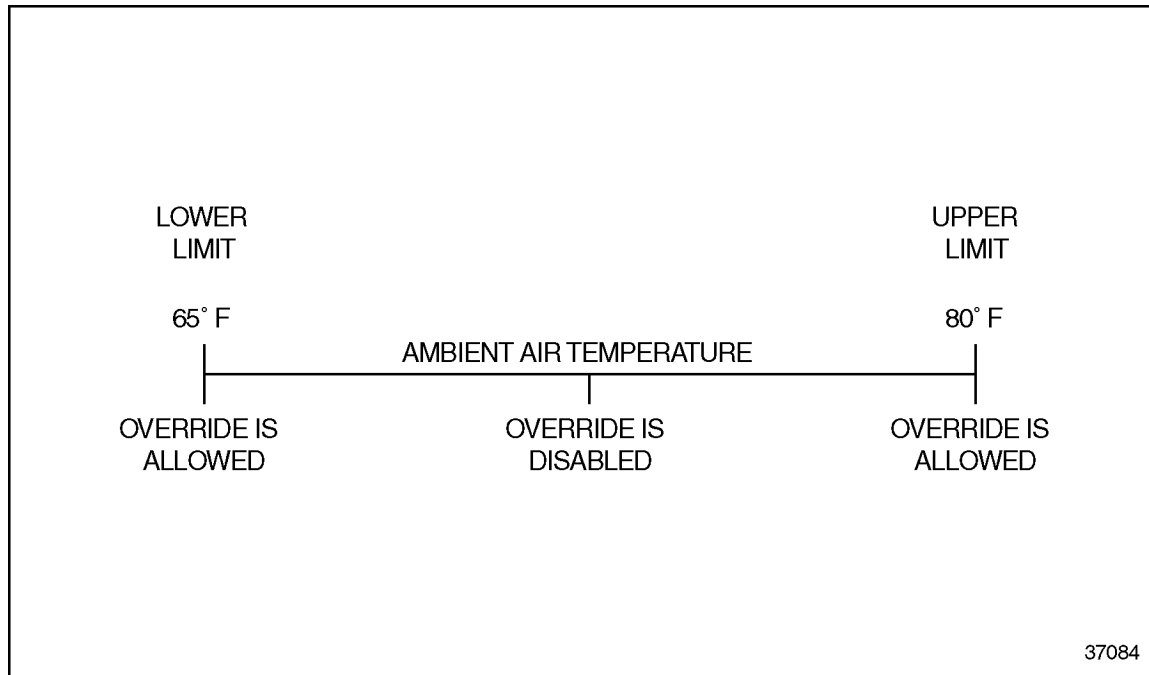


Figure 5-35 Ambient Air Temperature Override Disabled

Ambient Air Temperature Automatic Override — Optional

This option allows an automatic override if the ambient air temperature is out of the specified range as described in the previous section. Driver intervention is not required.

Inactive Shutdown

The Idle Shutdown Timer can be defeated by holding down the throttle or by not setting the park brake. The inactive timer will shutdown the engine after 20 minutes if the fueling is not sufficient to accelerate the vehicle.

5.13.2 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

To program the Idle Shutdown timer, the digital inputs listed in Table 5-37 must be configured by order entry, VEPS or DRS.

Description	Function #	Type
Park Brake/ISD	5	Digital Input
Vehicle Power Shutdown - optional	6	Digital Output

Table 5-37 Idle Shutdown Timer Digital Input

The Idle Shutdown timer options listed in Table 5-38 can be programmed by the DDR, DDDL, VEPS or DRS.

Parameter	Description	Choice / Display
ENABLED	Enables or Disables the Idle Shutdown feature. N/A will be displayed if the parking brake has not been configured as a digital input.	YES, NO
TIME (MIN)	The amount of engine idle time that is allowed before the Idle Shutdown feature stops fueling the engine.	1 to 100 minutes
OVERRIDE	The override will flash the CEL 90 seconds before shutdown to allow the driver to cancel the shutdown by pressing the throttle.	YES, NO
ENABLED ON VSG	Enables or disables the Idle Timer Shutdown feature when operating on the Variable Speed Governor.	YES, NO
OVERRIDE TEMP DISAB	Allows choice between lower or upper limit to disable the Idle Shutdown Override feature based on ambient air temperature.	LOWER LIMIT, UPPER LIMIT
☐ LOWER LIMIT	The lower limit of the ambient air temperature range that will disable the Idle Shutdown Override feature.	-40 to "UPPER LIMIT" °F
☐ UPPER LIMIT	The upper limit of the ambient air temperature range that will disable the Idle Shutdown Override feature.	"LOWER LIMIT" to 167°F
Ambient Air Temp Auto Override	Enables an automatic override if the ambient air temperature is out of range.	YES, NO

Table 5-38 Idle Shutdown Timer Programming Options

5.13.3 INTERACTION WITH OTHER FEATURES

The Idle Shutdown Timer is required for Optimized Idle. Refer to section 5.18, "Optimized Idle," for additional information.

THIS PAGE INTENTIONALLY LEFT BLANK

5.14 IRIS

The InfraRed Information System (IRIS) is an optional feature that provides two—way communication between a vehicle and a PC.

Detailed IRIS installation information can be found in the *IRIS User and Installation Guide* (7SA804).

5.14.1 OPERATION

IRIS replaces direct cable hook-up with an infrared beam (see Figure 5-36).

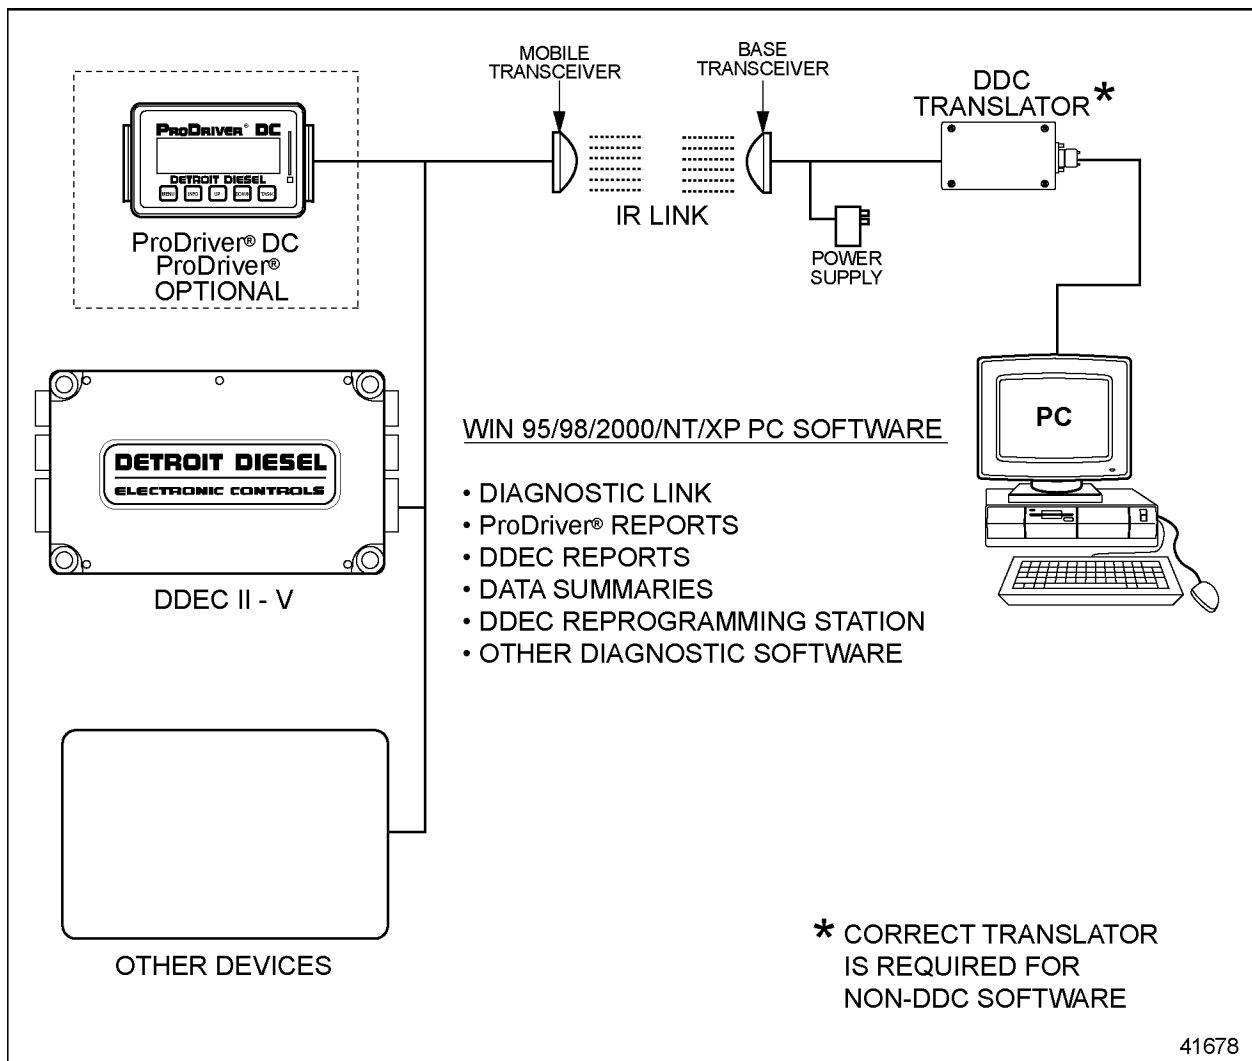


Figure 5-36 IRIS Configuration

All data which is currently transmitted via cable, can now be sent using IRIS. This includes downloading of all information in the ECM, ProDriver DC, engine diagnosis, and complete engine reprogramming. Downloading and uploading with IRIS takes approximately the same amount of time as a direct cable connection.

IRIS eliminates the need for the driver to exit the vehicle, locate a cable and plug into the vehicle. No physical connections between the vehicle and the PC are required. IRIS can also be used in a service bay with diagnostic equipment, eliminating the need to bring the computer cart to the vehicle.

IRIS works with most devices communicating via the J1708 Data Link.

IRIS consists of an infrared transceiver (see Figure 5-37) for the vehicle side of the IR beam and another infrared transceiver for the base side of the IR beam.

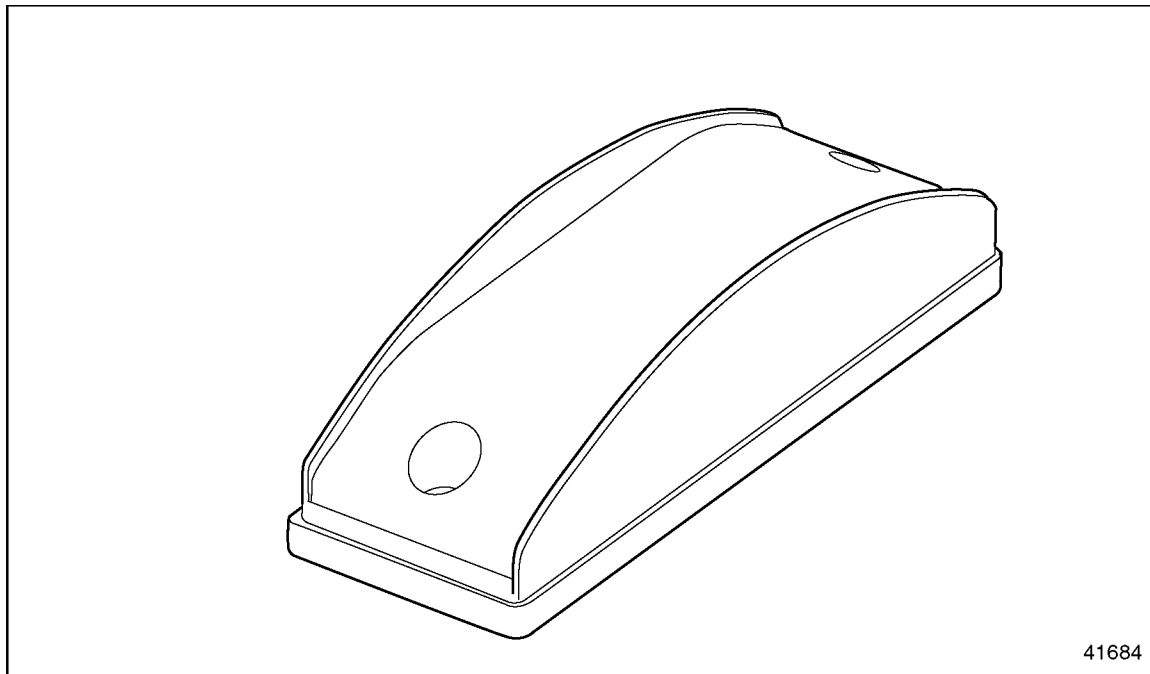


Figure 5-37 IRIS Transceiver

The mobile transceiver is mounted on the vehicle. The base transceiver is located where information is extracted, such as the entrance to the shop or the fuel island. The base transceiver is continuously polling for a vehicle; conversely the mobile transceiver is silent until it receives a message from the base transceiver. When the mobile transceiver on the vehicle is in general alignment with the base transceiver, handshaking will take place and establish the infrared link. (see Figure 5-38).

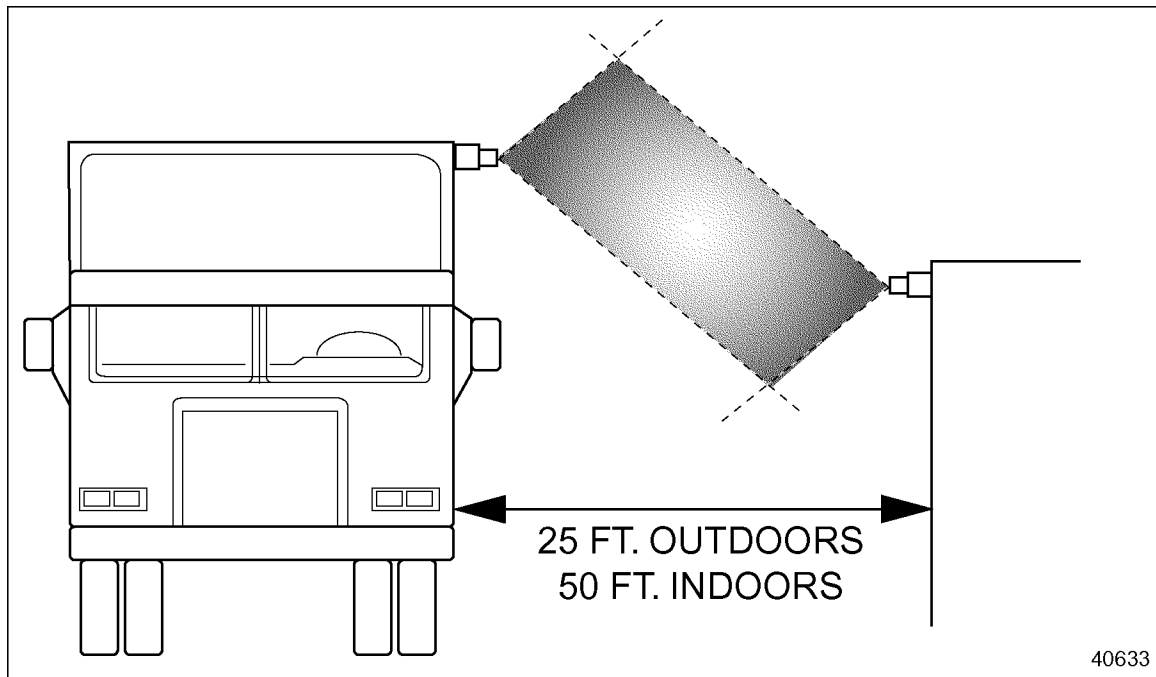


Figure 5-38 IRIS - Infrared Two-way Communication

There are two visible Light Emitting Diodes (LEDs) on the face of the transceiver. These LEDs are used for diagnostic purposes only. The LEDs will illuminate at the beginning of the ignition cycle and then turn off and remain off during system operation. The LEDs will illuminate for a maximum of 15 seconds.

The red LED indicates that the unit has proper power. The green LED indicates that the unit is receiving valid J1708 messages. The two LEDs may not always come on simultaneously, but they will always go off together.

The base transceiver will only communicate with one mobile transceiver at a time. The connection must be interrupted for a sustained period of time, or the ignition must be turned off for the base transceiver to start polling for another vehicle.

The IRIS dash light will flash during the handshaking communication between the two transceivers. Once the infrared link is established the light will be solidly illuminated until the connection is broken.

If the remote Data Interface (RDI) is used with IRIS, the RDI lights will indicate when the extraction has been completed. For installations without RDI, the service technician will need to indicate to the driver that the reprogramming or extraction has been completed.

5.14.2 INSTALLATION

As long as the two transceivers are in general alignment, IRIS will function up to a distance of 25 ft outdoors to 50 ft indoors (see Figure 5-39).

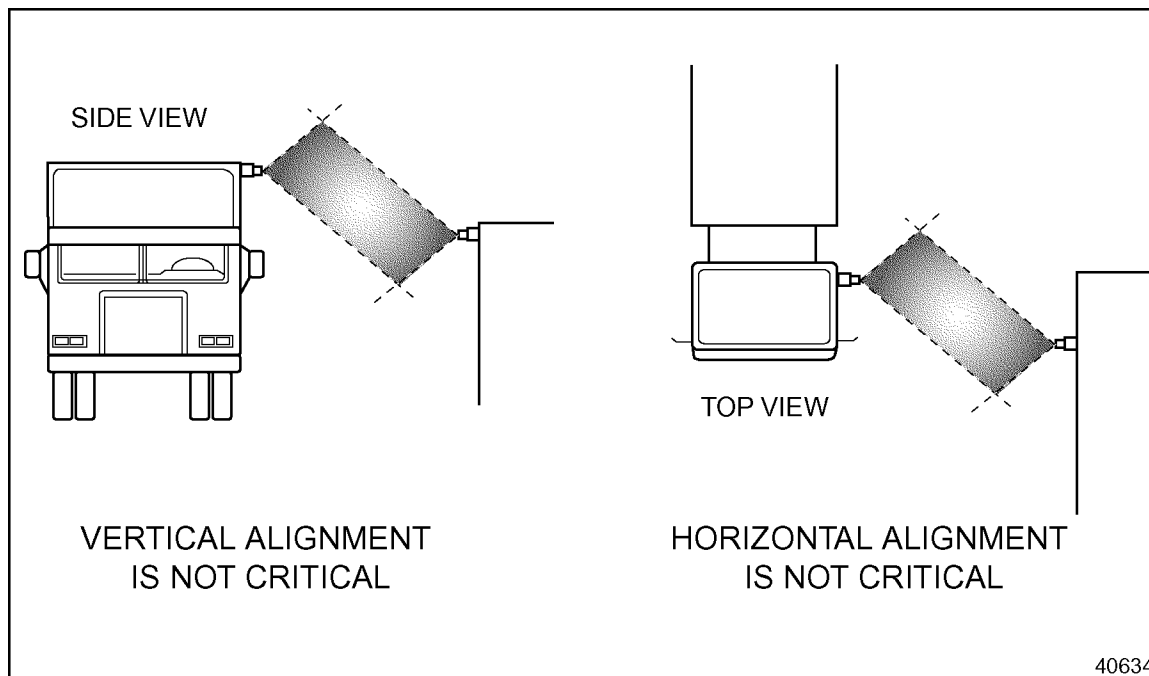


Figure 5-39 Horizontal and Vertical Alignment is not Critical

Use the following guidelines when installing IRIS:

- ☐ Shade the transceiver from bright sunlight to obtain more distance outdoors.
- ☐ Do not shine electronic ballast fluorescent lights into the transceiver.
- ☐ Do not install transceivers where they are exposed to strobe lights.

Mobile Unit Installation

The mobile transceiver should be mounted outside of the vehicle either on the side or the front. (see Figure 5-40).

NOTE:

For optimal performance, mount the mobile transceiver at least seven feet above the ground to minimize beam obstruction during operation.

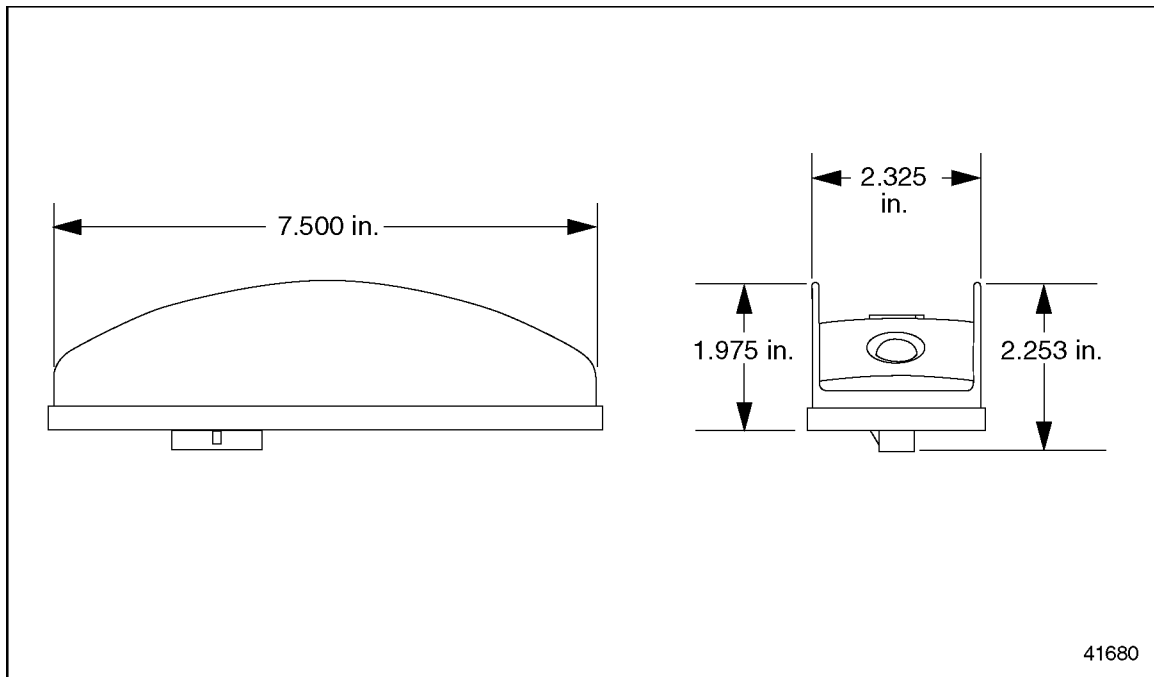


Figure 5-40 IRIS Transceiver Dimensions

The transceiver should be located on the vehicle so it aligns with the transceiver at the extraction site. Precise alignment of the transceivers is recommended but is not critical. IRIS transceivers have a wide beam pattern to assure an infrared connection.

See Figure 5-41 for the recommended cut out pattern.

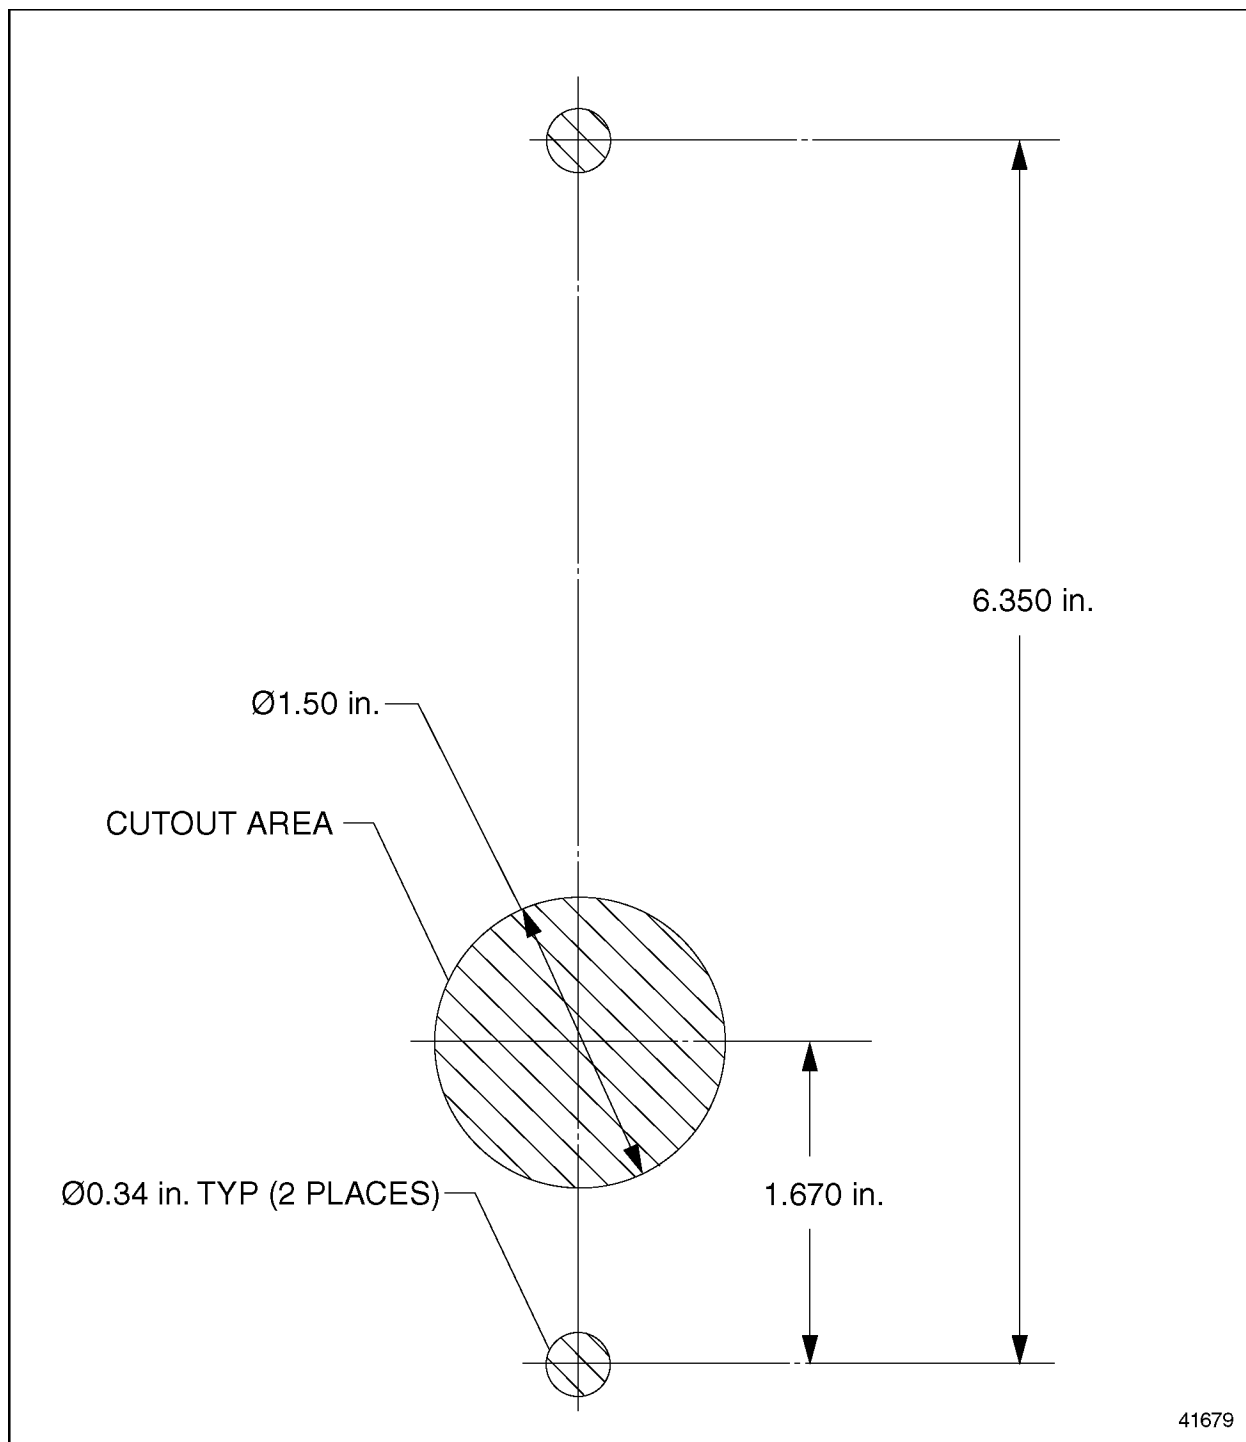


Figure 5-41 Recommended Cut Out Pattern

The IRIS dash light indicates when the IR connection is established (see Figure 5-42).

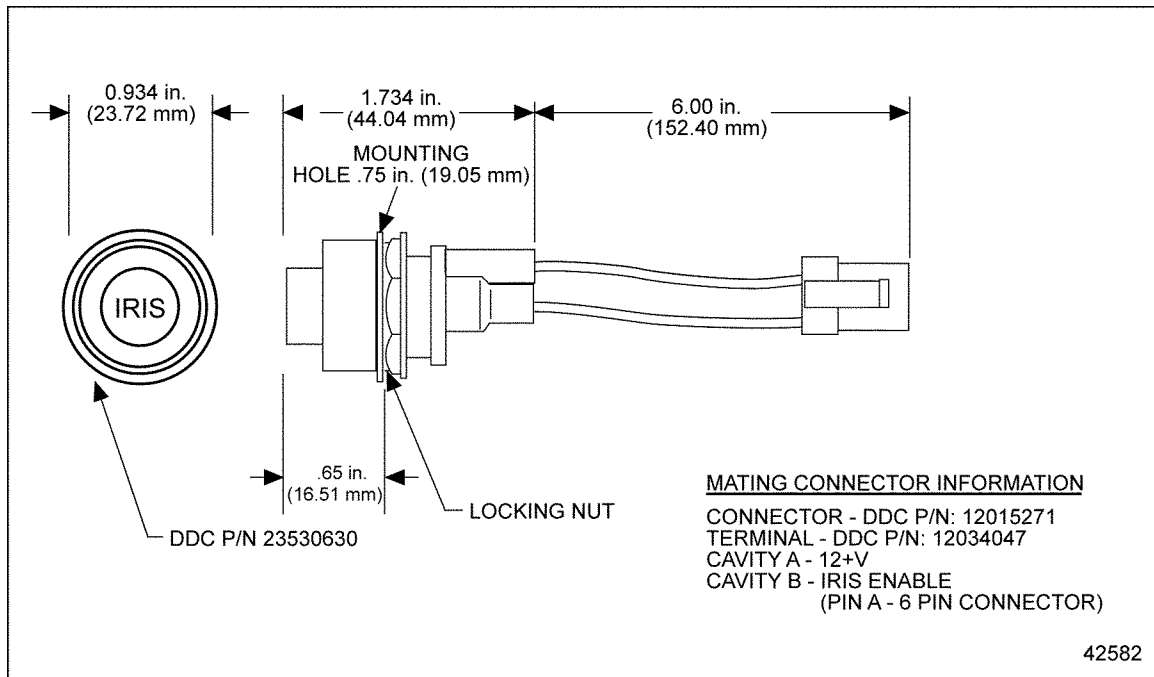


Figure 5-42 IRIS Dash Light

Two 1/4-20 grade 8 or greater stainless steel bolts are required to secure the transceiver to the vehicle. Bolt torque is 7-9 lb·ft.

The IRIS transceiver is capable of sinking 15 mA maximum for the dash light output. An LED type dash light is required. The part number for the IRIS LED dash light is 23530630.

The 6-pin connector on the mobile transceiver is used for power (ignition, ground), dash light, and data link communications. See Figure 5-43 for the interface to the vehicle.

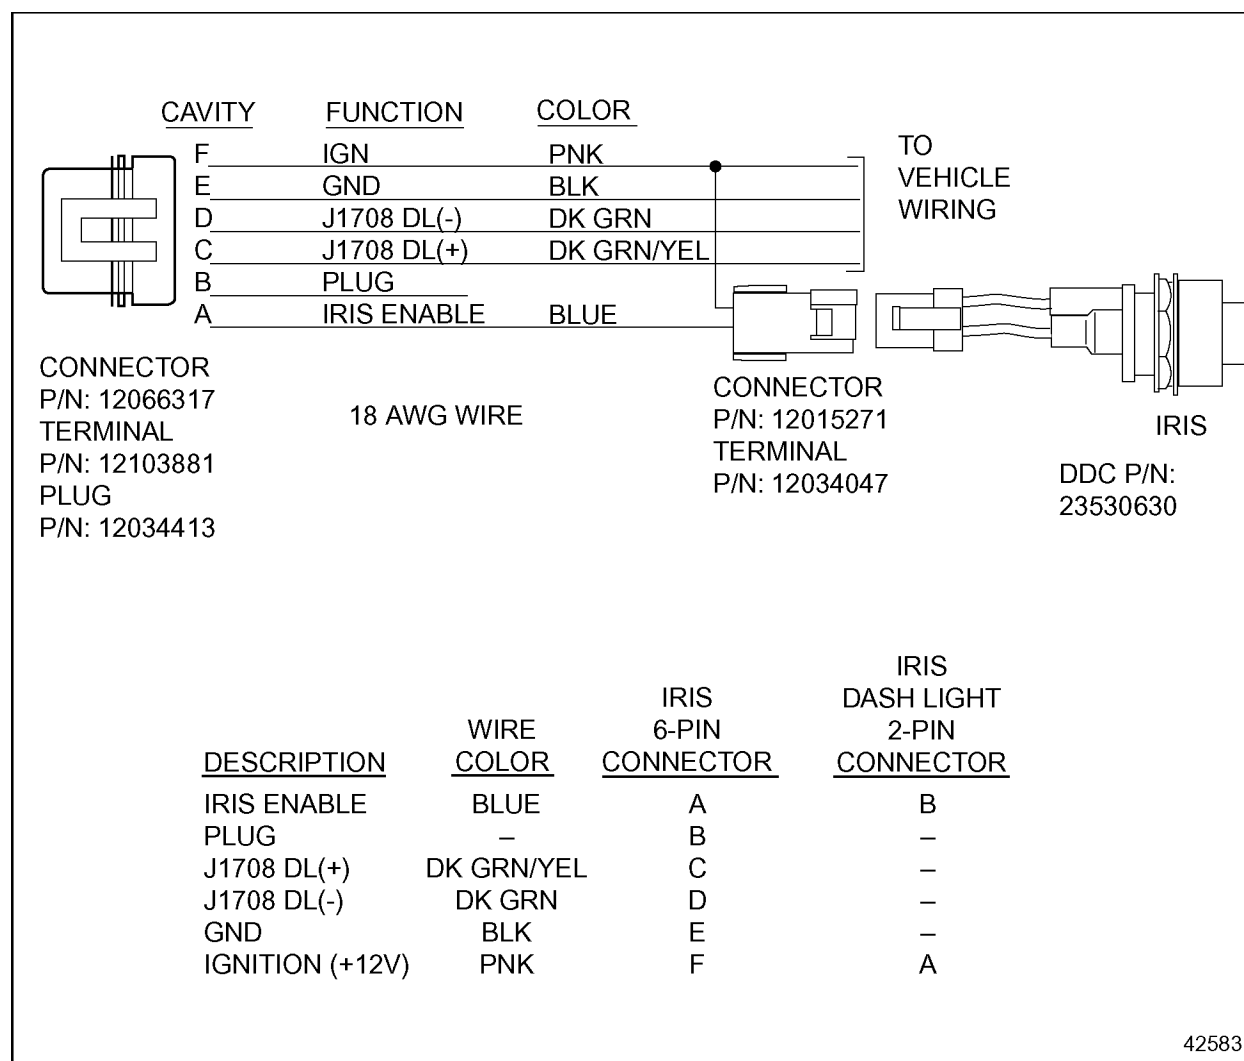


Figure 5-43 IRIS Harness

The IRIS module can only be powered by a 12 V supply. The current draw is 0.5 amps during steady state operations.

IRIS Hardware and Kits

IRIS hardware is listed in Table 5-39.

Part Number	Component
23529807	IR Base Transceiver
23530585	IRIS Communication/Power Harness – 6 ft
23528561	IRIS Standard Harness – 96 in.
23528639	IRIS-RDI Adapter Kit
23530571	IRIS Base Adapter Harness
23530629	IRIS Power Supply Harness
23530630	IRIS Active Light with Connector
23528945	IRIS LED Replacement
23512415	Translator Box
23515869	Cable 6 ft DDEC Interface PC Download
23515957	Adaptor 6-pin Deutsch to 15-pin DB Conn, Diag
23523893	Adapter 6-pin to 9-pin Deutsch
23520540	Cable RS232 9-pin serial, 6 ft
23520539	Adapter DB25 to DB9
23529808	IR Mobile Transceiver
23528559	IRIS Mobile Service Interface Harness
23530629	IRIS Mounting Bracket
7SA804	IRIS Installation Instructions
23530586	IRIS Communication/Power Harness 100 ft
23519359	Splice Clips, 18–22 AWG

Table 5-39 IRIS Hardware

The IRIS kits listed in Table 5-40, Table 5-41, Table 5-42, Table 5-43, and listed in Table 5-44 are available.

IRIS Base Adapter Kit — P/N: 23530730		
Part Number	Component	Quantity
23529807	IRIS Base Transceiver	1
23530585	IRIS Communication Harness – 6 ft	1
23530627	IRIS Power Supply Harness	1
23530629	IRIS Mounting Bracket	1
7SA804	IRIS Installation Instructions	1

Table 5-40 IRIS Base Adapter Kit

IRIS PC Extraction Kit — P/N: 23530731		
Part Number	Component	Quantity
23539807	IR Base Transceiver	1
23530585	IRIS Communication/Power Harness – 6 ft	1
23530627	IRIS Power Supply Harness	
7SA804	IRIS Installation Instructions	1
23512415	Translator Box	1
23515869	Cable 6 ft DDEC Interface PC Download	1
23515957	Adaptor 6-pin Deutsch to 15-pin DB Conn, Diag	1
23523893	Adaptor 6-pin to 9-pin Deutsch	1
23520540	Cable RS232 9-pin serial, 6ft	1
23520539	Adapter DB25 to DB9	1
23530629	IRIS Mounting Bracket	1

Table 5-41 IRIS PC Extraction Kit

IRIS RDI Extraction Kit — P/N: 23530732		
Part Number	Component	Quantity
23529807	IR Base Transceiver	1
23528639	IRIS-RDI Adaptor Kit	1
23528561	IRIS Standard Harness	1
23530629	IRIS Mounting Bracket	1
7SA804	IRIS Installation Instructions	1

Table 5-42 IRIS RDI Extraction Kit

IRIS Mobile Service zkit, 12 V — P/N: 23530734		
Part Number	Component	Quantity
23530629	IR Mobile Transceiver	1
23528559	Harness, IRIS Mobile Service Interface	1
23530629	IRIS Mounting Bracket	1
7SA804	IRIS Installation Instructions	1

Table 5-43 IRIS Mobile Service Kit, 12 V

IRIS Mobile Retrofit Kit, 12 V — P/N: 23530733		
Part Number	Component	Quantity
23539808	IR Mobile Transceiver	1
23530892	IRIS Active Light (No Connector)	1
23528561	IRIS Standard Harness (96 in.)	1
23519359	Splice Clips 18–22 AWG	9
7SA804	IRIS Installation Instructions	1

Table 5-44 IRIS Mobile Retrofit Kit, 12 V

THIS PAGE INTENTIONALLY LEFT BLANK

5.15 LOW GEAR TORQUE LIMITING

Low Gear Torque Limiting is an optional feature that allows a transmission to be used with engines capable of producing more torque than the transmission's peak torque rating.

5.15.1 OPERATION

Low Gear Torque Limiting provides a limit on the available torque if the ratio of vehicle speed to engine speed is below a set point. This limits full torque in lower gears and allows a transmission to be used with engines above the transmission's regular torque rating.

For example, the customer wants to hold the torque to 1400 ft lbs up to 8th gear. The transmission operates with the ratios listed in Table 5-45.

Gear	Ratio
5	3.57
6	2.79
7	2.14
	<< Threshold
8	1.65
9	1.27
10	1.00

Table 5-45 Transmission Ratios

Under Low Gear Torque Limit, set the "torque limit" (actual maximum torque you want to limit to) to 1400 and "threshold" to 1.89 (value between the gear you want to limit and the previous gear's ratio).

To summarize, the customer wants to limit torque up to the 8th gear to 1400. Find the ratio between 7th and 8th (1.89). From 8th gear on up, the full rated torque will be available.

5.15.2 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

A VSS or output shaft speed message over SAE J1939 is required (refer to section 3.14.25, "Vehicle Speed Sensor"). VEPS or DRS can enable the parameters listed in Table 5-46.

Parameter	Description	Choice / Display
LOW GEAR TORQUE LIMITING	Provides a limit on the available torque if the ratio of vehicle speed to engine speed is below a set point.	0 to 65535 ft lbs 65535 ft lbs disables this feature.
LOW GEAR THRESHOLD	The gear ratio below which torque is limited.	0.047 to 300

Table 5-46 Low Gear Torque Limiting Parameters

THIS PAGE INTENTIONALLY LEFT BLANK

5.16 MAINTENANCE ALERT SYSTEM

The Maintenance Alert System is available for Series 50 engines only. The Maintenance Alert System (MAS) is an optional feature that monitors engine fluid levels and filter restrictions and notifies the driver and/or technician when maintenance is required. MAS parameters that can be monitored are:

- ☐ Air Filter Restriction - OEM installed sensor
- ☐ Add Coolant Level - OEM installed sensor
- ☐ Oil Level - factory installed sensor, a standard MAS sensor
- ☐ Fuel Restriction - factory installed sensor, a standard MAS sensor

The CEL and SEL may be used to indicate the codes or an optional MAS display, ProDriver DC, Diagnostic Data Reader (DDR) or Detroit Diesel Diagnostic Link (DDDL) may be used.

MAS is available with DDEC IV software Release 27.0 or later.

5.16.1 OPERATION

DDEC continuously monitors the various sensors and logs and displays a code when a fault occurs. MAS faults do not engage any Engine Protection features (rampdown or shutdown).

DDEC will notify the operator/technician of maintenance requirements by one or more of the following methods:

- ☐ CEL/SEL indication
- ☐ ProDriver DC
- ☐ Maintenance Alert System Display Module
- ☐ DDR
- ☐ DDDL

For mobile applications, the DDR, DDDL, or MAS display must be used by personnel other than the vehicle operator.



CAUTION:

To avoid injury from loss of vehicle/vessel control, the operator of a DDEC equipped engine must not use or read any diagnostic tool while the vehicle/vessel is moving.

Oil level can only be determined when the engine is not running (i.e. after the ignition is turned off and after the drain down period or before the engine has been started). There is a minimum of four minutes and a maximum of 15 minutes (based on oil temperature) to determine the oil level after the engine has shutdown.

The Air Filter Restriction Sensor (AFRS) has two trip points, one at 18 in.H₂O and the second at 25 in.H₂O. An air filter is considered to be restricted if the AFRS reads 18 in.H₂O and the engine is operating below 1500 RPM or the AFRS reads 25 in.H₂O at any engine speed. The air filter restriction logic will look for either of these two restrictions that have occurred at least 24 engine hours apart but no more than 72 hours apart. When this condition is met, the ECM will activate an air filter restriction fault.

The air filter restriction fault and fuel restriction fault will remain active for the entire ignition cycle. If the MAS display is used, the fault will be latched in the display until a FILTER RESET is done.

ECM Power Down Behavior

If the Add Coolant Level Sensor (ACLS) or Oil Level Sensor (OLS) are configured, the ECM will go into a reduced activity mode after ignition off. In this mode, the ECM will not continuously broadcast data, but will still accept and respond to requests for two hours. The ECM will continue to monitor all the sensors, but the injectors will not fire. Just before the reduced activity mode ends, the ECM will broadcast the fluid levels, all faults (active and inactive) and preventative maintenance status. After the ECM has powered down, it will not respond to data link requests.

CEL/SEL Flashing

There are four options for using the CEL and SEL for MAS, which may be set with the DDR (Release 24.0 or later), DDDL (Release 3.0 or later), VEPS (Release 24.0 or later), or DRS.

1. CEL and SEL will not illuminate or flash for MAS Warnings - sensor faults will still be logged (recommended for vehicles equipped with the optional display modules).
2. CEL will illuminate continuously while the warning is active, i.e. low fluid levels (oil or coolant), filter restrictions.
3. Blinking CEL and SEL for 15 seconds when the ignition is first turned ON and warnings have been present.
4. Both 2 and 3.

The DDR, DDDL, or VEPS can set options for filter restriction and fluid levels independently. For example, filter restrictions can be set so the CEL/SEL do not flash, but the sensor code is logged and the fluid levels can be set so that CEL will turn on when the warning is active. The factory set default is listed in Table 5-47.

Parameters	Default
Fluid Levels	CEL and SEL flash for 15 seconds when the ignition is first turned on.
Filter Restrictions	CEL will illuminate while the warning is active.

Table 5-47 Factory Set Defaults for CEL and SEL

ProDriver DC

ProDriver DC will display any active faults and descriptions as they occur. The active faults listed in Table 5-48 will be displayed (PID and FMI) without description.

DDC Code # (Flashed)	SAE J1587 Code # (PID)	FMI	Description
13	111	6	Add Coolant Level Sensor (ACLS) Circuit Failed Low
16	111	5	Add Coolant Level Sensor (ACLS) Circuit Failed High
89	111	12	Maintenance Alert System Coolant Level Fault*
37	95	3	Fuel Restriction Circuit Failed High
38	95	4	Fuel Restriction Circuit Failed Low
89	95	0	Fuel Restriction High

* This fault will be logged when the Add Coolant Level Circuit (ACLS) reports the coolant level is OK and the Engine Protection Coolant Level Circuit (CLS) reports that coolant is low.

Table 5-48 Active Faults Displayed by ProDriver DC Without Description

Maintenance Alert System Display Module

The MAS display is cab mounted to easily display the current maintenance conditions. The display (see Figure 5-44) has seven tricolor LEDs and two switches (FILTER RESET and CHECK), each labeled for their function.

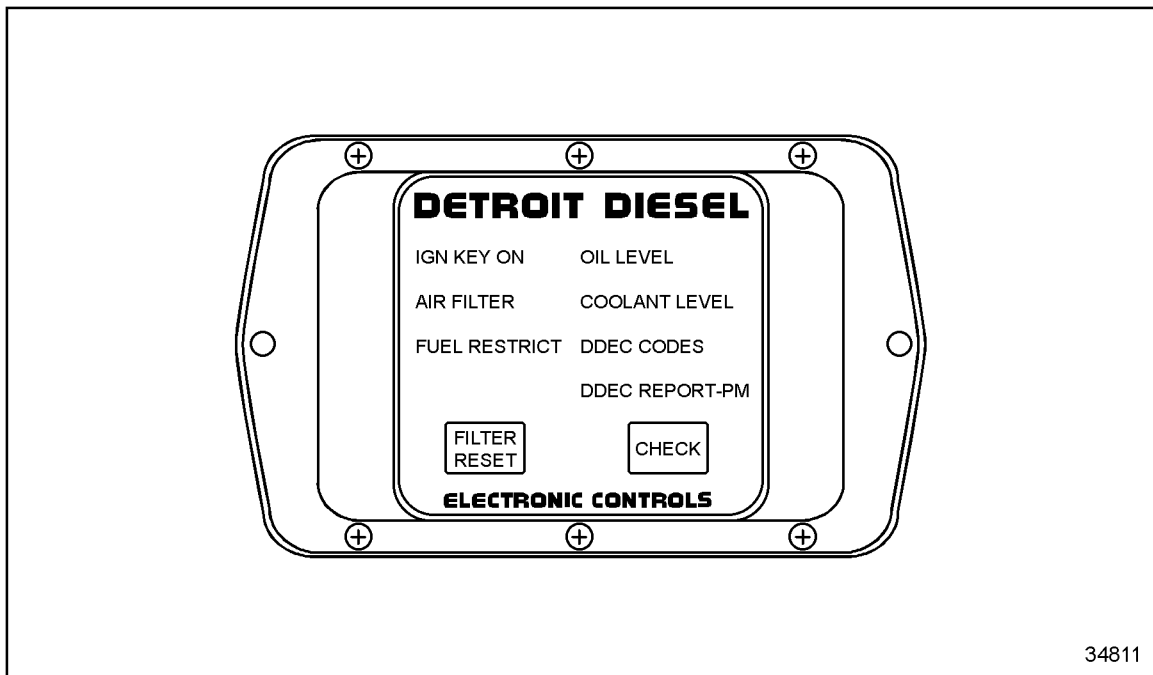


Figure 5-44 Maintenance Alert System Display (P/N: 23525655)

To display the current status of MAS parameters (listed in Table 5-49), press the CHECK button at any time to start the bulb check sequence.

Parameter	Green	Amber	Flashing Red	Blank
Air Filter	OK	N/A	Filter restriction is high.	Sensor fault or not configured.
Coolant Level	OK	N/A	Coolant Level is low. (Add coolant)	Sensor fault or not configured.
DDEC Codes	No sensor fault codes	Inactive sensor fault codes present; No Active sensor fault codes	Active sensor fault code is present.	N/A
DDEC Reports	Preventive Maintenance configured, no maintenance required	N/A	Preventive Maintenance configured and needs service.	Preventive Maintenance not configured.
fuel RESTRICT	OK	N/A	Filter restriction is high.	Sensor fault or not configured.
IGN Key ON	N/A	N/A	ECM asleep, memory data displayed.	ECM active, current data displayed.
Oil Level	OK	Oil is still draining to the oil pan.	Low oil level (minimum of 4 quarts)	Sensor fault or not configured.

Table 5-49 Maintenance Alert System Display Light Status

During the bulb check the display will request the current Preventative Maintenance (PM) data and update its memory with the received information. The LEDs will go through the following bulb check sequence:

1. All of the LEDs turn on and are green for approximately one (1) second.
2. All LEDs turn off very briefly.
3. All LEDs turn on and are red for approximately one (1) second.
4. All LEDs turn off very briefly.
5. The current information from memory will turn the LEDs to their appropriate color.
6. The LEDs will turn off after approximately 10 seconds with no switch activity.

The display will latch the fault for filter restrictions until cleared from the display. To reset the faults, press and hold the FILTER RESET button for three (3) seconds while the data is displayed. This will initiate the reset sequence for filters. This reset will only clear the display memory for each of the configured filters. FILTER RESET will change the flashing red filter LEDs to green until new and/or differing data is received and stored. If a filter LED is off and stays off after a reset this indicates that a problem other than Filter Restriction High (FMI 0) exists for that filter. The other LEDs (not used for filters) will still display the current data as they did before the reset sequence was initiated.

The MAS display will also perform minor diagnostics to inform the operator if the connection to the data link has been broken while the ignition is on. When this condition occurs, the display will flash all LEDs red at roughly two times/second while the ignition is on and until the FILTER RESET button is pushed, at which time the display will go blank. If the MAS display is energized via the CHECK button before the link connection has been repaired, the LEDs will again flash red in place of the normal service item status until the 10 second "no activity" timer has expired. After the display sees data bus activity, it will revert back to normal operation with the currently stored data and normal updates to the stored data.

Diagnostic Data Reader

The DDR (Release 24.0 or later) Maintenance Status menu will display the current status of MAS parameters, as listed in Table 5-50.

Parameter	Description	Choices
OIL LEVEL	Indicates the engine oil level. NOTE: While the engine is running, or for a maximum of 15 minutes after shutting down, the engine oil level will be UNKNOWN.	OK, ADD, N/A, UNKNOWN, FAIL
COOL LEVEL	Indicates the coolant level in the reservoir.	FULL, ADD, LOW, N/A, FAIL
AIR FILTER	Indicates the condition of the air inlet filter.	OK, PLUGGED, ERROR, N/A
FUEL FILTER	Indicates the condition of the fuel filter.	OK, PLUGGED, ERROR, N/A

Table 5-50 DDR Maintenance Status Menu List of MAS Parameters

The DDR (Release 24.0 or later) main data list will display the MAS parameters, as listed in Table 5-51.

Parameter	Description	Choices
OIL LEVEL	Indicates the engine oil level. NOTE: While the engine is running, or for a maximum of 15 minutes after shutting down, the engine oil level will be UNKNOWN.	OK, ADD, N/A, UNKNOWN, FAIL
COOL LEVEL	Indicates the coolant level in the reservoir.	FULL, ADD, LOW, N/A, FAIL
AIR FILT RS "H2O or kPa	Indicates the relative amount of restriction measured at the air inlet filter.	0.0 to 99.9 "H2O 0.0 to 99.9 kPa FAIL, N/A
FUEL IN RES "HG or kPa	Indicates the restriction measured at the fuel pump inlet.	0.0 to 99.9 "Hg 0.0 to 99.9 kPa FAIL, N/A

Table 5-51 DDR Main Data List MAS Parameters

NOTE:

After replacing the filter, PLUGGED will be displayed on the DDR until inactive codes or maintenance codes are cleared.

Maintenance codes can be cleared by the DDR under the Maintenance Alert menu. Only the MAS faults listed in Table 5-52 will be cleared under the Maintenance Alert menu.

PID	FMI	Description
98	1	Oil Level Low
111	1	Coolant Level Low
107	0	Air Filter Restriction High
95	0	Fuel Restriction High

Table 5-52 Maintenance Codes that Can Be Cleared by the DDR

Detroit Diesel Diagnostic Link

The DDDL (Release 3.0 or later) Maintenance Alert menu will display the current status of the MAS parameters and preventative maintenance status as listed in Table 5-53.

Parameter	Description	Choices
OIL LEVEL	Indicates the engine oil level. NOTE: While the engine is running, or for a few minutes after shutting down, the engine oil level will be UNKNOWN.	OK, ADD, N/A, UNKNOWN, FAIL
COOLANT LEVEL	Indicates the coolant level in the reservoir.	FULL, ADD, LOW, N/A, FAIL
AIR FILTER RESTRICTION	Indicates the relative amount of restriction measured at the air inlet filter.	OK, PLUGGED, ERROR, N/A
FUEL FILTER RESTRICTION	Indicates the restriction measured at the fuel pump inlet.	OK, PLUGGED, ERROR, N/A
PREVENTATIVE MAINTENANCE STATUS SERVICE A	Indicates the status of preventative maintenance limits.	EXPIRED, NOT EXPIRED, NOT CONFIGURED
PREVENTATIVE MAINTENANCE STATUS SERVICE B	Indicates the status of preventative maintenance limits.	EXPIRED, NOT EXPIRED, NOT CONFIGURED
PREVENTATIVE MAINTENANCE STATUS SERVICE C	Indicates the status of preventative maintenance limits.	EXPIRED, NOT EXPIRED, NOT CONFIGURED

Table 5-53 DDDL Maintenance Alert Menu List of MAS Parameters

The DDDL (Release 3.0 or later) Instrumentation menu will display the MAS parameters as listed in Table 5-54 under the "User ^6" tab.

Parameter	Description	Choices
OIL LEVEL	Indicates the engine oil level. NOTE: While the engine is running, or for a few minutes after shutting down, the engine oil level will be UNKNOWN.	OK, ADD, N/A, UNKNOWN, FAIL
COOLANT LEVEL	Indicates the coolant level in the reservoir.	FULL, ADD, LOW, N/A, FAIL
AIR FILTER DIFFERENTIAL PRESSURE	Indicates the relative amount of restriction measured at the air inlet filter.	0.0 to 99.9 "H ₂ O 0.0 to 99.9 kPa FAIL, N/A
FUEL FILTER DIFFERENTIAL PRESSURE	Indicates the restriction measured at the fuel pump inlet.	0.0 to 99.9 "Hg 0.0 to 99.9 kPa FAIL, N/A

Table 5-54 DDDL Instrumentation Menu List of MAS Parameters

NOTE:

After replacing the filter, DDDL will display PLUGGED until the inactive or maintenance codes are cleared.

Maintenance Codes can be cleared by DDDL under the Diagnostic Maintenance Alert menu. Only the MAS faults listed in Table 5-55 will be cleared under the Maintenance Alert menu.

PID	FMI	Description
98	1	Oil Level Low
111	1	Coolant Level Low
107	0	Air Filter Restriction High
95	0	Fuel Restriction High

Table 5-55 MAS Maintenance Codes DDDL Can Clear Under the Maintenance Alert Menu

5.16.2 INSTALLATION

The Oil Level Sensor (OLS) and the Fuel Restriction Sensor (FRS) are factory installed. The Air Filter Restriction Sensor (AFRS), the Add Coolant Level Sensor (ACLS), and the MAS Display Module are installed by the OEM.

The MAS pigtail (see Figure 5-45) on the DDC installed Engine Sensor Harness will be used to wire the AFRS and ACLS (see Figure 5-47).

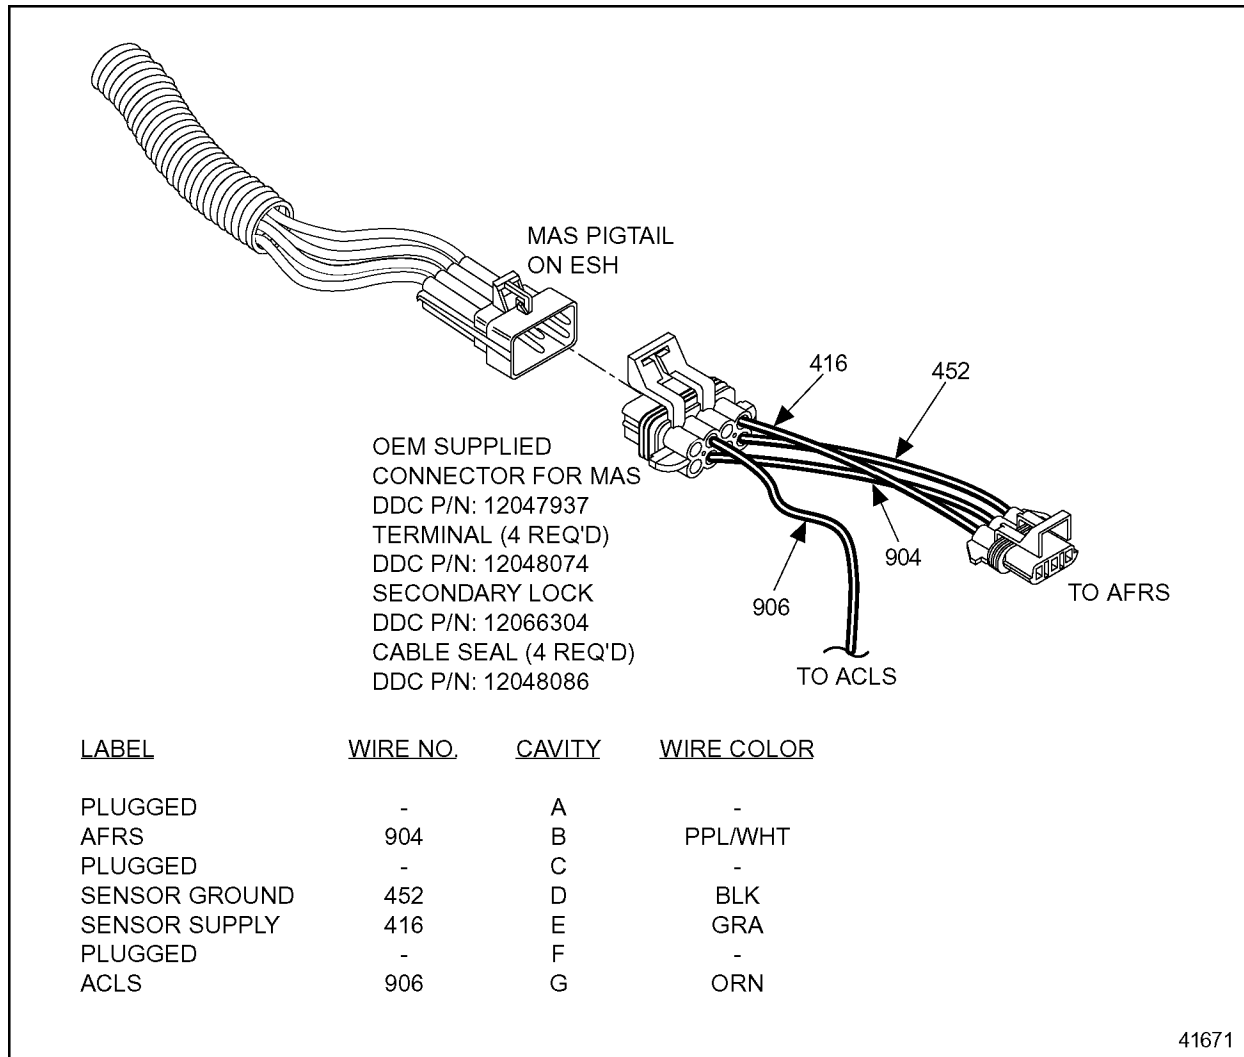


Figure 5-45 MAS Pigtail Connection to the Air Filter Restriction Sensor

Air Filter Restriction Sensor

The AFRS (see Figure 5-46) is mounted downstream of the air filter and upstream of the turbocharger.

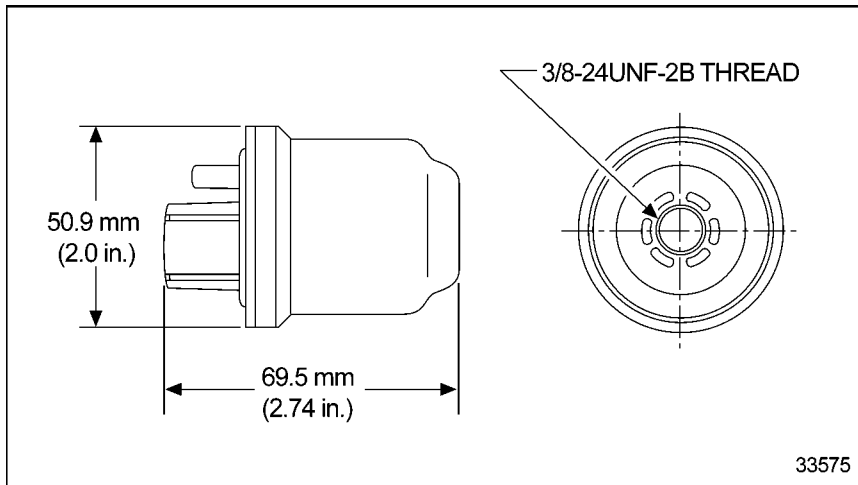


Figure 5-46 Air Filter Restriction Sensor

The AFRS must be in a straight section of pipe or where the OEM mechanical unit is normally mounted. This sensor must be enabled with VEPS (Release 24.0 software or later) or DRS.

NOTE:

The AFRS sensor and associated wiring is OEM installed.

Two fittings are provided with the sensor (see Figure 5-47). Each OEM can pick the application appropriate fitting.

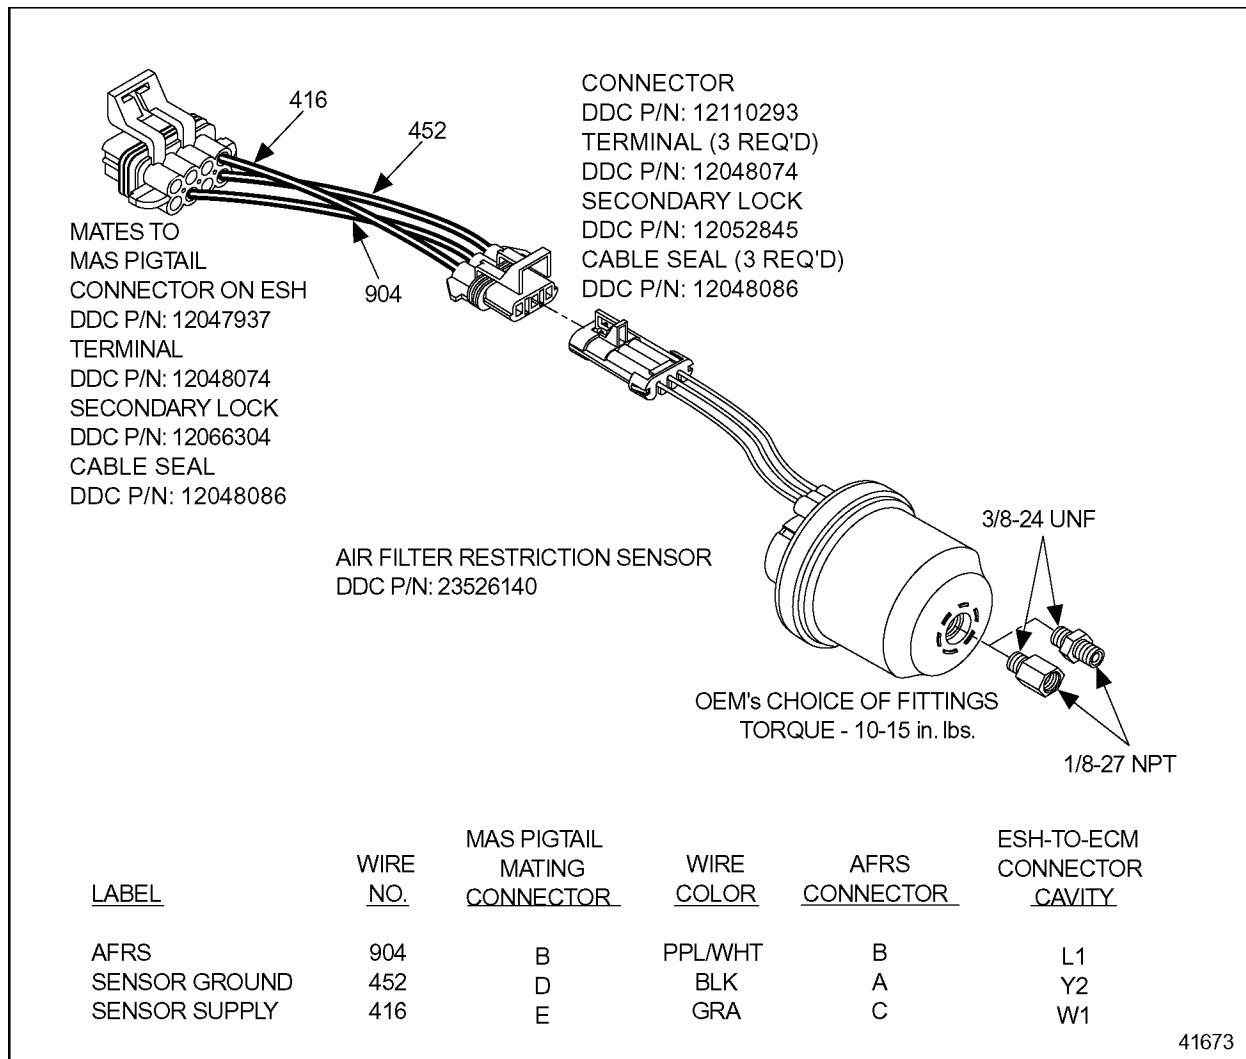


Figure 5-47 Air Filter Restriction Wiring Diagram

Add Coolant Level Sensor

The Add Coolant Level Sensor is used to warn the driver that the coolant level is below the recommended level but engine damage is not imminent. If the tank is equipped with an "ADD" level, the sensor should be installed there. This sensor will be activated approximately mid-way between the cold full level and the level where the standard (engine protection) CLS is located (see Figure 5-48).

NOTE:

This sensor is not available for the 2004 Series 50 engines.

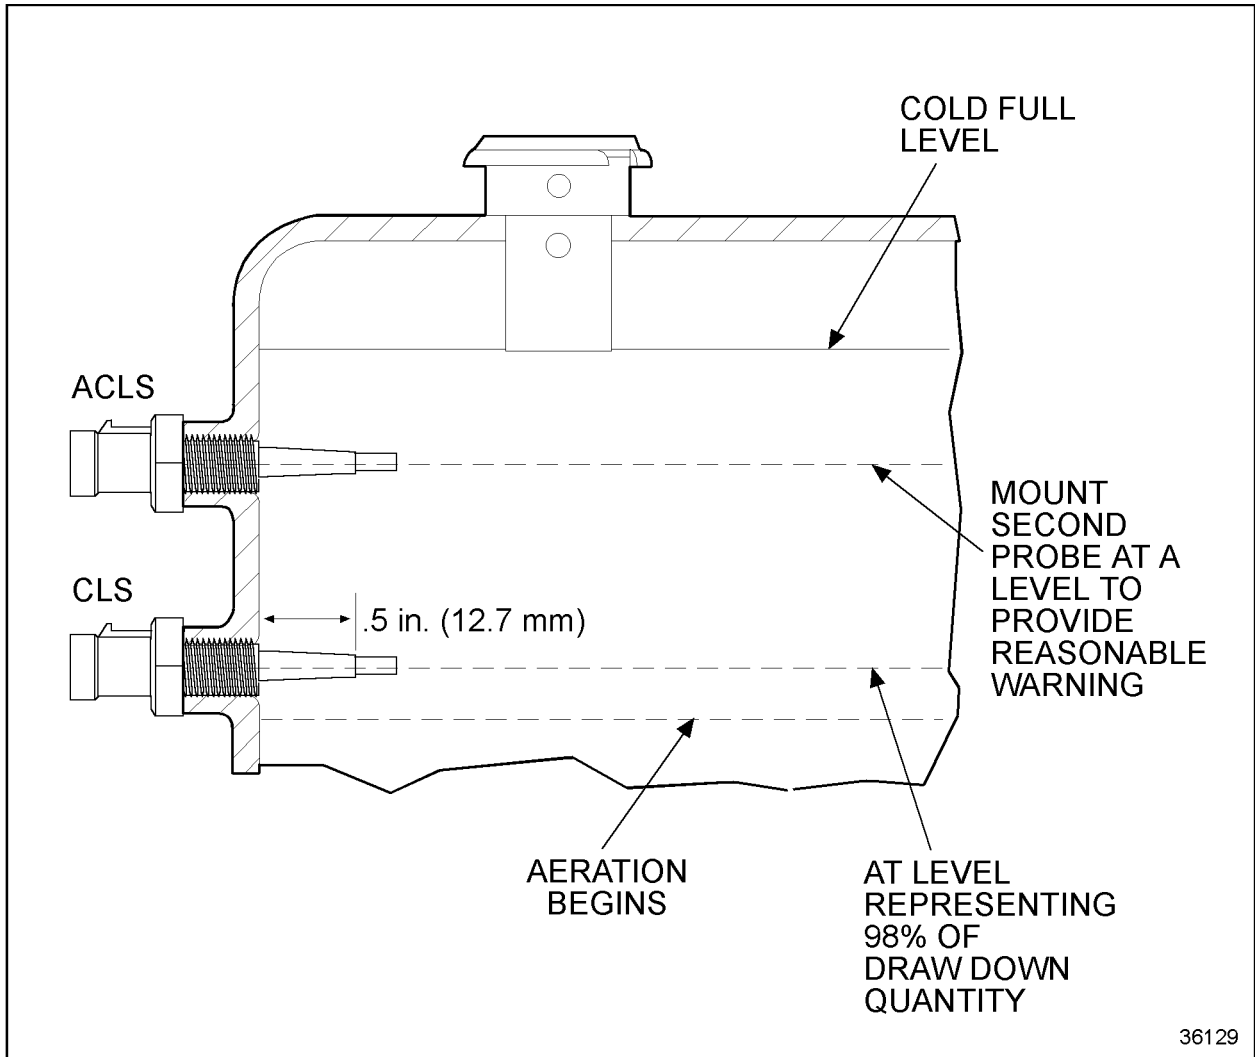


Figure 5-48 Add Coolant Level Sensor Location - Radiator Surge Tank

The ACLS must be enabled with VEPS (Release 24.0 or later) or DRS.

NOTE:

All ACLS components are OEM installed.

ACLS will require an additional module (P/N: 23524054) to condition the sensor signal. The module output will be connected to the MAS pigtail on the DDC supplied Engine Sensor Harness. See Figure 5-49 for wiring schematic.

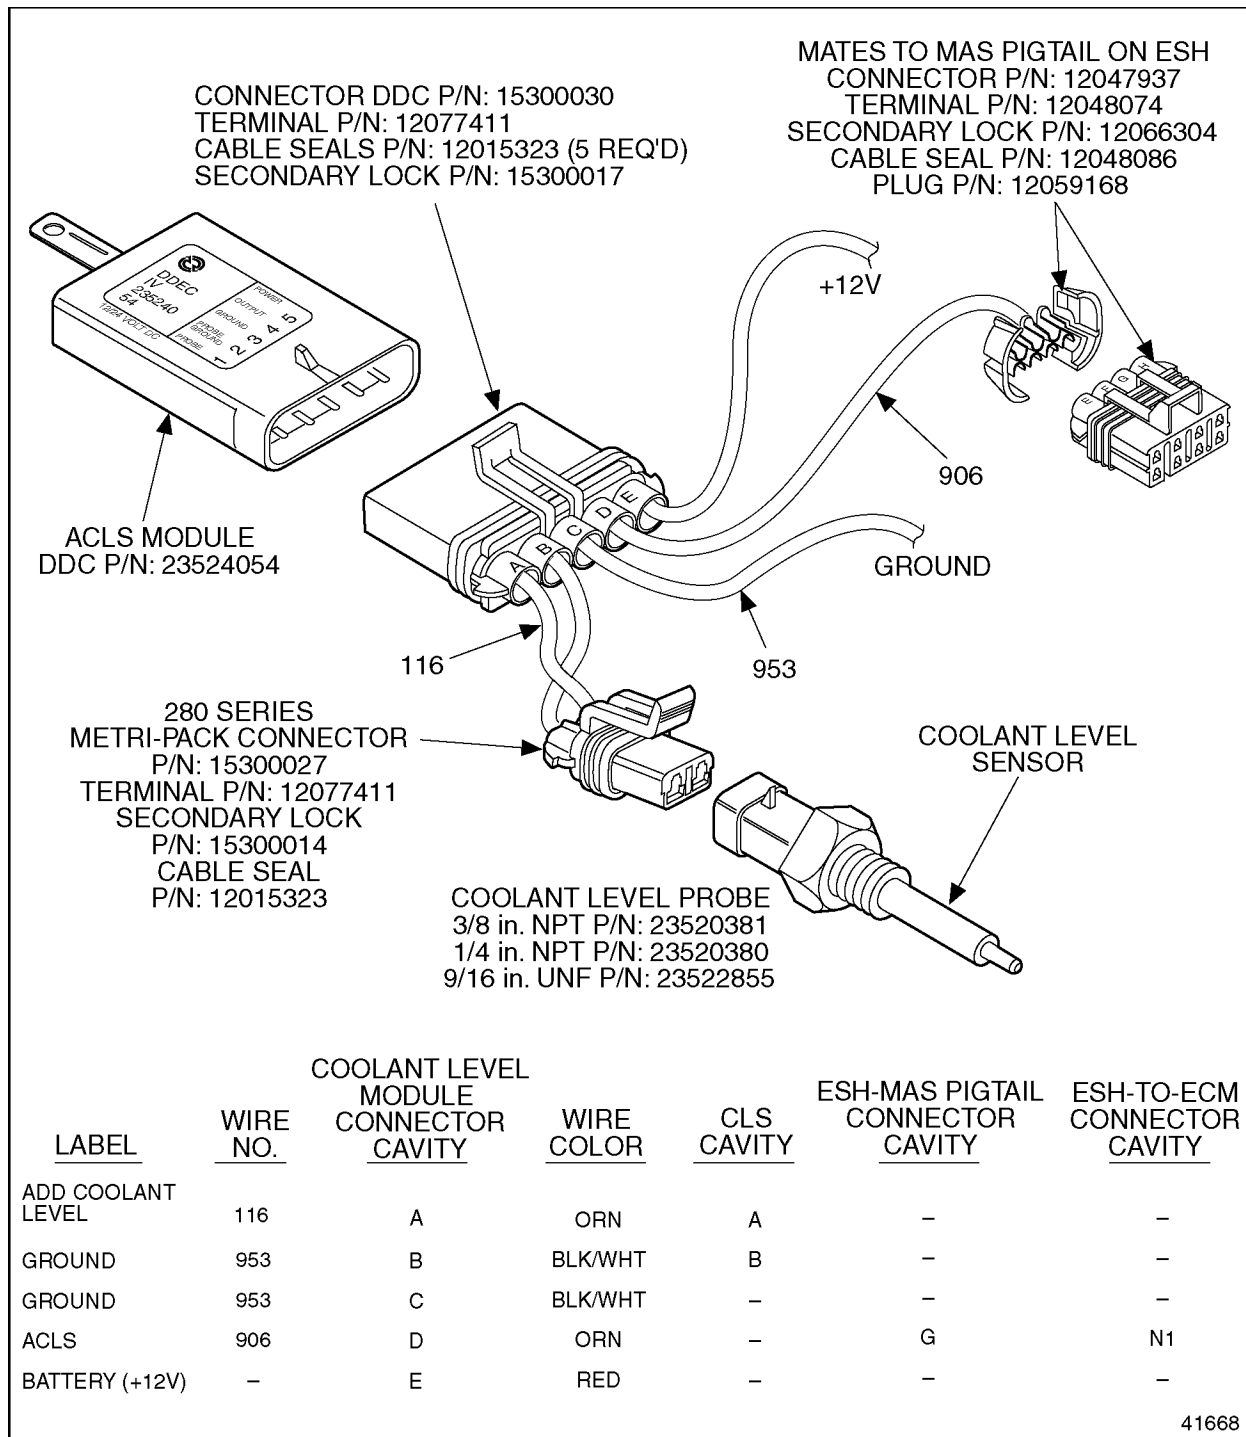


Figure 5-49 Add Coolant Level Sensor Installation

Fuel Restriction Sensor

The FRS is factory installed at DDC and is incorporated into the DDC Engine Sensor Harness (see Figure 5-50). No OEM installation is required. The proper 6N4C and 6N4 groups must be specified.

The FRS will log a fault code at 12 in. Hg.

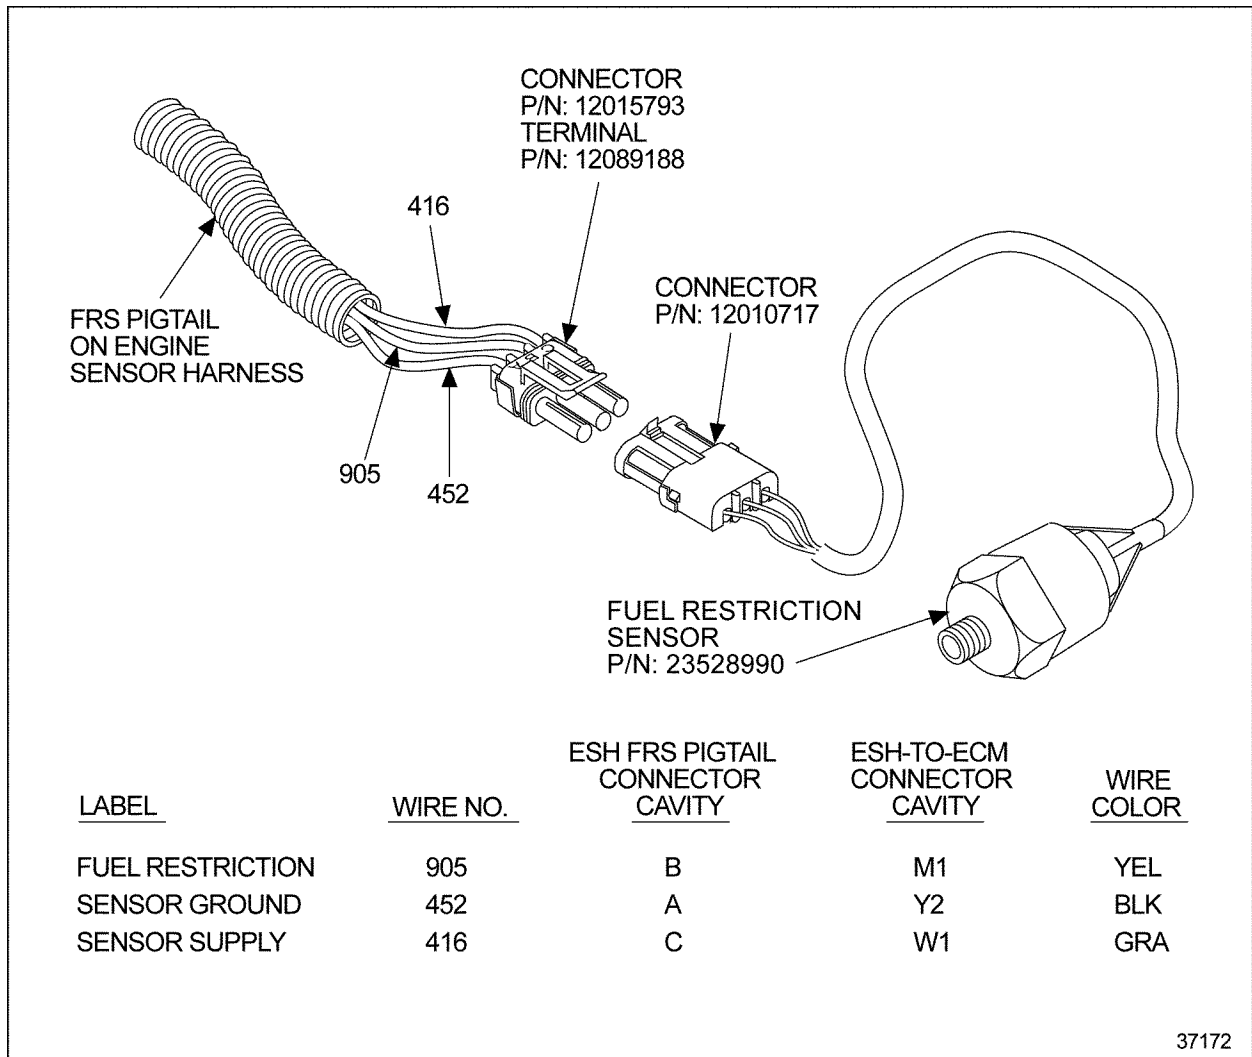


Figure 5-50 Fuel Restriction Sensor Installation

Oil Level Sensor

The OLS is factory installed at DDC and is incorporated into the DDC Engine Sensor Harness (see Figure 5-51). No OEM installation is required. The proper 6N4C and 6N4 groups must be specified. The OLS is mounted in the Series 50 engine oil pan at four quarts low.

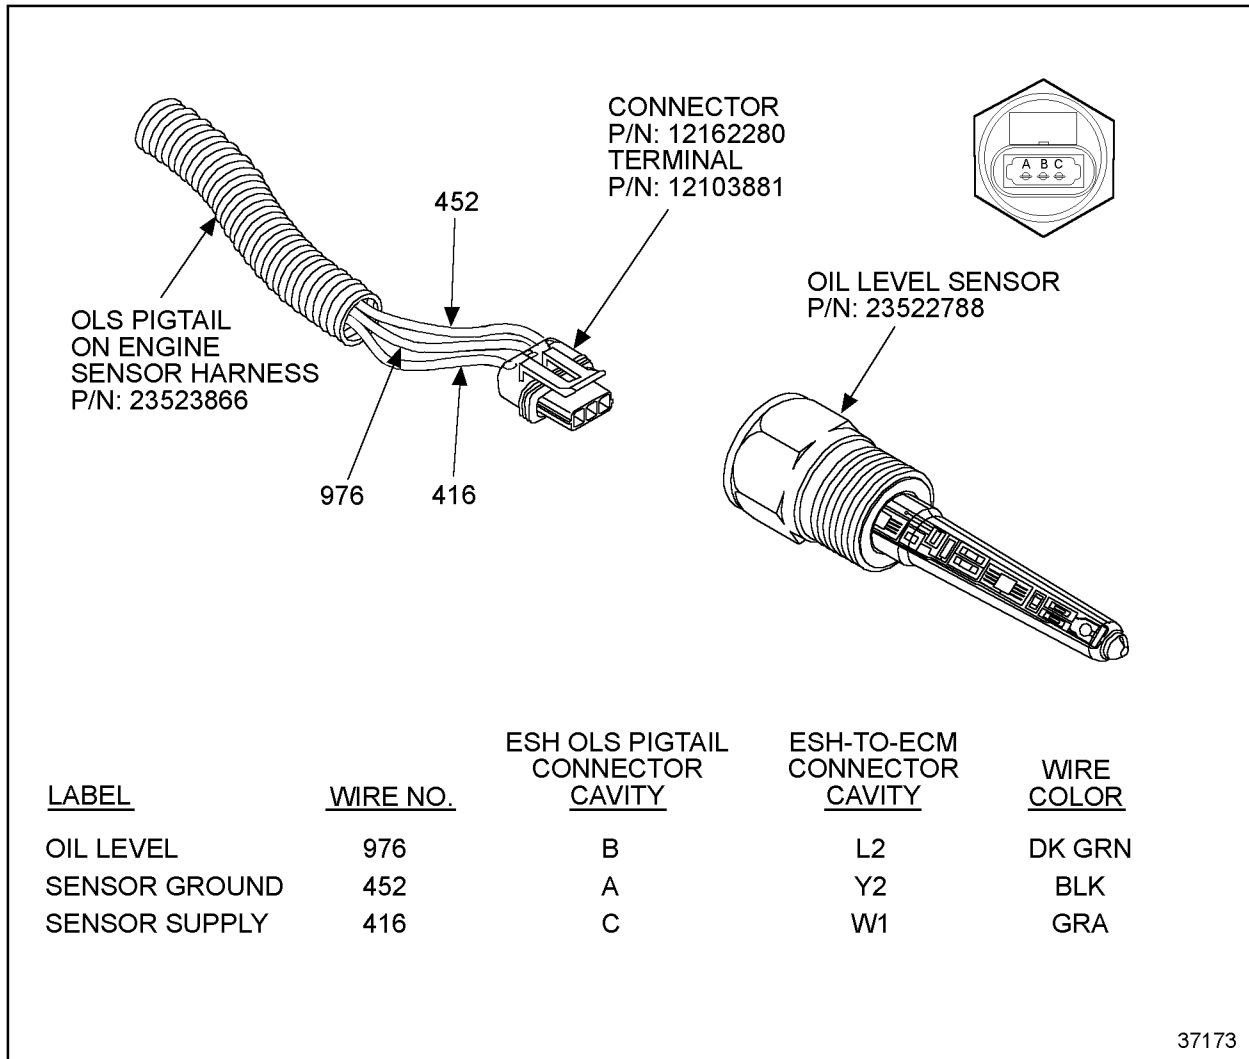


Figure 5-51 Oil Level Sensor Installation

Maintenance Alert System Display Module Installation

The display must be mounted in an interior location easily accessible from outside the vehicle for mechanics and other service personnel to view. It cannot be mounted in the engine compartment. The display may be installed in other enclosed areas such as a bus battery compartment. If the display is installed anywhere outside of the vehicle cab or passenger compartment, it must be completely sealed inside a protective enclosure to protect it from dirt and moisture. The part number for the MAS display is P/N: 23525655. See Figure 5-52 for the dimensions of the MAS display.

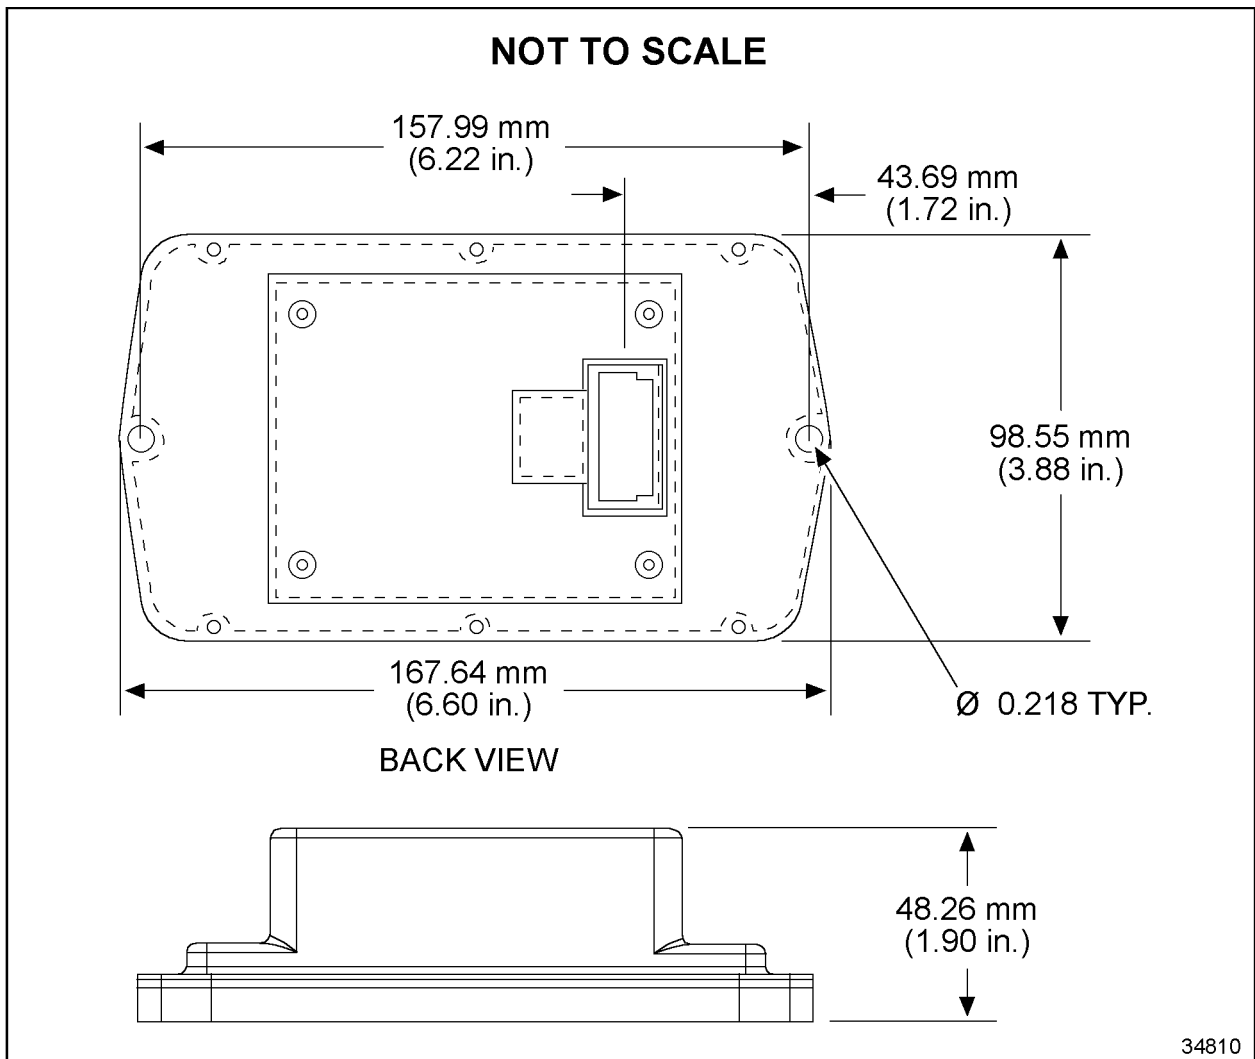


Figure 5-52 Maintenance Alert System Display Dimensions

An example of a typical bracket used to mount the MAS display in passenger compartment applications may be seen in the next two illustrations (see Figure 5-53 and Figure 5-54).

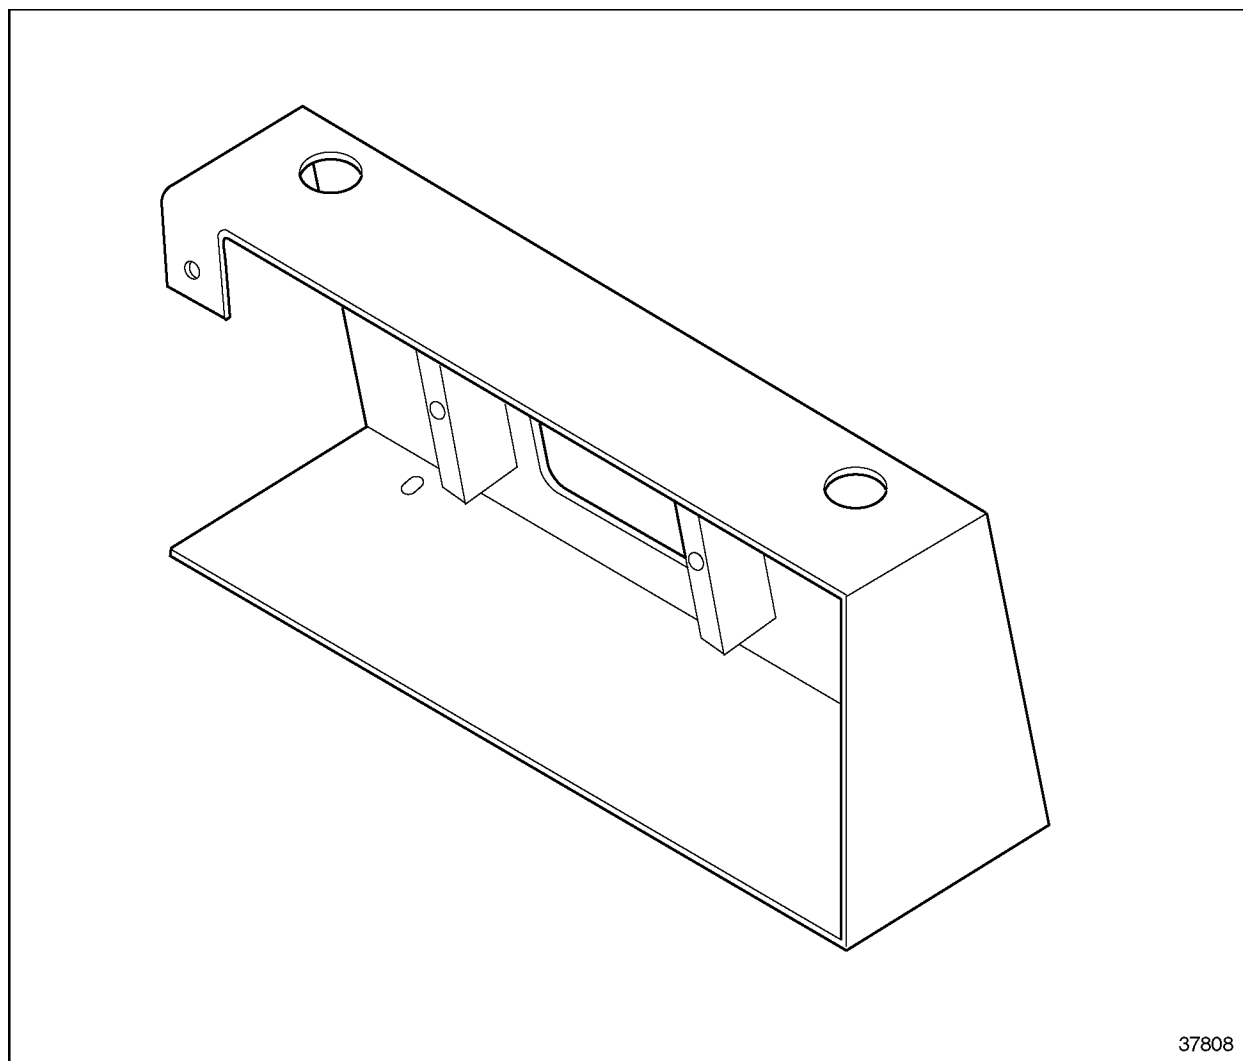


Figure 5-53 Maintenance Alert Display Bracket

The bracket is the responsibility of the OEM. A label on the front face of the bracket should be used for operating instructions and light definition. See Figure 5-55 for an example.

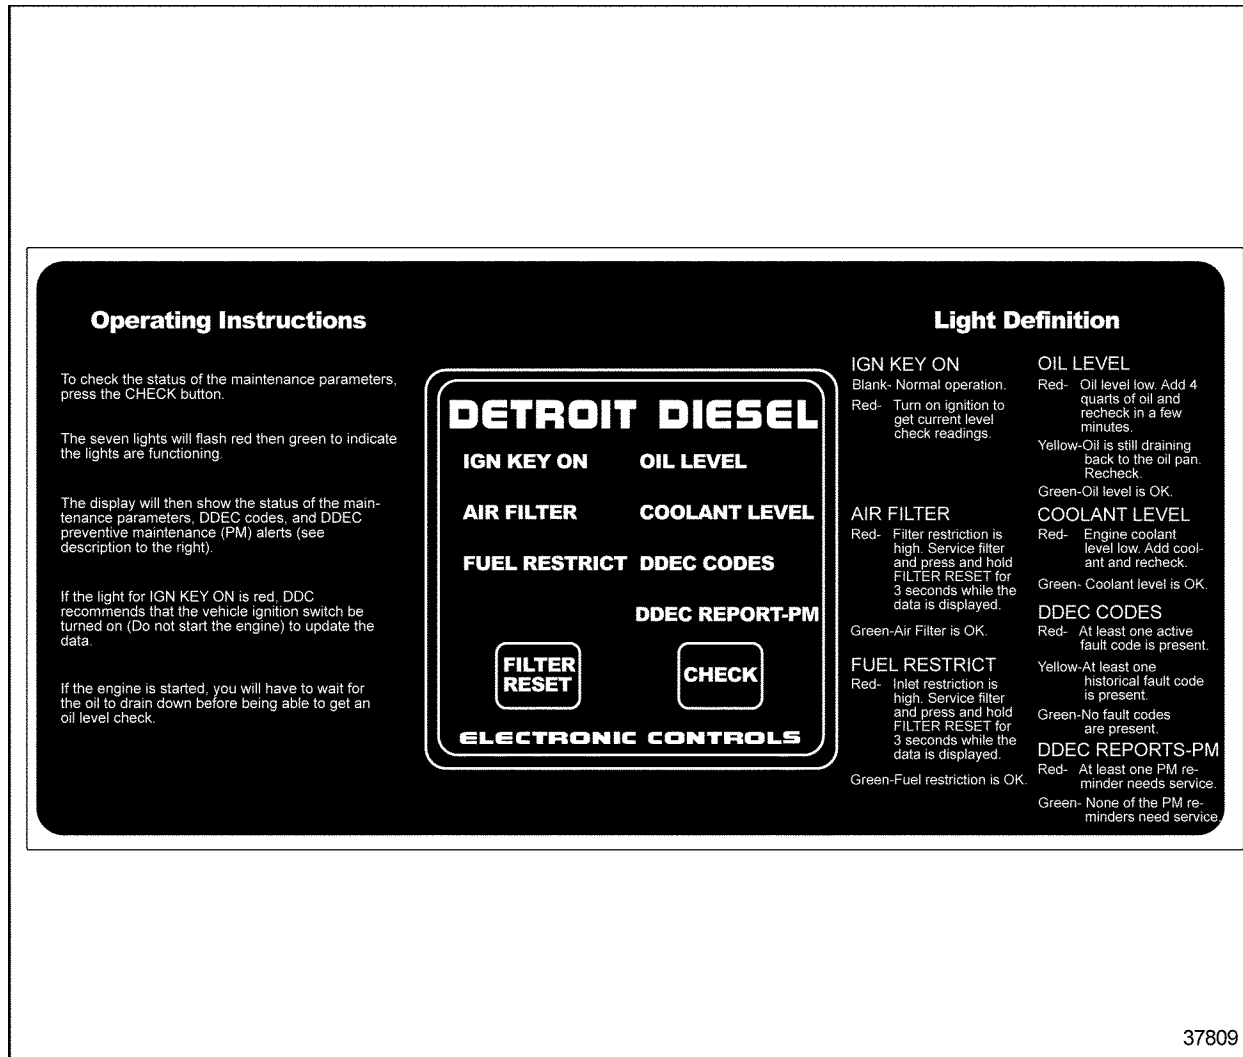


Figure 5-55 Maintenance Alert Display Bracket with Label

Maintenance Alert System Display Harness

The connector for the MAS display is a molded integral connector that mates to Delphi Packard 12065425 with the connections shown in the following schematic. See Figure 5-56 for the wiring schematic.

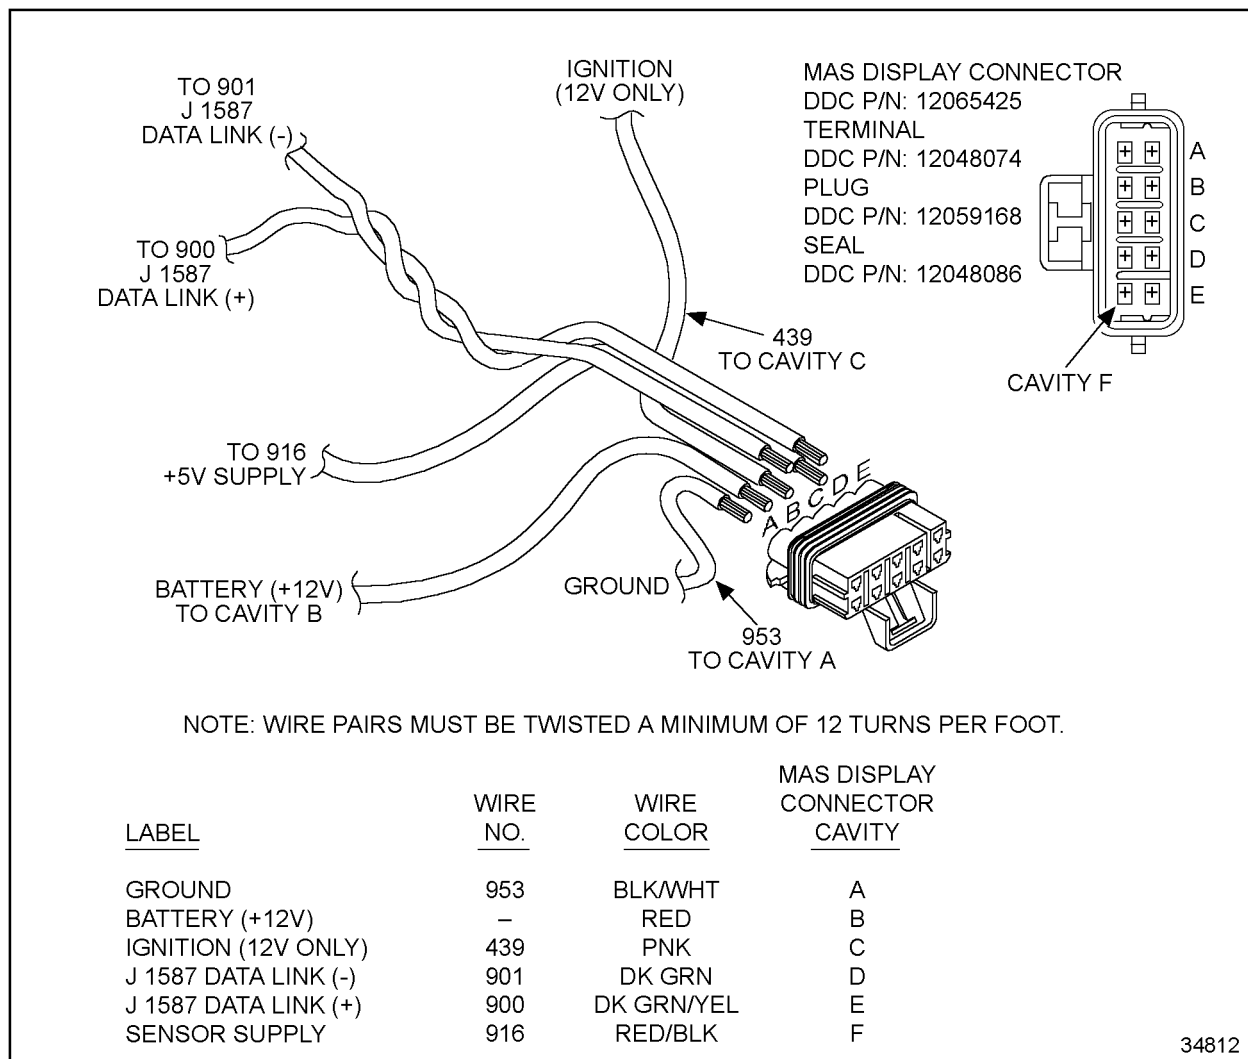


Figure 5-56 Maintenance Alert System Display Harness

5.16.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The OLS and FRS must be specified with the correct 6N4C and 6N4 groups.

The OEM installed sensors must be setup by VEPS or DRS. These sensors are the Air Filter Restriction Sensor, Add Coolant Level Sensor.

NOTE:

The MAS display must be wired to a 12 V battery and a 12 V ignition source only.

The DDR can set options for the CEL and SEL indication of MAS codes as listed in Table 5-56.

Parameter	Description	Choices	Action
Filters	Determines if the CEL/SEL will flash a maintenance alert for filters.	NO, FLASH, CONTINUOUS, BOTH	NO - no illumination or flashing FLASH - flash at ignition on CONTINUOUS - Light will stay on when there is an alert (CEL only) BOTH - light will flash at ignition on, then stay on
Levels	Determines if the CEL/SEL will flash a maintenance alert for fluid levels.	NO, FLASH, CONTINUOUS, BOTH	

Table 5-56 DDR Options

5.16.4 DIAGNOSTICS

The codes that will be logged are listed in Table 5-57.

DDC Code # (Flashed)	SAE J1587 Code # (PID)	FMI	Description
13	111	4	(Engine Protection) Coolant Level (CLS) Circuit Failed Low
13	111	6	Add Coolant Level (ACLS) Circuit Failed Low
16	111	3	(Engine Protection) Coolant Level (CLS) Circuit Failed High
16	111	5	Add Coolant Level (ACLS) Circuit Failed High
37	95	3	Fuel Restriction Circuit Failed High
38	95	4	Fuel Restriction Circuit Failed Low
43	111	1	Coolant Level (CLS or ACLS) Low
65	107	3	Air Filter Restriction Circuit Failed High
65	107	4	Air Filter Restriction Circuit Failed Low
73	107	0	Air Filter Restriction High
81	98	3	Oil Level Circuit Failed High
82	98	4	Oil Level Circuit Failed Low
84	98	1	Oil Level Low
89	111	12	Maintenance Alert System Coolant Level Fault*
89	95	0	Fuel Filter Restriction High

* This fault will be logged when the Add Coolant Level Circuit (ACLS) reports the coolant level is OK and the Engine Protection Coolant Level Circuit (CLS) reports that coolant is low.

Table 5-57 Maintenance Alert System Codes

NOTE:

Filter restrictions will latch a high restriction fault to active status for the entire ignition cycle.

5.16.5 INTERACTION WITH OTHER FEATURES

There are four options for using the CEL and SEL for MAS, which may be set with the DDR (Release 24.0). ProDriver DC will display any active faults as they occur.

5.17 MANAGEMENT INFORMATION PRODUCTS

The Management Information Products, formerly called Data Hub, comprise a modular system that provides monitoring of any DDEC-equipped engine. These products provide substantial storage capacity, flexible data extraction and communication capabilities. Members of the system that collect data include

- ☐ DDEC III Data Pages (refer to section 5.17.2)
- ☐ DDEC IV Data (refer to section 5.17.3)
- ☐ ProDriver® DC (refer to section 5.17.6)

PC software for data analysis and reporting include:

- ☐ DDEC Reports (refer to section 5.17.4)
- ☐ Detroit Diesel Data Summaries (refer to section 5.17.5)

5.17.1 OPERATION

The Management Information Products are designed to provide instantaneous feedback to the driver via the ProDriver DC display module. These driver-friendly features help provide an understanding of the effect of the driver's actions on the engine and vehicle performance.

The DDEC ECM provides engine control and monitoring as well as a stored summary of engine performance. The Data Logger compliments DDEC III Data Pages by extending the memory available to store detailed trip information.

Data in these devices can be extracted and analyzed with the PC software products as follows:

- ☐ DDEC Reports extracts data from all hardware devices and analyzes data from DDEC III Data Pages and DDEC IV Data.
- ☐ ProManager Rel. 2.1 software extracts and analyzes the Data Logger data and DDEC III Data Pages.
- ☐ Data Summaries extracts data from all hardware devices and analyzes data from all but the Data Logger.

All these products allow printing of comprehensive reports for managing vehicle operation.

Additional diagnostic data available from Management Information includes:

- ☐ Instantaneous and average fuel economy
- ☐ Trip time, miles, fuel, total fuel used economy, and average speed
- ☐ Driving time, percentage, miles, fuel, and fuel economy
- ☐ Idle time, fuel and percentage
- ☐ Cruise time, percentage, miles, fuel, and fuel economy
- ☐ Top gear time, percentage, miles, fuel used, and fuel economy
- ☐ One gear down time, percentage, miles, fuel used, and fuel economy

- ☐ VSG time, fuel, and percentage
- ☐ Overspeed time and percentage for two speed thresholds
- ☐ Over-rev time and percentage
- ☐ Maximum speed and RPM
- ☐ Coasting time and percentage
- ☐ Driving average load factor (DDEC IV Rel. 21 and higher)
- ☐ Automated oil change interval tracking
- ☐ Hard braking incident records
- ☐ Driver initiated incident records
- ☐ Stop and check engine code logs
- ☐ Optimized Idle[®] active time, idle time, and estimated fuel savings
- ☐ SAE J1587 data link timeouts and power interruptions
- ☐ Leg time, distance, fuel used, fuel economy, average speed, and cruise time and percentage
- ☐ Last Stop records

5.17.2 DDEC III DATA PAGES

DDEC III Data Pages is an optional feature of the DDEC III ECM. When activated, it utilizes available memory and processing speed to record engine and vehicle operating information. Data is stored in daily records for a maximum of 14 working days. Information on engine performance trends, service intervals and ECM diagnostics are also stored.

5.17.3 DDEC IV DATA

DDEC IV Data is a standard part of the DDEC IV ECM. DDEC IV Data utilizes available memory and processing speed, along with a built-in, battery-backed clock/calendar to document the performance of the driver and vehicle. Data is stored in three monthly records and in a trip file that may be reset at extraction. Data on periodic maintenance intervals, hard brake incidents, last stop records, daily engine usage, and ECM diagnostics is also stored.

DDEC IV Data can be extracted onto a PC hard disk through a wide range of options:

- ☐ Direct extraction using a DDEC translator box and cables connected to a PC running DDEC Reports.
- ☐ A Remote Data Interface (RDI) which adds automation to the process. This weatherproof extraction module is usually located at a fuel island and the PC it connects to is remotely located. The PC will be operating the communications part of DDEC Reports called DDEC Communications.
- ☐ Wireless extraction via cellular telephone, satellite radio communications equipment. The PC can be operating DDEC Reports or DDEC Communications.

5.17.4 DDEC REPORTS

After the data is extracted from the ECM, DDEC Reports software produces a wide range of diagnostic and management reports. DDEC Reports produces comprehensive trip reports in both on-highway and nonroad markets. The on-highway reports are listed in Table 5-58.

Available Reports	DDEC III Data Pages	DDEC IV - R20	DDEC IV - R21 or Later	DDEC Reports Version Required
Trip Activity	X		X	2.0 or Later
Vehicle Speed/RPM	X	X	X	2.0 or Later
Overspeed / Over Rev		X	X	2.0 or Later
Engine Load/RPM		X	X	2.0 or Later
Vehicle Configuration	X	X	X	2.0 or Later
Periodic Maintenance	X		X	2.1 or Later
Hard Brake Incident			X	2.1 or Later
Last Stop			X	2.1 or Later
DDEC Diagnostic			X	2.1 or Later
Profile	X		X	2.1 or Later
Monthly Activity			X	2.1 or Later
Daily Engine Usage			X	2.1 or Later
Life to Date	X		X	2.1 or Later


Table 5-58 On-highway Reports Available from DDEC Reports

The nonroad reports are listed in Table 5-59.

Available Reports	DDEC III Data Pages	DDEC IV - R20	DDEC IV - R21 or Later	DDEC Reports Version Required
Period Activity		X	X	3.0 or Later
High RPM		X	X	3.0 or Later
Engine Load/RPM		X	X	3.0 or Later
Configuration		X	X	3.0 or Later
Periodic Maintenance		X	X	3.0 or Later
DDEC Diagnostic			X	3.0 or Later
Profile			X	3.0 or Later
Monthly Activity			X	3.0 or Later
Daily Engine Usage			X	3.0 or Later
Life to Date			X	3.0 or Later

Table 5-59 Nonroad Reports Available from DDEC Reports

See Figure 5-57, Figure 5-58, and Figure 5-59 for examples of on-highway DDEC Reports. See Figure 5-60, Figure 5-61, and Figure 5-62 for examples of nonroad DDEC Reports. This Windows® 95 compatible product is included as part of the Detroit Diesel Diagnostic Link (DDDL) service tool. DDDL is designed for the service technician and with the built-in troubleshooting manual it is ideal for extracting data, analyzing and printing information from the ECM. A set of Marine reports is now available in DDEC Reports 3.10.

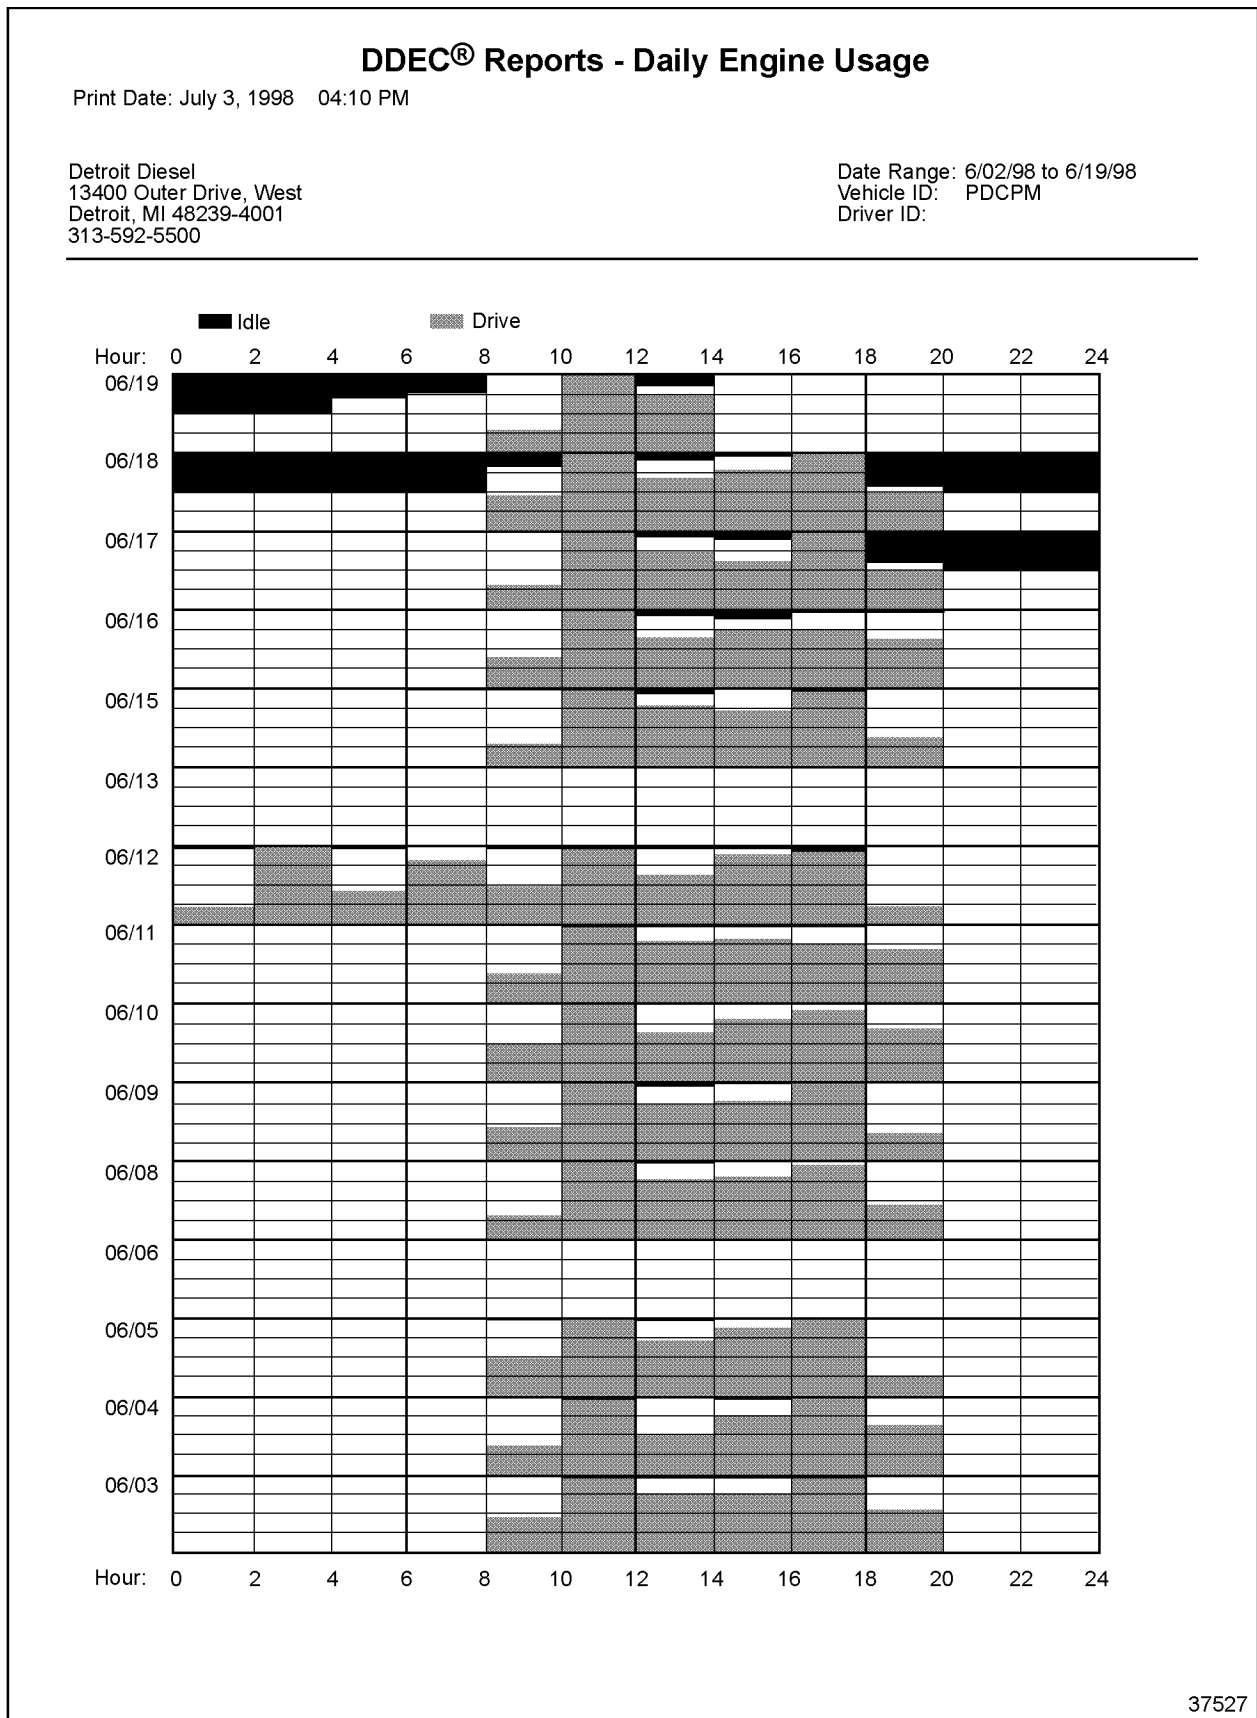

37527

Figure 5-57 DDEC Reports, On-highway - Idle and Drive Time

DDEC® Reports - Daily Engine Usage

Print Date: July 3, 1998 08:27 AM

Detroit Diesel
13400 West Outer Drive
Detroit, MI 48239
313-592-5500

Date Range: 6/02/98 to 6/19/98
Vehicle ID: PDCPM
Driver ID:

Date:	6/19/1998
Start Time:	01:00:00 (EST)
Odometer:	58068.5 mi
Distance:	205.1 mi
Fuel:	28.00 gal
Fuel Economy:	7.33 mpg
Average Speed:	49.4 mph

Total (hh:mm)	04:09	03:24	16:27
Hour (EST)	Drive (min)	Idle (min)	Off (min)
00:00-02:00	0	61	59
02:00-04:00	0	61	59
04:00-06:00	0	38	82
06:00-08:00	3	27	90
08:00-10:00	36	2	82
10:00-12:00	118	2	0
12:00-14:00	92	13	15
14:00-16:00	0	0	120
16:00-18:00	0	0	120
18:00-20:00	0	0	120
20:00-22:00	0	0	120
22:00-24:00	0	0	120

Date:	6/18/1998
Start Time:	01:00:00 (EST)
Odometer:	57650.6 mi
Distance:	418.0 mi
Fuel:	66.50 gal
Fuel Economy:	6.29 mpg
Average Speed:	47.4 mph

Total (hh:mm)	08:49	07:37	07:34
Hour (EST)	Drive (min)	Idle (min)	Off (min)
00:00-02:00	0	61	59
02:00-04:00	0	61	59
04:00-06:00	0	61	59
06:00-08:00	0	61	59
08:00-10:00	56	20	44
10:00-12:00	117	3	0
12:00-14:00	80	10	30
14:00-16:00	95	6	19
16:00-18:00	119	1	0
18:00-20:00	62	51	7
20:00-22:00	0	61	59
22:00-24:00	0	61	59

Date:	6/17/1998
Start Time:	08:55:59 (EST)
Odometer:	57233.0 mi
Distance:	417.6 mi
Fuel:	62.50 gal
Fuel Economy:	6.68 mpg
Average Speed:	48.8 mph

Total (hh:mm)	08:33	03:13	12:14
Hour (EST)	Drive (min)	Idle (min)	Off (min)
00:00-02:00	0	0	120
02:00-04:00	0	0	120
04:00-06:00	0	0	120
06:00-08:00	0	2	116
08:00-10:00	56	2	75
10:00-12:00	117	2	0
12:00-14:00	80	8	25
14:00-16:00	95	10	36
16:00-18:00	119	3	0
18:00-20:00	62	44	4
20:00-22:00	0	61	59
22:00-24:00	0	61	59

37526

Figure 5-58 DDEC Reports, On-highway - Daily Engine Usage

DDEC® Reports - Engine Load / RPM



Print Date: July 3, 1998 08:26 AM

Detroit Diesel
13400 West Outer Drive
Detroit, MI 48239
313-592-5500

Trip: 6/02/98 to 6/19/98
Vehicle ID: PDCPM
Driver ID:
Odometer: 58273.6 mi

Trip Distance: 5698.9 mi
Trip Fuel: 831.13 gal
Fuel Economy: 6.86 mpg
Avg. Drive Load: 46 %
Avg. Vehicle Speed: 49.0 mph

Trip Time: 134:33:33
Fuel Consumption: 6.18 gal/h
Idle Time: 18:14:17
Idle Percent: 13.55 %
Idle Fuel: 7.63 gal

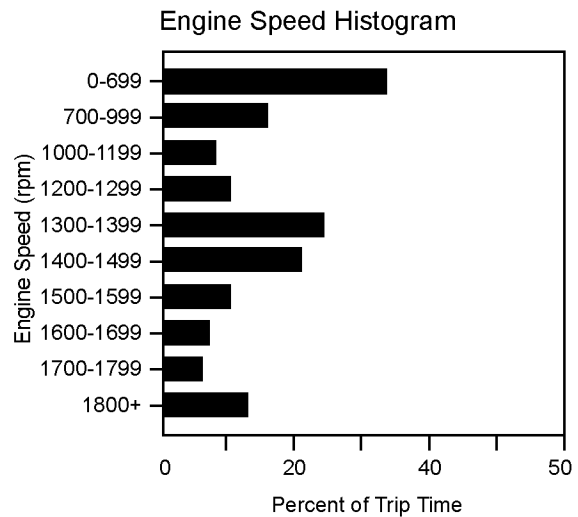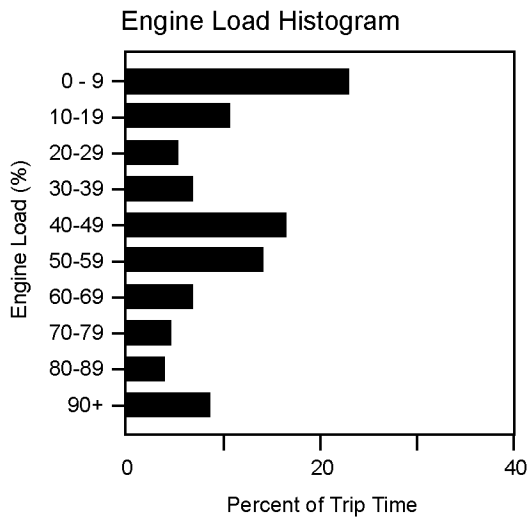

Percent of Trip Time in Load and RPM Table
Engine Load (%)

Engine RPM	0 -9	10-19	20-29	30-39	40-49	50-59	60-69	70-79	80-89	90-100	TOTAL
0-699	0.5	5.4	0.5	0.2	0.1	0.1	0.1	0.1	0.1	0.1	7.2
700-999	8.1	0.7	0.4	0.3	0.2	0.1	0.1	0.4	0.4	0.2	10.8
1000-1199	7.1	0.9	0.9	0.6	0.6	0.5	0.6	0.5	0.5	1.1	13.3
1200-1299	1.7	0.7	0.7	0.5	0.6	0.5	0.5	0.4	0.3	1.3	7.2
1300-1399	1.5	0.6	0.5	0.6	0.9	0.9	0.6	0.5	0.3	1.9	8.4
1400-1499	3.1	1.8	2.4	4.5	12.9	10.8	4.5	2.7	2.2	3.0	47.7
1500-1599	0.7	0.3	0.2	0.3	0.5	0.5	0.3	0.2	0.2	0.7	4.0
1600-1699	0.2	0.1				0.1	0.1			0.4	0.9
1700-1799	0.1									0.1	0.3
1800+											0.1
Total	22.9	10.4	7.0	7.0	15.9	13.5	6.8	4.9	4.1	8.7	

37525

Figure 5-59 DDEC Reports, On-highway - Engine Load/RPM

DDEC® Reports - Periodic Maintenance

Print Date: Apr 19, 1999 03:53 PM

DDC DDEC Lab - RDI
13400 Outer Drive West
Detroit, MI 48239
313-592-5959

Period: 04/09/1999 to 04/19/1999
Equipment ID: PDCPM
Operator ID:

Period Time	63:49:53	Idle Time	9:46:46
Period Fuel	446.00 gal	Idle Fuel	2.50 gal
Fuel Consumption	6.99 gal/h	Idle Percent:	15.32 %
Avg. Operating Load	51 %		

Maintenance Due

Name	Eng. Hrs. Left	Projected Date	Fuel Left (gal)
PMA	-1	04/24/1999	250.00
PMB	39	05/04/1999	550.00
PMC	79	05/14/1999	850.00

Maintenance Limits

Name	Engine Hours	Days	Fuel (gal)
PMA	40	10	300.00
PMB	80	20	600.00
PMC	120	30	900.00

Last Maintenance

Name	Eng. Hrs.	Date
PMA	3318	04/14/1999
PMB	3318	04/14/1999
PMC	3318	04/14/1999

37719

Figure 5-60 DDEC Reports, Nonroad - Periodic Maintenance

DDEC® Reports - High RPM


Print Date: Apr 19, 1999 03:52 PM

DDC DDEC Lab - RDI
13400 Outer Drive West
Detroit, MI 48239
313-592-5959

Period: 04/09/1999 to 04/19/1999
Equipment ID: PDCPM
Operator ID:

Period Time 63:49:53
Period Fuel 446.00 gal
Fuel Consumption 6.99 gal/h
Avg. Operating Load 51 %

Idle Time 9:46:46
Idle Fuel 2.50 gal
Idle Percent: 15.32 %

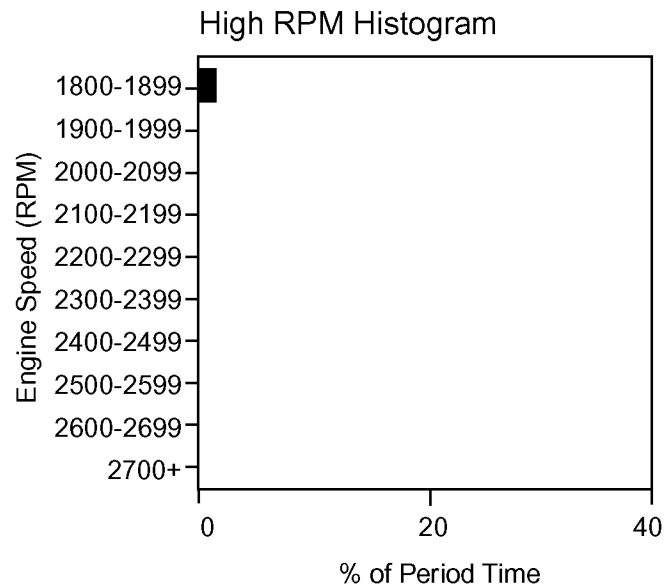

Percent of Time Spent in High RPM Bands

1800 1899	1900 1999	2000 2099	2100 2199	2200 2299	2300 2399	2400 2499	2500 2599	2600 2699	2700+
10.01	0.04								

37720

Figure 5-61 DDEC Reports, Nonroad - High RPM Detail

DDEC® Reports - Diagnostic Record #1

Print Date: Apr 19, 1999 03:53 PM

DDC DDEC Lab - RDI
13400 Outer Drive West
Detroit, MI 48239
313-592-5959

Period: 04/09/1999 to 04/19/1999
Equipment ID: PDCPM
Operator ID:

Period Time	63:49:53	Idle Time	9:46:46
Period Fuel	446.00 gal	Idle Fuel	2.50 gal
Fuel Consumption	6.99 gal/h	Idle Percent:	15.32 %
Avg. Operating Load	51 %		

Diagnostic Code: [43] - Coolant Level Low
Diagnostic Time: 01/17/00 09:34:18 (EST)

Time	Engine Speed (RPM)	Boost Press (PSI)	Fuel Press (PSI)	Fuel Temp (°F)	Oil Press (PSI)	Oil Temp (°F)
09:34:18	823	0.0	0.0	46.8	63.4	79.5
09:34:13	824	0.0	0.0	46.8	63.4	79.5
09:34:08	825	0.0	0.0	47.0	63.4	79.5
09:34:03	823	0.0	0.0	47.5	63.4	79.5
09:33:58	824	0.0	0.0	47.8	63.4	79.8
09:33:53	824	0.0	0.0	48.5	63.4	80.0
09:33:48	825	0.0	0.0	49.3	63.4	80.3
09:33:43	827	0.0	0.0	50.5	63.3	80.0
09:33:38	825	0.0	0.0	51.5	63.3	80.3
09:33:33	1021	0.0	0.0	53.3	1.9	78.3
09:33:28	0	0.0	0.0	-40.0	0.0	-40.0
09:33:23	0	0.0	0.0	-40.0	0.0	-40.0

Time	Coolant Temp (°F)	Air Temp (°F)	Engine Load (%)	Throttle (%)	Pulse Width (deg)	Eng. Brake (cylinders)
09:34:18	70.0	50.0	19.0	0.0	4.4	Off
09:34:13	69.0	50.0	18.5	0.0	4.2	Off
09:34:08	69.5	50.0	17.5	0.0	4.1	Off
09:34:03	68.8	51.3	19.5	0.0	4.4	Off
09:33:58	68.8	51.0	20.0	0.0	4.5	Off
09:33:53	68.5	53.3	21.0	0.0	4.6	Off
09:33:48	68.5	54.0	21.0	0.0	4.7	Off
09:33:43	69.5	59.5	22.5	0.0	4.9	Off
09:33:38	68.0	65.0	24.0	0.0	5.2	Off
09:33:33	67.8	66.5	28.0	0.0	6.8	Off
09:33:28	-40.0	-40.0	0.0	0.0	0.0	Off
09:33:23	-40.0	-40.0	0.0	0.0	0.0	Off

37721

Figure 5-62 DDEC Reports, Nonroad - Diagnostic Record

5.17.5 DETROIT DIESEL DATA SUMMARIES

This new PC program for Windows 95/98 is used to analyze and report trip data from DDEC Data and ProDriver DC. Data Summaries can report trip data one vehicle at a time, summary reports for the whole fleet, and reports of driver trip activity.

Trip extractions from individual vehicles are loaded into Data Summaries database. The database divides trip extractions into yearly files. New extractions are added to the current year database making it possible to run reports for any time period within the year. this make it possible for the user to form summary reports of the entire fleet, for a group of vehicles, or an individual vehicle. It is also possible to do the same for all drivers, groups of drivers, or individual drivers.

Data Summaries also supports ProDriver DC. Utilities in Data Summaries allow the user to format and setup the different data card types, such as the Driver Card, the Configuration Card, etc. A driver ID can be placed on Driver Cards. The extracted data is read from Driver Cards and placed into the database.

5.17.6 PRODRIVER DC

ProDriver DC (P/N: 23525745) is a dashboard-mounted display (see Figure 5-63) that provides real time and summary information on vehicle and engine operation. Real time graphic displays, shown when the engine is running, provide driver feedback on idle and driving performance relative to fleet goals. ProDriver DC also has a Fuel Economy Incentive status screen and a clock/calendar with battery backup. Engine alerts provide a descriptive message when the CEL and SEL are illuminated.

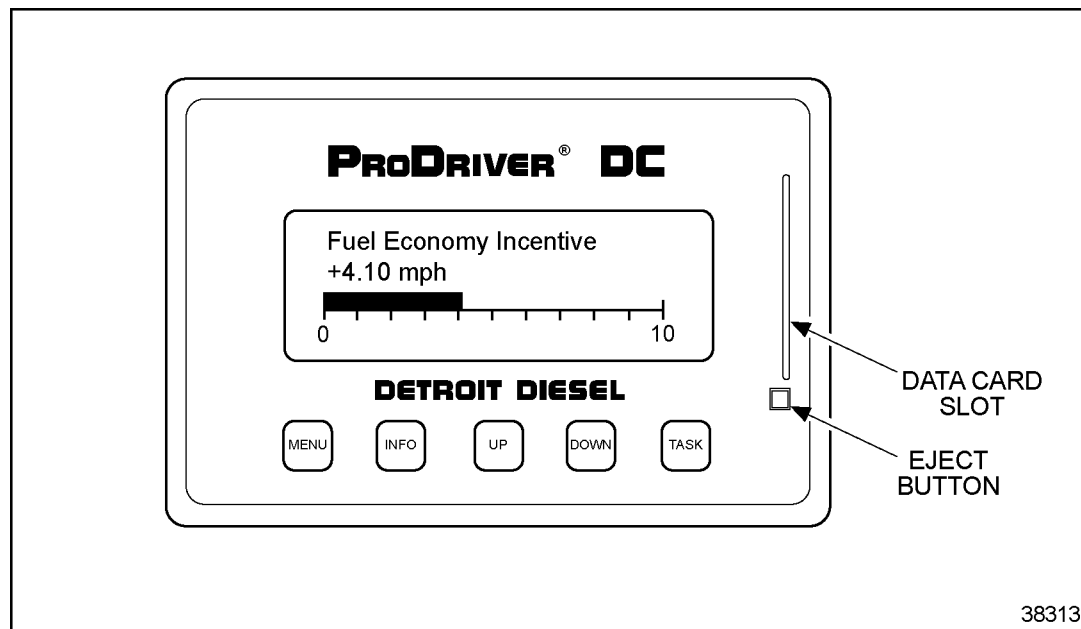


Figure 5-63 ProDriver DC

The Data Card provides a convenient way to transport data to and from the vehicle. The Data Card can hold up to 16 megabytes of data. It can also be formatted to perform various functions through the Detroit Diesel Data Summaries software. These functions are listed in Table 5-60.

Data Card	Functions
Driver Card	Assigned to a specific driver
	Capacity: 10 vehicles or 10 trips plus 2 months
Extraction Card	Extracts stored vehicle data
	Capacity: 100 extractions
Configuration Card	Loads new ProDriver DC user settings
	Multiple vehicles
	Vehicle ID and odometer not affected
Reprogramming Card	Upgrade ProDriver DC features, as new software becomes available

Table 5-60 Data Card Functions

Data Cards are the Smart Media product used in many digital cameras.

ProDriver DC configuration (user settings) can be viewed and changed with Detroit Diesel Data Summaries. Configuration options that can be changed at any time are: Display Intensity, Measurement Units, Language, and Alarm Status. Other setup parameters such as Vehicle Overspeed Limits can be changed, but only if the trip information in the ProDriver DC memory has first been extracted and cleared.

ProDriver DC has two access modes: Owner/Operator and Manager/Driver. The Owner/Operator mode does not require a password to change Setup. If the ProDriver DC access mode is set to Manager/Driver, a password is needed to enable changes to the ProDriver DC Setup menu.

Programming ProDriver DC with a Configuration Card is perhaps more convenient. When the card is inserted in ProDriver DC, the technician will be prompted through a few simple steps. Using the same Configuration Card on all ProDriver DC units in a fleet assures that each one has the same setup.

Trip summary data may be reviewed on the ProDriver DC screen or extracted to a PC for later analysis. Extraction options include:

- ☐ Direct connection to a PC running Detroit Diesel Data Summaries software through a translator box
- ☐ Automated direct connection with the Remote Data Interface
- ☐ Wireless communications such as the Highway Master cellular telephone service
- ☐ Extraction to a Driver Card or Extraction Card
- ☐ Wireless Extraction with IRIS

ProDriver DC Installation

The ProDriver DC module should be dashboard mounted in a location that is easily seen so the driver's eyes do not have to leave the road for a long period of time. The ProDriver DC module has the same installation dimensions as the ProDriver DC module. ProDriver DC can be mounted as either a flush mount or a surface mount. See Figure 5-64.

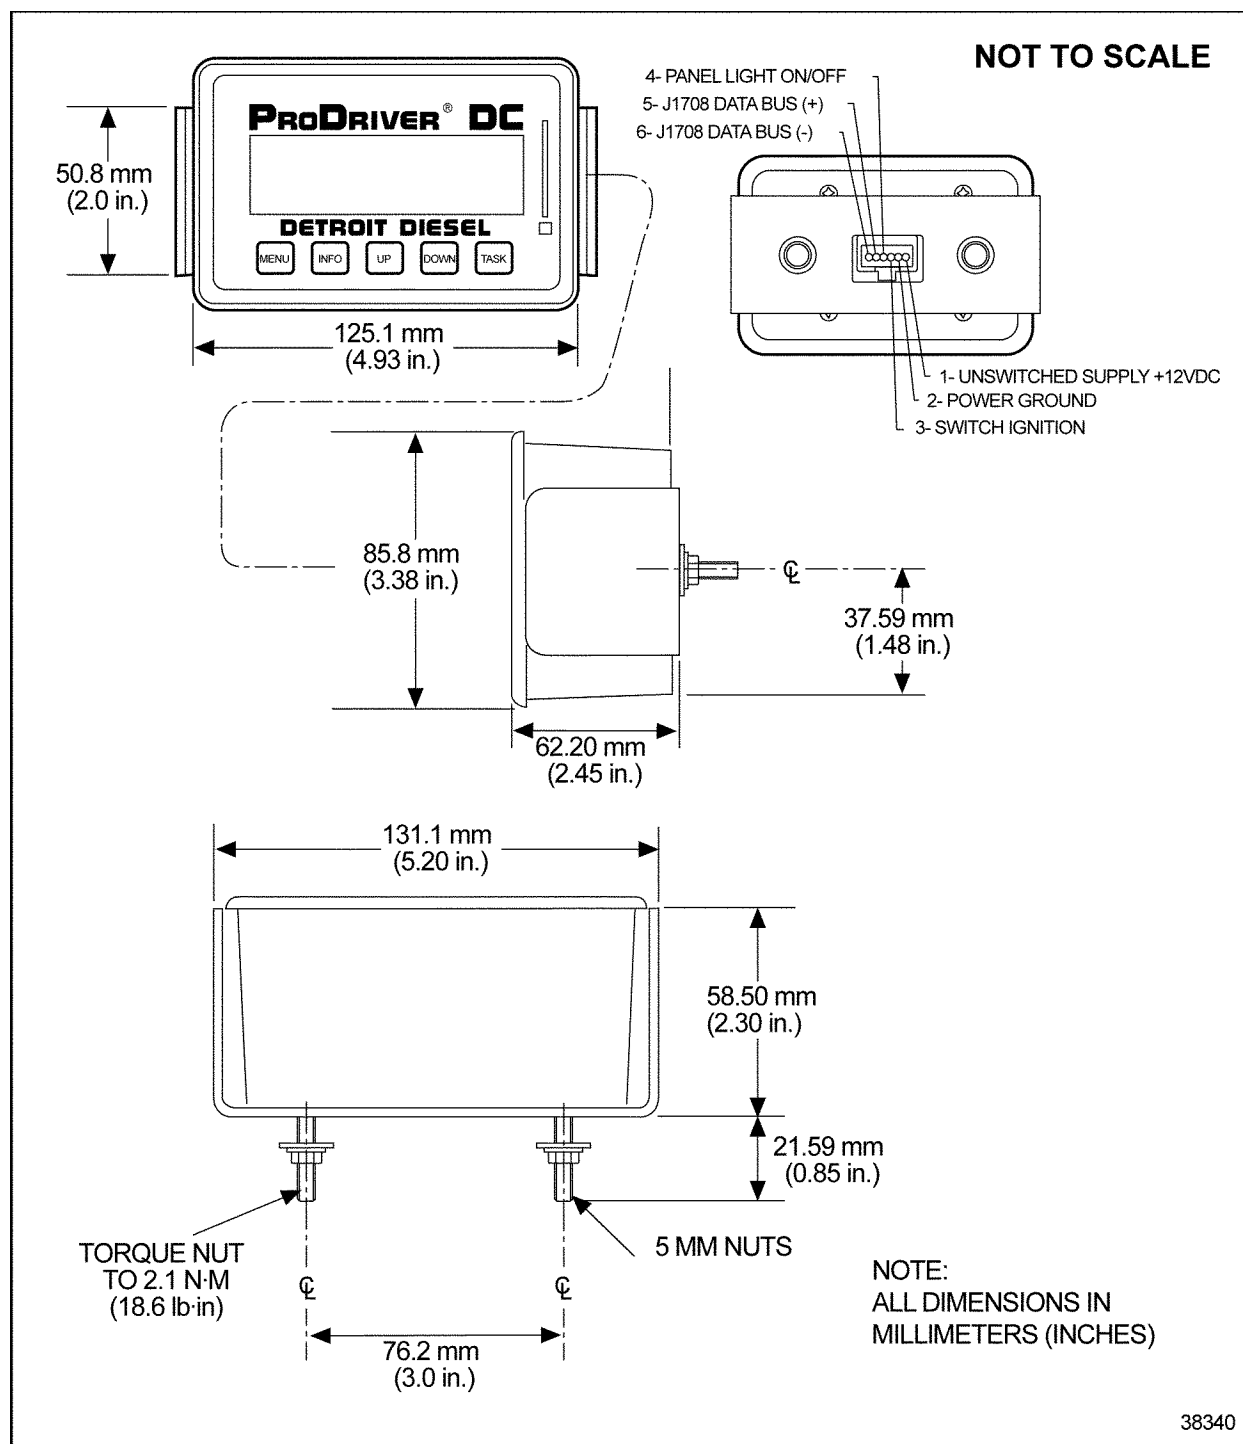


Figure 5-64 ProDriver DC Flush Mount

See Figure 5-65 for the mounting bracket for the flush mount ProDriver DC.

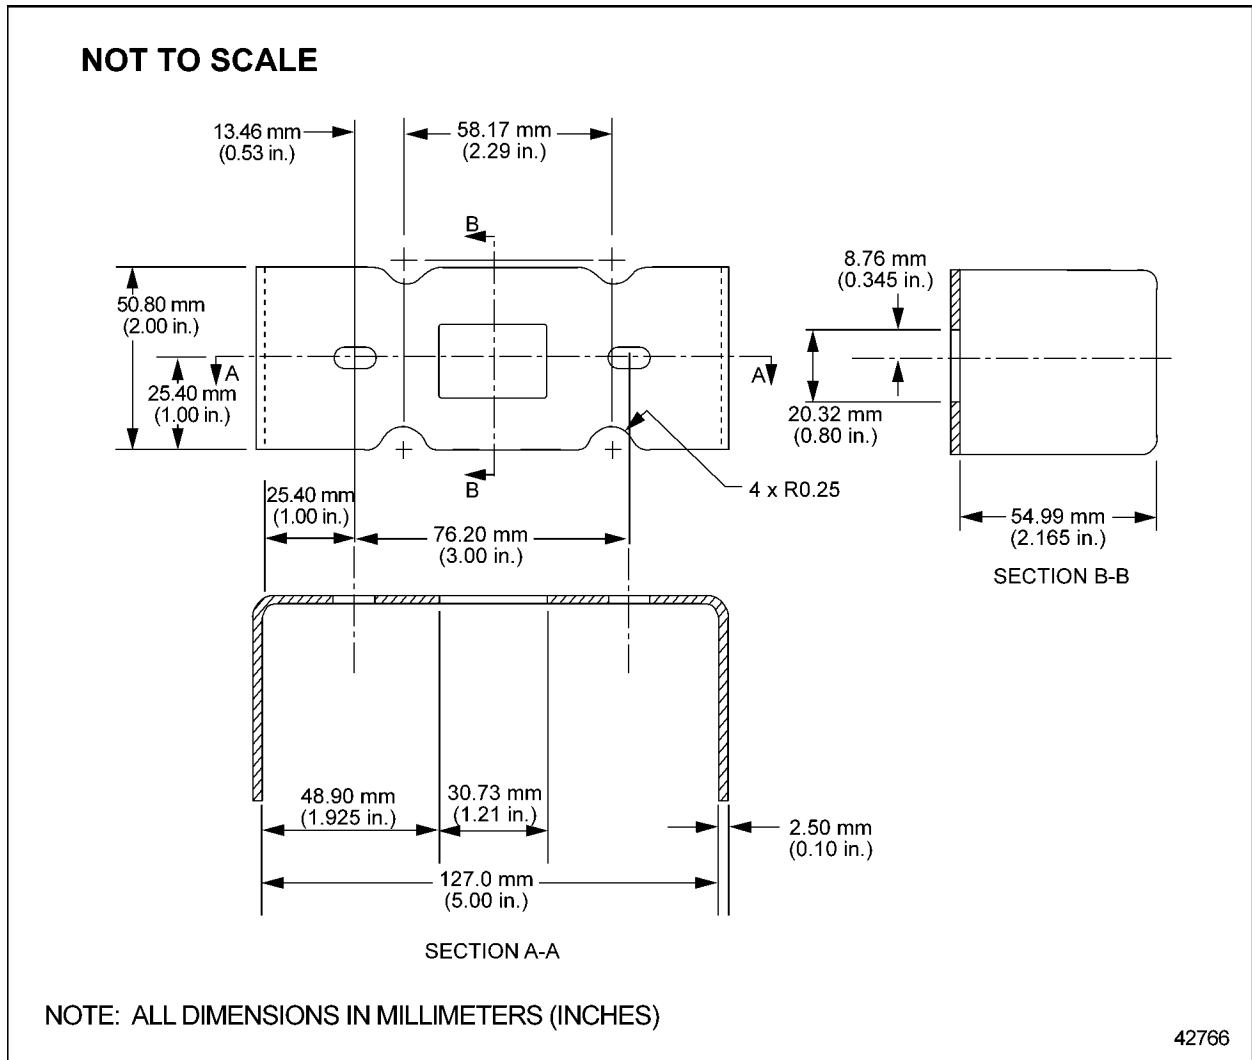


Figure 5-65 ProDriver DC Flush Mount Mounting Bracket

See Figure 5-66 for a cutout template of the flush mount display.

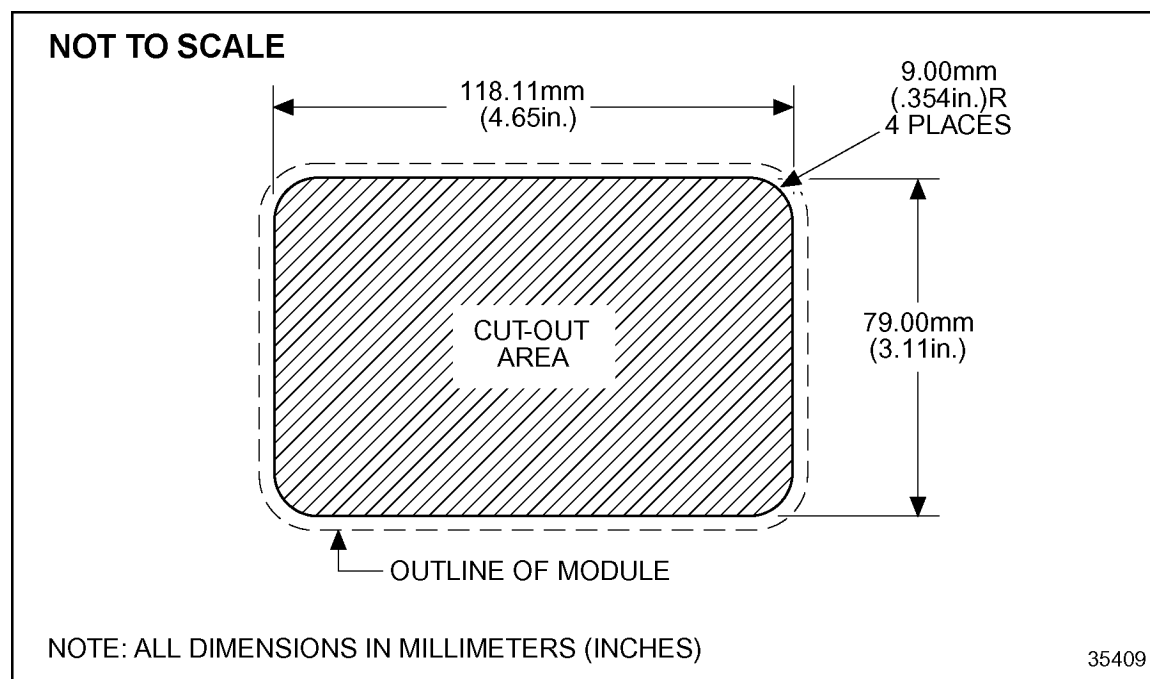


Figure 5-66 ProDriver DC Flush Mount Display Template

The surface mounted display for ProDriver DC is installed on top of the dash, the overhead or the face of the dash. See Figure 5-67.

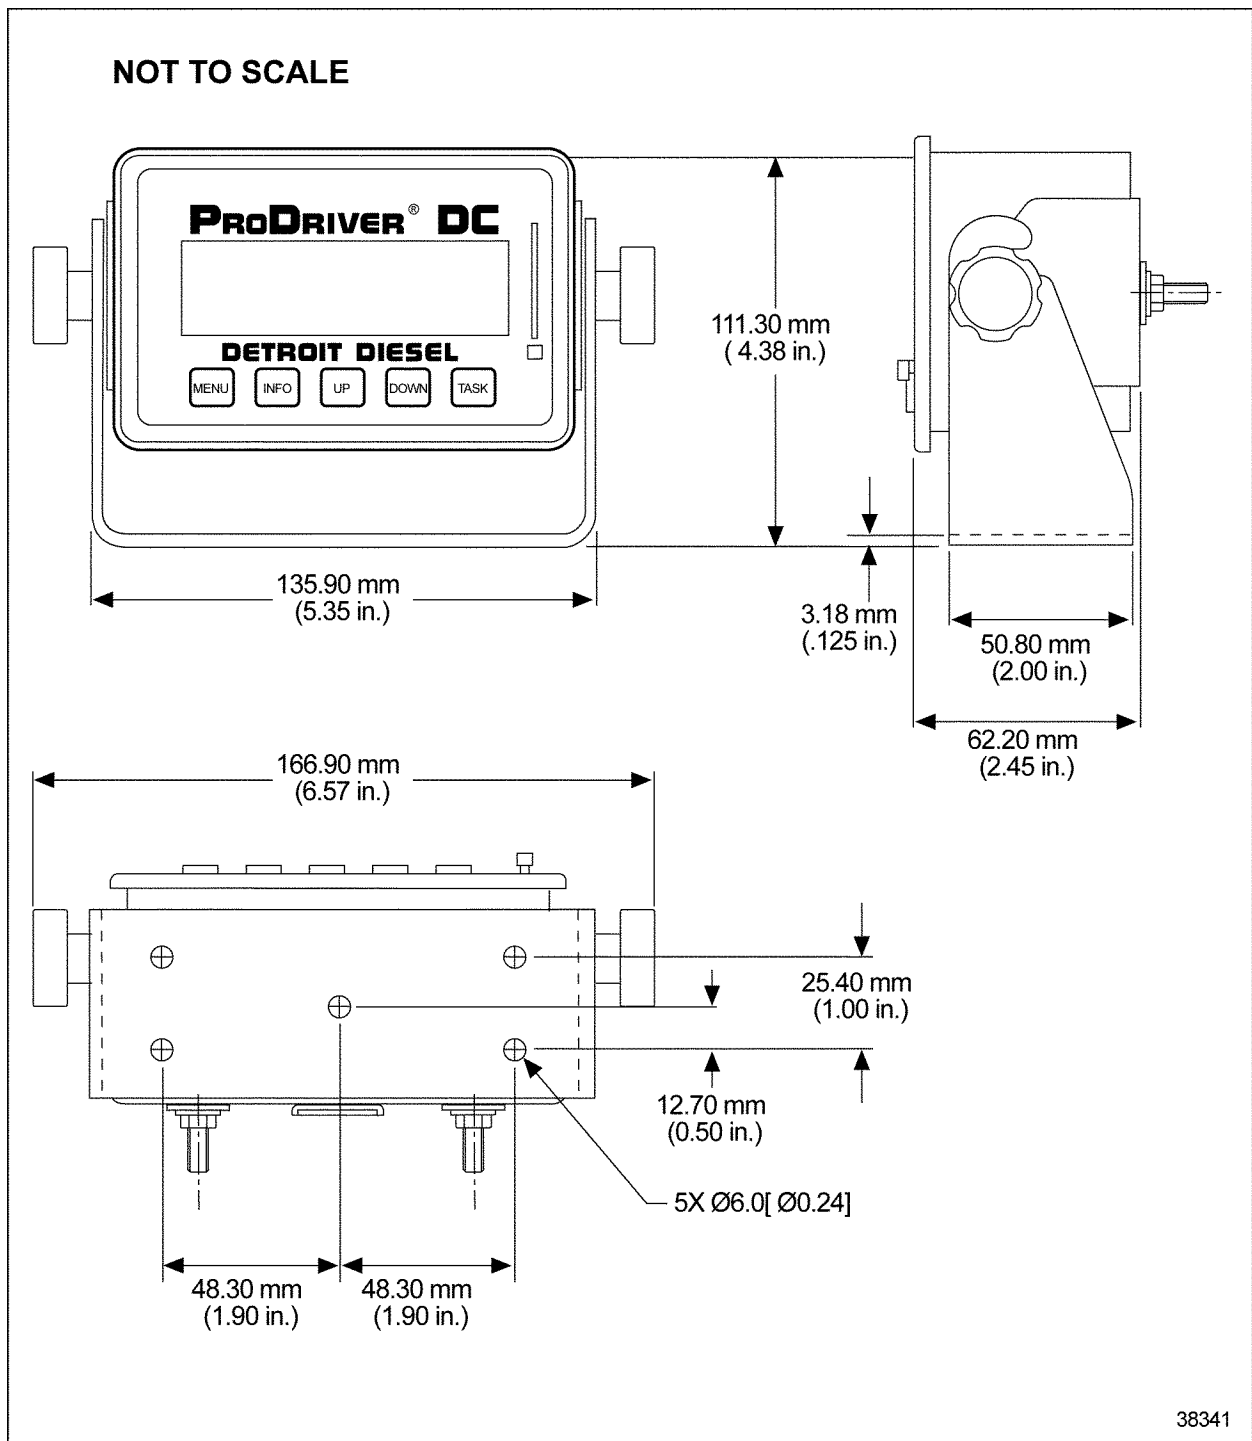


Figure 5-67 ProDriver DC Surface Mount

See Figure 5-68 for bracket dimensions and characteristics of the surface mount bracket.

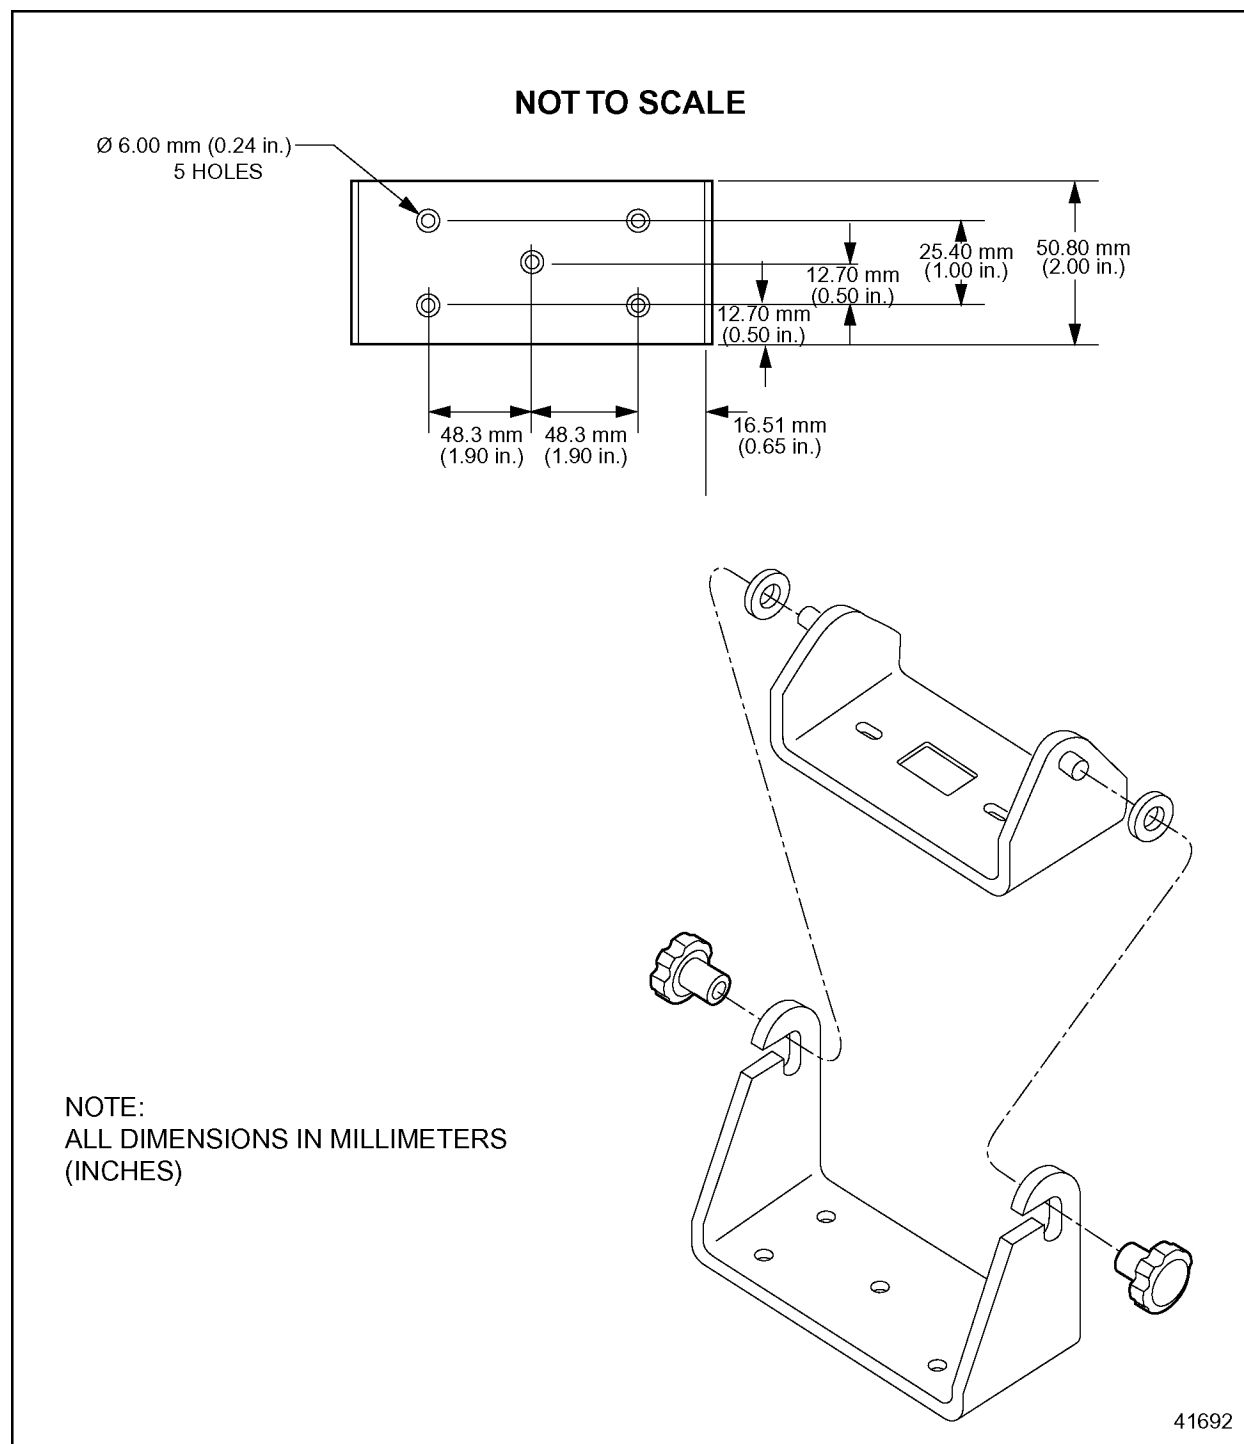


Figure 5-68 ProDriver DC Surface Mount Bracket

ProDriver DC has one harness for connection to the vehicle. The following paragraphs contain information that will be helpful in designing this harness.

The panel light on/off wire detects when the instrument panel lights are on. It is recommended that the 12 volt signal be taken from the high side of the intensity control potentiometer. This will ensure that the display intensity will change when the running lights are on as well as when the headlights are on.

See Figure 5-69 for the diagram to use when constructing a harness for ProDriver DC.

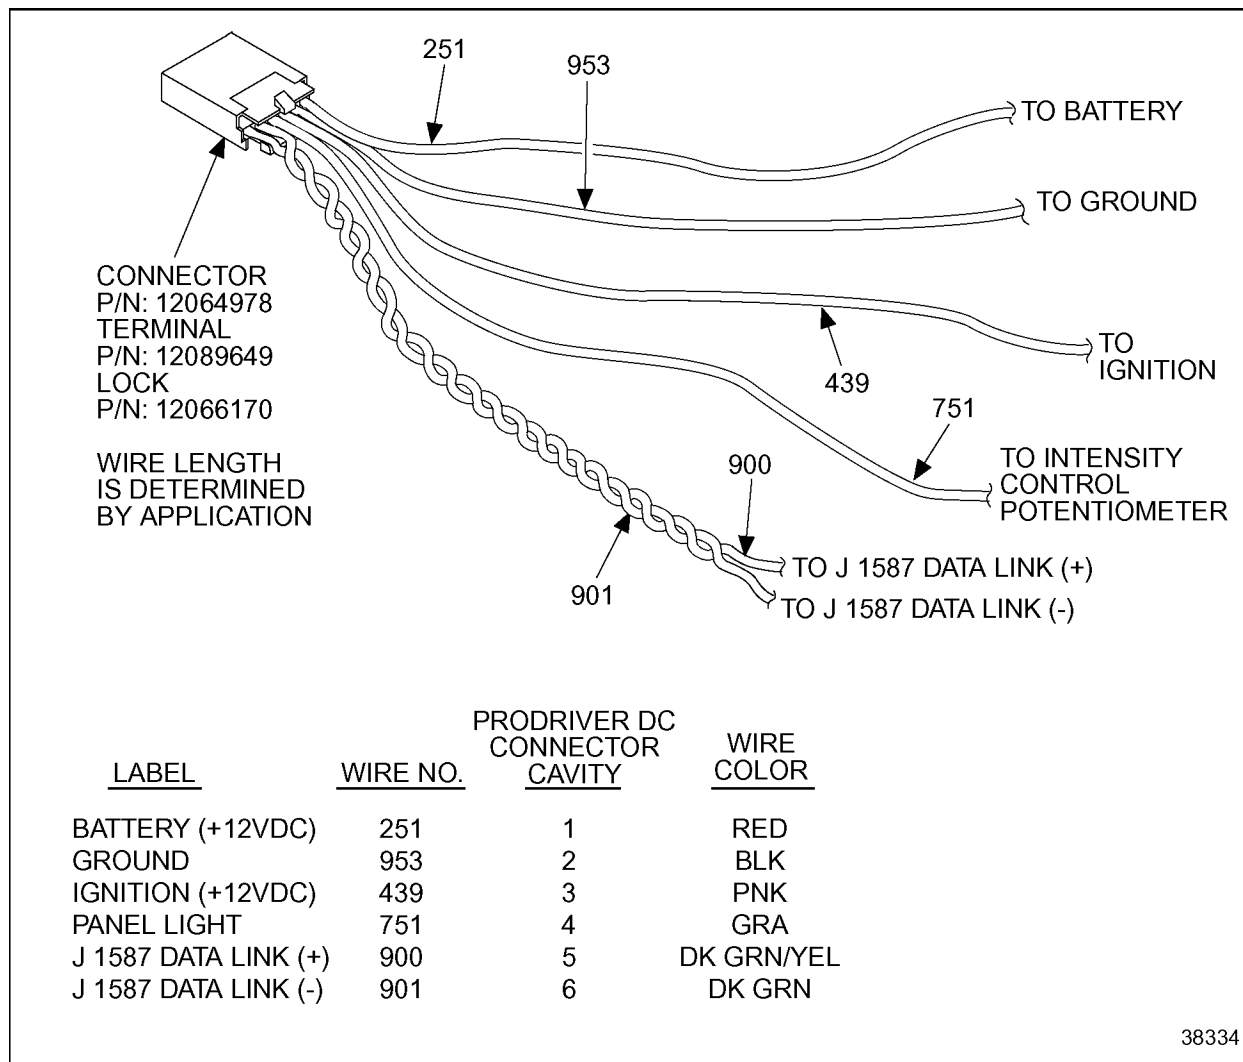


Figure 5-69 ProDriver DC Vehicle Harness

NOTE:

ProDriver DC is 12V only. The ignition and battery wires must be connected to +12V only.

A jumper harness (P/N: 23524862) is available to install a ProDriver DC in place of a ProDriver (see Figure 5-70).

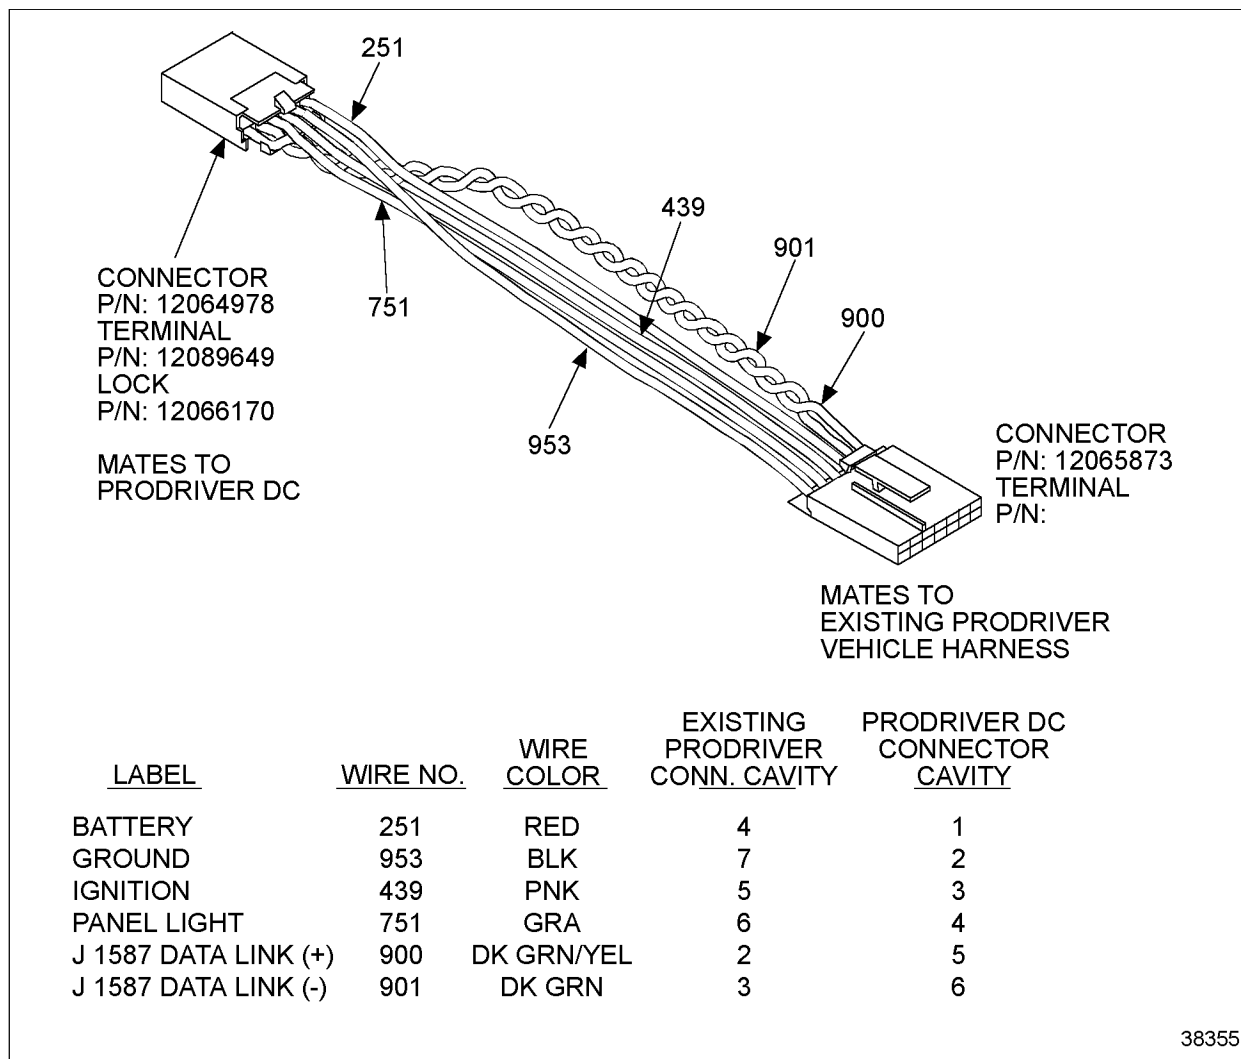


Figure 5-70 ProDriver DC Jumper Harness

5.17.7 MANAGEMENT INFORMATION PRODUCTS KITS

Several kits are available to install the Management Information Products.

ProDriver DC Kits are listed in Table 5-61, Table 5-63, and Table 5-65.

Part Number	Description	Quantity
23525745	ProDriver DC Display Unit	1
23525872	ProDriver DC Flush Mount Bracket	1
23525874	ProDriver DC Wiring Harness	1
12033769	Connector 2-way 630 Metri-Pack Fuse Holder	1
12033731	Cover Fuse Holder	1
12020156	Fuse Terminals — 16 ga.	2
12004003	Fuse — 3 Amp.	1
05101020	Nylon Tie Strap	5
18SP528	ProDriver DC Installation Instructions	1
6SE0703	ProDriver DC User Manual (6SE703)	1
7SE0447	ProDriver DC Pocket Card (7SE447)	1

Table 5-61 ProDriver DC Flush Mount Kit P/N: 23525759

Part Number	Description	Quantity
23525745	ProDriver DC Display Unit	1
23525872	ProDriver DC Flush Mount Bracket	1
23524862	ProDriver DC Adapter Harness	1
6SE0703	ProDriver DC User Manual (6SE703)	1
7SE0447	ProDriver DC Pocket Card (7SE447)	1

Table 5-62 ProDriver DC Flush Mount Kit P/N: 23525753

Part Number	Description	Quantity
23525745	ProDriver DC Display Unit	1
23525873	ProDriver DC Surface Mount Bracket	1
23525874	ProDriver DC Wiring Harness	1
12033769	Connector 2-way 630 Metri-Pack Fuse Holder	1
12033731	Cover Fuse Holder	1
12020156	Fuse Terminals — 16 ga.	2
12004003	Fuse — 3 Amp	1
05101020	Nylon Tie Strap	5
18SP528	ProDriver DC Installation Instructions	1
6SE0703	ProDriver DC User Manual (6SE703)	1
7SE0447	ProDriver DC Pocket Card (7SE447)	1

Table 5-63 ProDriver DC Surface Mount Kit P/N: 23525760

Part Number	Description	Quantity
23525745	ProDriver DC Display Unit	1
23524862	ProDriver DC Adapter Harness	1
23525873	ProDriver DC Surface Mount Bracket	1
6SE0703	ProDriver DC User Manual (6SE703)	1
7SE0447	ProDriver DC Pocket Card (7SE447)	1

Table 5-64 ProDriver DC Surface Mount Kit P/N: 23525754

Part Number	Description
23530729	Data Card (pack of 10)
23529276	ProDriver DC USB Data Card Reader
23529277	ProDriver DC PCMCIA Data Card Reader

Table 5-65 Other ProDriver DC Parts

5.18 OPTIMIZED IDLE

Optimized Idle[®] enhances the DDEC Idle Shutdown feature. Optimized Idle will automatically stop and restart the engine when required in order to keep the engine temperature above 60°F, the battery charged, and/or the vehicle interior at the desired temperature (using the optional Optimized Idle thermostat). Other benefits include an overall reduction in exhaust emissions and noise and improved starter and engine life (by starting a warm engine). The DDR, Detroit Diesel Diagnostic Link (DDDL), ProManager[®] software, and DDEC Reports provide access to the Optimized Idle fuel and idle time savings, and run time information.

5.18.1 OPERATION

The following conditions must be met in order to use the Optimized Idle function:

- ☐ The Ignition must be ON with the vehicle idling
- ☐ Hood, cab, and/or engine compartment doors closed
- ☐ Transmission in neutral and splitter in high range (if equipped)
- ☐ Park brake set
- ☐ Idle shutdown timer must be enabled
- ☐ Cruise master switch turned to ON position (if in the ON position, turn to OFF then to ON)

Once these conditions are met, remain idling and the Optimized Idle Active light will flash. This indicates that Optimized Idle will begin operation only after the idle shutdown timer is over. Optimized Idle allows the operation of all DDEC features such as PTO, throttle control, and VSG Cruise, while the active light is flashing.

The active light will stop flashing and stay on, after the shutdown timer has expired. The operator no longer can use other DDEC features, including the throttle, until the park brake is released, one of the safety conditions are broken, or the cruise switch is turned OFF. The engine operates in engine mode or thermostat mode. Once Optimized Idle becomes active, the engine will either shutdown if Optimized Idle parameters are satisfied or ramp to 1100 RPM.

If the engine does not start after the second attempt, or if the vehicle moves while Optimized Idle is active, the Check Engine Light will turn ON to indicate that Optimized Idle has been turned OFF (Active Light will turn OFF) due to the above condition. The ignition must be turned OFF and the engine restarted in order to use Optimized Idle.

The alarm will sound briefly prior to any engine start. After Optimized Idle starts the engine, the speed will be 1100 RPM.

NOTE:

The wiring for Optimized Idle has changed for engines built after October 2002.

Engine Mode

Optimized Idle will start and stop the engine to keep the following parameters within limits.

Battery Voltage - The engine will start when the battery voltage drops below 12.2 Volts for 12 Volt systems or 24.4 Volts for 24 Volt systems. DDEC IV engines (Release 22.01 or later) will run for a minimum of two hours when started due to low battery voltage.

Oil Temperature - The engine will start when the oil temperature drops below 60°F (15.55°C) and will run until the oil temperature reaches 104°F (40°C).

Thermostat Mode

The optional Optimized Idle thermostat must be turned ON. Engine mode parameters as well as the interior temperature are monitored in this mode. The thermostat informs the ECM when to start/stop the engine to keep the interior warm/cool based on the thermostat setting. It also monitors the outside temperature by way of the skin temperature sensor to determine if the ambient temperature is extreme enough that the engine should run continuously.

Any other accessories connected to the Vehicle Power Shutdown relay will turn ON for Thermostat Mode engine starts. The heater and A/C fans will remain OFF for Engine Mode starts.

If Optimized Idle starts the engine for the Engine Mode, and Thermostat Mode is then requested, the heater and A/C fan will turn ON approximately 30 seconds after the Thermostat Mode is requested.

For additional information, refer to the *Optimized Idle Installation and Troubleshooting* manual (7SA741).

Optimized Idle Start Up Sequence

The following occurs during to any Optimized Idle engine start:

1. Optimized Idle Active Light is ON. The ECM determines when the engine needs to start to charge the battery, warm the engine, or heat/cool the vehicle interior.
2. The alarm (mounted in the engine compartment) will sound briefly.
3. The starter will engage and the engine will start. If the engine speed does not reach a predetermined level within a few seconds, Optimized Idle will attempt a second engine start after 45 seconds. The alarm will sound again prior to the second engine start. If the engine still does not start after the second start attempt, the system will disarm for the rest of the ignition cycle. The CEL will flash and the ECM will go into low power mode after 20 minutes.
4. The engine will ramp up to 1100 RPM. If the engine was started in the Thermostat Mode, the heater or A/C fans will turn ON after approximately 30 seconds.

5.18.2 INSTALLATION

New installations must be approved by Detroit Diesel. See Figure 5-71 for the Optimized Idle overall system schematic. Refer to the *Optimized Idle Installation and Troubleshooting* manual (7SA741) for installation requirements.

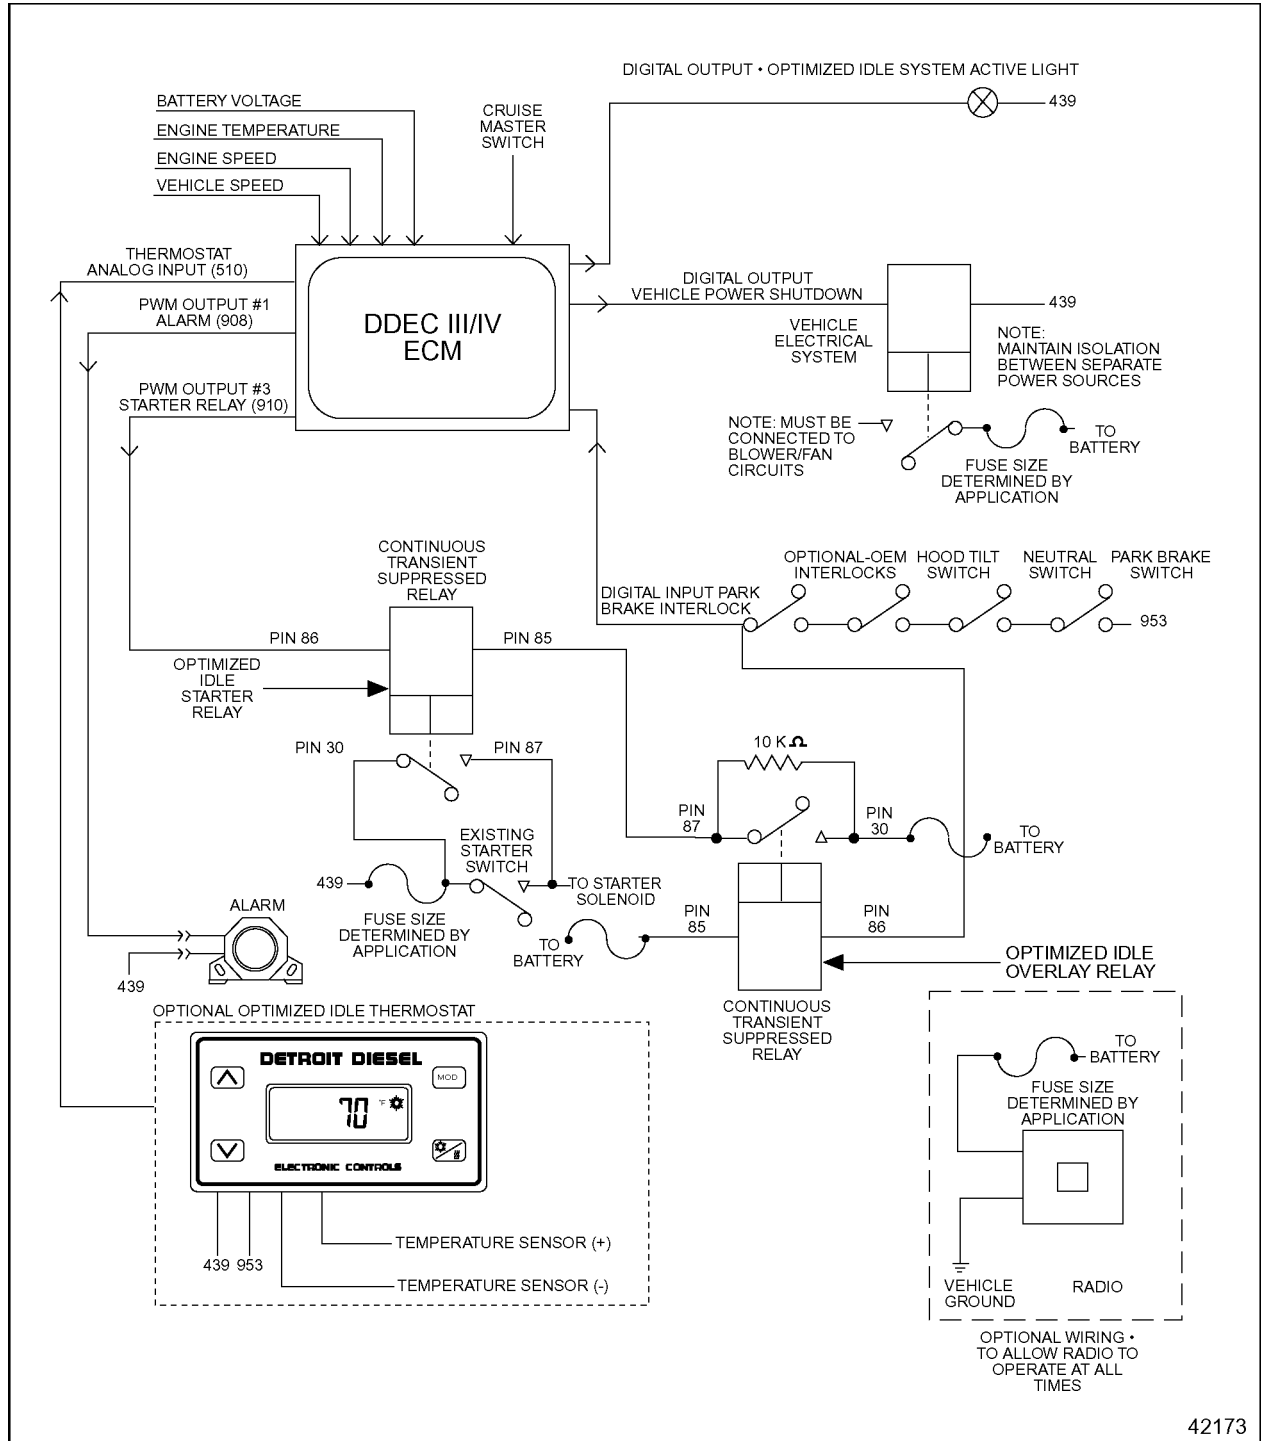


Figure 5-71 Optimized Idle System Overview — October 2002 and Later

5.18.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

Optimized Idle must be turned on by the factory via order entry or by Detroit Diesel Technical Service. Software group 6N5-3 must be specified.

The digital inputs and outputs listed in Table 5-66 can be programmed at order entry, VEPS or DRS.

Function Number	Type	Description
5	Digital Input	Park Brake / ISD
23	Digital Input	Cruise Enable
6	Digital Output	Vehicle Power Shutdown
26	Digital Output	Optimized Idle Active Light

Table 5-66 Optimized Idle Digital Inputs and Digital Outputs

The Idle Timer must be enabled by VEPS, DDR, DDDL or DRS. The recommended Idle Timer parameters are listed in Table 5-67.

Parameter	Description	Recommended Setting
IDLE SHUTDOWN TIMER ENABLE	Enables/Disables the Idle Shutdown Feature	YES (Required)
TIME (min)	The amount of engine idle time that is allowed before the idle shutdown feature stops fueling the engine	1-100 minutes (customer's choice)
OVERRIDE	Disables the Idle Shutdown timer Override feature.	NO
ENABLED ON VSG	Allows the Idle timer to shutdown the engine when operating on PTO	YES

Table 5-67 Idle Shutdown Timer Parameters

Optimized Idle installations should have the parameters listed in Table 5-68 set to Shutdown.

NOTICE:		
DDC recommends that Shutdown be enabled for all Engine Protection parameters with Optimized Idle installations.		

Parameter	Description	Setting
OIL TEMP	Indication of the type of engine protection based on high engine oil temp.	SHTDWN
COOLANT TMP	Indication of the type of engine protection based on high engine coolant temp.	SHTDWN
OIL PRS	Indication of the type of engine protection based on low engine oil pressure.	SHTDWN
COOLANT LVL	Indication of the type of engine protection based on low coolant level.	SHTDWN

Table 5-68 Engine Protection Parameters

5.18.4 DIAGNOSTICS

Refer to the *Optimized Idle Installation and Troubleshooting* manual (7SA741) for diagnostic and troubleshooting information.

5.18.5 INTERACTION WITH OTHER FEATURES

The Vehicle Power shutdown feature is used by Optimized Idle to turn off all accessory loads when the engine is shutdown. Optimized Idle will turn these loads on for Thermostat Mode starts. No other DDEC features can be used when Optimized Idle is active.

THIS PAGE INTENTIONALLY LEFT BLANK

5.19 PASSMART

The PasSmart™ feature is available on selected on-highway DDEC engines equipped with a Vehicle Speed Sensor. This feature is available with DDEC IV ECM software (Release 28.00).

5.19.1 OPERATION

The PasSmart feature allows a fleet manager to enable a second Vehicle Limit Speed (VLS) above the normal VLS to assist while passing other vehicles on the highway. This second VLS is programmed for a limited duration during a given time period (interval). The passing speed interval starts when the feature is programmed. An interval of 8, 12, or 24 hours will always reset at midnight.

The driver activates PasSmart by double-pumping the EFPA. Starting at the full throttle position, the driver releases the throttle completely, returns the throttle to the full throttle position, releases it again and then returns to full throttle. If the driver completes this action within 5 seconds, PasSmart is activated.

After double-pumping the EFPA, the vehicle is given 20 seconds to accelerate to a speed above the normal VLS limit. If the vehicle speed does not exceed the normal VLS speed in 20 seconds, the driver must repeat the double-pump action. Once the normal VLS has been exceeded, a new higher VLS becomes the maximum vehicle speed limit. This limit is the normal VLS plus the Passing Speed Increment.

A passing speed duration timer starts when vehicle speed exceeds the normal VLS limit and continues to count until the vehicle speed drops back below the normal VLS speed. At the end of the passing event when the vehicle speed drops back below the normal VLS, PasSmart is automatically deactivated and the driver cannot exceed the normal VLS unless the Accelerator Pedal is double-pumped again.

PasSmart operates only with the foot pedal and not with the Cruise Control switches or hand throttle. However, activating PasSmart does not disturb or deactivate Cruise Control if it is on when the passing event begins. Once the driver has passed the other vehicles and PasSmart has deactivated, Cruise Control automatically takes over. To deactivate Cruise Control during the pass, the driver must turn the Cruise Control switch to off.

When the Passing Speed Duration time expires, the CEL will begin to flash one minute prior to ramping the VLS limit back down to the normal VLS limit. The rampdown event always takes 5 seconds regardless of the Passing Speed Increment programmed into the ECM. The rampdown alert can be distinguished from an engine fault warning in that the CEL flashes for the PasSmart alert and remains on constantly for an engine fault.

If intervals of 8, 12, or 24 hours are selected, the interval will always reset after the chosen interval and at midnight. This allows fleets to synchronize the reset with driver change periods. All other intervals reset from the time they are selected. For example, if you select 4 hours, then a reset will occur every 4 hours from the time of programming but not necessarily at midnight.

PasSmart still operates when there is an active (non-shutdown) system fault. In this situation the CEL goes from constant illumination to flashing one minute before the VLS limit ramps down. At the end of the passing event when PasSmart is deactivated, the CEL will return to constant illumination if the fault is still active.

If there is an active stop engine fault, the rampdown/shutdown activity overrides PasSmart. The additional passing speed is not available until the fault is cleared.

For example, if the normal fleet speed limit is 65 MPH, the fleet manager can increase the VLS an additional 5 MPH for up to 30 minutes each day with a reset interval of 8 hours. An example of these limits is listed in Table 5-69.

Parameter	Limit
Passing Speed Duration	30 minutes
Passing Speed Interval	8 hours
Passing Speed Increment	10 MPH

Table 5-69 PasSmart Limits

Each time the driver exceeds 65 MPH, the 30 minute clock counts down as long as the speed remains above 65 MPH. He or she can continue to enter and exit the PasSmart extra speed zone to pass vehicles until the entire 30 minutes of higher VLS is used up. The driver is warned by the CEL one minute before the time expires. The vehicle speed is then limited to 65 MPH until the 8 hour period expires and an additional 30 minutes of passing time is available.

5.19.2 INSTALLATION

An OEM supplied Vehicle Speed Sensor or output shaft speed over the SAE J1939 Data Link is required. Refer to section 3.14.25, "Vehicle Speed Sensor," for additional information.

5.19.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The PasSmart parameters are programmable at engine order entry or with DDDL (release 3.1 or later), WinVeps (Release 3.0 or later), Vehicle Electronic Programming System (VEPS), the DDR (Suite 7 or later), or the DDEC Reprogramming System (DRS) as listed in Table 5-70.

Parameter	Description	Choice / Display
Passing Speed Duration	The duration of time per interval that is permitted at the higher speed. A value of zero will disable the feature.	0 to 255 minutes
Passing Speed Interval	The period of time when the ECM resets to begin a new period.	1 to 24 hours*
Passing Speed Increment	The additional vehicle speed permitted above the programmed vehicle speed limit. A value of zero will disable the feature.	0 to 20 MPH

* A value of 8, 12, or 24 will always reset the interval at midnight otherwise it resets every reset interval after the reprogramming was done.

Table 5-70 PasSmart Parameters

5.19.4 INTERACTION WITH OTHER FEATURES

PasSmart will increase the Vehicle Speed Limit.

A vehicle can be set up with both PasSmart and Fuel Economy Incentive, but the extra speed increments provided by the two features do not add together. For example, if Fuel Economy Incentive is set up to give 7 MPH of extra speed when the driver hits the maximum fuel economy target and the PasSmart increase is 5 MPH the resulting speed increase is 7 MPH, not 12 MPH.

THIS PAGE INTENTIONALLY LEFT BLANK

5.20 PASSWORDS

DDEC provides various levels of password protection such as Rating Password, Injector Password, Anti-Theft Password, and Customer Password. Parameter Group Lockout is needed for another level of password protection that affects groups of functions.

5.20.1 RATING PASSWORD

DDEC provides up to four preprogrammed horsepower ratings. The entry of a valid Rating Password and Customer Password are required in order to select a different rating. The rating password can be four alphanumeric characters consisting of the uppercase letters A-Z and the numerals 0-9. The default password is 0000. The Rating Password can be changed with VEPS, DRS, or DDDL. The Customer Password and the current Rating Password are required to change it.

5.20.2 INJECTOR PASSWORD

A valid Injector Password is required to update/change injector calibrations. The Injector Password can be four alphanumeric characters consisting of the uppercase letters A-Z and the numerals 0-9. The default password is 0000. The Injector Password can be changed with DDDL or DRS.

5.20.3 CUSTOMER PASSWORD

The entry of a valid password is required in order to reprogram any parameter(s). Current parameters may be read without entering a password. The password can be four alphanumeric characters consisting of the uppercase letters A-Z and the numerals 0-9.

A random Maximum Security Password can be set by VEPS or DRS for the Customer Password. When set, the factory backdoor password is required to make any changes. The factory backdoor password can be obtained from DDC Technical Service. The Customer Password can be changed with VEPS, DRS, or DDDL. The current Customer Password is required to change to another Customer Password. The default password is 0000.

Parameter Group Lockout

DDEC is capable of providing a second level of password protection for groups of functions. The entry of a valid Parameter Group Lockout Password and Customer Password are requirements before allowing changes to groups that are locked out. The lockout password can be four alphanumeric characters consisting of the uppercase letters A-Z and the numerals 0-9. The default password is 0000.

NOTE:

The parameters are not locked out until a four number non-zero lockout password has been defined.

The groups selected for additional password protection are listed in Table 5-71 and Table 5-72.

Feature with Lockout Enabled	Lockout Password Needed to Reprogram These Parameters	
Engine/Vehicle	VIN	Fuel Economy Incentive MPH Delta
	A/C Fan Timer	Fuel Economy Incentive MPH to MPG
	Dynamic Brake Enabled	Fuel Economy Incentive Trip Mileage
	Fuel Economy Incentive MPG Threshold	--
Engine Droop	LSG Droop	VSG Droop
VSG	VSG Minimum RPM	VSG Maximum RPM
	Alternate Minimum VSG RPM	--

Table 5-71 Features and Parameters Selected for Additional Password Protection

Feature with Lockout Enabled	Lockout Password Needed to Reprogram These Parameters	
Cruise Control	Enable Cruise Control	Tire Revs/Mile
	Minimum Cruise Control Speed	Axle Ratio
	Max Cruise Control Speed	Top Gear Ratio
	Enable Engine Brake on Cruise Control	VSS Teeth
	Engine Brake Increment	Max Speed with Fuel
	Enable Auto Resume	Max Speed without Fuel
	Enable Vehicle Speed Limiting	Cruise Switch VSG Enable
	Maximum Vehicle Limit Speed	Cruise Switch VSG Initial RPM
	Enable Vehicle Speed Sensor	Cruise Switch VSG Increment
	Sensor Type	Enable Adaptive Cruise Control
	VSS Signal	--
Idle Shutdown Timer	Enable Idle Shutdown	Idle Shutdown Duration
	Enable Idle Shutdown on VSG	Idle Shutdown Min Ambient Temperature
	Enable Idle Shutdown Override	Idle Shutdown Max Ambient Temperature
Engine Protection	Engine Protection on Oil Temperature High	Engine Protection on Intercooler Temperature High
	Engine Protection on Coolant Temperature High	Engine Protection on Crankcase Pressure High
	Engine Protection on Oil Pressure Low	Engine Protection on Auxiliary Shutdown #1
	Engine Protection on Coolant Level Low	Engine Protection on Auxiliary Shutdown #2
Air Compressor	Air Compressor Load Delta	Air Compressor Max #2 Pressure
	Air Compressor Unload Delta	Air Compressor Max #3 Pressure
	Air Compressor Min#1 Pressure	Air Compressor Pressure Increment
	Air Compressor Min#2 Pressure	Air Compressor Gain Proportional
	Air Compressor Min#3 Pressure	Air Compressor Gain Integral
	Air Compressor Max#1 Pressure	--
Progressive Shift	Enable Progressive Shift	Low Gear #2 RPM Limit
	Low Gear #1 Off Speed	Low Gear #2 Max Limit
	Low Gear #1 RPM Limit	High Gear On Speed
	Low Gear #1 Max Limit	High Gear RPM Limit
	Low Gear #2 Off Speed	--
ESS and Top2	ESS Late Change	ESS Skip Shift
	ESS Second Chance	Top2 Cruise Switch
	ESS Engine Brake Shift	--
Maintenance Alert	MAS CEL/SEL to flash for Levels	MAS CEL/SEL to flash for Filters

Table 5-72 Features and Parameters Selected for Additional Password Protection (Continued)

5.20.4 PROGRAMMING REQUIREMENTS & FLEXIBILITY

VEPS, DRS, or DDDL can set the group lockouts listed in Table 5-73.

Parameter	Description	Choice
ENGINE/VEHICLE OPTIONS	Enables/Disables lockout for Engine/Vehicle parameters.	YES, NO
DROOP	Enables/Disables lockout for Droop parameters.	YES, NO
VSG	Enables/Disables lockout for VSG parameters.	YES, NO
CRUISE CONTROL	Enables/Disables lockout for Cruise Control parameters.	YES, NO
IDLE SHUTDOWN TIMER	Enables/Disables lockout for Idle Shutdown parameters.	YES, NO
ENGINE PROTECTION	Enables/Disables lockout for Engine Protection parameters.	YES, NO
AIR COMPRESSOR	Enables/Disables lockout for Air Compressor parameters.	YES, NO
PROGRESSIVE SHIFT	Enables/Disables lockout for Progressive Shift parameters.	YES, NO
ESS / TOP2	Enables/Disables lockout for ESS/Top2 parameters.	YES, NO
MAINTENANCE ALERT SYSTEM	Enables/Disables lockout for Maintenance Alert System parameters.	YES, NO

Table 5-73 Group Lockout Parameters

The Lockout Password can be changed with the VEPS, DRS, or DDDL. The Customer Password and the current Lockout Password are required to change it.

5.21 PRESSURE SENSOR GOVERNOR

The Pressure Sensor Governor (PSG) is an optional DDEC feature designed primarily for fire truck applications. PSG is a unique governor system which electronically controls engine speeds based on one of two selected modes of operation. An optional panel display is available (refer to section 5.5, "Electronic Fire Commander").

5.21.1 PSG OPERATION

The Pressure Sensor Governor operates in one of two modes:

- ☐ Pressure Mode - monitors water pump discharge pressure while varying engine speed to maintain the set pump pressure
- ☐ RPM Mode - maintains a set engine speed regardless of engine load, similar to Variable Speed Governor (VSG) operation

Once PSG has been enabled, the mode is selected with the Pressure/RPM Mode Switch. PSG is enabled by grounding the digital input "PSG Enable" (function #24). The mode is selected by either providing battery ground (Pressure Mode) or an open circuit (RPM Mode) to the digital input "Pressure/RPM Mode" (function #8).

The engine will maintain the engine speed or pump pressure that is current when the mode switch is toggled between the RPM and Pressure modes.

The PSG Ready Light illuminates when PSG is waiting for an operating point. After the Increase or Decrease button has been pressed the PSG active output will be turned on illuminating the PSG Active Light.

See Figure 5-72 for a schematic of the PSG system.

RPM Mode

RPM Mode allows the governor to maintain the set speed within engine operating capabilities. RPM Mode is selected when the digital input "Pressure/RPM Mode" (Function #8) is an open circuit. If the pump is not engaged, RPM Mode can still be used to vary engine speed.

Pressure Mode

Pressure Mode allows the governor to monitor and maintain the fire pump discharge pressure. Pressure Mode is selected by providing battery ground via the digital input Pressure/RPM Mode (Function #8).

In Pressure Mode, the maximum allowable increase above the RPM at which the pressure setpoint was established is 400 RPM. This protects the fire fighter from a pressure surge which may result from a momentary loss of pressure if the maximum allowable increase in engine speed is not limited. Also, the maximum allowable increase in engine speed protects the pump from cavitation.

The Pressure Mode is maintained until one of the following situations occurs:

Situation 1 - The Pressure/RPM Mode switch is moved to the RPM Mode. The system reverts to RPM Mode and the same engine speed is maintained.

Situation 2 - The Pressure Sensor signal exceeds diagnostic limits. The system reverts to RPM Mode. The same engine speed will be maintained. The Check Engine Light (CEL) illuminates, and either Code 86 or 87 will be logged into the ECM memory.

Situation 3 - If the water pump discharge pressure falls below 40 psi and the engine RPM rises a minimum of 400 rpm above the current set point for more than five (5) seconds, the system also considers cavitation to have occurred and the following happens:

1. The engine will return to idle.
2. The current engine speed and discharge pressure set points will be cleared.
3. The CEL will illuminate.

5.21.2 SWITCHES - DECREASE AND INCREASE

The Increase and Decrease switches follow similar logic as the Cruise Control switches (Set/Coast On and Resume/Accel On). The Increase and Decrease switches use digital inputs.

Increase (Resume/Acceleration On)

Momentarily toggling and releasing the increase switch (grounding the Resume/Acceleration On digital input) at the initiation of PSG operation will set the Pressure or RPM operating point. The Pressure or RPM setting will increase by 4 psi (approximately 27.6 kPa) or 25 RPM per increment by momentarily contacting the increase switch as listed in Table 5-74.

Mode	Switch	Amount
RPM Mode	Increase/Decrease	+/- 25 rpm
Pressure Mode	Increase/Decrease	+/- 4 psi

Table 5-74 Increase and Decrease for RPM and Pressure Mode

Holding the switch in the increase position (grounding the Resume/Acceleration On digital input), will increase the pressure or engine speed. The pressure or engine speed will increase by 4 psi (approximately 27.6 kPa) or 25 RPM per increment at a rate of two increments per second. Releasing the switch sets PSG to the higher setting.

Decrease (Set/Coast On)

The pressure or engine speed is decreased by momentarily contacting the switch to the decrease position (grounding the Set/Coast On digital input). The Pressure/RPM setting will decrease by 4 psi (approximately 27.6 kPa) or 25 RPM per increment when the Decrease Switch is momentarily contacted as listed in Table 5-74.

Holding the switch in the decrease position (grounding the Set/Coast On digital input) will decrease the pressure or engine speed. The pressure or engine speed will decrease by 4 psi (approximately 27.6 kPa) or 25 RPM per increment at a rate of two increments per second. Releasing the switch sets the Pressure/RPM to the lower setting.

5.21.3 INSTALLATION

See Figure 5-72

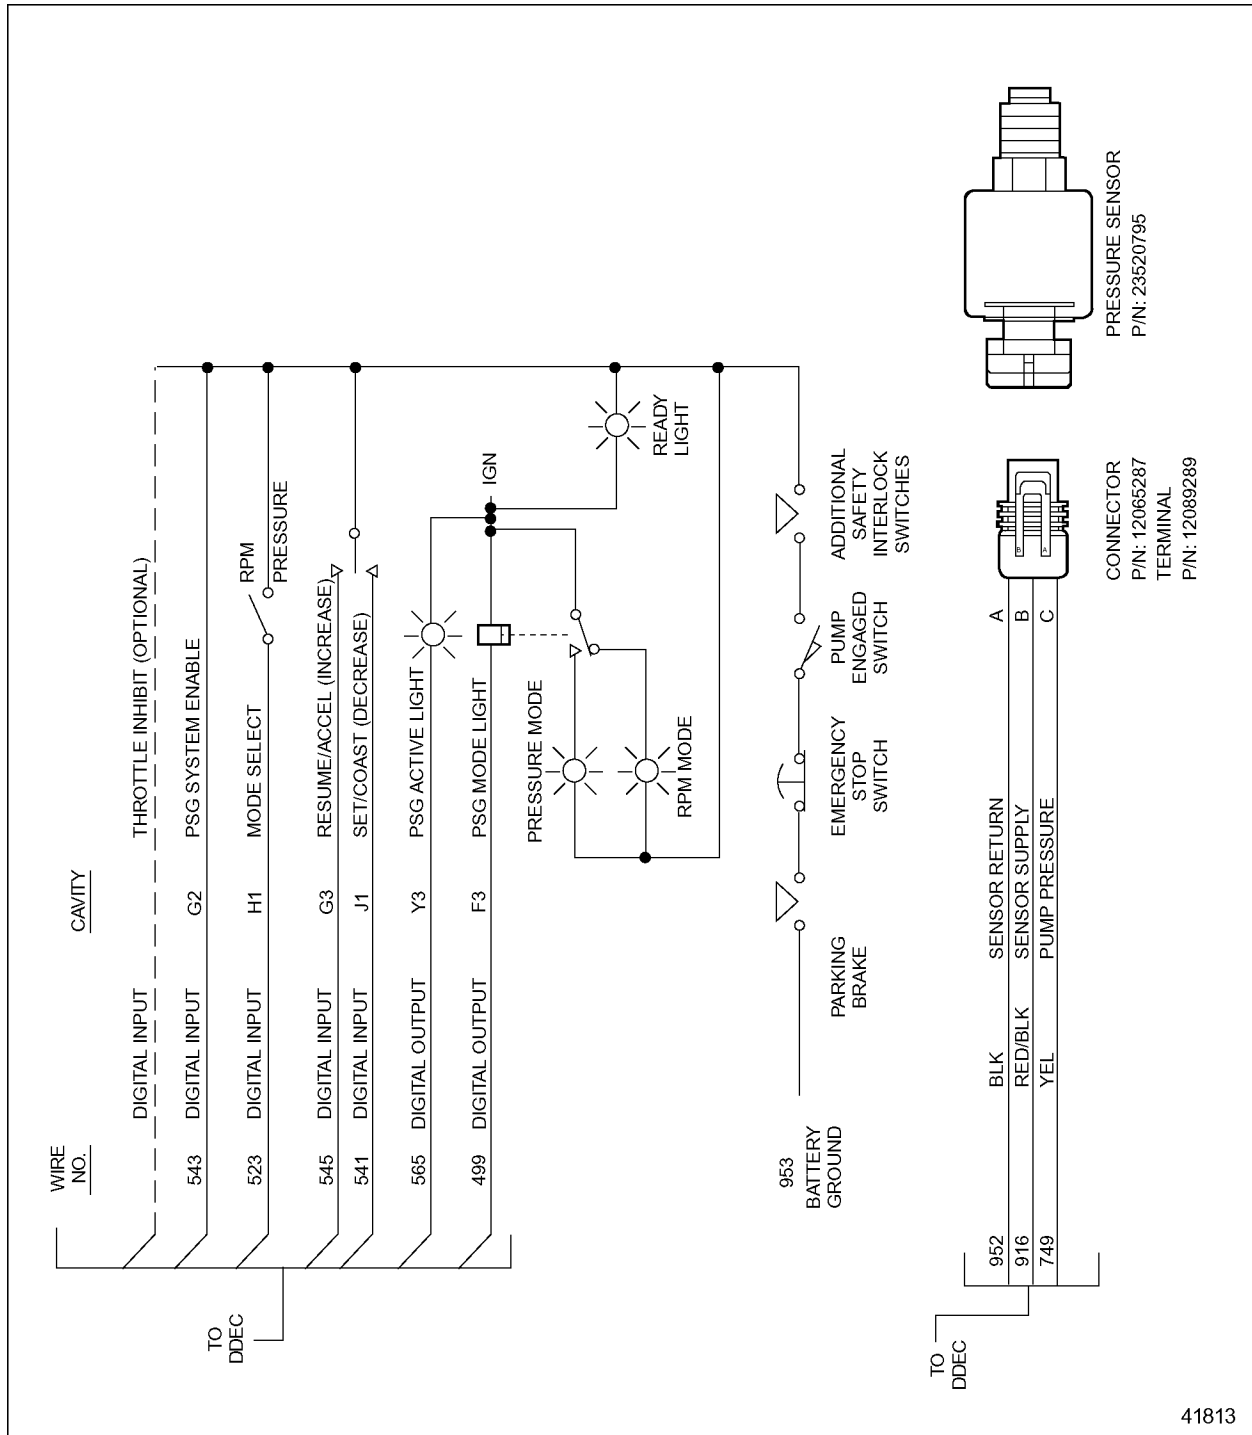


Figure 5-72 Pressure Sensor Governor System - Vehicle Interface Harness Connector

5.21.4 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

There are four digital inputs and two digital outputs required for PSG. The four digital inputs required for use with PSG are listed in Table 5-12.

Order Entry Function Number	Circuit Number*	VIH-to-ECM Connector Assignment*	DDR Description
8	523	H1	Pressure/RPM Mode
24	543	G2	PSG Enable
22	545	G3	Resume/Accel On (increase)
20	541	J1	Set/Coast On (decrease)

* DDC circuit numbers and port assignments shown are default settings but can differ from application to application.

Table 5-75 Required Digital Inputs for PSG

The digital outputs required for use with PSG are listed in Table 5-13.

Order Entry Function Number	Circuit Number*	Connector Assignment*	DDR Description
5	499	VIH-to-ECM Connector - Cavity F3	PSG Active
11	565	Pigtail off the Engine Sensor Harness - Cavity Y3	Cruise Active

* DDC circuit numbers and port assignments shown are default settings but can differ from application to application.

Table 5-76 Required Digital Outputs for PSG

The Pressure Sensor Governor is programmed with unique operational parameter defaults intended to cover a wide variety and range of pump applications. The PSG parameter defaults are listed in Table 5-77.

Parameter	Default	Range
Integral Gain	10.00 rpm/(psi-s)	0.000 - 39.845
Proportional Gain	0.75 rpm/s	0.00 - 512.00
Engine Speed Increment	25.00 rpm	0 - 250
Pump Pressure Increment	4.00 psi (27.6 kPa)	0 - 99
Cavitation Time Out	5.00 s	0 - 99

Table 5-77 PSG Parameters and Defaults

Customizing the parameter defaults can be accomplished at the time of engine order, by VEPS or DRS. Changes to the parameter defaults can not be made with DDDL/DDR.

5.21.5 INTERACTION WITH OTHER FEATURES

The EFPA (LSG) remains active while PSG is operating unless the digital input Throttle Inhibit (function #9) is configured and enabled by switching to battery ground.

PSG has priority in installations where both VSG and PSG are used. The VSG input is completely independent of PSG. When the PSG Enable digital input is grounded, the VSG system is disabled.

PSG uses logic similar to Cruise Control and requires many of the same digital inputs and outputs. Therefore, neither Cruise Control or the digital input Cruise Enable (function #23) may be specified in conjunction with PSG (refer to section 4.2.1 for more information on Cruise Control digital inputs). Refer to section 4.2.6 for more information on PSG digital inputs. Refer to section 5.5 for information on PSG interaction with Electronic Fire Commander.

Cruise Switch VSG can not be used if PSG is configured.

THIS PAGE INTENTIONALLY LEFT BLANK

5.22 PROGRESSIVE SHIFT

The Progressive Shift option offers a high range maximum vehicle speed limit to encourage the use of high (top) gear during cruise operation. Progressive Shift encourages the driver to upshift from a lower to a higher gear prior to reaching the engine's governed speed. The resulting lower engine speed in high range should result in improved fuel economy. Progressive shifting techniques should be practiced by every driver, but can be forced if fleet management considers it necessary. The benefits from progressive shifting are best realized during stop-and-go driving cycles.

The rate of acceleration will be limited below the programmed MPH to encourage up shifting.

As the driver accelerates beyond a specified MPH, the rate of engine acceleration is limited in higher RPM, to encourage (force) the operator to select the top gear.

- ☐ Progressive Shift should be used with 2100 RPM rated engines in fleet applications where the reduced driveability will not impede trip times or productivity.
- ☐ Progressive Shift is not compatible with most automatic transmission.

NOTICE:
Progressive Shift may be selected only when Spec Manager is run. Progressive Shift selection without Spec Manager could result in mismatched equipment, poor fuel economy, and poor performance. Your local Detroit Diesel Distributor will run the program.

5.22.1 OPERATION

The Progressive Shift option has two sets of low ranges and one set of high range parameters, which should be selected at the time of engine order, but also are programmable with the DDR, DDDL, or VEPS. Refer to section 5.22.6. The example shift pattern chart (see Figure 5-73) reflects default values when the Progressive Shift option is chosen and the low and high gear parameters are not modified.

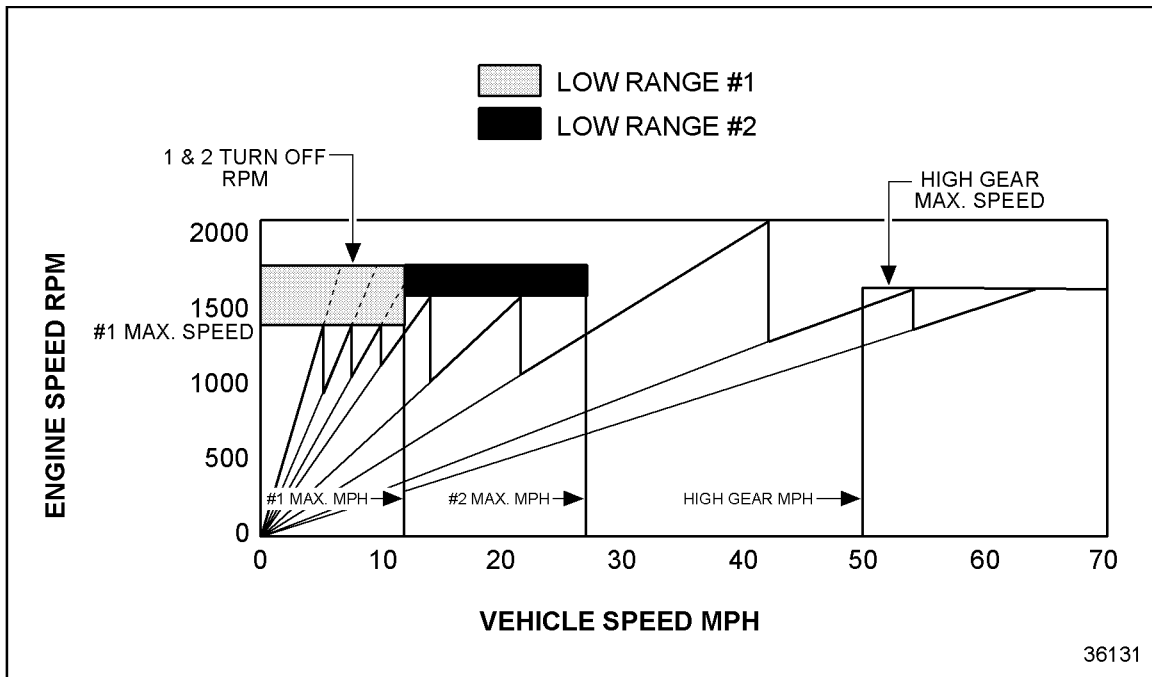


Figure 5-73 Progressive Shift Chart - Represents Default

An alternate use for the Progressive Shift option would be to encourage a driver (or force him/her) into top gear. Normally this condition exists when the gearing selected at the time of order allows a vehicle speed limit to be reached in a gear lower than top gear. See Figure 5-74.

5.22.2 LOW RANGE #1

The low range #1 area of operation is bound by a maximum vehicle speed, a maximum engine speed and a maximum turn-off speed. In the first illustration (see Figure 5-73) the default values are 12 MPH (approximately 19.3 kmh), 1400 RPM and 1800 RPM, respectively. During vehicle acceleration, when the vehicle speed is below selected maximum vehicle speed value attained, the maximum rate the engine can be accelerated is reduced to 33 RPM/s. During light load operation, the driver will feel this and be encouraged to up-shift to regain his rate of acceleration. If the engine continues to be operated above the low range #1 maximum speed, it may eventually reach the low range #1 turn-off speed. When the low range #1 turn-off speed is obtained, no additional increase in engine speed will be allowed. At this point, the transmission must be up-shifted if the vehicle is to continue accelerating.

5.22.3 LOW RANGE #2

The low range #2 area of operation is bounded by a maximum speed (MPH), a maximum engine speed and a maximum engine turn-off speed. In the first illustration (see Figure 5-73) the default values shown are 27 MPH (approximately 43.5 km/h), 1600 RPM and 1800 RPM, respectively. (The lower vehicle speed boundary is the low range #1 maximum speed value.) Different values can be selected at the time of the engine order or programmed with the DDR. The engine acceleration rate for low range #2 is 25 RPM/sec.

5.22.4 HIGH RANGE

Two high range parameters should be selected; a high range maximum vehicle speed (MPH) and a high range maximum engine speed (RPM). The default values shown in the first illustration (see Figure 5-73) are 50 MPH (approximately 80.5 km/h) and 1650 RPM, respectively. Once the high range maximum engine speed is attained, the engine will not be allowed to operate above the high range maximum engine speed. This is meant to encourage up-shifting to high gear in order to increase vehicle speed (see Figure 5-74 and Figure 5-74). Spec Manager should be used if the HIGH GEAR MPH is set such that it reduces the vehicle speed and the engine MPH; this limit will not work as desired.

NOTE:

The HIGH GEAR maximum engine speed could change the maximum vehicle speed limit if the high gear maximum engine speed (RPM) limits the vehicle speed limit. With Progressive Shift enabled, the high gear RPM limit overrides the rated speed of the engine rating.

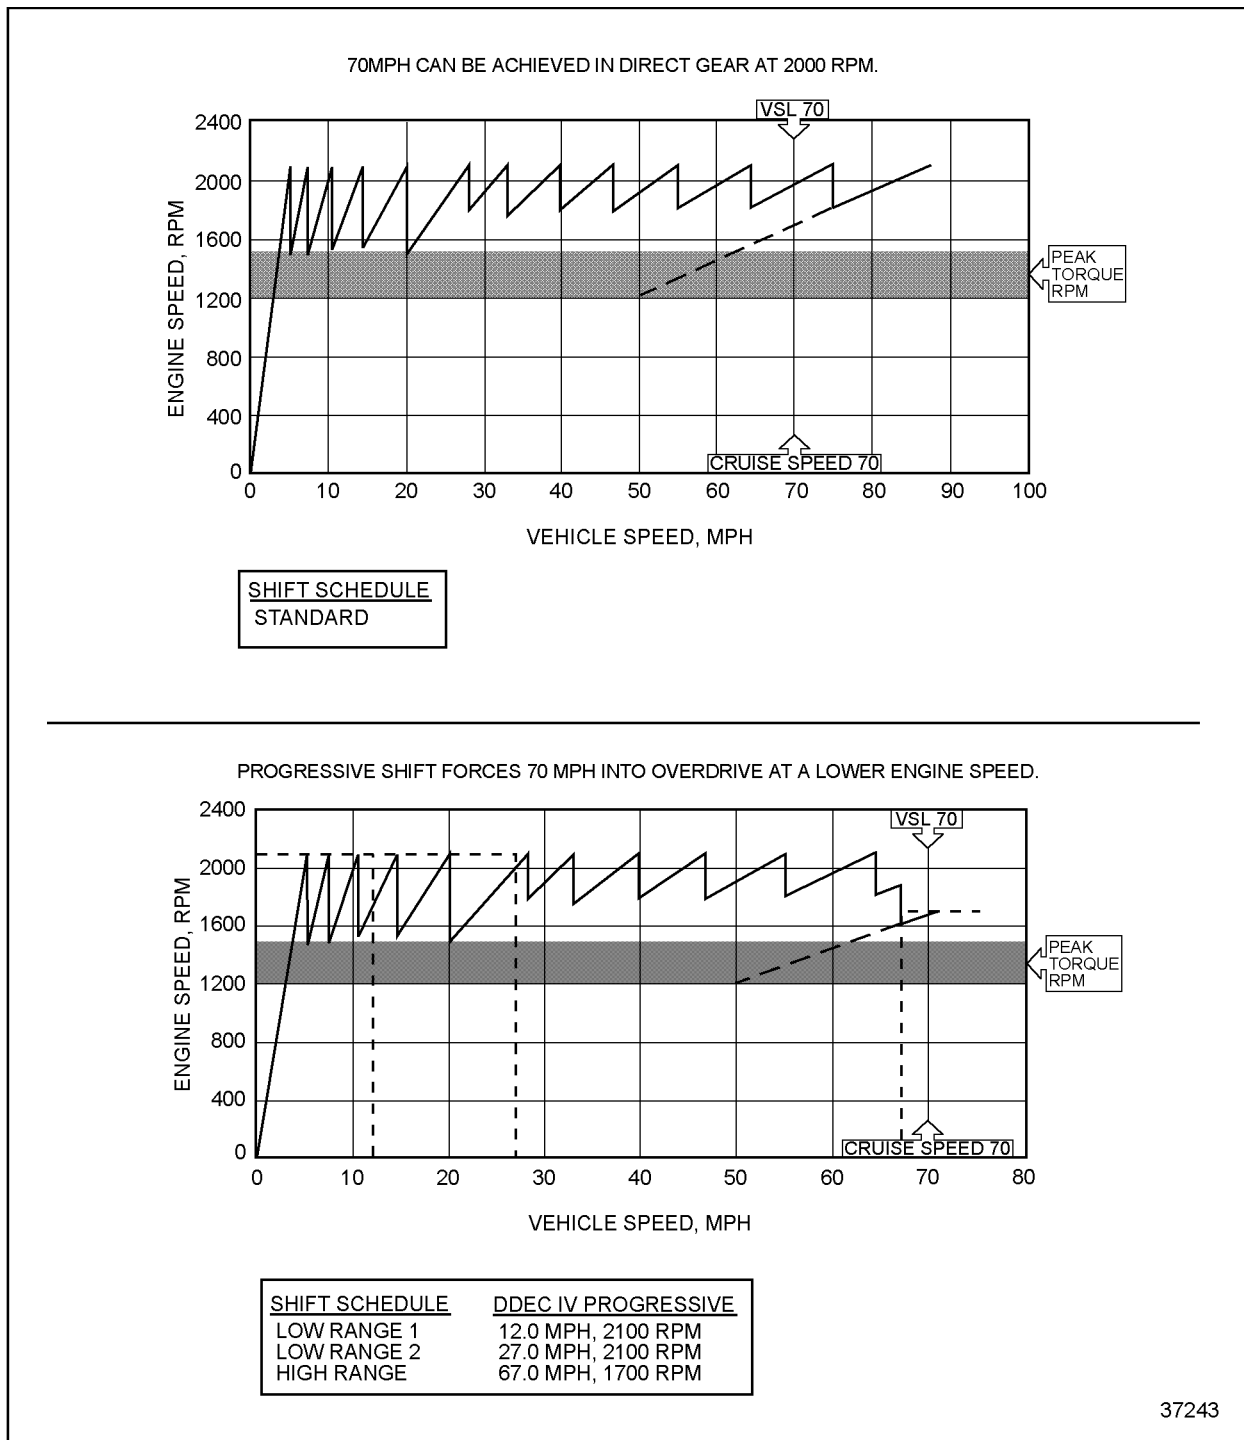


Figure 5-74 Progressive Shift Corrects Problem with High and Low Gears Modified

5.22.5 INSTALLATION INFORMATION

A Vehicle Speed Sensor (VSS) must be installed. It must be enabled, and all proper calculations entered into the ECM with DRS, DDDL, VEPS, or the DDR as listed in Table 5-78. Refer to section 3.14.25, "Vehicle Speed Sensor," for additional information.

Parameter	Choice
VSS ENABLED	Yes
VSS TYPE	Tail/Wheel
VSS TEETH	8 - 160
VSS SIGNAL	Magnetic/Switched
TIRES REVS/MI	Actual revolutions per mile
AXLE RATIO	Rear Axle ratio
TOP GEAR RATIO	Gear ratio in top gear.

Table 5-78 VSS Parameters

The Spec Manager program should be utilized to determine maximum vehicle speed for low range #1 and #2. If the maximum engine speed and maximum vehicle speed coincide, the Progressive Shift logic may not correctly compensate faster or slower on either side of the maximum vehicle speed. Spec Manager can alert the programmer to this dilemma and advise accordingly on maximum vehicle speed set points.

Example: If the maximum vehicle speed #1 was 12 MPH (approximately 19.5 kmh), the Progressive Shift logic may not determine if the maximum engine speed is 1400 or 1600 RPM. Spec Manager would advise moving the maximum vehicle speed #1 plus or minus 2 MPH (approximately 3.2 kmh) to eliminate any possible confusion.

5.22.6 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

Enabling all areas required for Progressive Shift can be performed with the DDR, DDDL, VEPS, or at DRS.

The Progressive Shift option has two sets of low gear and one set of high gear parameters as listed in Table 5-79.

Parameter	Description	RANGE
Enabled	Enables/Disables the Progressive Shift feature	YES, NO
Low Gear #1 Off Speed (MPH)	Sets the low gear #1 turn off speed.	12 to 27 MPH
Low Gear #1 RPM Limit	Sets the low gear #1 RPM limit.	1000 to Low Gear #1 Maximum Limit RPM
Low Gear #1 Maximum Limit (RPM)	Sets the maximum low gear #1 RPM limit.	1600 to Rated Speed RPM
Low Gear #2 Off Speed (MPH)	Sets the low gear #2 turn off speed.	Low Gear#1 Off Speed to High Gear On Speed MPH
Low Gear #2 RPM Limit	Sets the low gear #2 RPM limit.	1000 to Low Gear #2 Maximum Limit RPM
Low Gear #2 Maximum Limit (RPM)	Sets the maximum low gear #2 RPM limit.	Low Gear #1 Maximum Limit to High Gear RPM Limit
High Gear On Speed (MPH)	Sets the high gear turn on speed.	Low Gear #2 Off Speed to 127 MPH
High Gear RPM Limit	Sets the high gear RPM limit.	1600 to Rated Speed RPM

Table 5-79 Progressive Shift Programming

5.22.7 INTERACTION WITH OTHER FEATURES

When Progressive Shift is enabled the ECM will treat "HG RPM LMT" as the rated speed of the engine. Vehicle maximum speed or maximum Cruise Control settings can not be set higher then engine speed will allow based on the VSS data entered.

5.23 TACHOMETER DRIVE

DDEC uses the TRS signals to compute engine speed (refer to section 3.14.12). The engine speed is transmitted over the J1708/J1587 Data Link. Engine speed can be displayed by connecting a tachometer from VIH connector pin K-1. Circuit 505 provides the standardized output signals for the tachometer drive per ATA recommended practice RP123. See Figure 5-75.

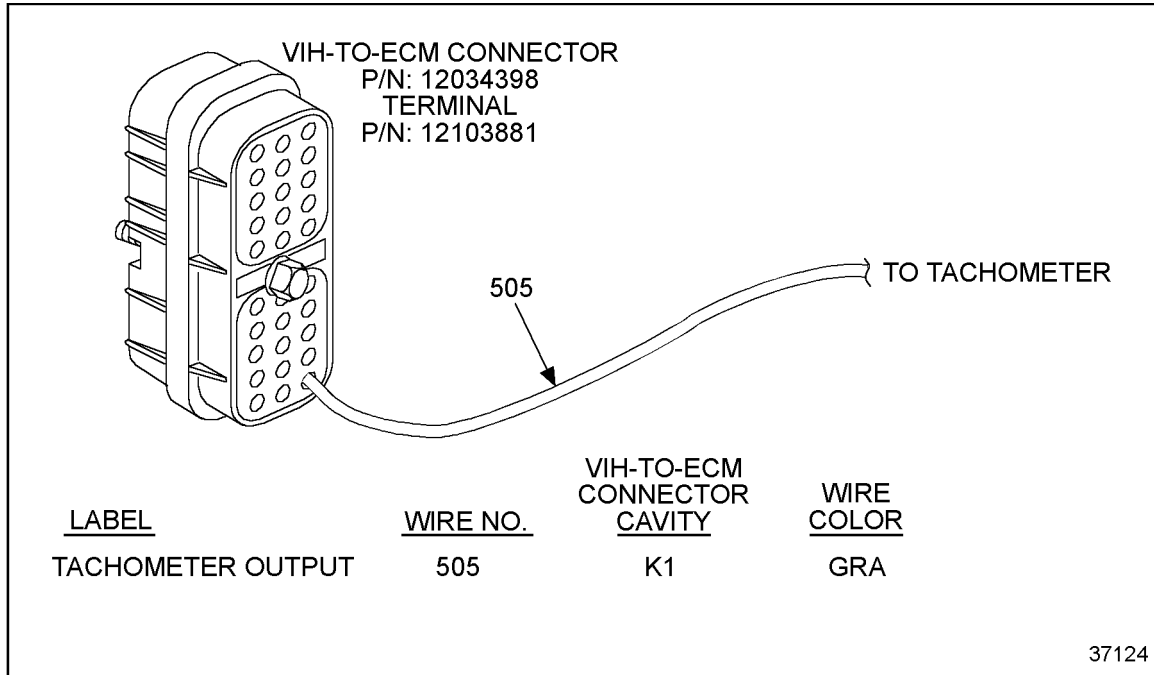


Figure 5-75 Tachometer Drive Installation

Signal output characteristics are listed in Table 5-80.

Signal	Signal Characteristics
PULSE RATE	12 Pulse/Rev (all engines)
DUTY CYCLE	50% $\pm$ 30%
SIGNAL LOW	0V < V < .5V when sinking less than 50mA out
SIGNAL HIGH	4.0 < V < V Batt + sourcing less than 5mA out

Table 5-80 Tachometer Drive Signal Output Characteristics

See Figure 5-76 for the tachometer output signal.

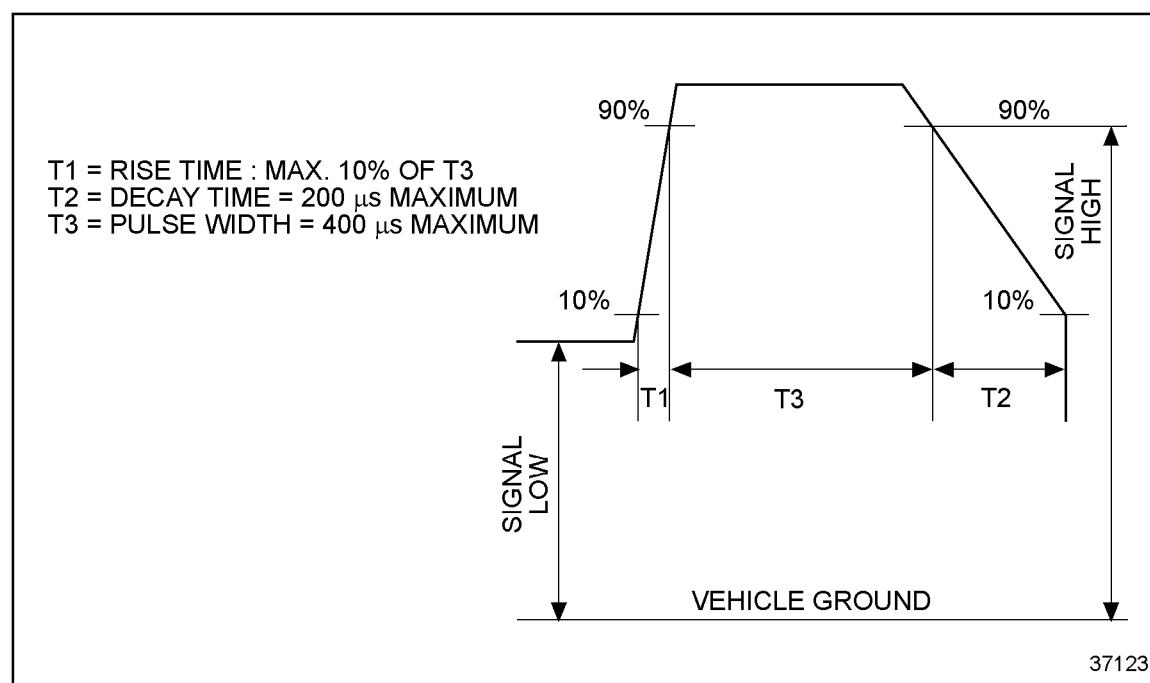


Figure 5-76 Tachometer Output Signal

5.24 THROTTLE CONTROL/GOVERNORS

There are two types of engine governors that are used with throttle controls. The engine governors are:

- ☐ The Limiting Speed Governor (LSG) for torque control, typical governor for on-highway (refer to section 5.24.1)
- ☐ The Variable Speed Governor (VSG) for speed control, typical governor for nonroad (refer to section 5.24.2)

5.24.1 LIMITING SPEED GOVERNOR - ON-HIGHWAY

In on-highway applications and some nonroad applications, LSG is the primary throttle source. The throttle input in a LSG sets percent load. The amount of fuel input to the engine is determined by the throttle position. As the load on the engine varies the resulting engine speed will vary between idle speed and rated speed.

The Hot Idle and Governor Droop are selected at the time of engine order. Both of these variables can be adjusted with DDDL/DDR. Hot idle is the engine idle RPM when the oil temperature is greater than 140°F and governor droop/overrun is the overrun beyond rated speed. The droop/overrun can be adjusted in the range from 0 to 300 RPM, depending on engine rating. VSG droop cannot exceed LSG droop. The idle can be adjusted in a range from 25 RPM below to 100 RPM above hot idle depending on engine rating.

If a wire is installed in circuit 510 (VSG Control) and is not terminated, the wire must be grounded to circuit 953 or sensor return circuit 952. Alternatively, if no wire exists, the cavity can be plugged, but there is a risk of water intrusion.

LSG Primary with VSG as a Secondary Control

VSG is available as a secondary control (LSG is primary) for specialized on-highway applications. For these applications, the LSG is programmed to override the VSG under certain conditions.

VSG is disabled during initial startup, until the VSG throttle is moved to the idle range (less than 140 counts) and the LSG throttle is near idle (less than 4% throttle).

VSG (including Alt Min VSG) may be disabled when a predetermined (set by ACS) LSG percent throttle is exceeded as listed in Table 5-81.

Application	% Throttle
On-highway Trucks	4%
Transit Bus	100%
Fire Truck	100%
Motor Coach	100%
Crane	4%

Table 5-81 Predetermined LSG % Throttle

VSG operation is disabled when the engine protection option has been selected and the SEL is illuminated because one of the engine parameters being monitored is out of limits.

For another example of VSG or LSG only operation using two inputs see Figure 5-77.

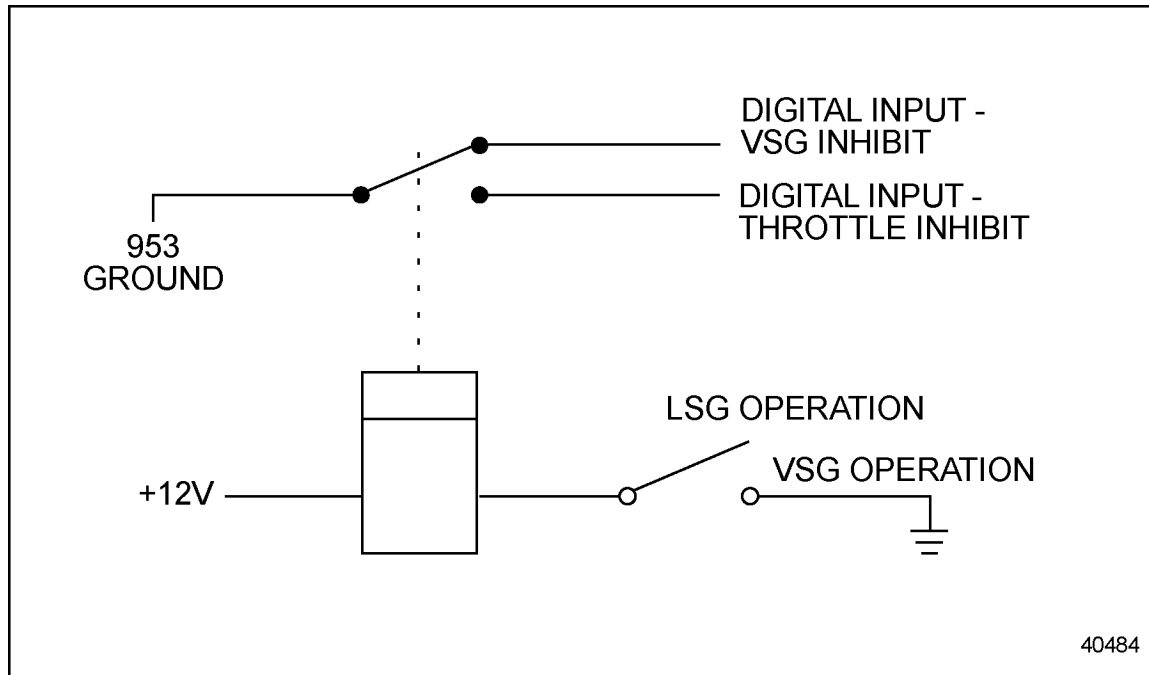


Figure 5-77 VSG or LSG Only Operation Using VSG Inhibit

Grounding the VSG Inhibit digital input will reduce the engine speed to idle. When the ground is removed from the input, the throttle must be reset to zero before engine speed can be increased from idle.

LSG Control Options

The LSG control options are the following:

- ☐ Electronic Foot Pedal Assembly (EFPA)
- ☐ Dual Electronic Foot Pedal Assembly

LSG Electronic Foot Pedal Assembly

The EFPA sends an input signal which the LSG uses to calculate engine power proportional to the foot pedal position. This assembly is also referred to as the Throttle Position Sensor (TPS) assembly.

LSG Electronic Foot Pedal Assembly Installation

DDEC IV is compatible with an EFPA, which has an output voltage that meets SAE J1843 and has less than 5% of voltage supply closed throttle variability.

The EFPA is an OEM supplied part. Vendor sources that may be contacted for additional design and installation details are:

Williams Controls

14100 S.W. 72nd Avenue
Portland, Oregon 97224
Phone: (503) 684-8600
www.williamscontrols.com

King Controls

5100 West 36th Street
St. Louis Park, Minnesota 55416
Phone: (952) 922-6889
www.kingcontrols.com

Bendix Commercial Vehicle

901 Cleveland
Elyria, Ohio 44035
Phone: 1-800-AIR-BRAKE
www.bendix.com

The EFPA must be wired so at low engine speed a small resistance is seen between circuits 417 (signal) and 952 (reference ground). At high engine speed a larger resistance must be seen between circuits 417 and 952 (see Figure 5-78). A Volt/Ohm meter must be used to measure resistance to ensure correct installation.

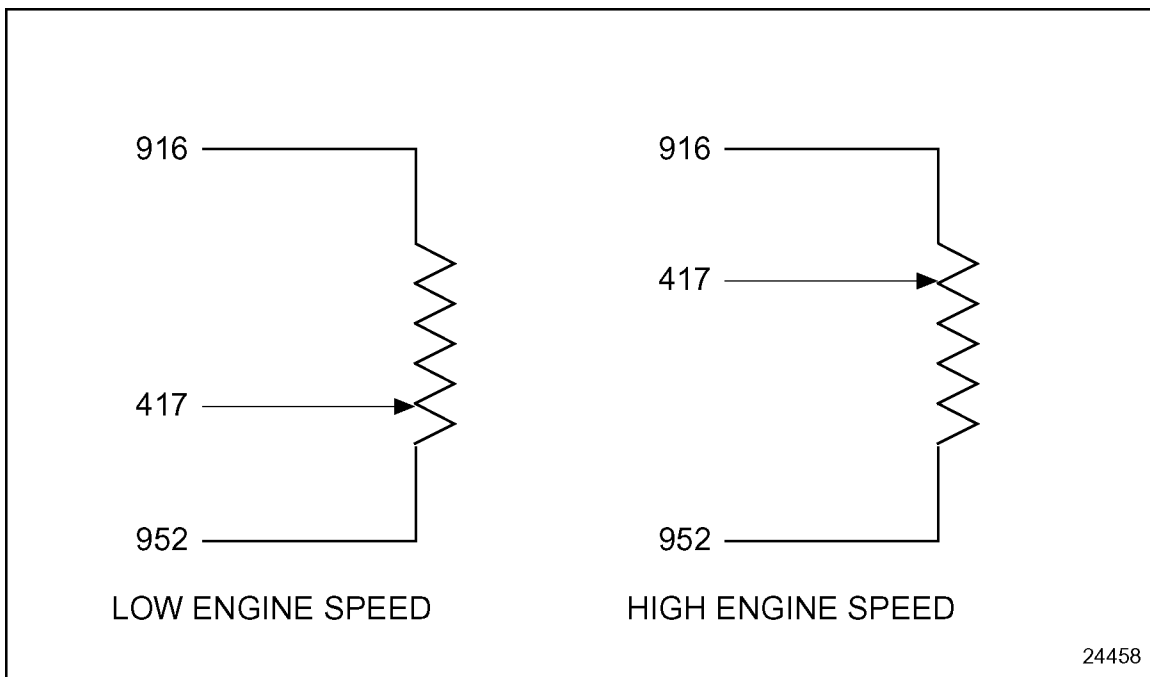


Figure 5-78 Electronic Foot Pedal Assembly Installation

The Idle Validation Switch is provided as an option and uses a digital input. Refer to section 4.2, "Digital Inputs," for additional information.

LSG Electronic Foot Pedal Assembly Diagnostics

An idle validation switch provides redundancy to assure that the engine will be at idle in the event of an EFPA in-range malfunction. The idle validation switch is connected to a digital input on the ECM. When the idle validation switch on the EFPA is switched to battery ground, the engine speed will be at idle.

LSG Dual Electronic Foot Pedal Assembly Throttle Controls

Some applications require LSG controls at two stations.

LSG Dual Throttle Control Installation

The dual EFPA schematic (see Figure 5-79) shows an EFPA at two locations with only one EFPA active at a time. The dual EFPA option requires one digital input. The digital input is switched to either battery ground or system voltage to indicate which EFPA is active.

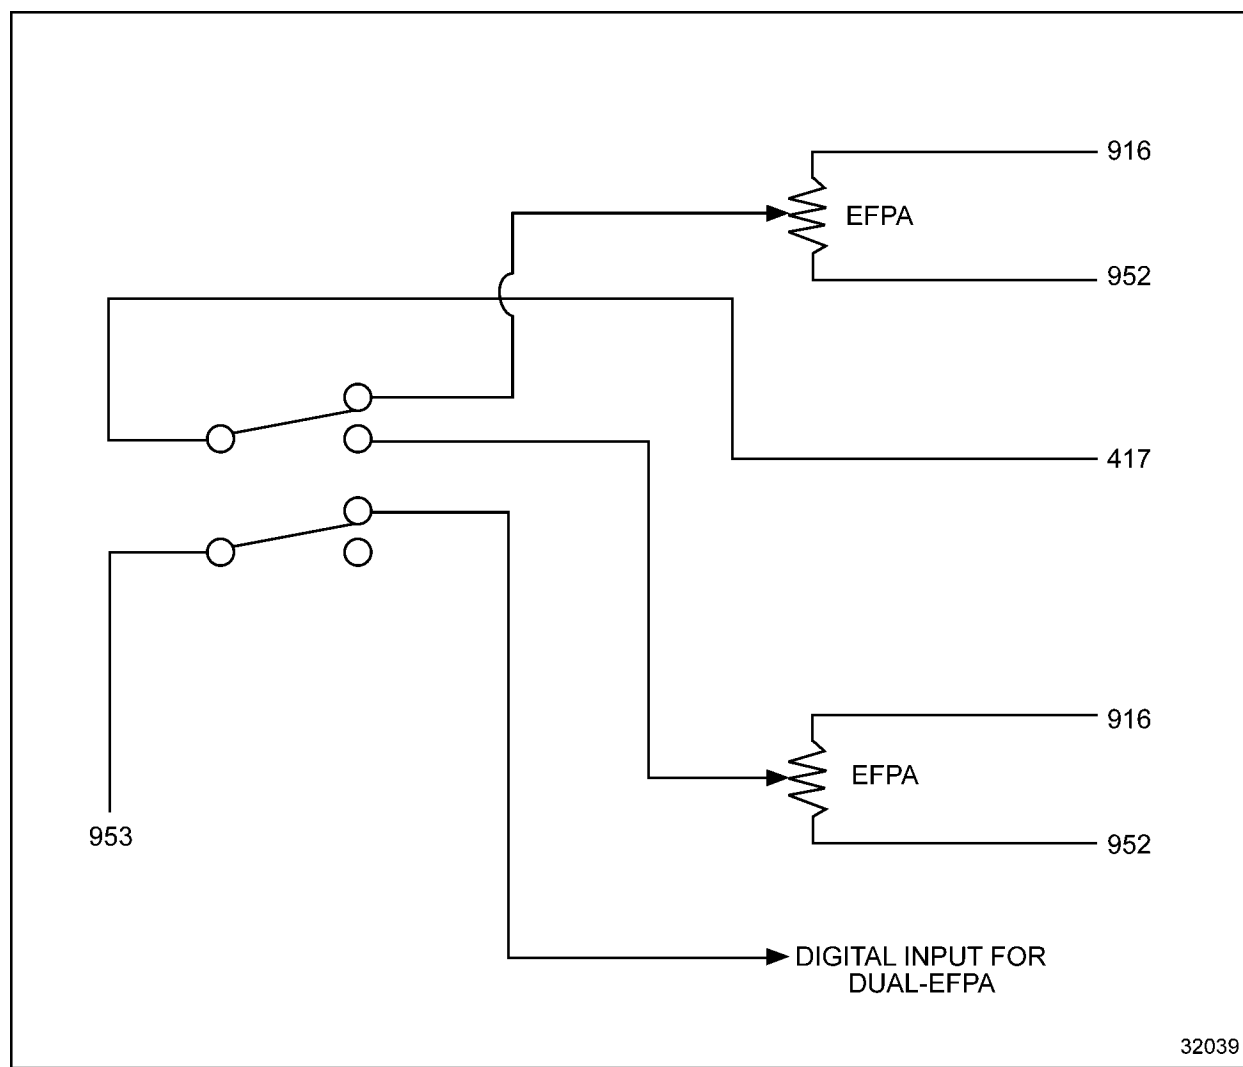


Figure 5-79 LSG Dual Electronic Foot Pedal Assembly Throttle

LSG Dual Throttle Control Programming Requirements and Flexibility

The digital input listed in Table 5-82 is required for LSG dual throttle control. This digital inputs may be ordered at the time of engine order, configured by VEPS or DRS.

Digital Input	Function Number
Dual EFPA	28

Table 5-82 LSG Dual Throttle Control Digital Input

Refer to section 4.2, "Digital Inputs" for additional information.

LSG Dual Throttle Control Diagnostics

System diagnostics will detect active sensor or associated wiring malfunction and return the engine to idle speed. An Idle Validation Switch provides redundancy to assure that the engine will be at idle in the event of an in-range malfunction.

5.24.2 VARIABLE SPEED GOVERNOR - NONROAD

The throttle input to a VSG controls engine speed between idle and rated speed. The VSG senses load and fuels the engine to maintain a set speed (within the capability of the engine). Upon startup the engine will go to the speed selected by the VSG throttle control.

The Variable Speed Governor (VSG) throttle control options are:

- ☐ Cruise Switch VSG
- ☐ Hand Throttle
- ☐ EFPA
- ☐ Alternate Minimum VSG (Release 2.0 or later)
- ☐ Voltage Dividers
- ☐ Dual Throttle Controls
- ☐ Frequency Input

In on-highway applications and some nonroad applications, the LSG is the primary throttle source. In these applications, the following conditions must be met to operate on the VSG:

- ☐ On-highway truck applications disable VSG operation when the EFPA is pressed. In truck applications the EFPA must be released. Note that coach and motor home, and fire truck applications do not disable VSG operation when the EFPA is depressed as listed in Table 5-81.
- ☐ Once disabled, the VSG voltage must be reduced to < 0.68 volts before it can be reactivated.
- ☐ When fault code 12 (VSG voltage high) occurs, the VSG is disabled and the engine returns to idle. To regain VSG throttle control, the VSG throttle must be returned to the idle position (less than 140 counts).

- ☐ VSG will not operate when the vehicle speed exceeds a predetermined, application specific vehicle limit. Contact DDC Application Engineering for application specific details.

VSG Programming Requirements and Flexibility

The VSG parameters which can be selected at the time of engine order or programmed with a DDR, DDDL, VEPS or DRS are listed in Table 5-83.

Parameter	Description
VSG MIN SPD	The VSG minimum speed can be set between the hot idle speed and the rated engine speed (or VSG MAX SPD when selected). This causes the engine speed to jump from the hot idle speed to VSG idle speed when the VSG throttle position is first moved (above 140 counts).
VSG MAX SPD	The VSG maximum speed can be set between the hot idle (or VSG MIN SPD when selected) and the engine rated speed.
VSG ALT MIN SPD	The alternate minimum VSG (VSG ALT MIN SPD) option allows the customer to switch to a VSG idle speed greater than the VSG minimum speed (VSG MIN SPD). VSG ALT MIN SPD is active when its digital input is switched to battery ground. When VSG ALT MIN SPD is active and the throttle position is less than or equal to 140 counts, the engine speed will jump from the VSG MIN SPD directly to the VSG ALT MIN SPD. After the throttle is moved above 140 counts (205 counts - Series 4000), the throttle will control the engine speed between VSG ALT MIN SPD and VSG MAX SPD (VSG maximum speed).
VSG DROOP	The VSG droop can be programmed between 0 and LSG droop but not greater than 300 RPM, depending on engine rating.

Table 5-83 VSG Options

NOTE:

Error code 22 (LSG Low) is disabled for most nonroad applications.

Cruise Switch VSG

The Cruise Control switches can be used to control the VSG set speed. This feature is referred to as Cruise Switch VSG.

NOTE:

This option is not recommended for fire truck pumping applications or crane applications and is not available for Pressure Sensor Governor systems.

The cruise switches are used to activate and control the Cruise Switch VSG option. The Cruise On/Off switch must be turned ON and the park brake must be engaged to enable this feature.

If Cruise Switch VSG is inactive and the Cruise Switch VSG conditions are met, pressing and releasing the Resume/Accel Switch will activate Cruise Switch VSG at the VSG initial speed. The VSG initial speed can be programmed with the DDR/DDDL, VEPS, DRS and cannot be greater than the VSG maximum speed. Pressing and releasing the Set/Coast Switch will activate Cruise Switch VSG at the current engine operating speed.

Once the VSG set speed is established, pressing and releasing the Resume/Accel Switch will increment the set speed by the amount defined by the VSG increment speed up to the VSG maximum speed. Pressing and holding the Resume/Accel Switch will initiate a speed increase, up to the VSG maximum speed. Releasing the Resume/Accel Switch will set the engine speed at the current operating speed.

Pressing and releasing the Set/Coast Switch will decrement the set speed by the amount defined by the VSG increment speed, down to the hot idle speed. Pressing and holding the Set/Coast Switch will initiate a speed decrease, down to the hot idle speed. Releasing the Set/Coast Switch will set the engine speed at the current operating speed.

NOTE:

VSG Min Speed is not recognized by Cruise Switch VSG.

Cruise Switch VSG Installation Requirements

The following must be installed for Cruise Switch VSG to operate:

- ☐ Vehicle Speed Sensor (VSS)
- ☐ Cruise Control Switches - digital inputs
- ☐ Park Brake Switch - digital input

Refer to section 4.2.1, Cruise Control and section 4.2, Digital Inputs.

Cruise Switch VSG Programming Requirements and Flexibility

The digital inputs listed in Table 5-84 are required for Cruise Switch VSG. These digital inputs may be configured at the time of engine order, configured by VEPS or DRS.

Digital Input	Function Number
Cruise Enabled Switch	23
Service Brake Switch	17
Clutch Switch (optional)	18
Set/Coast Switch	20
Resume/Accel Switch	22
Park Brake Switch	5

Table 5-84 Cruise Switch VSG Digital Inputs

Refer to section 4.2, "Digital Inputs," for additional information.

The DDR, DDDL, VEPS or DRS must enable a Vehicle Speed Sensor (VSS). Refer to section 3.14.25 for additional information on VSS.

The parameters listed in Table 5-85 can be set with at engine order entry DDDL/DDR, VEPS or DRS.

Parameter	Description	Choice / Display
VSG MAXIMUM RPM	Sets the maximum VSG RPM.	VSG MIN RPM to (Rated Engine RPM + LSG Droop)
CRUIZE SWITCH VSG	Enables or disables the cruise switch VSG set speed feature.	YES, NO
CRUIZE SWITCH VSG INITIAL SET SPEED	Sets the cruise switch VSG initial set speed.	VSG MIN RPM to VSG MAX RPM
VSG RPM INCREMENT	Sets the cruise switched VSG RPM increment.	1 to 255 RPM

Table 5-85 Cruise Switch VSG Programming

VSG Hand Throttle

A hand throttle (potentiometer) may be used to control engine speed on the VSG between the minimum VSG speed and maximum VSG speed. The total resistance must be between 1k Ω and 10 k Ω .

VSG Hand Throttle Installation

The hand throttle must be wired so at low engine speed a small resistance is seen between circuits 510 (signal) and 952 (reference ground). The low engine speed position is typically fully counter-clockwise. At high engine speed a larger resistance must be seen between circuits 510 (signal) and 952 (reference ground). See Figure 5-80.

NOTE:

A Volt/Ohm meter must be used to measure resistance to ensure correct installation.

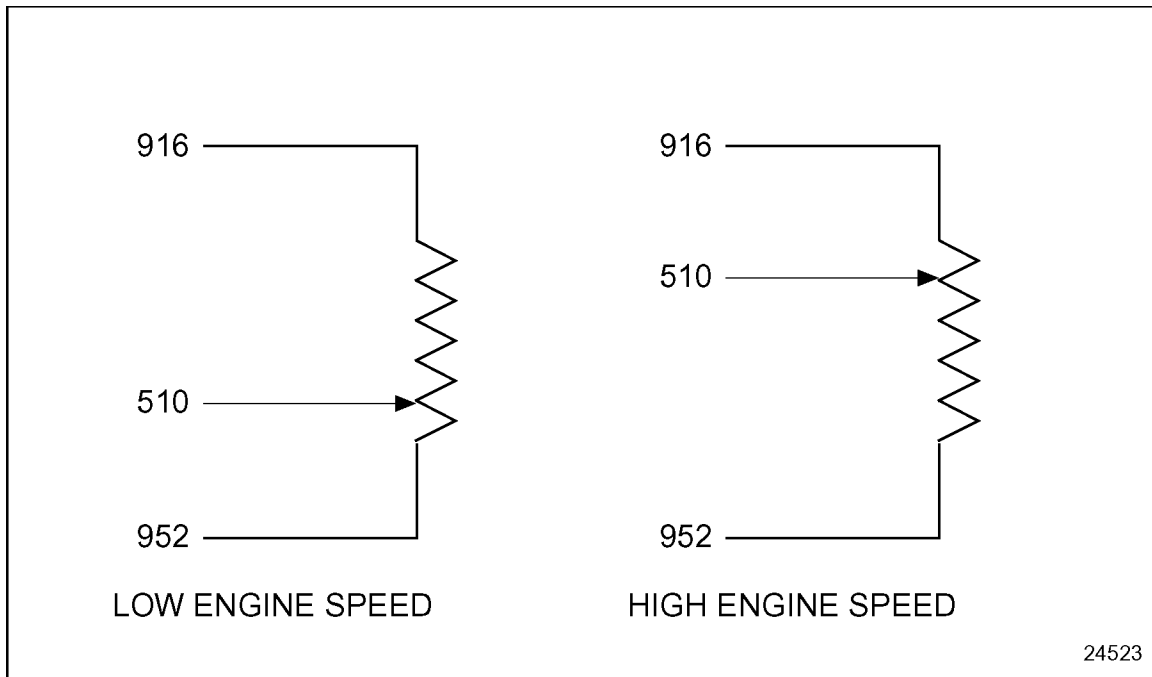


Figure 5-80 Hand Throttle Installation

VSG Hand Throttle Calibration

The hand throttle is calibrated with a DDR/DDDL as follows:

1. Display the VSG counts. The VSG counts will range from 0 to 1023.
2. In the low speed position, set the hand throttle between 100 and 130 counts.
3. In the high speed position, set the hand throttle between 920 and 950 counts.

The hand throttle is an OEM supplied part. Vendor sources that may be contacted for additional design and installation details are:

Teleflex Morse

Phone: (610) 495 -7011

VSG Electronic Foot Pedal Assembly

The EFPA can be used as an alternative to a hand throttle.

The EFPA provides an input signal to the ECM to control engine speed on the VSG, proportional to the foot pedal position. The idle validation switch is not applicable to the EFPA when used as an input to the VSG.

The Alternate Minimum VSG/Fast Idle digital input may also be used with the EFPA to provide an alternate engine operating speed range.

Alternate Minimum VSG (Fast Idle)

The Alternate Minimum VSG option allows a customer to switch to an alternate VSG operating range when its digital input is switched to battery ground and VSG is the active governor.

Example:

VSG Minimum Speed - 500 RPM

VSG Alternate Minimum Speed - 1000 RPM

VSG Maximum Speed - 1500 RPM

When the Alternate Minimum VSG/Fast Idle digital input is inactive, the engine speed will be controlled between 500 and 1500 RPM. When the Alternate Minimum VSG option is initiated, the engine speed will increase and be controlled between 1000 and 1500 RPM depending on the hand throttle position.

The Alternate Minimum VSG/Fast Idle digital input may be used to operate the engine at a higher engine idle speed.

If the Alternate Minimum VSG becomes disabled when LSG is the primary governor or for any other reason, the operator must toggle the switch to re-enable fast idle unless the primary speed controller is VSG.

Alternate Minimum VSG Installation

Wire #510 must be wired to battery ground unless a hand throttle or voltage dividers are used in addition to Alternate Minimum VSG.

Alternate Minimum VSG Programming Flexibility

The digital input "Alternate Minimum VSG" (function #16) can be set by order entry, VEPS or DRS.

Refer to section 4.2, "Digital Inputs," for additional information.

The parameters listed in Table 5-86 can be set with DDDL/DDR, VEPS or DRS.

Parameter	Description	Choice / Display
ALT MIN VSG	Sets the Alternate Minimum VSG RPM.	VSG MIN RPM to VSG MAX RPM

Table 5-86 Alternate Minimum VSG Programming

VSG Voltage Dividers

Voltage dividers can be used with the VSG input to provide a means to select a predetermined engine speed. Voltage dividers can be used to provide a fast idle operation or other engine operations where a fixed engine speed is desired.

VSG Voltage Dividers Installation

The voltage divider consists of two precision resistors (+/- 1% tolerance, 1/4 watt minimum) in series between circuits 916 and 952 with a center tap connected to circuit 525. The values of the resistors determine engine speed. See Figure 5-81.

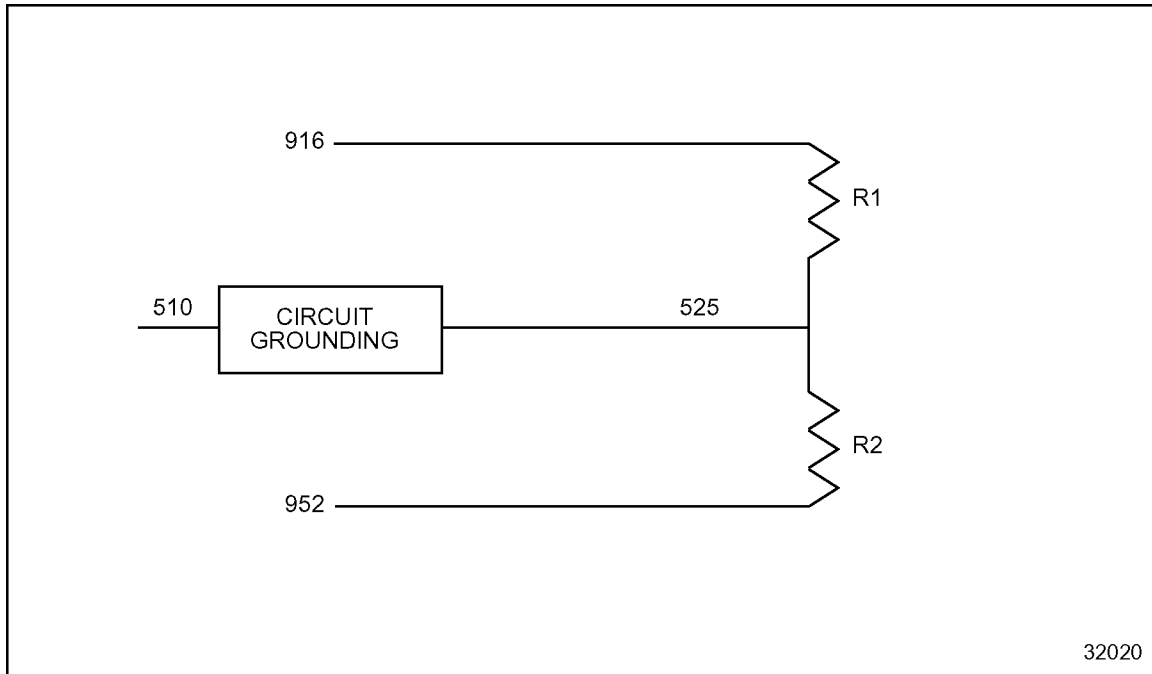


Figure 5-81 Voltage Divider

NOTE:

The voltage divider circuit must be placed inside a weatherproof container.

VSG Resistor Selection for Voltage Dividers

The selection of the resistors is accomplished by using the following calculations. These calculations determine the RPM/count, which is then used to determine the counts needed to reach the desired engine speed. The counts are a direct representation of voltage. See Figure 5-82.

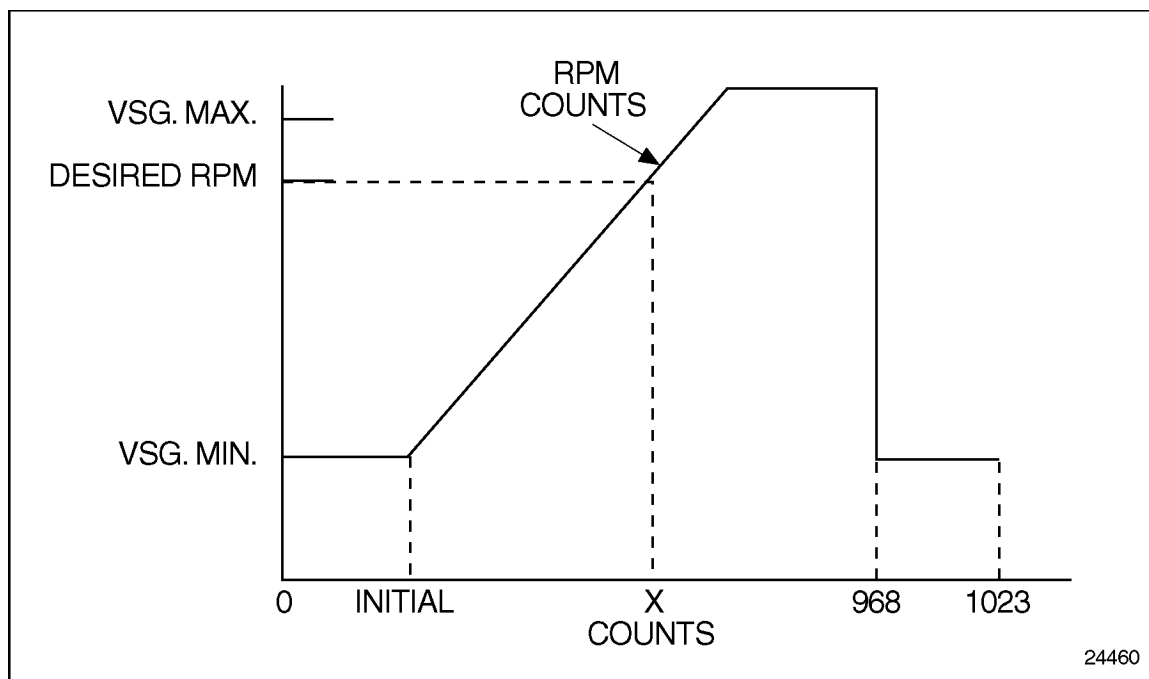


Figure 5-82 Throttle Count Profile

Use the following steps to calculate resistor values:

1. Determine a value for RPM/Count as follows:

$$\text{RPM / Count} = \frac{(\text{VSG Max. Speed} - \text{VSG Min. Speed})}{\text{Divisors}^*}$$

- * Divisor = 775 (all applications not using VSG foot pedal)
 Divisor = 512 (all applications using VSG foot pedals)

2. Solve for the counts at the desired engine speed, X:

$$X = \frac{\text{Desired Speed} - \text{VSG Min. Speed}}{\text{RPM / Count}} + \text{PTO Offset}^\dagger$$

- † PTO Offset = 140 (all applications not using VSG foot pedal)
 PTO Offset = 205 (all applications using VSG foot pedals)

3. Solve for the voltage divider resistance ratio, R:

$$R = \frac{X}{1024}$$

4. Choose a value for R1 and solve for a value of R2 as

follows: $R = \frac{R2}{R1 + R2} \rightarrow R2 = \frac{R1 \times R}{1 - R} \quad 1 \text{ k}\Omega \leq R1 + R2 \leq 10 \text{ k}\Omega$

The standard precision resistor values are listed in Table 5-87.

Standard Precision Resistor Values, Ω					
10.0	14.7	21.5	31.0	46.4	68.1
10.2	15.0	22.1	32.4	47.5	69.8
10.5	15.4	22.6	33.2	48.7	71.5
10.7	15.8	23.2	34.0	49.9	73.2
11.0	16.2	23.7	34.8	51.1	75.0
11.3	16.5	24.3	35.7	52.3	76.8
11.5	16.9	24.9	36.5	53.6	78.7
11.8	17.4	25.5	37.4	54.9	80.6
12.1	17.8	26.1	38.3	56.2	82.5
12.4	18.2	26.7	39.2	57.6	84.5
12.7	18.7	27.4	40.2	59.0	86.6
13.0	19.1	28.0	41.2	60.4	88.7
13.3	19.6	28.7	42.2	61.9	90.9
13.7	20.0	29.4	43.2	63.4	93.1
14.0	20.5	30.1	44.2	64.9	95.3
14.3	21.0	30.9	45.3	66.5	97.6

Standard precision resistors are available in the values listed and all multiples of 10 (i.e., 10.7 Ω , 107 Ω , 1.07k Ω , etc.)

Table 5-87 Precision Resistor Values (+/-1%; 1/4 Watt Minimum)

VSG Dual Throttle Controls

Some applications require VSG controls at multiple control stations. These include fire trucks, cranes, etc. Special circuits can be designed to handle these unique requirements.

A dual hand throttle implementation allows a hand throttle to be installed at two locations with one hand throttle active at any one time. Two digital inputs, Dual VSG and Dual VSG Complement, are used to transfer operation from one hand throttle to the other once station qualification is achieved.

DDEC monitors the switch inputs and maintains the engine speed when a station switch occurs until the newly selected station is qualified by reducing the station position to idle and then increasing it to the current engine speed position. After qualification, the engine speed is controlled by the new station. If qualification does not occur within 30 seconds, the engine speed will be ramped down from its current value to VSG minimum speed. If the new station becomes qualified, the rampdown process will be stopped and the new station will have control.

VSG Dual Throttle Controls Installation

See Figure 5-83 for a schematic of a dual hand throttle implementation.

This allows a hand throttle to be installed at two locations with one hand throttle active at any one time.

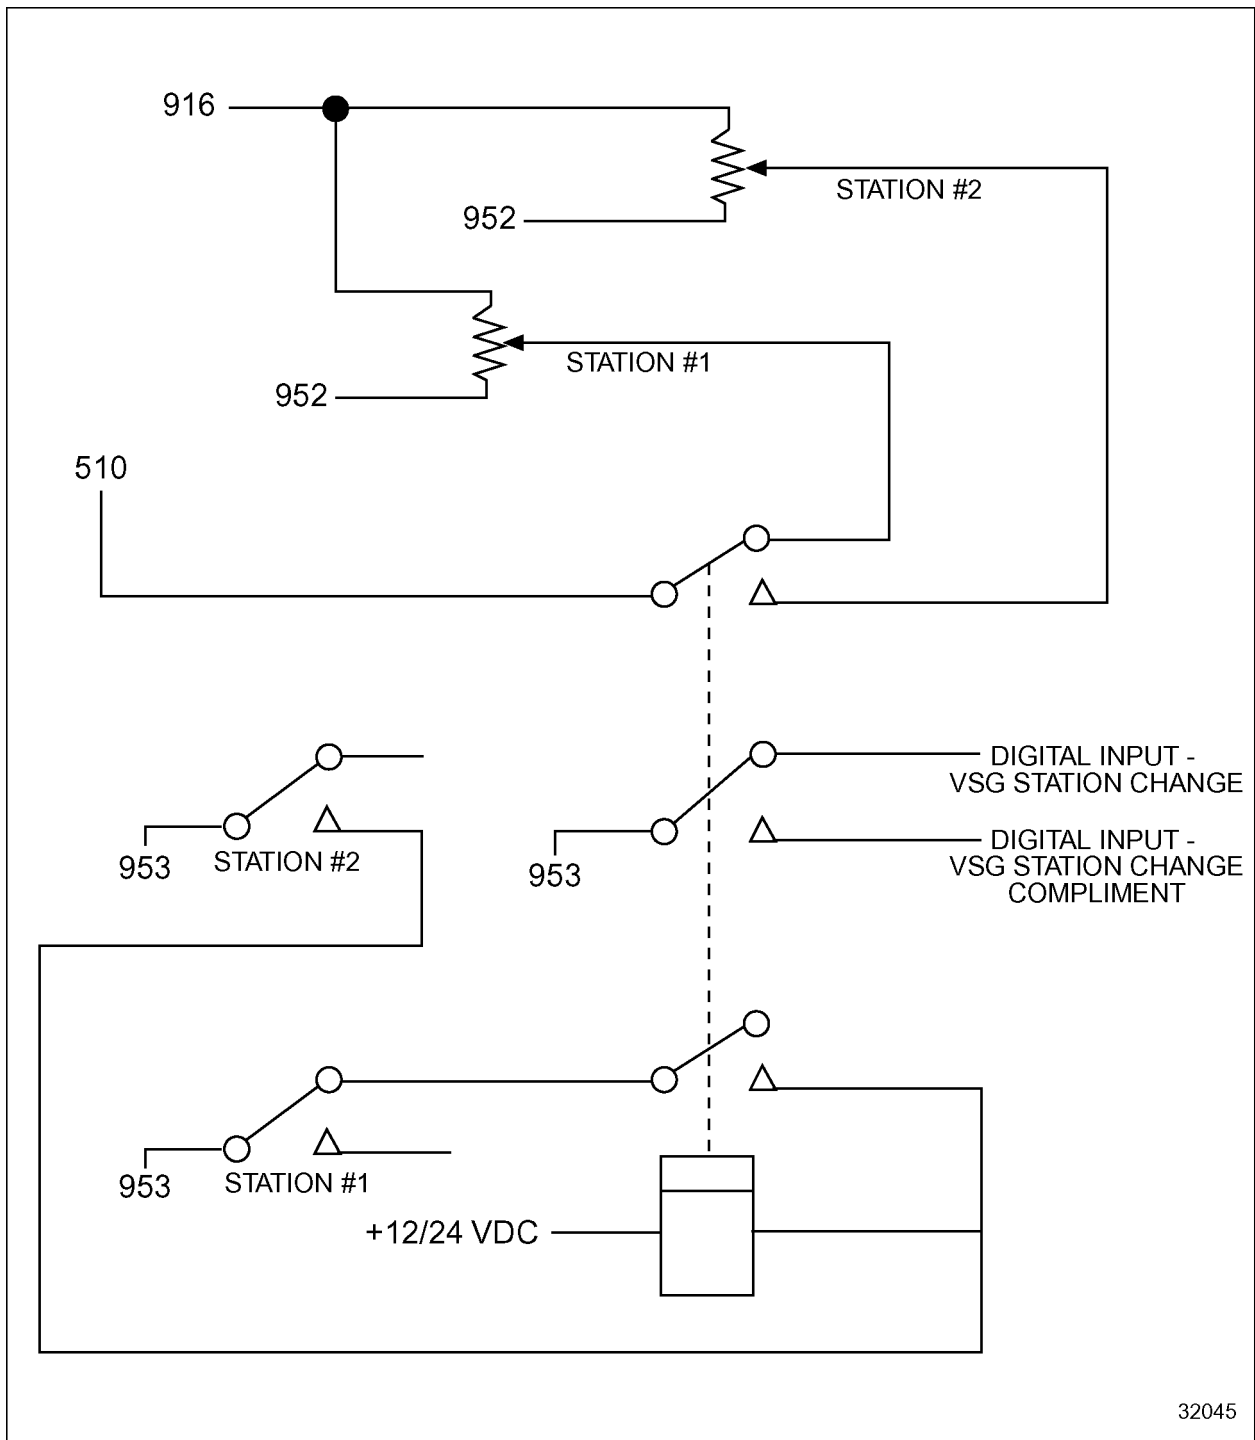


Figure 5-83 Dual Hand Throttle

Dual Throttle Controls Programming Requirements and Flexibility

The digital inputs listed in Table 5-88 can be set by order entry, VEPS or DRS.

Description	Function Number
VSG Station Change	33
VSG Station Change Complement	34

Table 5-88 Dual VSG Throttle Control Digital Inputs

Refer to section 4.2, Digital Inputs, for additional information.

VSG Dual Throttle Controls Diagnostics


If the two digital inputs (VSG Station Change and VSG Station Change Complement) are in the same state for two seconds, a fault (Flash code 11, PID 187 FMI 7) is logged. The engine will ramp to idle and neither station can control engine speed until the fault is inactive.

VSG Frequency Input

A frequency input can be used to control the VSG. This frequency is connected to the vehicle speed input or the Aux Timed Input. The VSS input offers better resolution than the Aux Timed Input. The Aux Timed Input must be used for frequency control when vehicle speed is required in the application.

VSG Frequency Input Installation

The digital input, External Engine Synchronization, must be grounded for frequency control. See Figure 5-84.

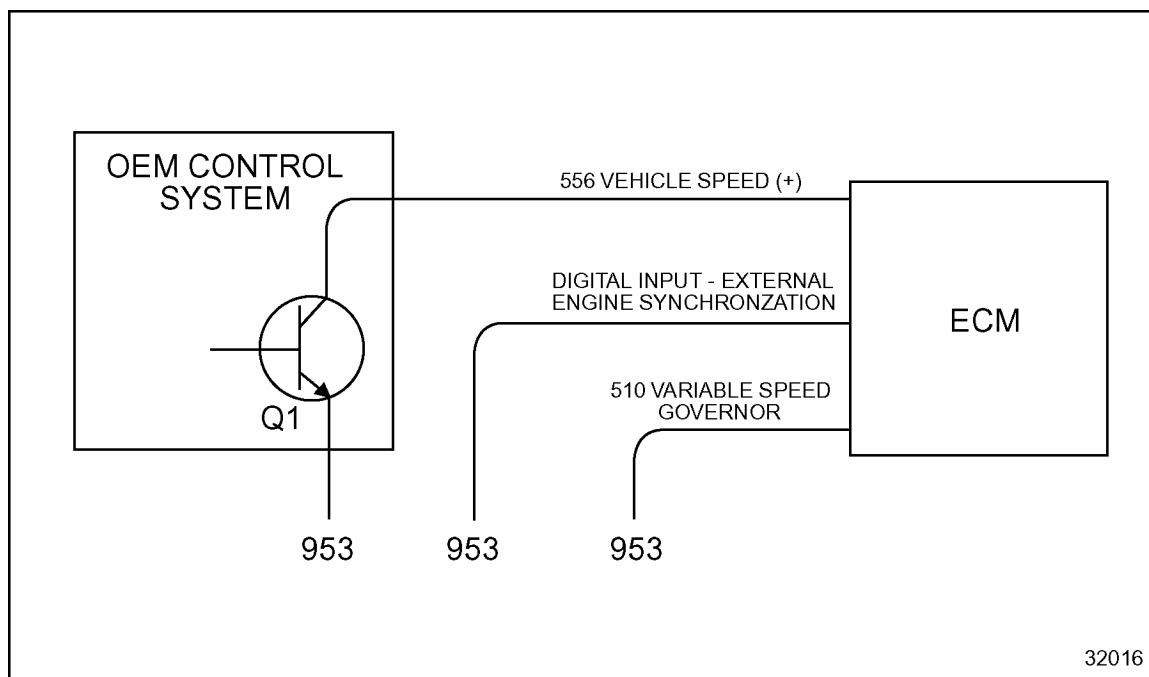**Figure 5-84 Frequency Input Diagram**

The following specifications need to be followed when using the frequency input feature. These specifications apply when using the Aux Timed Input or the VSS in open collector mode. See Figure 5-85.

High State Input Voltage: $V_{in} > 4.0$ Volts DC

Low State Input Voltage: $V_{in} < 0.4$ Volts DC

Input Frequency: $80 < \text{freq} < 480$ Hz

Q1 Off Impedance: $> 10 \text{ k}\Omega$

Q1 On Impedance: $< 100 \Omega$

Resolution: 5 RPM/Hz

NOTE:

The VSS in open collector mode offers better resolution than Aux timed Input.

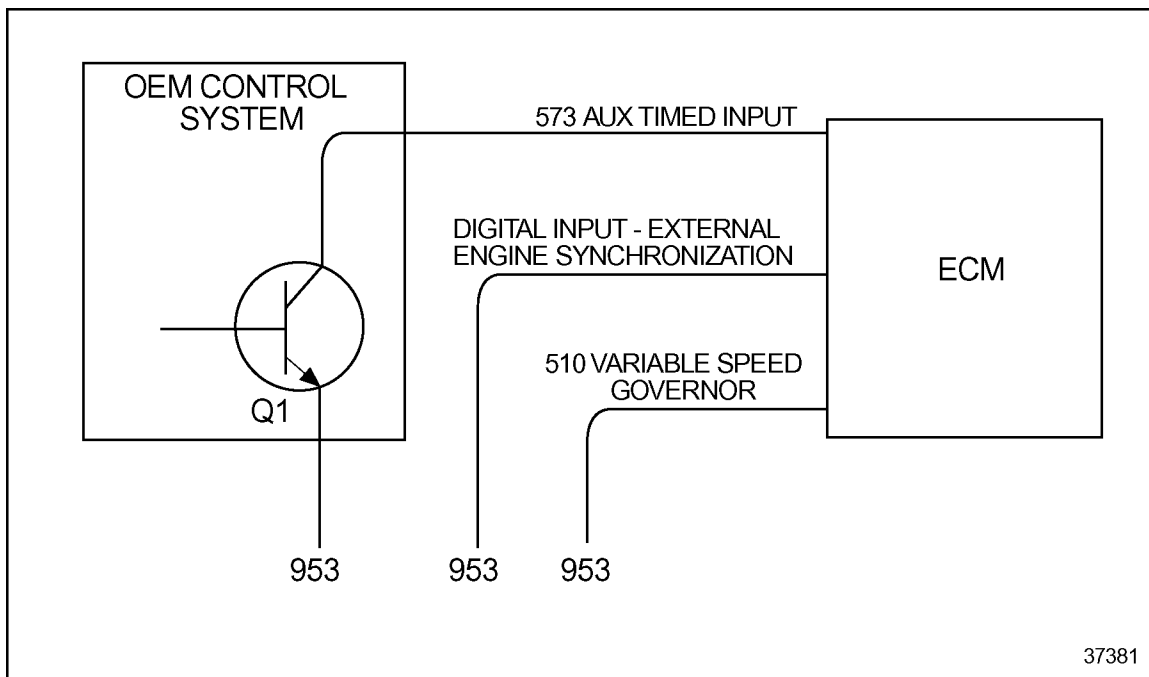


Figure 5-85 Frequency Input Diagram Using Aux Timed Input

VSG Frequency Input Programming Flexibility

The digital input "External Engine Synchronization" (function #10) must be configured by order entry, VEPS or the DRS.

This feature must be enabled by the appropriate application code.

THIS PAGE INTENTIONALLY LEFT BLANK

5.25 TRANSMISSION INTERFACE

DDEC IV communicates to transmissions using the following:

- ☐ Pulse Width Modulated Signal (PWM 1)
- ☐ SAE J1587 Data Link
- ☐ SAE J1922 Powertrain Control Data Link
- ☐ SAE J1939 Powertrain Control Data Link
- ☐ Digital Inputs/Digital Outputs

5.25.1 PWM1 OPERATION

The PWM 1 port's output can be a 50 Hz modulated signal or a discrete on/off signal representing the powertrain demand with the corresponding duty cycle.

Powertrain demand is the ratio of operating torque over available torque at the current speed where operating torque:

- ☐ Includes torque generated by the driver (accelerator pedal)
- ☐ Includes torque generated by the Cruise Control Governor
- ☐ Includes torque reduction by the Vehicle Speed Governor
- ☐ Does not include torque generated by the Variable Speed Governor
- ☐ Does not include torque reduction due to emission control or engine protection
- ☐ Does not include torque generated by the Idle Governor
- ☐ Does not include torque reduction by the Rated Speed Governor

NOTE:

Percent load on the SAE J1587 link (PID 92) is current torque over the maximum torque at current engine speed; includes all internal torque reductions and governors.

Modulated Signal

The PWM signal duty cycle range can cover 0-100% or be limited to 5-95% (representing full range). PWM sample duty cycles can be seen in the next three illustrations. See Figure 5-86 for a 10% duty cycle.

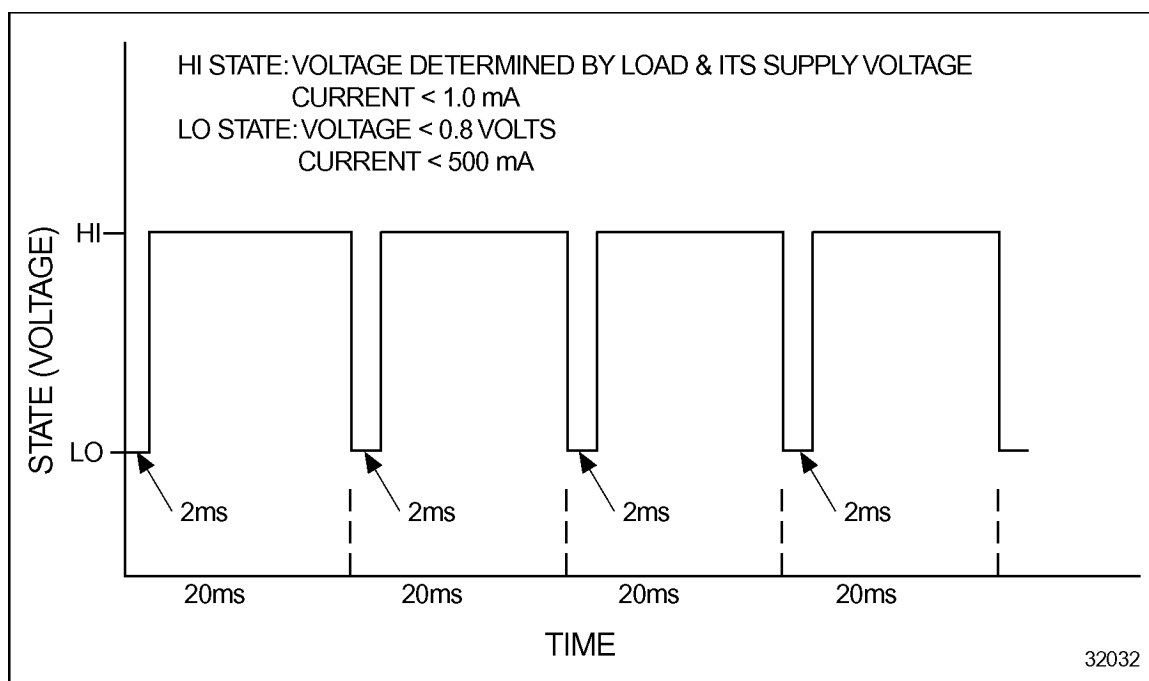


Figure 5-86 PWM Output - 10% Duty Cycle

See Figure 5-87 for a 50% duty cycle.

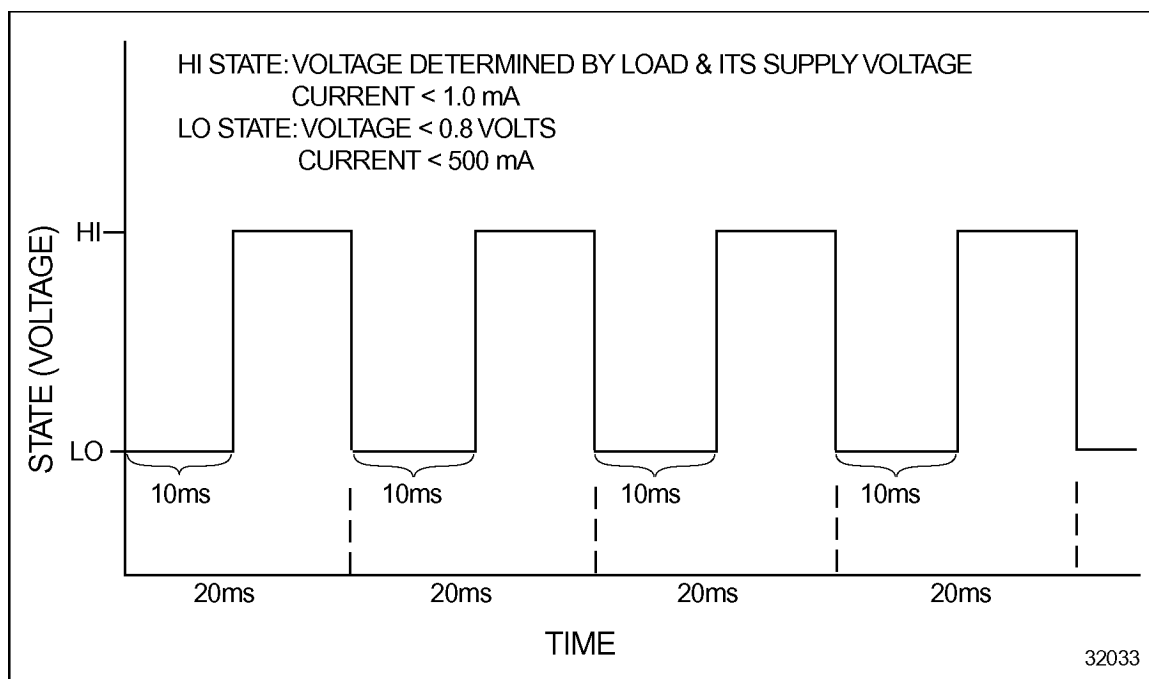


Figure 5-87 PWM Output - 50% Duty Cycle

See Figure 5-88 for a 90% duty cycle.

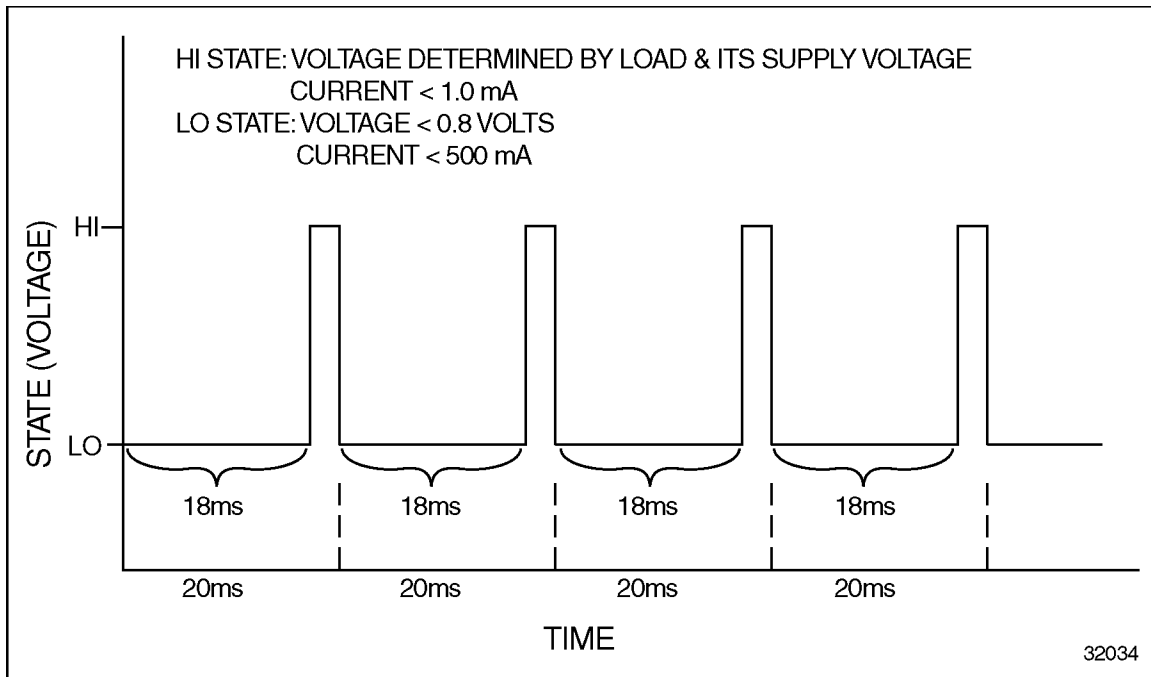


Figure 5-88 PWM Output - 90% Duty Cycle

Discrete On/Off signal

The PWM output can be used as a discrete on/off signal. The on trigger point and hysteresis are DDC calibrated parameters. The signal turns on (ground) once the powertrain demand reaches 80% and turns off (opens) once powertrain demand falls below 60%.

5.25.2 PWM1 INSTALLATION

The transmissions listed in Table 5-89 communicate with the ECM using PWM1.

Transmission	ECM Communication	Information Sent	Duty Cycle	PWM Signal Description
Allison Hydraulic (see Figure 5-95)	PWM 1	Powertrain Demand	0-100%	Discrete
Allison Transmission Electronic Controls (ATEC)	PWM 1	Powertrain Demand	0-100%	Modulated
GE Propulsion System Controller (see Figure 5-92)	PWM 1	Operation on Load Curve	5-95%	Modulated
VOITH (see Figure 5-94)	PWM 1 or SAE J1939	Powertrain Demand	5-95%	Modulated
ZF Transmissions AVS™ or Ecomat™ (see Figure 5-93)	PWM 1	Powertrain Demand	5-95%	Modulated

Table 5-89 Transmissions Communicating with PWM1

Allison Interface Modules

The Allison Throttle Interface Module (see Figure 5-89) translates the powertrain demand signal broadcast by the DDEC IV ECM into a signal which is recognized by the transmission.

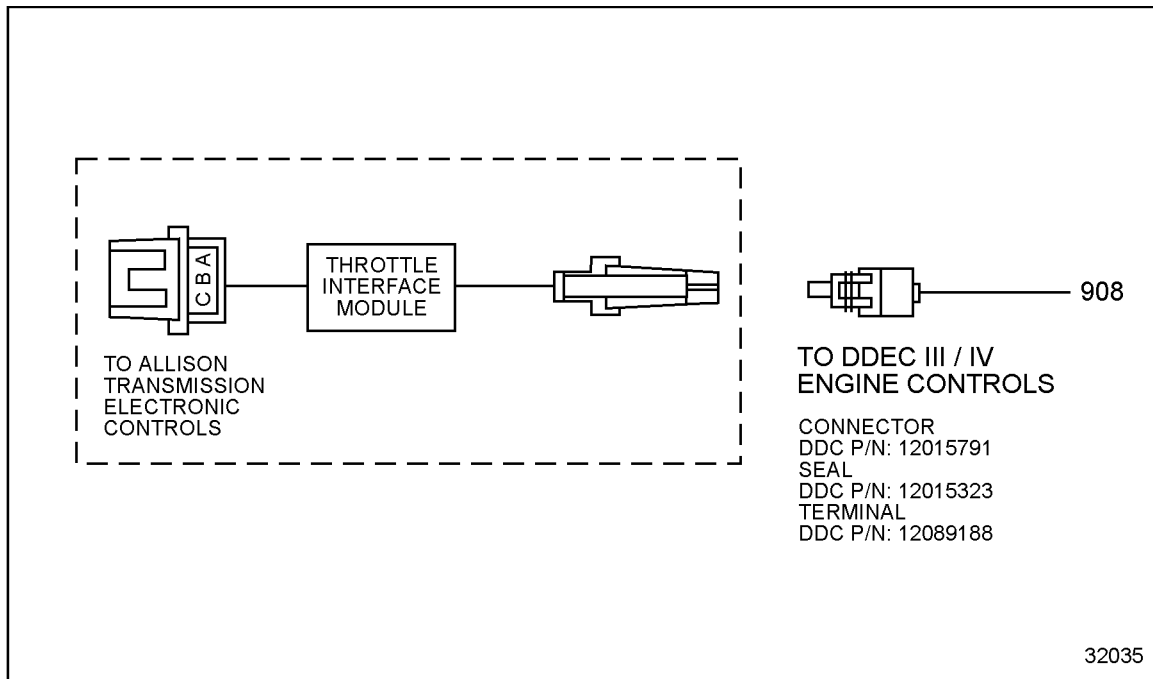


Figure 5-89 Throttle Interface Module, Allison Transmission

The Allison Maximum Feature Interface Module translates the powertrain demand signal broadcast by the DDEC IV ECM into a signal which is recognized by the transmission (see Figure 5-90).

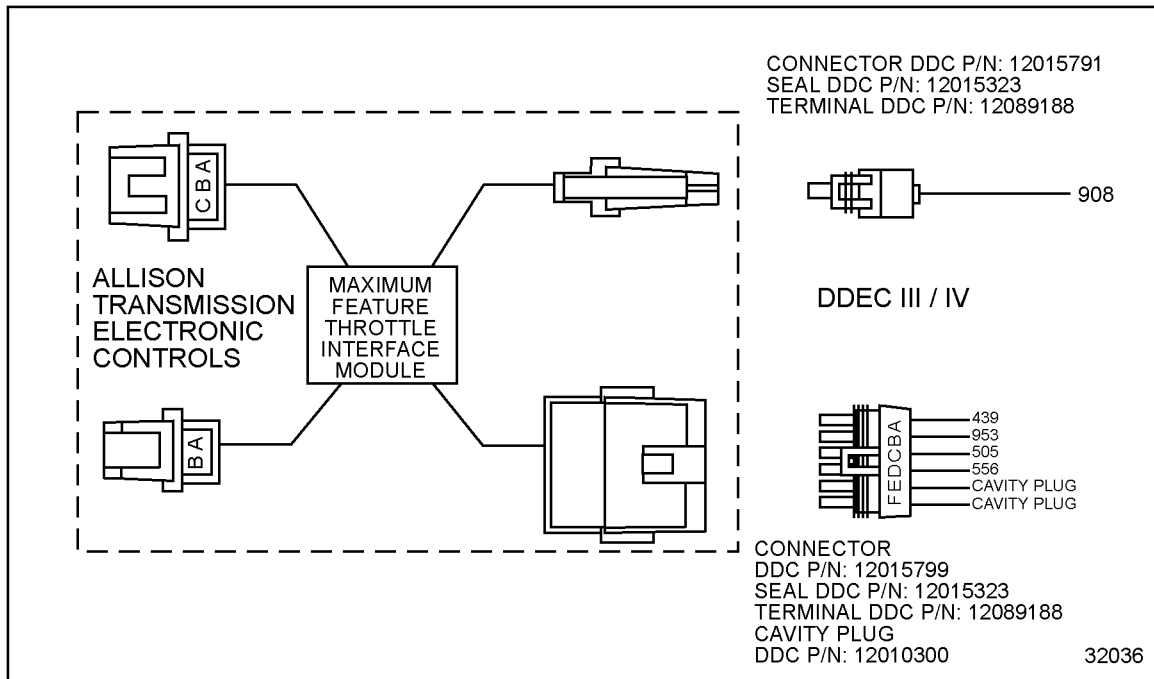


Figure 5-90 Maximum Feature Throttle Interface Module, Allison Transmission

The module communicates the transmission output speed signal back to DDEC for use in Cruise Control/vehicle speed limiting. It also incorporates an integral engine speed switch which is sent to Allison Electronic Control as an input signal for the logic preventing shifting into a range above preset engine speeds. All Allison Electronic Control transmissions require this module or the throttle interface module when connected to DDEC IV.

DDEC IV uses the open collector sensor type to integrate with the Allison Automatic Transmission to calculate vehicle speed (see Figure 5-91).

NOTE:

For Allison Transmission Electronic Controls refer to Allison Automatic Transmissions General Book #1, Page AS00-138, for world transmission refer to Allison Automatic Transmissions World Transmission WT Controls And General Information, Page Sa07-040.

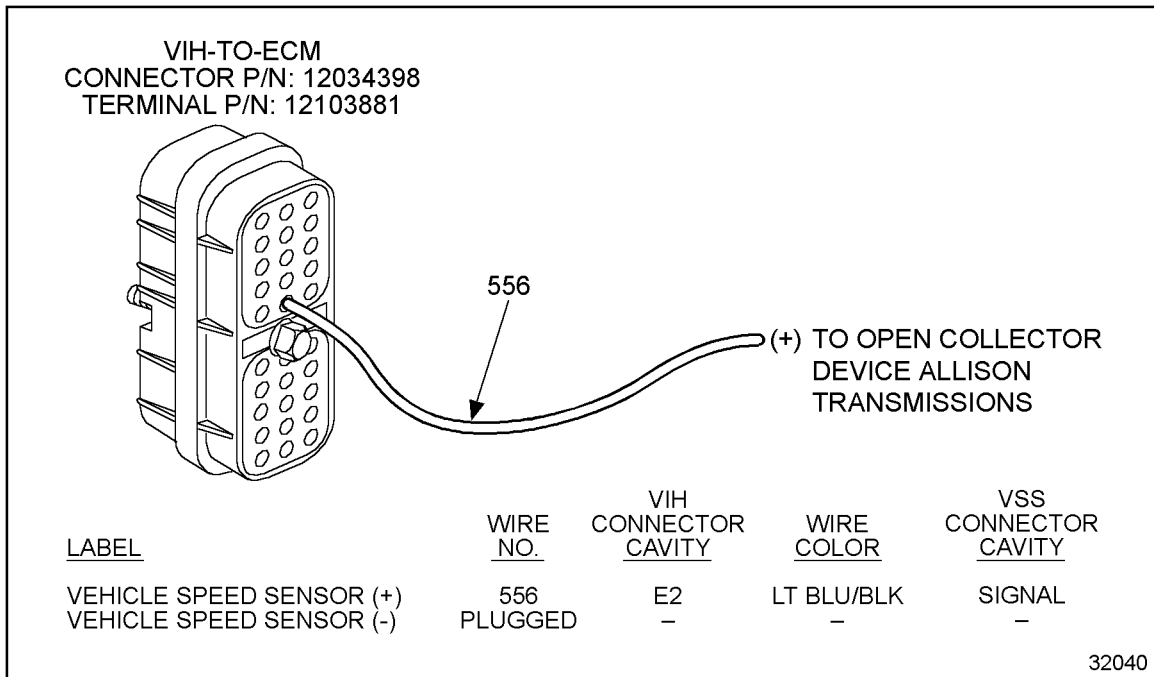


Figure 5-91 Allison Automatic Transmission Open Collector Speed Sensor

GE Propulsion System Controller

See Figure 5-92 for the PWM wiring for the GE Propulsion System.

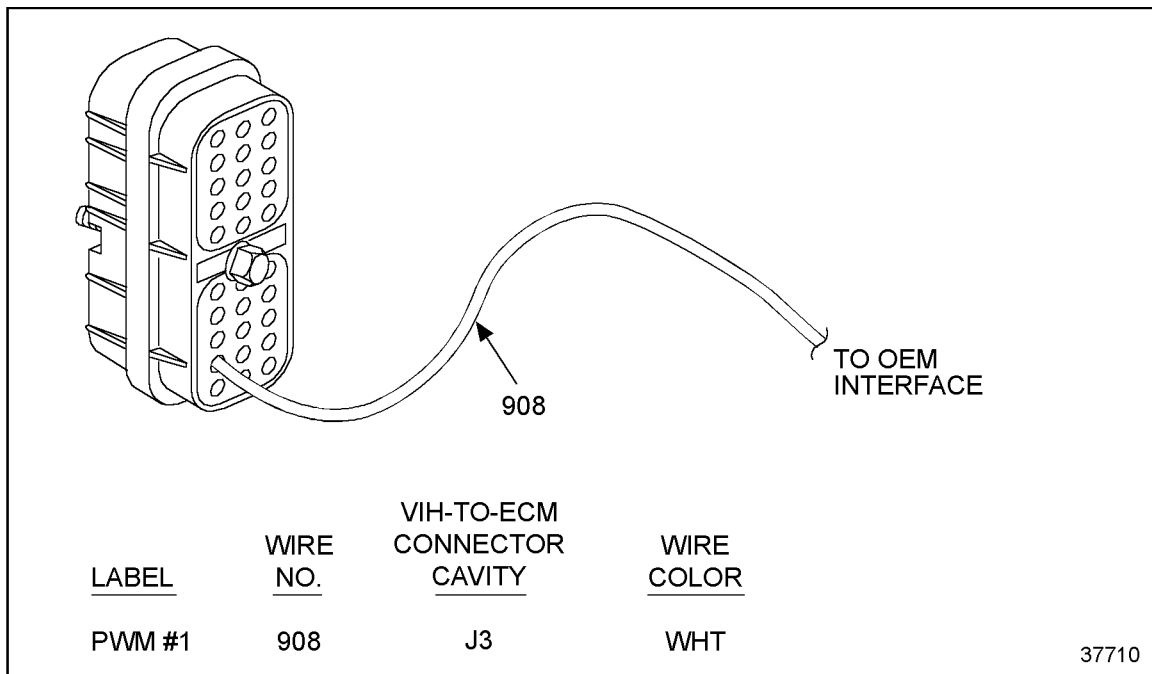


Figure 5-92 DDEC IV to GE Propulsion System Controller

ZF Ecomat and Voith Transmissions

See Figure 5-93 for installation of the ZF Ecomat transmission interface.

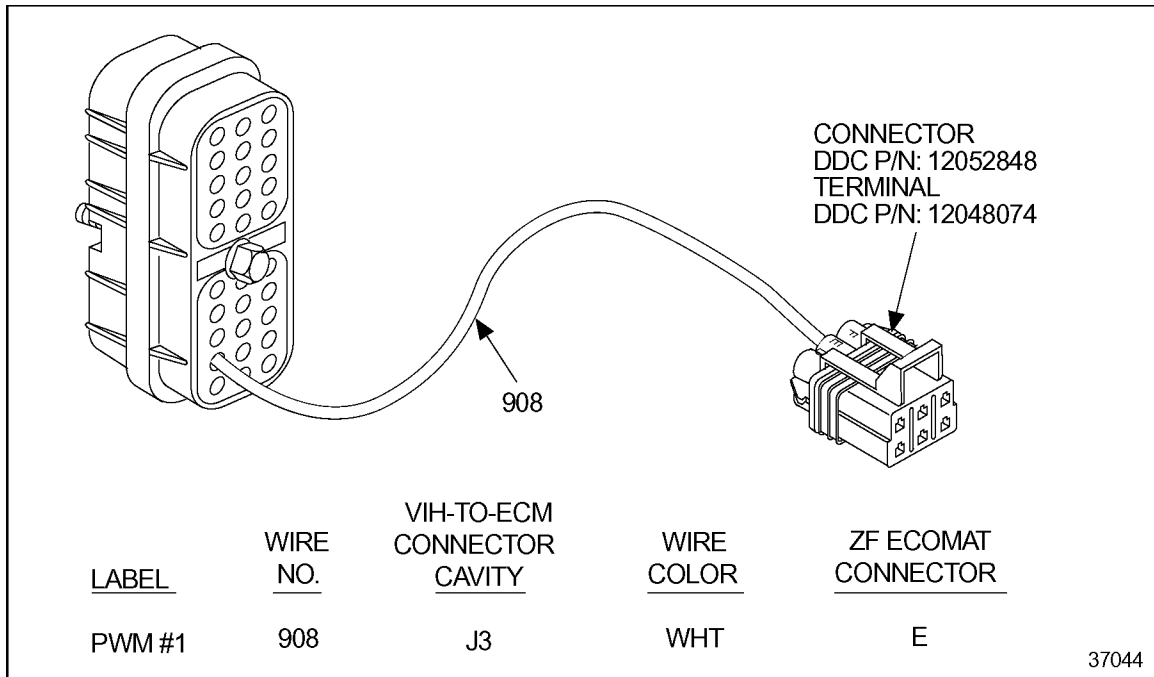


Figure 5-93 DDEC IV to ZF Ecomat Transmission

See Figure 5-94 for installation of the Voith transmission interface.

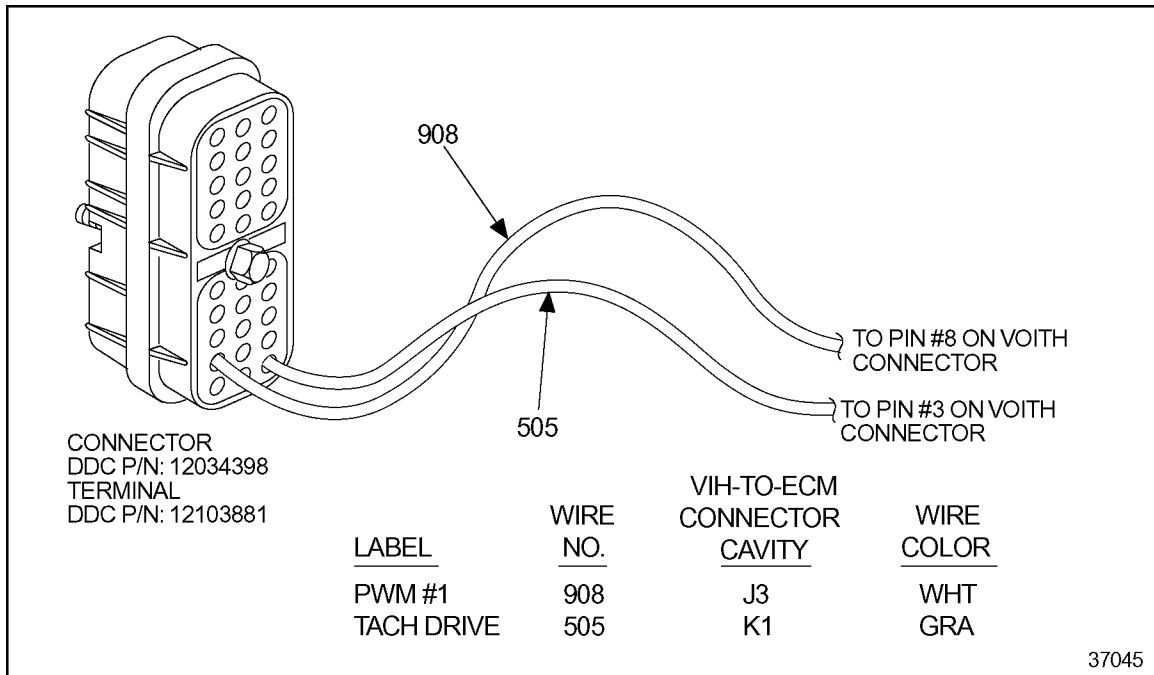


Figure 5-94 DDEC IV to Voith Transmission

Allison Hydraulic Transmission

See Figure 5-95 for a schematic of the Allison Hydraulic Transmission and DDEC IV.

NOTE:

The exception to the following schematic is Allison HT750DR. Refer to "Allison Watch" #145 for DDEC IV to HT750DR.

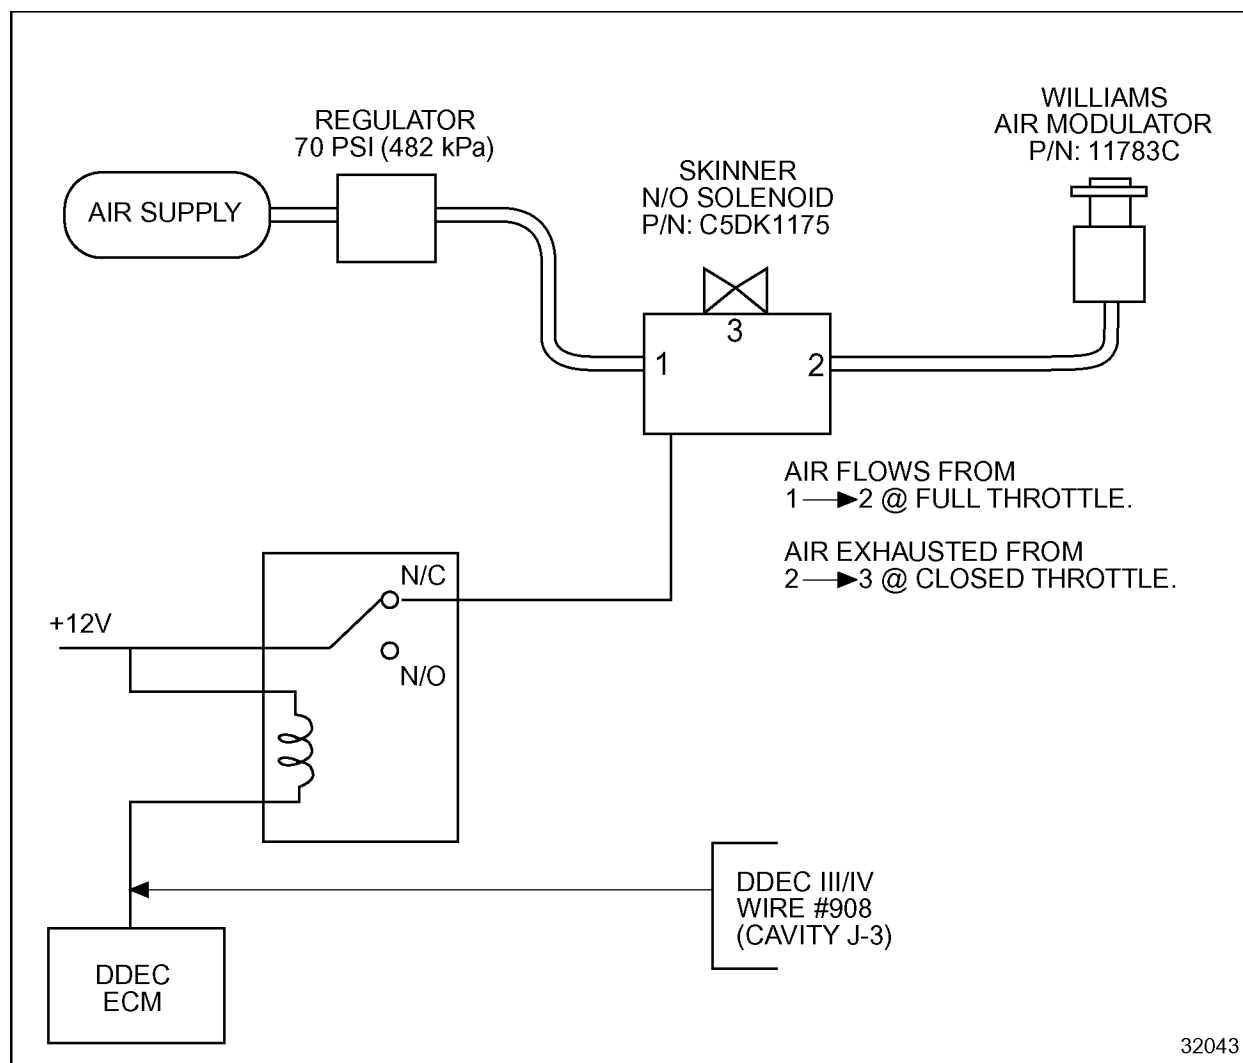


Figure 5-95 DDEC IV to Allison Hydraulic Transmission)

Programming Requirements and Flexibility

The correct transmission type, listed in Table 5-90, must be programmed by VEPS or DRS.

Transmission	Transmission Type
Allison Hydraulic	1
Allison Transmission Electronic Controls (ATEC)	9
GE Propulsion System (AC)	32
Voith	3
Z-F Transmissions	4
% TPS Hydraulic	26

Table 5-90 Transmission Types

Transmission Type 1 – Allison Hydraulic– This selection identifies the transmission as a hydraulic Allison transmission. The PWM signal will be driven to 100% duty cycle above a predetermined throttle position (full power shifts) and will return to a 0% duty cycle below a predetermined throttle position. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 3 – Voith – This selection identifies the transmission as a Voith electronic transmission. The PWM signal will be driven based on powertrain demand as a percentage of the maximum available torque at the current operating speed. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 4 – Z-F Ecomat – This selection identifies the transmission as a Z-F electronic transmission. The PWM signal will be driven based on powertrain demand as a percentage of the maximum available torque at the current operating speed. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 9 – Allison Electronic (ATEC)– This selection identifies the transmission as an Allison electronic first generation transmission. The PWM signal will be driven based on powertrain demand as a percentage of the maximum available torque at the current operating speed. This selection will also configure the vehicle speed sensor input type the open-collector output that is generated internally by the Allison electronic module. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 26 – %TPS Hydraulic – This selection is typically used to identify mechanical transmission such as the Allison Hydraulic that require a discrete signal. The PWM signal will be driven to 100% duty cycle above a predetermined throttle position (full power shifts) and will return to a 0% duty cycle below a predetermined throttle position. The maximum warm-up idle speed will be set to 700 rpm.

Transmission Type 32 – Optimum Load Curve– This selection is used with a GE AC power train system on electric mine haul trucks. PWM #1 will be configured to provide a signal that reflects if the engine is under loaded, overloaded or at optimum load throughout the engine RPM range. 5% duty cycle represents maximum overload, 50% is optimum load, and 95% is maximum under load.

Programming information is listed in Table 5-91.

Transmission	Sensor Type	DDEC IV Wire	Transmission Wire	DDEC IV Calibration
Allison Transmission Electronic Controls	Open Collector	556	205	Open Collector
Allison Hydraulic	External Magnetic	556 557	--	--
ZF Ecomat™	Open Collector	556	714	Open Collector or Magnetic
Voith	Magnetic	556 557	pin 5 Blue wire pin 6 Brown wire	Magnetic

Table 5-91 VSS Information for Various Transmissions

For additional information on Vehicle Speed Sensors, refer to section 3.13.2.12.

5.25.3 COMMUNICATION LINKS OPERATION

The serial communication links SAE J1587, SAE J1922, and SAE J1939 communicate control information from the engine to various vehicle systems such as transmissions. SAE J1587 defines the recommended format of messages and data being communicated between microprocessors used in heavy-duty vehicle applications. SAE J1922, and SAE J1939 transmit to the powertrain the messages assigned to both the engine and the transmission retarder.

5.25.4 COMMUNICATION LINKS INSTALLATION

The transmissions listed in Table 5-92 communicate with the ECM using the data links.

Transmission	ECM Communication
Allison World Transmission (see Figure 5-96)	SAE J1587
Allison WTEC III	SAE J1939 & SAE J1587
Eaton® CEEMAT™ (see Figure 5-98)	SAE J1922
VOITH	PWM 1 or SAE J1939
SAE J1939 Transmissions	SAE J1939

Table 5-92 Transmissions Communicating with the Data Links

Allison World Transmission

The Allison World Transmission Series utilizes the SAE J1587 data link to obtain transmission control information. See Figure 5-96 for installation instructions.

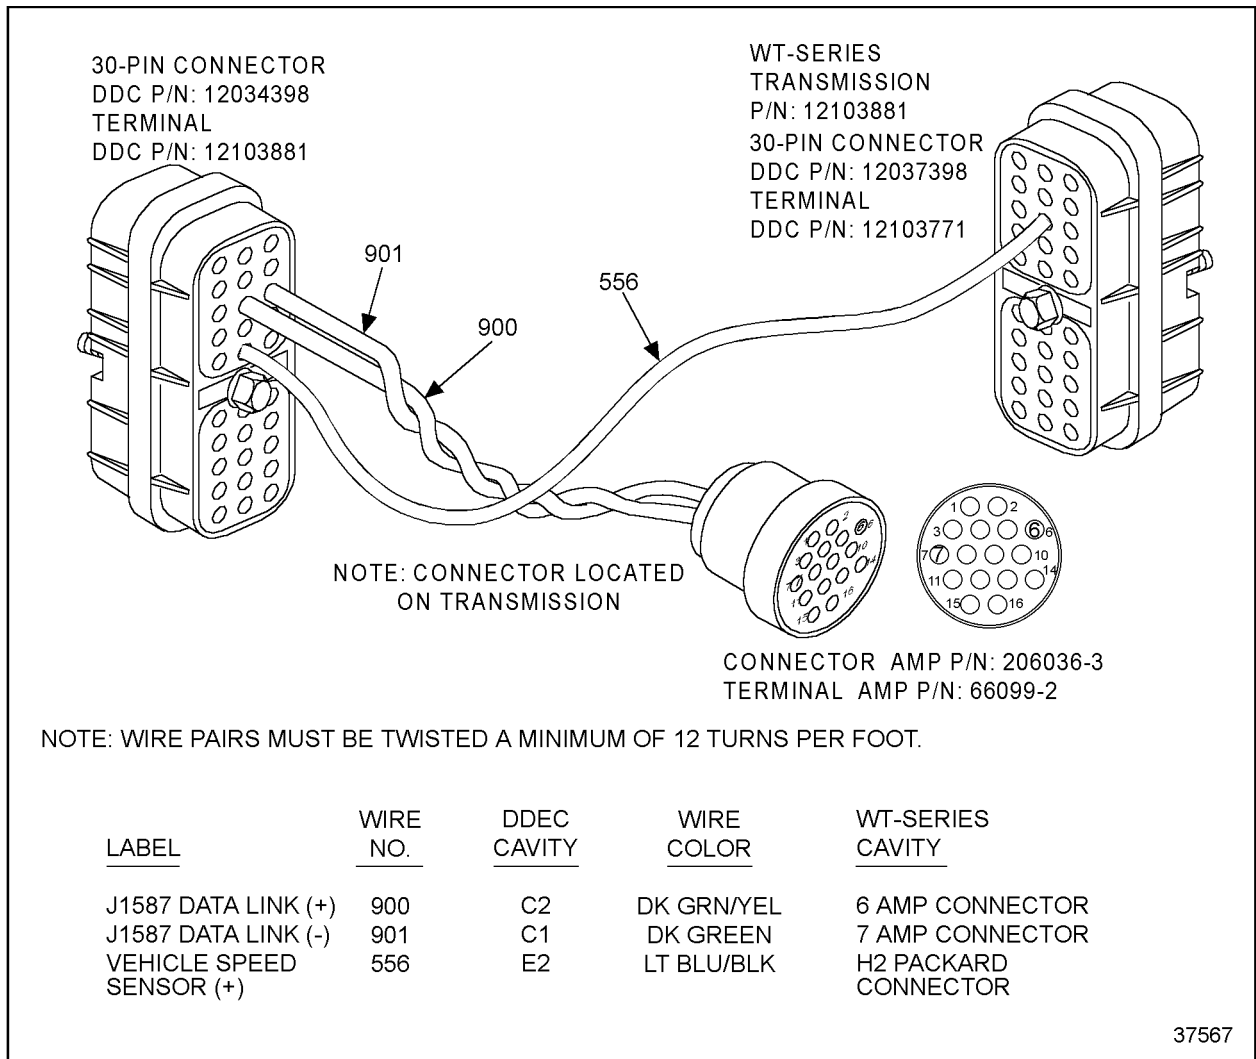


Figure 5-96 DDEC IV to Allison WT-Series Transmission

DDEC IV uses the open collector sensor type to integrate with the Allison Automatic Transmission to calculate vehicle speed (see Figure 5-97).

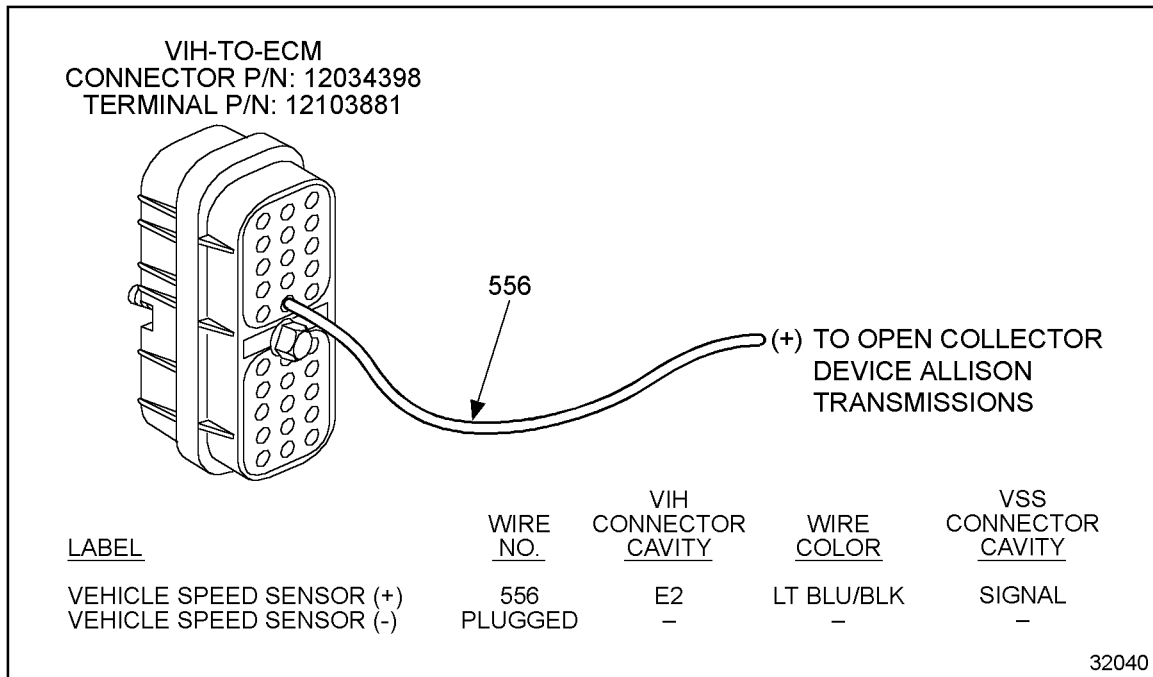


Figure 5-97 Allison Automatic Transmission Open Collector Speed Sensor

NOTE:

For Allison Transmission Electronic Controls refer to Allison Automatic Transmissions General Book #1, Page AS00-138, for world transmission refer to Allison Automatic Transmissions World Transmission WT Controls And General Information, Page Sa07-040.

Eaton CEEMAT Transmission

The Eaton CEEMAT™ transmission utilizes the SAE J1922 powertrain control link to obtain transmission control information. See Figure 5-98.

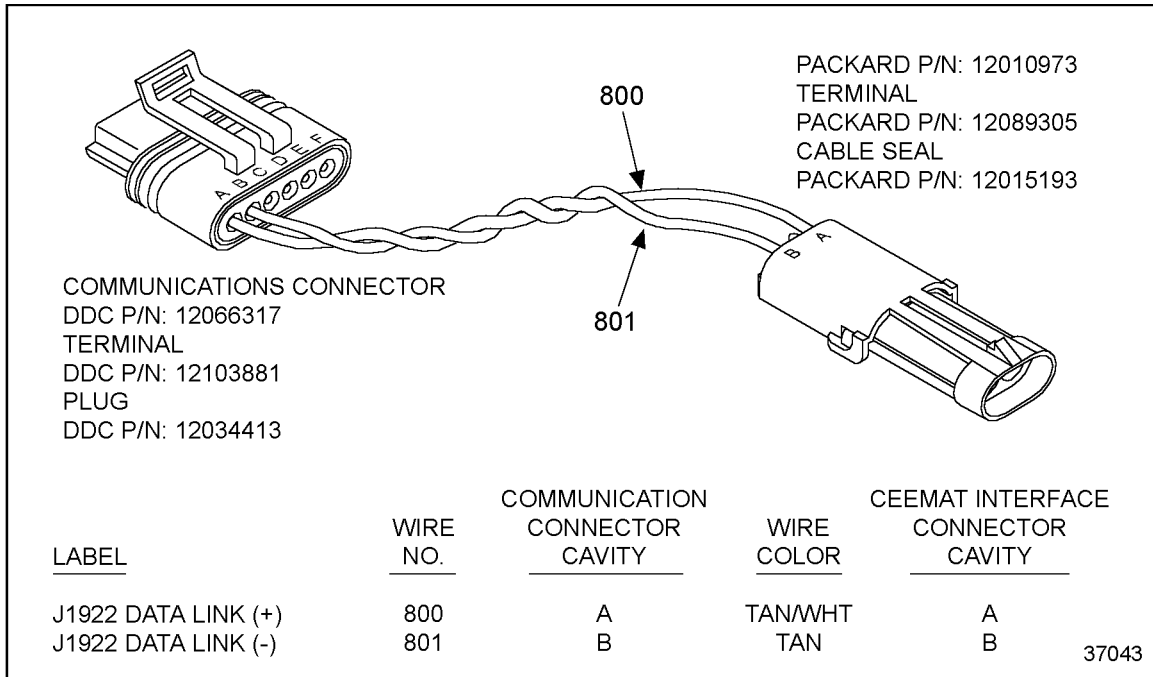


Figure 5-98 DDEC IV to CEEMAT Transmission

SAE J1939 Transmissions

The SAE J1939 powertrain control link is designed to communicate control information between the engine and the transmission. Refer to section 3.5, "Communication Harness," for additional information.

Programming Requirements and Flexibility

The correct transmission type, listed in Table 5-93, must be programmed by VEPS or DRS.

Transmission	Transmission Type
Allison World Transmission	12
Allison WTEC III	12 or 16
Eaton CEEMAT	14
Voith	16
SAE J1939 Transmissions	16
Eaton Fuller Automatic	33

Table 5-93 Transmission Types

Transmission Type 12 – Allison WT – The Allison WT transmission uses the J1587 data link to determine current operating conditions. This selection is required to configure the vehicle speed sensor input type to open-collector output that is generated internally by the Allison electronic module. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 14 – Automatic – This selection identifies the transmission as an automatic transmission, other than those identified as Transmission Types 1, 4, 9, or 12. The maximum warm-up idle speed will be set to 700 rpm.

Transmission Type 16 – J1939 Transmission – The J1939 data link is enabled on all DDEC IV ECMs. This selection requires that the transmission provide output shaft speed via J1939 so a hard-wired vehicle speed sensor is not required. However, the vehicle parameters (axle ratio, transmission ratio, and tire revs/mile) must be configured. The maximum warm-up idle speed will be set to 800 rpm.

Transmission Type 33– Eaton Fuller Automatic – This selection identifies the transmission as a Eaton Fuller Automatic. The J1939 data link is enabled on all DDEC IV ECMs. This selection requires that the transmission provide output shaft speed via J1939 so a hard-wired vehicle speed sensor is not required. However, the vehicle parameters (axle ratio, transmission ratio, and tire revs/mile) must be configured. The maximum warm-up idle speed will be set to 750 rpm.

5.25.5 DIGITAL INPUT AND DIGITAL OUTPUT TRANSMISSIONS

The transmissions supported by DDEC IV that communicate using digital inputs and outputs are listed in Table 5-94.

Transmission	Transmission Models	ECM Communication
Eaton® Top2™	RTLO-xx610B-T2 (Release 4.01 or later) RTL-xx710B-T2 (Release 21.0 or later) RTLO-xx713A-T2 (Release 22.0 or later) RTLO-xx718B-T2 (Release 22.0 or later)	2 Digital Outputs

Table 5-94 Transmissions Communicating with Digital Inputs and Digital Outputs

5.25.6 EATON TOP2 OPERATION

The Top2 system automatically shifts between the top two gears of the Eaton Top2 Transmission to optimize drivetrain for best fuel economy or performance. Shifting between the two highest gears in the transmission is done by the ECM and requires no driver interaction. The system works with engine brakes and Cruise Control during automatic shifts. The torque demand from throttle or Cruise Control is smoothly ramped down before the shift and ramped up after the shift allowing the driver to keep his foot on the throttle during shifts. Cruise Control is automatically resumed after the shift. When the transmission is shifted out of the two top gears, the driver has full manual control over the transmission. The engine will also detect skip shifts into the auto mode and still take control of the transmission's top two gears.

Installation

See Figure 5-99 to install Top2.

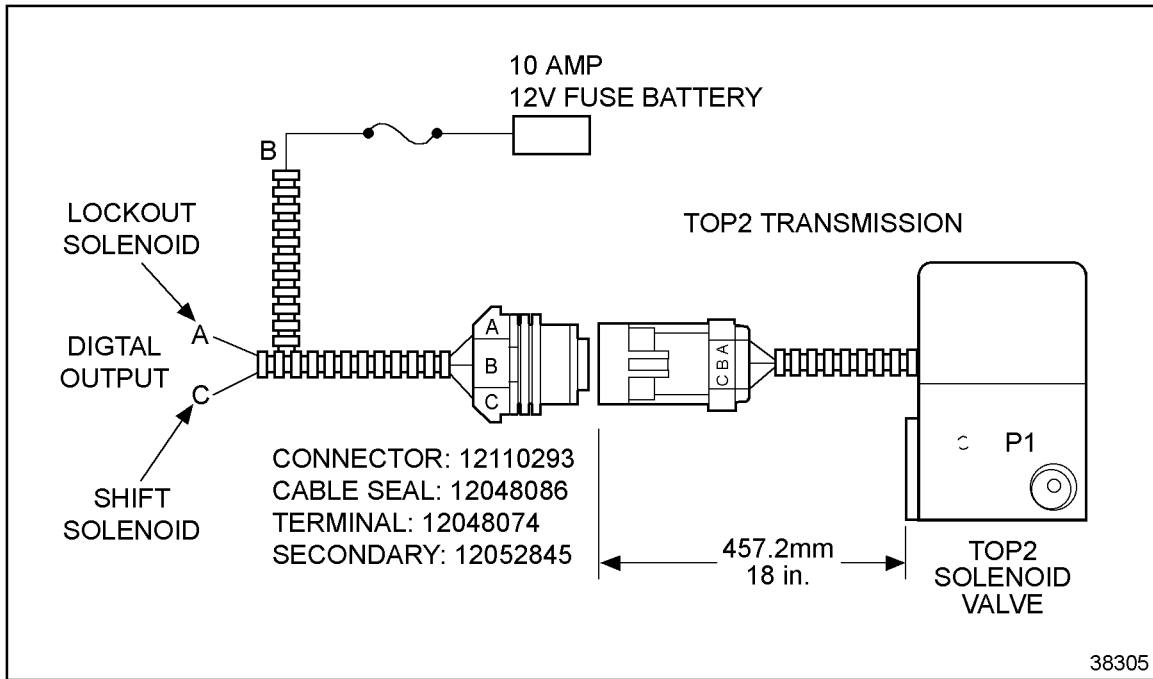


Figure 5-99 Top2 Transmission

Programming Requirements and Flexibility

The Top2 feature is enabled when the Top2 Shift Solenoid (function #30) and the Top2 Lockout Solenoid (function #31) digital outputs, listed in Table 5-95 are configured. The digital outputs must be configured by order entry, VEPS or DRS.

Description	Function Number
Top2 Shift Solenoid	30
Top2 Lockout Solenoid	31

Table 5-95 Digital Outputs Used by Top2

Once Top2 is enabled, the logic will default to support the Super 10 Overdrive Transmission RTLO-xx610B-T2 unless one of the transmissions listed in Table 5-96 is selected.

Transmission	Transmission Type
RTLO-XX610B-T2	27
RTL-XX710B-T2	28
RTLO-XX713A-T2	29
RTLO-XX718B-T2	30

Table 5-96 Top2 Transmission Types

DRS, the DDR, or VEPS (Release 26.0) allow you to enable/disable Top2 functionality as listed in Table 5-97.

On-screen	Definition	Choice
TOP2 CRUISE SW*	Enables or disables Top2 functionality.	ON, OFF

* This feature is available for Release 8.0 or higher of DDEC III, Release 21.0 or higher for DDEC IV.

Table 5-97 Top2 Reprogramming Choices

Diagnostics

If a fault is detected on either the shift solenoid or shift lockout digital output, the ECM will leave the transmission in manual mode until the fault is repaired. When there is a fault in any of the following sensors, the driver will be left with manual control of the transmission and the ECM will turn ON the check engine light.

- ☐ Vehicle Speed Sensor
- ☐ Synchronous Reference Sensor/Timing Reference Sensor (SRS/TRS) failure
- ☐ Lockout and shift solenoid failures

When there is a fault in any of the following features, the driver will be left with manual control of the transmission. The Check Engine Light (CEL) will be turned ON for these conditions.

- ☐ Failed splitter engagements
- ☐ Failed splitter disengagements
- ☐ Failed synchronizing attempts (possible in-gear)

5.26 TRANSMISSION RETARDER

A hydraulic transmission retarder is a device used to slow an engine by applying a torsional resistance to the engine output shaft. This resistance is achieved by the flow of hydraulic fluid against a rotating wheel, within an enclosed cavity. Energy is absorbed by the fluid, and is transferred as heat to an auxiliary cooler.

5.26.1 OPERATION

A digital output is switched to battery ground whenever the throttle is in the 0% position and Cruise Control is inactive. This signal, in conjunction with a relay, may be used to control a transmission retarder. The retarder option must be specified at the time of engine order. This output will also be enabled if a SAE J1922 data link message is received requesting transmission retarder.

5.26.2 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The transmission retarder option must be specified at the time of engine order.

The digital output listed in Table 5-98 must be configured by order entry, VEPS, or DRS.

Function Number	Type	Description
9	Digital Output	Transmission Retarder

Table 5-98 Transmission Retarder Digital Outputs

5.26.3 INTERACTION WITH OTHER FEATURES

A deceleration light can be used to warn that the vehicle is slowing down. A digital output is switched to ground whenever the percent throttle is zero and Cruise Control is inactive. This output is typically used to drive a relay, which drives the deceleration lights. Refer to section 4.3 , "Digital Outputs," for additional information.

THIS PAGE INTENTIONALLY LEFT BLANK

5.27 VEHICLE SPEED LIMITING

The Vehicle Speed Limiting feature is available on all DDEC engines equipped with a Vehicle Speed Sensor.

5.27.1 OPERATION

Vehicle Speed Limiting discontinues engine fueling at any vehicle speed above the programmed limit. DDEC stops fueling when maximum vehicle speed is reached. The Fuel Economy Incentive option will increase the Vehicle Speed Limit (refer to section 5.11, "Fuel Economy Incentive").

5.27.2 INSTALLATION

An OEM supplied Vehicle Speed Sensor or output shaft speed over the SAE J1939 Data Link is required. Refer to section 3.14.25, "Vehicle Speed Sensor," for additional information.

5.27.3 PROGRAMMING REQUIREMENTS AND FLEXIBILITY

The Vehicle Speed Limit is programmable at engine order entry or with the DDR, DDDL, VEPS or DRS as listed in Table 5-99.

Parameter	Description	Choice / Display
VEHICLE SPEED LIMIT ENABLE	Enables or disables vehicle speed limiting feature.	YES, NO, N/A
MAX VEHICLE SPD	Sets the maximum vehicle speed in MPH.	20 MPH to (rated speed/VSS ratio)
MAX OVERSPEED LIMIT	Sets the vehicle speed above which a diagnostic code will be logged if the driver fuels the engine and exceeds this limit. Entering a zero (0) will disable this option.	0 to 127 MPH
MAX SPEED NO FUEL	Sets the vehicle speed above which a diagnostic code will be logged if the vehicle reaches this speed without fueling the engine. Entering a zero (0) will disable this option.	0 to 127 MPH

Table 5-99 Vehicle Speed Limiting Parameters

5.27.4 INTERACTION WITH OTHER FEATURES

The Cruise Control maximum set speed cannot exceed the Vehicle Speed Limit.

Fuel Economy Incentive will increase the Vehicle Speed Limit. When Vehicle Speed Limiting is enabled and a VSS code is logged, the engine speed in all gears will be limited for the duration of the ignition cycle to engine speed at the Vehicle Speed Limit in top gear.

A vehicle can be set up with both PasSmart and Fuel Economy Incentive, but the extra speed increments provided by the two features do not add together. For example, if Fuel Economy Incentive is set up to give 7 MPH of extra speed when the driver hits the maximum fuel economy target and the PasSmart increase is 5 MPH the resulting speed increase is 7 MPH, not 12 MPH.

THIS PAGE INTENTIONALLY LEFT BLANK

5.28 VEHICLE SPEED SENSOR ANTI-TAMPER

VSS Anti-tamper can be used to detect fixed frequency oscillators or devices which track engine RPM and produce fewer pulses per revolution than a VSS wheel. These devices are used to trick the ECM into believing that vehicle speed is low.

5.28.1 OPERATION

A VSS fault will be logged if the sensor appears to be working improperly but the vehicle speed is not zero. The engine speed in all gears will be limited for the duration of the ignition cycle to the engine speed at the Vehicle Speed Limit in top gear.

NOTE:

Enabling VSS anti-tamper for use with J1939, automatic, semi-automatic, or torque converter transmissions such as Meritor ESS or Eaton Top2 may cause false codes.

5.28.2 PROGRAMMING FLEXIBILITY

The DDR, DDDL, or the DRS can enable VSS Anti-tamper as listed in Table 5-100. Vehicle Speed Limit must also be enabled.

Parameter	Description	Choice / Display
VSS ANTI-TAMPER	Enables or disables VSS Anti-tamper feature.	YES, NO
VEHICLE SPEED LIMIT ENABLE	Enables or disables the Vehicle Speed Limiting feature.	YES, NO
MAX VEHICLE SPD	Sets the maximum vehicle speed in MPH	20 MPH to (rated speed/VSS ratio)

Table 5-100 VSS Anti-tamper Parameters

THIS PAGE INTENTIONALLY LEFT BLANK

6 COMMUNICATION PROTOCOLS

Section	Page
6.1 OVERVIEW	6-3
6.2 SAE J1587	6-5
6.3 SAE J1922	6-37
6.4 SAE J1939	6-45

THIS PAGE INTENTIONALLY LEFT BLANK

6.1 OVERVIEW

Key components of the DDEC IV system are the serial communication links SAE J1587, SAE J1922, and SAE J1939. Using these communication links allows DDEC IV to offer the following functionality:

- ☐ Transmitting sensor information from the ECM via the data link at regular intervals and/or upon request to obtain data and to monitor for failures
- ☐ Sharing information between stand-alone modules used in the system via the data link
- ☐ Sharing engine data with electronic dashboard displays and vehicle management information systems via the data link
- ☐ Transmitting and performing diagnostic procedures from external instrumentation such as the hand-held diagnostic data readers or DDDL via the data link
- ☐ Transmitting customer requested changes to the ECM from external instrumentation via the data link
- ☐ Transmitting to the powertrain the messages assigned to both the engine and the transmission retarder.

The following industry standard Society of Automotive Engineers (SAE) documents can be used as a reference:

- ☐ SAE J1587, *Electronic Data Interchange Between Microcomputer Systems In Heavy Duty Vehicle Applications*
- ☐ SAE J1708, *Serial Data Communications Between Microcomputer Systems In Heavy Duty Vehicle Applications*
- ☐ SAE J1922, *Powertrain Control Interface For Electronic Controls Used In Medium And Heavy Duty Diesel On-highway Vehicle Applications*
- ☐ SAE J1939/71, *Vehicle Application Layer*
- ☐ SAE J1939, *Top Layer (Overview)*
- ☐ SAE J1939/01, *Truck and Bus Applications*
- ☐ SAE J1939/11, *Physical Layer*
- ☐ SAE J1939/21, *Data Link Layer*
- ☐ SAE J1939/73, *Application Layer Diagnostics*

To obtain a copy of the above documents contact the Society of Automotive Engineers (SAE).

SAE International

400 Commonwealth Drive
Warrendale, PA 15096
Attention: Publications
Phone: (412) 776-4970
www.sae.org

THIS PAGE INTENTIONALLY LEFT BLANK

6.2 SAE J1587

SAE RP J1587 defines the recommended format of messages and data being communicated between microprocessors used in heavy-duty vehicle applications. Circuits 900 (Data Link +) and 901 (Data Link -) as shown on the Vehicle Interface Harness schematic are used as the J1587 communication link. These circuits also exist in the DDEC six-pin diagnostic connector for use with the DDR.

NOTE:

The maximum length for the SAE J1587 Data Link is 40 m (130 ft).

6.2.1 MESSAGE FORMAT

A complete description of the DDEC IV parameters is provided within this section of the manual. DDEC IV transmits parametric data at SAE J1587 recommended rates in packed message form. The first byte or character of each message is the Message Identification character (MID). The MID identifies which microcomputer on the serial communication link originated the information. Each device in the system originating messages must have a unique MID. The assignment of MIDs should be based on those listed in SAE RP J1587. The primary MID for DDEC IV is 128. Engines with 12 and 16 cylinders use MID 128 and MID 175. Engines with 20 cylinders use MID 128, MID 175 and MID 183.

The ProDriver display uses MID 171. Off-board diagnostic tools like hand-held readers should be identified by MID 172. Off-board programming stations like Vehicle Engine Programming Station (VEPS) should be identified by MID 182. Messages using MIDs as recommended by SAE RP J1587 will be responded to by the ECM.

Subsystems also require identifiers. The subsystem identifier character (SID) is a single byte character used to identify field-repairable or replaceable subsystems for which failures can be detected or isolated. SIDs are used in conjunction with SAE standard diagnostic codes defined in J1587 within PID194.

The identifiers used by DDEC are defined and listed in Table 6-1.

Identifier	Description
Failure Mode Identifier (FMI)	The FMI describes the type of failure detected in the subsystem and identified by the PID or SID.
Message Identification Character (MID)	The MID is the first byte or character of each message that identifies which microcomputer on DDEC 1587 serial communication link originated the information.
Parameter Identification Character (PID)	A PID is a single byte character used in DDEC 1587 messages to identify the data byte(s) that follow. PIDs identify the parameters transmitted.
Subsystem Identification Character (SID)	A SID is a single byte character used to identify field-repairable or replaceable subsystems for which failures can be detected or isolated.

Table 6-1 Identifiers Used by DDEC

6.2.2 1708/1587 MESSAGE PRIORITY

Each message sent by DDEC is assigned a priority on a scale of 1 to 8, in compliance with the message priority assignment specified in SAE RP J1708. The most critical message has a priority of one. The message assignments are listed in Table 6-2. All devices transmitting messages across DDEC's 1708/1587 Data Link must be prioritized and transmitted in this manner.

Priority	Description
1 and 2	Reserved for messages that require immediate access to the bus.
3 and 4	Reserved for messages that require prompt access to the bus in order to prevent severe mechanical damage.
5 and 6	Reserved for messages that directly affect the economical or efficient operation of the vehicle.
7 and 8	All other messages not fitting into the previous priority categories.

Table 6-2 Message Priority Assignments

SAE J1587 Parameters Available with DDEC IV

DDEC IV supports the J1587 parameter identifiers (PIDs) listed in Table 6-3 and listed in Table 6-4.

NOTE:

Data is transmitted only if the source has been configured for the engine.

PID	Description	PID	Description
147	Average Fuel Economy — Natural Gas	248	Total VSG Hours
148	Instantaneous Fuel Economy — Natural Gas	249	Total Engine Revolution
149	Mass Flow Rate — Natural Gas	250	Total Fuel Used
229	Total Fuel Used — Natural Gas	251	Clock
230	Total Idle Fuel Used — Natural Gas	252	Date
231	Trip Fuel — Natural Gas	351	Turbo Compressor Inlet Temperature
243	Device Identification	354	Relative Humidity
244	Trip Miles	404	Turbo Compressor Out Temperature
245	Total Miles	411	EGR Differential Pressure
247	Total Engine Hours	412	EGR Temperature
—	—	439	Extended Range Boost Pressure

Table 6-3 SAE J1587 PIDs Provided by DDEC IV

PID	Description	PID	Description
–	–	109	Coolant Pressure
18	Extended Range Fuel Pressure	110	Coolant Temperature
19	Extended Range Oil Pressure	111	Coolant Level
20	Extended Range Coolant Pressure	113	Engine Governor Droop
44	Attention/Warning Indicator Lamps Status	121	Engine Retarder Status
48	Extended Range Barometric Pressure	122	Engine Retarder Percent
51	Throttle Position	153	High Range Crankcase Pressure
52	Engine Intercooler Temperature	154	Auxiliary Input & Output Status #2
62	Retarder Inhibit Status	155	Auxiliary Input & Output Status #1
65	Service Brake Switch Status	162	Transmission Range Selected
68	Torque Limiting Factor	163	Transmission Range Attained
70	Parking Brake Switch Status	164	Injection Control Pressure
71	Idle Shutdown Timer Status	166	Rated Engine Power
72	Blower Bypass Valve Position/Blower Bypass Door Position	168	Battery Potential (Voltage)
73	Auxiliary Water Pump Pressure	171	Ambient Air Temperature
74	Vehicle Speed Set Limit	172	Air Inlet Temperature
81	Exhaust Back Pressure	173	Exhaust Temperature
83	Vehicle Speed Limit Status	174	Fuel Temperature
84	Vehicle Speed	175	Engine Oil Temperature
85	Cruise Control Switch Status	182	Trip Fuel
86	Cruise Control Set Speed	183	Fuel Rate
87	Cruise Control High Limit	184	Instantaneous Fuel Economy, (mile/gal)
88	Cruise Control Low Limit	185	Average Fuel Economy, (mile/gal)
89	VSG Switch Status	187	PTO Set Speed
91	Percent Throttle	188	Idle Engine Speed
92	Percent Engine Load	189	Rated Engine Speed
93	Output Torque	190	Engine Speed
94	Fuel Delivery Pressure	191	Transmission Output Shaft Speed
95	Fuel Filter Differential Pressure	192	Multi-sectioned Parameter
98	Engine Oil Level	194	Transmitter System Diagnostic Code and Occurrence Count Table
99	Oil Filter Differential Pressure	196	Diagnostic Data/Count Clear Response
100	Engine Oil Pressure	222	Anti-Theft
101	Crankcase Pressure	228	Speed Sensor Calibration
102	Turbo Boost Pressure	233	Unit Number
103	Turbo Speed	234	Software Identification
105	Intake Manifold Temperature	235	Total Idle Hours
106	Air Inlet Pressure	236	Total Idle Fuel Used
107	Air Filter Differential Pressure	237	Vehicle Identification Number (VIN)
108	Barometric Pressure	240	Last Customer Calibration Change Hours

Table 6-4 SAE J1587 PIDs Provided by DDEC IV (continued)

6.2.3 SAE J1587 PIDS REQUIRING DDEC ACTION

DDEC will respond to data requests per the J1587 PID requests shown in the next sections.

Data Request

The format for a data request is shown below.

PID	Data
0	a
	a - Parameter number of the requested parameter

Component Specific Request

The format for a component specific request is shown below.

PID	Data
128	a b
	a - Parameter number of the requested parameter
	b - MID of the component from which the parameter data is requested

NOTE:

DDEC responds with the appropriate data provided the MID in byte (b) matches the MID stored in calibration. The primary MID for DDEC IV is 128. Engines with 12 and 16 cylinders use MID 128 and MID 175. Engines with 20 or 24 cylinders use MID 128, MID 175 and MID 183.

Retarder Status Request

Electronic transmissions may indicate the status of the transmission output retarder to DDEC by using the following message:

PID	Data
47	a
	a - Transmission output retarder status
	Bits 2-1 Output retarder status
	00 = off 10 = error
	01 = on 10 = error
	Bits 8-3 Reserved, Bits set to 1
comments:	This parameter is supported in Release 4.00 or later.

Transmitter Data Request / Clear Count

The format for a transmitter data request is shown below.

PID	Data
195	n a b c
	n - Number of parameter data characters = 3
	a - MID of the device to which the request is directed
	b - SID or PID of a standard diagnostic code
	c - Diagnostic code number
Bits: 1 - 4	Failure mode identifier (FMI) of a standard diagnostic code
Bit: 5	Byte (b) identifier
	1 - Byte (b) is a Subsystem Identifier (SID)
	0 - Byte (b) is a Parameter Identifier (PID)
Bit: 6	Type of diagnostic code
	1 - Standard diagnostic code
	0 - Reserved for expansion diagnostic codes
Bit: 7, 8	-- Request an ASCII descriptive message for the given diagnostic code.
	01 - Request count be cleared for the given diagnostic code on the device with the given MID.
	10 - Request counts be cleared for all diagnostic codes on the device with the given MID. The diagnostic code given in this transmission is ignored.
	11 - Request additional diagnostic information for the given diagnostic code, the content of which is defined under PID 196.

NOTE:

DDEC responds with the appropriate data using PID 196.

source: ECM calculated; outputs represent intended state

PID 256 (255 0) Page 2 Data Request

The format for Page 2 data requests is shown below.

PID	Data
0	a
	a - Parameter number of the requested parameter from Page 2

J1587 Outputs - Single Byte Parameters

PID 18 - Extended Range Fuel Pressure

update rate: 1 time/s
resolution: 4 kPa/Bit (Uns/SI)
source: Fuel Pressure Sensor
comments: This PID is used to provide a wider range of pressure values than that provided with PID 94.
This parameter is available with Release 24.00 software or later.

PID 19 - Extended Range Engine Oil Pressure

update rate: 1 time/s
resolution: 4 kPa/Bit (Uns/SI)
source: Engine Oil Pressure Sensor
sensor range: 0 to 145 psi
comments: This PID is used to provide a wider range of pressure values than that provided with PID 100.
This parameter is available with Release 24.00 software or later.

PID 20 - Extended Range Coolant Pressure

update rate: 1 time/s
resolution: 2 kPa/Bit (Uns/SI)
source: Coolant Pressure Sensor
comments: This PID is used to provide a wider range of pressure values than that provided with PID 109.
This parameter is available with Release 24.00 software or later.

PID 44 - Attention/Warning Indicator Lamps Status

update rate: 10 time/s or
1 time/s when
changing

format:

Bit: 1,2	Stop Engine Light Status
	00 - off
	01 - on
	10 - error
	11 - Not Available
Bit: 3,4	Check Engine Light Status
	00 - off
	01 - on
	10 - error
	11 - Not Available
Bit: 5-8	Reserved, All Bits set to 1

PID 48 - Extended Range Barometric Pressure

update rate: 1 time/s
resolution: 0.6 kPa/Bit (Uns/SI)
source: Barometric Pressure Sensor or Turbo Boost Pressure Sensor

PID 51 - Throttle Position

update rate: 5 time/s
resolution: 0.4%/Bit (Uns/SI)
source: Throttle Position Sensor
comments: This parameter identifies the position of the value used to regulate the supply of a fluid, usually air or fuel/air mixture, to an engine - 0% represents no supply.

PID 52 - Engine Intercooler Temperature

update rate: 1 time/s
resolution: 1°F/Bit (Uns/SI)
source: Engine Intercooler Temperature Sensor

PID 62 - Retarder Inhibit Status

update rate: On request

format:

Bits: 1, 2

Retarder Inhibit Status

00 - Off (not Inhibited)

01 - On (Inhibited)

Bits: 3-8

Uncommitted, all Bits set to 1

source: Digital output for Engine Brake Enable

comments: Used with the Engine Brake outputs.

PID 65 - Service Brake Status

update rate: 1 time/s

format:

Bits: 1, 2

Service Brake Status

00 - off

01 - on

Bits: 3-8

Uncommitted, all Bits set to 1

Bits 3-8 = 1

source: Service Brake Switch

PID 68 - Torque Limiting Factor

update rate: 1 time/s

resolution: 0.5%/Bit (Uns/SI)

source: ECM calculated.

comments: This parameter indicates the amount of engine protection torque reduction that is in effect.

PID 70 - Parking Brake Switch Status

update rate: 1 time/s

format:

Bits: 8

Parking Brake Switch Status

0 - off

1 - on

Bits: 1-7

Uncommitted, all Bits set to 0

source: Parking Brake Switch

PID 71 - Idle Shutdown Timer Status

update rate: 1 time/s

format:

Bit: 1	Idle Shutdown Override ("Driver Alert") 1 - Active
Bit: 2	Engine Has Shutdown by Idle Timer to 1 - Yes
Bit: 3	Idle Timer Shutdown Override 1 - Active (Idle Shutdown has been overridden)
Bit: 4	Idle shutdown timer function 1 - Enabled in calibration 0 - Disabled in calibration
Bit: 8	Idle Shutdown Timer Status 1 - Active
Bits: 5-7	All Bits set to 0

source: ECM calculated

PID 72 - Blower Bypass Valve Position

update rate: 2 times/s

resolution: 0.4%/Bit (Uns/SI)

source: Blower Bypass Valve Position sensor

comments: Electronically controlled blower bypass valves are used on Methanol engines.

PID 73 - Auxiliary Water Pump Pressure

update rate: 1 time/s

resolution: 2 psi/Bit (Uns/SI)

source: Water Pump Pressure Sensor

comments: The auxiliary Water Pump Pressure system is used on fire trucks with DDEC pressure control. The transmitted value is gage pressure.

PID 74 - Vehicle Speed Set Limit (Road Speed Limiting)

update rate: On request only

resolution: 0.5 mph/Bit (Uns/SI)

source: Calibration value (customer defined)

comments: Vehicle Speed Limiting is a customer option.

PID 81 — Exhaust Back Pressure

update rate: 1 time/sec.

resolution: 0.169 kPa/Bit (Uns/SI)

comments: Update rate is different than that specified by SAE (every 10 sec.)

PID 83 - Vehicle Speed Limit Status

update rate: 1 time/s

format:

Bit: 8

Vehicle Speed Status

1 - Active

Bits: 1-7

All Bits set to 0

source: ECM calculated

comments: Vehicle Speed Limiting is a customer option.

PID 84 - Vehicle Speed

update rate: 10 times/s

resolution: 0.5 mph/Bit (Uns/SI)

source: Vehicle Speed Sensor input

comments: Transmitted only if the Vehicle Speed Sensor is configured.

PID 85 - Cruise Control Switch Status

update rate: 10 times/s

format:

	On/Off Switch
Bit: 1	1-On 0-Off
	Set Switch
Bit: 2	1-Off 0-On
	Coast Switch
Bit: 3	1-Off 0-On
	Resume Switch
Bit: 4	1-Off 0-On
	Accel Switch
Bit: 5	1-Off 0-On
	Brake Switch
Bit: 6	1-Off 0-On
	Clutch Switch
Bit: 7	1-Off 0-On
	Cruise Active
Bit: 8	1-On 0-Off

source: Cruise Control switch inputs

comments: Cruise Control status (Bit 8) is not cleared if Cruise Control is active but being overridden by the throttle.

PID 86 - Cruise Control Set Speed

update rate: 0.1 times/s, 5 times/s when the set speed is changing

resolution: 0.5 mph/Bit (Uns/SI)

source: Cruise Control switch inputs

comments: Transmitted if Vehicle Speed Cruise control is enabled.

PID 87 - Cruise Control High Set Limit

update rate: On request only

resolution: 0.5 mph/Bit (Uns/SI)

source: Calibration value (customer define)

comments: Transmitted if Vehicle Speed Cruise control is enabled.

PID 88 - Cruise Control Low Set Limit

update rate: On request only
resolution: 0.5 mph/Bit (Uns/SI)
source: Calibration value
comments: Transmitted if Vehicle Speed Cruise control is enabled.

PID 89 - VSG Switch Status

update rate: 1 time/s
format:

Bit: 1	On/off switch 0-Off 1-On
Bit: 2	Set switch 0-Off 1-On
Bit: 3	Coast switch 0-Off 1-On
Bit: 4	Resume switch 0-Off 1-On
Bit: 5	Accel switch 0-Off 1-On
Bit: 6	Brake 0-Off 1-On
Bit: 7	Clutch 0-Off 1-On
Bit: 8	VSG 0-Off 1-On

source: VSG switch inputs/ECM calculated
comments: Transmitted when either the Pressure Sensor Governor, Cruise-Switch VSG or analog VSG is configured.

PID 91 - Percent Throttle

update rate: 10 times/s
resolution: 0.4%/Bit (Uns/SI)
source: Throttle Sensor input

PID 92 - Percent Engine Load

update rate: 10 times/s
resolution: 0.5%/Bit (Uns/SI)
source: ECM calculated
comments: Percent engine load is the ratio of actual torque and the minimum of the requested torque and digital torque limit.

PID 93 - Output Torque

update rate: 1 time/s
resolution: 20 ft-lb/Bit (S/SI)
source: ECM calculated

PID 94 - Fuel Delivery Pressure

update rate: 1 time/s
resolution: 0.5 psi/Bit (Uns/SI)
source: Fuel Pressure Sensor

PID 95 - Fuel Filter Differential Pressure

update rate: 0.1 time/s
resolution: 0.25 psi/Bit (Uns/SI)
source: Fuel Filter Differential Pressure Sensor
comments: This parameter is available with Release 24.00 software or later.

PID 98 - Engine Oil Level

update rate: 0.1 time/s
resolution: 0.5%/Bit (Uns/SI)
source: Oil Level Sensor

PID 99 - Oil Filter Differential Pressure

update rate: 0.1 time/s
resolution: 0.0625 psi/Bit (Uns/SI)
source: Oil Filter Differential Pressure Sensor
comments: This parameter is available with Release 24.00 software or later.

PID 100 - Engine Oil Pressure

update rate: 1 time/s
resolution: 0.5 psi/Bit (Uns/SI)
source: Oil pressure sensor
sensor range: 0 to 65 psi

PID 101 - Crankcase Pressure

update rate: 1 time/s
resolution: 0.125 psi/Bit (S/SI)
source: Crankcase pressure sensor
comments: Some engine applications use a discrete switch in place of a full range sensor. In these applications, the crankcase pressure data transmitted on the J1587 data link is not a true representation of crankcase pressure.

PID 102 - Turbo Boost Pressure (Gage)

update rate: 2 times/s
resolution: 0.125 psi/Bit (Uns/SI)
source: Turbo Boost Pressure Sensor
comments: Update rate is different than that specified by SAE (1 time/sec)

PID 103 - Turbo Speed

update rate: 1 time/s
resolution: 500 rpm/Bit (Uns/SI)
source: Turbo Speed Sensor

PID 105 - Intake Manifold Temperature

update rate: 1 time/s
resolution: 1°F/Bit (Uns/SI)
source: Intake Manifold Temperature Sensor

PID 106 - Air Inlet Pressure

update rate: 1 time/s
resolution: 0.25 psi/Bit (Uns/SI)
source: Air Inlet Pressure Sensor or Boost Pressure Sensor (Series 2000 and Series 4000 only before Release 21.0, Series 50 and Series 60 beginning with Release 21.0)

PID 107 - Air Filter Differential Pressure

update rate: 0.1 time/s
resolution: 0.2 in.H₂O/Bit (Uns/SI)
source: Air Filter Differential Pressure Sensor
comments: This parameter is available with Release 24.00 software or later.

PID 108 - Barometric Pressure

update rate: 1 time/s
resolution: 0.0625 psi/Bit (Uns/SI)
source: Barometric Pressure Sensor or ECM calculated

PID 109 - Coolant Pressure

update rate: 1 time/s
resolution: 0.125 psi/Bit (Uns/SI)
source: Coolant Pressure Sensor

PID 110 - Coolant Temperature

update rate: 1 time/s
resolution: 1°F/Bit (Uns/SI)
source: Coolant Temperature Sensor
sensor range: 0 to 300 F

PID 111 - Coolant Level

update rate: 10 times/s
resolution: 0.5%/Bit (Uns/SI) (or full = 100%, low = 0%)
source: Coolant Level Sensor
comments: If the Add Coolant Level Sensor (ACLS) is installed with the Engine Protection Coolant Level Sensor (CLS), the coolant level will be:
100% When both sensors are in coolant
50% When the ACLS is out of the coolant
0% When both sensors are out of the coolant
If only the CLS is configured:
100% Full
0% Low

PID 113 - Engine Governor Droop

update rate: On request only
resolution: 2 rpm/Bit (Uns/SI)
source: Calibration value

PID 121 - Engine Retarder Status

update rate: 1 time/s (5 times/s when changing)
format:
Bit: 1 1 - 2 cylinders active
Bit: 2 1 - 3 cylinders active
Bit: 3 1 - 4 cylinders active
Bit: 4 1 - 6 cylinders active
Bit: 5 1 - 8 cylinders active
Bit: 8 1 - Retarder active
comments: Transmitted only if engine brakes are configured.

PID 122 - Engine Retarder Percent

update rate: 1 time/s
resolution: 0.5%Bit (Uns/SI)
source: ECM calculated
comments: This parameter is available with Release 5.00 or later

PID 351 (255 95) - Turbo Compressor Inlet Temperature

update rate: 1 time/s
resolution: 1°F/Bit (Uns/SI)
comments: This parameter is available with Rel 33.0 software or later.

PID 354 (255 98) - Relative Humidity

update rate: Every 10 seconds
resolution: 0.4%Bit (Uns/SI)
comments: This parameter is available with Rel 33.0 software or later.

Double Byte Parameters**PID 147 - Average Fuel Economy — Natural Gas**

update rate: every 10 seconds
resolution: 1/512 km/kg per bit (Uns/I)

PID 148 - Instantaneous Fuel Economy — Natural Gas

update rate: 5 times/s
resolution: 1/512 km/kg per bit (Uns/I)

PID 149 - Fuel Mass Flow Rate — Natural Gas

update rate: 5 times/s
resolution: 0.125 kg/hr per bit (Uns/I)

PID 153 - Crankcase Pressure

update rate: 1 time/s
resolution: 0.0078125 kPa/Bit (S/I)
comments: Some engine applications use a discrete switch in place of a full range sensor. In these applications, the crankcase pressure data transmitted on the J1587 data link is not a true representation of crankcase pressure. This PID is used to provide crankcase pressure with better resolution than that provided with PID 101. This parameter is available with Release 3.00 software or later.

PID 154 - Auxiliary Input and Output status #2

update rate: On request

format:

PID	Data
-----	------

154	a b
-----	-----

a -	Auxiliary Input Status
-----	------------------------

Bit: 1, 2	Torque/RPM Limiting Switch
-----------	----------------------------

00	- Off
----	-------

01	- On
----	------

10	- Error Condition
----	-------------------

11	- Not Available
----	-----------------

Bit: 4-3	Stop Engine Override Switch
----------	-----------------------------

00	- Off
----	-------

01	- On
----	------

10	- Error Condition
----	-------------------

11	- Not Available
----	-----------------

Bit: 5, 6	A/C Disengaged
-----------	----------------

00	- Off
----	-------

01	- On
----	------

10	- Error Condition
----	-------------------

11	- Not Available
----	-----------------

Bit: 8-7	Reserved
----------	----------

b -	Auxiliary Output Status
-----	-------------------------

Bit: 1, 2	Fan Control #2
-----------	----------------

00	- Off
----	-------

01	- On
----	------

10	- Error Condition
----	-------------------

11	- Not Available
----	-----------------

Bit: 3, 4	Reserved
-----------	----------

Bit: 5, 6	Reserved
-----------	----------

Bit: 7, 8	Reserved
-----------	----------

source: ECM calculated; outputs represent intended state

PID 155 - Auxiliary Input and Output status #1

update rate: On request

format:

PID	Data
-----	------

154	a b
-----	-----

a -	Auxiliary Input Status
-----	------------------------

Bit:1, 2	Jake Brake Low Switch
----------	-----------------------

00	- Off
----	-------

01	- On
----	------

		10 - Error Condition
		11 - Not Available
Bit: 3, 4	Jake Brake Medium Switch	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
Bit: 5, 6	Idle Validation Switch	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
Bit: 7, 8	Throttle Inhibit Switch	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
b -	Auxiliary Output Status	
Bit: 1, 2	Vehicle Power Shutdown	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
Bit: 3, 4	Starter Lockout	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
Bit: 5, 6	Coolant Level Low Light	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available
Bit: 7, 8	Fan Control #1	
		00 - Off
		01 - On
		10 - Error Condition
		11 - Not Available

source: ECM calculated; outputs represent intended state

PID 162 - Transmission Range Selected

update rate: 2 times/s
format: aa - Transmission Range Selected (ASCII)
comments: Transmitted only when the transmission type is a Meritor ESS (17-22).
Characters sent will be 0, L, 1, 2, ..., 15. If only one character is required, the second character will be used and the first character will be a space.
Whenever a target gear is not selected a "0" will be transmitted.

PID 163 - Transmission Range Attained

update rate: 2 times/s
format: aa - Transmission Range Attained (ASCII)
comments: Transmitted only when the transmission type is a Meritor ESS (17-22).
Characters sent will be 0, L, 1, 2, ..., 15. If only one character is required, the second character will be used and the first character will be a space.
Whenever a target gear is not selected a "0" will be transmitted.

PID 164 - Injection Control Pressure

update rate: 1 time/s
resolution: 1/256 MPa (Uns/I)
source: Injection Pressure Sensor

PID 166 - Engine Horsepower Rating

update rate: On request only
resolution: 1 bhp/Bit (Uns/I)
source: Calibration value

PID 168 - Battery Voltage

update rate: 1 time/s
resolution: 0.05 volts/Bit (Uns/I)
source: Battery voltage measured at input to ECM
comments: The ECM input battery voltage does fluctuate as injectors fire and will require filtering if used for display purposes.

PID 171 - Ambient Air Temperature

update rate: 1 time/s
resolution: 0.25°F/Bit (S/I)
source: ECM estimated

PID 172 - Air Inlet Temperature

update rate: 1 time/s
resolution: 0.25°F/Bit (S/I)
source: Air Temperature Sensor
sensor range: -40 to 175°F

PID 173 — Exhaust Temperature

update rate: 1 time/sec
resolution: 0.25°F/Bit (S/I)

PID 174 - Fuel Temperature

update rate: 1 time/s
resolution: 0.25°F/Bit (S/I)
source: Fuel Temperature Sensor
sensor range: -40 to 175°F

PID 175 - Engine Oil Temperature

update rate: 1 time/s
resolution: 0.25°F/Bit (S/I)
source: Oil temperature sensor
sensor range: -40 to 300°F

PID 182 - Trip Fuel

update rate: 0.1 times/s
resolution: 0.125 gal/Bit (Uns/I)
source: ECM calculated

PID 183 - Fuel Rate

update rate: 5 times/s
resolution: 1/64 gal/hour/Bit (Uns/I)
source: ECM calculated

PID 184 - Instantaneous Fuel Economy (MPG)

update rate: 5 times/s
resolution: 1/256 mpg/Bit (Uns/I)
source: ECM calculated
comments: Transmitted only if the Vehicle Speed Sensor is configured.

PID 185 - Average Fuel Economy (MPG)

update rate: 0.1 times/s
resolution: 1/256 mpg/Bit (Uns/I)
source: ECM calculated
comments: Trip information from DDEC requires that the Vehicle Speed Sensor is enabled.

PID 187 - VSG Set Speed

update rate: 0.1 times/s, 5 times per s when the set speed is changing
resolution: 0.25 rpm/Bit (Uns/I)
source: VSG switch input
comments: Used to indicate the current set speed from:
☐ Analog VSG
☐ Cruise Switch VSG
☐ Engine Speed Cruise Control
☐ Pressure Governor Mode - RPM or pressure
☐ Engine Sync. Mode (marine applications)

PID 188 - Idle Set Speed

update rate: On request only
resolution: 0.25 rpm/Bit (Uns/I)
source: Calibration value

PID 189 - Rated Engine Speed

update rate: On request only
resolution: 0.25 rpm/Bit (Uns/I)
source: Calibration value

PID 190 - Engine Speed

update rate: 10 times/s
resolution: 0.25 rpm/Bit (Uns/I)
source: ECM calculated

PID 191 - Transmission Output Shaft Speed

update rate: 10 times/s
resolution: 0.25 rpm/Bit (Uns/I)
source: Transmitted when configured for Meritor ESS transmissions only.

PID 404 (255 148) - Turbo Compressor Out Temperature

update rate: 1 times/s
resolution: 0.25°F/Bit (S/I)

PID 411 (255 155) - EGR Delta Pressure

update rate: 1 time/s

resolution: 0.0078125 kPa/Bit (S/I)

comments: This parameter is available with Rel 33.0 software or later.

PID 412 (255 156) - EGR Temperature

update rate: 1 time/s

resolution: 0.25°F/Bit (S/I)

comments: This parameter is available with Rel 33.0 software or later.

PID 439 (255 183) - Extended Range Boost Pressure

update rate: 1 time/s

resolution: 0.125 kPa/Bit (UnS/I)

comments: This parameter is available with Rel 36.0 software or later.

Variable Length Parameters

PID 192 - Multi-Section Parameter

update rate: Used to transmit messages that are greater than 21 bytes in length.

format:

PID	Data
192	n a b c/d c c c c c
	Byte count of data that follows this character. This excludes characters MID, PID 192 and n but it includes a, b, c, or d type character.
a -	PID specifying the parameter that has been sectioned.
	The last section number (total number of sections minus ONE) and the current section number. The upper nibble contains the current section number (1 to 15). The lower nibble contains the current section number and is limited to the range 0 to 15. Section numbers are assigned in ascending order.
b -	Data portion of the sectioned parameter. May be 1 to 14 characters in the first packet. May be 1 to 15 characters in the middle and ending packets.
c -	Byte count of the total data portion. This character is sent only in the first packet. The values are limited to 239 or less but must be greater than 17.
d -	

comment: PID 192 is used to section any DDEC message that exceeds 21 bytes while the engine is running, in particular PID 194, PID 196, and PID 243. If the engine is stopped, DDEC may transmit messages up to 40 bytes in length.

PID 194 - Transmitter System Diagnostic Code / Occurrence Count Table

update rate: On Request only

format:

PID Data

194 n a b c a b c a b c a b c...

n - Byte count of data that follows this character. This excludes characters MID, PID 194 and n but includes a, b, c type characters.

a - SID or PID of a standard diagnostic code.

b - Diagnostic code character

Bits: 1-4 FMI of a standard diagnostic code

Bit: 5 Byte (a) Identifier

1 - Byte (a) is a SID

0 - Byte (a) is a PID

Bit: 6 Type of Diagnostic Code

1 - standard diagnostic code

0 - expansion diagnostic codes (PID/SID from page 2)

Bit: 7 Current Status of Fault

1 - fault is inactive

0 - fault is active

Bit: 8 Occurrence count

1 - count is included

0 - count is not included

c - Occurrence count for the diagnostic code defined by the preceding 2 characters. The maximum occurrence count is 255. Bit 8 of byte (b) of the diagnostic code is used to determine if it is included.

source: ECM calculated

comment: comments: Diagnostic codes are transmitted periodically while active. When the active code becomes inactive, the code is transmitted once to indicate that the fault became inactive. Inactive diagnostic codes are available by request of PID 194. If more than 6 codes are active at any point, PID 194 is sectioned as described in PID 192.

PID 196 - Diagnostic Data/count clear response

update rate: On Request only

format:

PID Data

196 n a b c c c c c

Byte count of data that follows this character. This excludes

n - characters MID, PID 194 and n but includes a, b, and c type characters.

a - SID or PID of a standard diagnostic code

b - Diagnostic Code Character

Bits 1-4 - FMI of a standard diagnostic code

Bit 5 - Byte (a) identifier

1 - Byte (a) is a SID

0 - Byte (a) is a PID

Bit 6 - Type of diagnostic code

1 - standard diagnostic code

0 - expansion diagnostic codes (PID/SID from page 2)

Bit 7-8 - Action

- Message is an ASCII descriptive message for the given diagnostic code.

01 - The count has been cleared for the given diagnostic code.

10 - All clearable diagnostic counts have been cleared for this device.

- Message is additional diagnostic information for the given diagnostic code, as defined below.

c = Additional information (if applicable)

c1-c5 - ATA/VMRS (DTDSC)

c6, c7 - Engine hours the code was first logged (LSB first)

format: 1 h/Bit.

range - 0-65535 hours.

c8, c9 - Calendar date (Month, Day) the code was first logged, if available.

c10, c11 - Clock time the code was first logged (hours, minutes), if available.

c12, c13 - Engine hours the code last became active (LSB first).

c14, c15 - Calendar date (Month, Day) the code last became active, if available.

c16, c17 - Clock time the code last became active (hours, minutes), if available.

PID 196 - Diagnostic Data/count clear response

update rate: On Request only

format:

PID Data

c18, c19 - Number of ss the code has been active (LSB first).

format: ss = 1 s/Bit

range = 0-65535 (18.2 hours)

Value remains at 65535 ss once it has been reached.

c20 - Number of Stop Engine Override Switch restarts while the code was active. The value remains at 255 once it has been reached.

c21+ = Optional associated parameter value (scaled as defined in J1587)

For temperatures, pressures, and voltages with FMI 0

- Highest value achieved

For temperatures, pressures, and voltages with FMI 1

- Lowest value achieved

For engine speed with FMI 0 - Highest speed achieved

For vehicle speed with FMI 0 or 11 - Highest speed achieved

Last byte = checksum

source: ECM calculated

comment: The date and time that the code last became inactive (bytes c14-c17) will be transmitted as zero if the code is currently active. This data may be sectioned using PID 192.

PID 228- Speed Sensor Calibration

update rate: On Request only

format:

PID Data

228 n a a a a

n = number of bytes: 4

a = Speed Sensor Calibration 1 pulse/mi (Uns/LI)

source: Calculated from calibration values

PID 229- Total Fuel — Natural Gas

update rate: On Request

format:

PID	Data
-----	------

229	n a a a a
-----	-----------

n = number of bytes: 4

a = total fuel used

resolution: 0.5 kg per bit (Uns/LI)

PID 230- Total Idle Fuel Used — Natural Gas

update rate: On Request

format:

PID	Data
-----	------

230	n a a a a
-----	-----------

n = number of bytes: 4

a = total fuel used

resolution: 0.5 kg per bit (Uns/LI)

PID 231- Trip Fuel — Natural Gas

update rate: Every 10 seconds

format:

PID	Data
-----	------

231	n a a a a
-----	-----------

n = number of bytes: 4

a = trip fuel

resolution: 0.5 kg per bit (Uns/LI)

PID 233- Unit Number (Power Unit)

update rate: On Request only

format:

PID	Data
-----	------

231	n a a a . . .
-----	---------------

n = number of bytes: 10

a = unit number in alphanumeric ASCII characters

comment: This parameter is available with Release 20.00 software or later

PID 234- Software Identification

update rate: On Request only

format:

PID	Data
234	n a a b c c
	n = number of bytes: 5
	a = Major software release level in ASCII
	b = ASCII "."
	c = Minor software release level in ASCII

Example: "01.05" is interpreted as Major release 1, Minor release 5

source: ECM calculated

comment: This parameter is available with Release 3.00 software or later

PID 235- Total Idle Hours

update rate: On Request only

format:

PID	Data
235	n a a a a
	n = number of bytes: 4
	a = Total idle hours; scaled 0.05 hours/Bit (Uns/LI)

source: ECM calculated

comment: Accumulates time while the engine is operating at idle.

PID 236- Total Idle Fuel Used

update rate: On Request only

format:

PID	Data
236	n a a a a
	n = number of bytes: 4
	a = Idle fuel used; scaled 1/8 gallons/Bit (Uns/LI)

source: ECM calculated

comment: Accumulates while the engine is operating at idle.

PID 237- Vehicle Identification Number (VIN)

update rate: On Request only

format:

PID	Data
237	n a a a ...
	n = number of bytes: up to 17
	a = VIN in ASCII characters

source: Calibration value

PID 240- Last Customer Calibration Change Hours

update rate: On Request only

format:

PID	Data
240	n a a a a
	n = number of bytes: 4
	a = Last customer calibration change hours; scaled 0.05 h/Bit (Uns/LI)

source: ECM calculated

comment: Used to identify the last customer reprogramming occurrence, stored in engine hours.

PID 243- Device Identification

update rate: On Request only

format:

PID	Data
243	n a b b b b b c d d d d d d d e f f f f f f f f f f
	n = number of bytes: 26
	a = component ID = MID
	b = ATA/VMRS manufacturer ID (5 bytes)
	c = delimiter: ASCII '*'
	d = engine model number (8 bytes)
	e = delimiter: ASCII '*'
	f = engine serial number (10 bytes)

source: Calibration value

comment: This parameter may be sectioned using PID 192.

PID 244- Trip Miles

update rate: 0.1 times/s

format:

PID Data

244 n a a a a

n = number of bytes: 4

a = trip miles 0.1 mile/Bit (Uns/LI)

source: ECM calculated

comment: Transmitted only if the vehicle speed sensor is configured.

PID 245- Total Miles

update rate: 0.1 times/s

format:

PID Data

245 n a a a a

n = number of bytes: 4

a = total miles, 0.1 mile/Bit (Uns/LI)

source: ECM calculated

comment: Transmitted only if the vehicle speed sensor is configured.

PID 247- Total Engine Hours

update rate: On request only

format:

PID Data

247 n a a a a

n = number of bytes: 4

a = total engine hours 0.05 hour/Bit (Uns/LI)

source: ECM calculated

comment: Used to identify the total hours that the engine is operating. Time accumulated while the engine speed is above 60 rpm.

PID 248- Total VSG Hours

update rate: On request only

format:

PID	Data
-----	------

248	n a a a a
-----	-----------

n = number of bytes: 4

b = total VSG hours 0.05 hour/Bit (Uns/LI)

source: ECM calculated

comment: Used to identify total engine hours the engine is operating in the following modes:

-Hand throttle VSG

-High idle using cruise switches

-Pressure governor mode: either RPM or pressure

PID 249- Total Engine Revolutions

update rate: On request only

format:

PID	Data
-----	------

249	n a a a a
-----	-----------

n = number of bytes: 4

a = total engine revolutions 1000 revolutions/Bit (Uns/SI)

comment: This parameter is available with Release 20.00 software or later

PID 250- Total Fuel Used

update rate: On request only

format:

PID	Data
-----	------

250	n a a a a
-----	-----------

n = number of bytes: 4

a = total fuel used 0.125 gal/Bit (Uns/LI)

source: ECM calculated

PID 251- Clock

update rate: On request only

format:

PID Data

251 n a b c

n = number of bytes: 3

a = Seconds 0.25 sec/Bit, range 0 to 59.75 seconds

b = Minutes 1.0 min/Bit, range 0 to 59 minutes

c = Hours 1.00 hour/Bit, range 0 to 23 hours

comment: Transmitted if clock data is considered valid. The time is broadcast in Greenwich Mean Time. This parameter is available with Release 20.00 software or later.

PID 252- Date

update rate: On request only

format:

PID Data

252 n a b c

n = number of bytes: 3

a = Day 0.25 day/Bit, range 1 to 31.75 days

b = Month 1.0 month/Bit, range 1 to 12 months

c = Year - 1985 1.00 year/Bit, range 0 to 99

comment: Day of the month is scaled such that 0 is a null value, values 1, 2, 3, and 4 are the first day of the month, 5, 6, 7, 8, are the second day of the month, etc. Transmitted if clock data is considered valid. This parameter is available with Release 20.00 software or later.

6.3 SAE J1922

Circuits 800 (Data Link +) and 801 (Data Link-) as shown on the communications harness schematic are used as the J1922 communication link.

6.3.1 MESSAGE FORMAT

A complete description of the DDEC IV parameters is provided within this section of the manual. DDEC IV transmits parametric data at SAE J1922 recommended rates in packed message form. The first byte or character of each J1922 message is the Message Identification Character (MID). The MID is used to identify the source of a data transmission and identify the type of data being transmitted.

6.3.2 SAE J1922 PARAMETERS AVAILABLE WITH DDEC IV

DDEC IV supports the J1922 message identifiers (MIDs) listed in Table 6-5.

MID	Description
69	Engine to powertrain message
70	Engine to powertrain initialization message
74	Transmission to powertrain message
76	Transmission to powertrain initialization request message
79	ABS/traction control to powertrain message
81	ABS/traction control to powertrain initialization request message
83	Retarder to powertrain message
84	Retarder to powertrain initialization message

Table 6-5 SAE J1922 MIDs Supported by DDEC

6.3.3 SAE J1922 MIDS

The following sections identify the MIDs supported by DDEC.

Engine to Powertrain

Byte 1	069	MID - Engine to powertrain
Byte 2	---	Percent torque value scaled 1% of peak torque/Bit - S/SI
Byte 3	---	Accelerator pedal position scaled 0.392%/Bit (100/255%/Bit) - Uns/SI
Byte 4	---	Control/status byte
Bit 1		Cruise control status 1: cruise control active 0: cruise control inactive
Bit 2		VSG control status 1: VSG active 0: VSG inactive
Bit 3		Road speed limit status 1: road speed limit active 0: road speed limit inactive
Bit 4		Retarder control status 1: engine retarder enabled 0: engine retarder not enabled
Bit 5		AP kickdown switch 1: in kickdown position 0: not in kickdown position
Bit 6		AP low idle switch 1: in low idle position 0: not in low idle position
Bit 7		Engine parameter change
Bit 8		Reserved 1: parameters have changed 0: current parameters valid
Byte 5	---	Engine's desired RPM scaled 16 rpm/Bit - Uns/SI
Byte 6	---	Desired RPM asymmetry adjustment scaled as a ratio - Uns/SI
Byte 7	---	Checksum

If either the transmission messages or the ABS messages are enabled, DDEC shall transmit this message 20 times per second.

Engine Initialization Response

Byte 1	070	MID - Engine initialization response
Byte 2,3	---	Engine speed at idle (warm condition) scaled 0.0625 rpm/Bit - Uns/I
Byte 4	---	Percent of peak torque at idle scaled 1% of peak torque/Bit - S/SI
Byte 5,6	---	Rated engine speed scaled 0.0625 rpm/Bit - Uns/I
Byte 7	---	Percent of peak torque at rated engine speed scaled 1% of peak torque/Bit - S/SI
Byte 8,9	---	Engine speed at point 3 scaled 0.0625 rpm/Bit - Uns/I
Byte 10	---	Percent of peak torque at point 3 scaled 1% of peak torque/Bit - S/SI
Byte 11,12	---	Engine speed at point 4 scaled 0.0625 rpm/Bit - Uns/I
Byte 13	---	Percent of peak torque at point 4 scaled 1% of peak torque/Bit - S/SI
Byte 14,15	---	Engine speed at point 5 scaled 0.0625 rpm/Bit - Uns/I
Byte 16	---	Percent of peak torque at point 5 scaled 1% of peak torque/Bit - S/SI
Byte 17,18	---	Engine speed at peak torque scaled 0.0625 rpm/Bit - Uns/I
Byte 19	---	Peak torque of engine scaled 10 lb·ft/Bit - Uns/SI
Byte 20,21	---	Engine speed at high idle scaled 0.0625 rpm/Bit - Uns/I
Byte 22	---	Maximum engine override speed scaled 16 rpm/Bit - Uns/SI
Byte 23	---	Checksum

DDEC transmits this message in response to the initialization request messages defined in "Transmission Initialization Request" and "ABS/Traction Control Initialization Request."

Transmission to Powertrain Message

Byte 1	074	MID - transmission to powertrain
Byte 2	---	Control/status byte
	Bit 1,2	Override control mode 00: override disabled 01: engine speed control 10: engine torque control 11: engine speed/torque limit
	Bit 3	Retarder enable 1: enable retarder 0: disable retarder
	Bit 4	Momentary high idle enable 1: override enabled 0: override disabled
	Bit 5	Driveline engaged (ignored by DDEC) 1: driveline engaged 0: driveline disengaged
	Bit 6	Transmission retarder status (ignored by DDEC) 1: retarder active 0: retarder inactive
	Bit 7,8	Reserved
Byte 3	---	When mode is as follows 00: Not broadcast 01: Desired engine speed (LSB) scaled 0.0625 rpm/Bit - Uns/I 10: Not broadcast 11: Engine speed upper limit scaled 16 rpm /Bit - Uns/SI
Byte 4	---	When mode 00: Not broadcast 01: Desired engine speed (MSB) - scaled 0.0625 rpm/Bit - Uns/I 10: Desired torque value scaled 1% of peak torque/Bit - S/SI 11: Percent torque upper limit scaled 1% of peak torque/Bit - S/SI
Byte 5	---	Output shaft speed scaled 16 rpm/Bit - Uns/SI
Byte 6	---	Checksum

The desired speed request requires a zero droop operation, regardless of the droop calibrated for either the rated speed governor or the VSG governor. While the transmission is requesting an override control mode other than override disabled (00), the messages are expected to be repeated on a continuous basis. DDEC will maintain the most recent requested control mode until a request to disable override (00) is received or a timeout period has elapsed without any request from the transmission, at which point DDEC will revert to its normal (override disabled) state.

Requests to disable the retarder (Bit 3 of byte 2) and override momentary high idle (Bit 4 of byte 2) follow the same strategy. DDEC will maintain the most recent requested state until a new request is received or a timeout period has elapsed without any request from the transmission. The default state for the retarder is enabled and for override momentary high idle is disabled.

NOTE:

This message has a variable length.

Transmission Initialization Request

Byte 1	076	MID - transmission initialization request
Byte 2		Status/enable byte
	Bit 1	1 = request engine initialization message
	Bit 2	1 = request trans. initialization message (ignored by DDEC)
	Bit 3	1 = request ABS initialization message (ignored by DDEC)
	Bit 4	1 = request retarder initialization message
	Bit 5-7	Reserved
	Bit 8	1 = progressive shift disable
Byte 3	---	Checksum

If enabled, DDEC responds to this request with the initialization messages defined in "Engine Initialization Response" and "Retarder Initialization Response" as appropriate. Once a progressive shift indication (allow or disallow) is transmitted, this state is maintained until a subsequent request from the transmission changes the state or a new ignition cycle begins.

ABS/Traction Control To Powertrain

Byte 1	079	MID - ABS/Traction control to powertrain
Byte 2	---	Control/status byte
	Bit 1,2	Override control mode 00: override disabled 01: engine speed control 10: engine torque control 11: engine torque limit
	Bit 3	Retarder or engine control select 1: retarder control 0: engine fueling control
	Bit 4	Gear shift disable (ignored by DDEC) 1: Inhibit gear shifts 0: allow shifts
	Bit 5	Retarder disable 1: disable retarders 0: enable retarders
	Bit 6	Torque converter lock up disable (ignored by DDEC) 1: disable lock up clutch 0: enable lock up clutch
	Bit 7	Request to neutral (ignored by DDEC) 1: request de-clutch to neutral 0: allow normal operation
	Bit 8	Reserved
Byte 3	---	When mode is as follows: 00: Not broadcast 01: Desired engine speed value scaled 16 rpm/Bit - Uns/SI 10: Desired % peak torque value scaled 1% of peak torque/Bit - S/SI 11: Percent torque upper limit scaled 1% of peak torque/Bit - S/SI
Byte 4	---	Checksum

While the traction control system is requesting a override control mode other than override disabled (00), the messages are expected to be repeated on a continuous basis. DDEC will maintain the most recent requested engine control mode and/or retarder control mode until a request to disable override (00) is received or a timeout period has elapsed without any request from the traction control system, at which point DDEC will revert to its normal (override disabled) state.

Requests to disable the retarder (Bit 5 of byte 2) follow the same strategy. DDEC will maintain the most recent requested state until a new request is received or a timeout period has elapsed without any request from the traction control system. The default state for the retarder is enabled. The retarder request is honored independent of the particular control select (Bit 3 of byte 2) in effect.

NOTE:

The retarder disable request applies to all retarder types; external engine retarder, DDEC controlled engine retarder, and transmission retarder.

DDEC will ignore requests from the ABS system when the transmission type is a Meritor ESS and the transmission is performing a shift.

DDEC will honor requests for both retarder control (Bit 3 of byte 2 = 1) and engine control (Bit 3 of byte 2 = 0). For retarder control, the percent of peak torque request will be translated into engine brake low, medium and high as follows:

0%	no braking or disable retarder
1% to 33%:	low braking
34% to 66%:	medium braking
67% to 100%:	high braking

Low, medium and high braking modes only apply when DDEC controls the engine brake directly. A request of 0% torque may apply to either direct engine brake control by DDEC or indirect engine brake control.

NOTE:

This message has a variable length.

ABS/Traction Control Initialization Request

Byte 1	081	MID - ABS/Traction control initialization request
Byte 2	---	Status/enable byte
	Bit 1	1 = request engine initialization message
	Bit 2	1 = request transmission initialization message (ignored by DDEC)
	Bit 3	1 = request ABS initialization message (ignored by DDEC)
	Bit 4	1 = request retarder initialization message
	Bit 5-8	Reserved
Byte 3	---	Checksum

If enabled, DDEC responds to this request with the initialization messages defined in "Engine Initialization Response" and "Retarder Initialization Response" as appropriate.

Retarder to Powertrain

Byte 1	083	MID - Retarder to powertrain
Byte 2	---	Retarder status byte
Bit 1		Retarder active/inactive 1: retarder active 0: retarder inactive
Bit 2		Retarder operational status 1: retarder selected 0: not selected
Bit 3,4		For future use
Bit 5-8		Retarding level status 0000: Off 0101: Active in low (33%) 1010: Active in medium (66%) 1111: Active in high (100%)
Byte 3	---	Checksum

If either the transmission messages or the ABS/ASR messages are enabled and digital outputs are configured for DDEC controlled engine brake operation, DDEC shall transmit this message 10 times per second.

Retarder Initialization Response

Byte 1	084	MID - Retarder initialization response
Byte 2	---	Type of retarder
Bit 1		Reserved - sent as 0
Bit 2		1 = Engine compression release
Bit 3-7		Not applicable for DDEC - sent as 0
Bit 8		Reserved - sent as 0
Byte 3	---	Peak torque of retarder (10 lb·ft/Bit) - Uns/SI
Byte 4	---	Checksum

If either the transmission messages or the ABS/ASR messages are enabled and digital outputs are configured for DDEC controlled engine brake operation, DDEC transmits this message in response to the initialization request messages defined in "Transmission Initialization Request" and "ABS/Traction Control Initialization Request."

6.4 SAE J1939

Circuits 925 (CAN_H/J1939 [+]), 926 (CAN_L/J1939 [-]) and 927 (CAN_SHLD/J1939 Shield) as shown on the communications harness schematic are used as the J1939 communication link. See Figure 6-1.

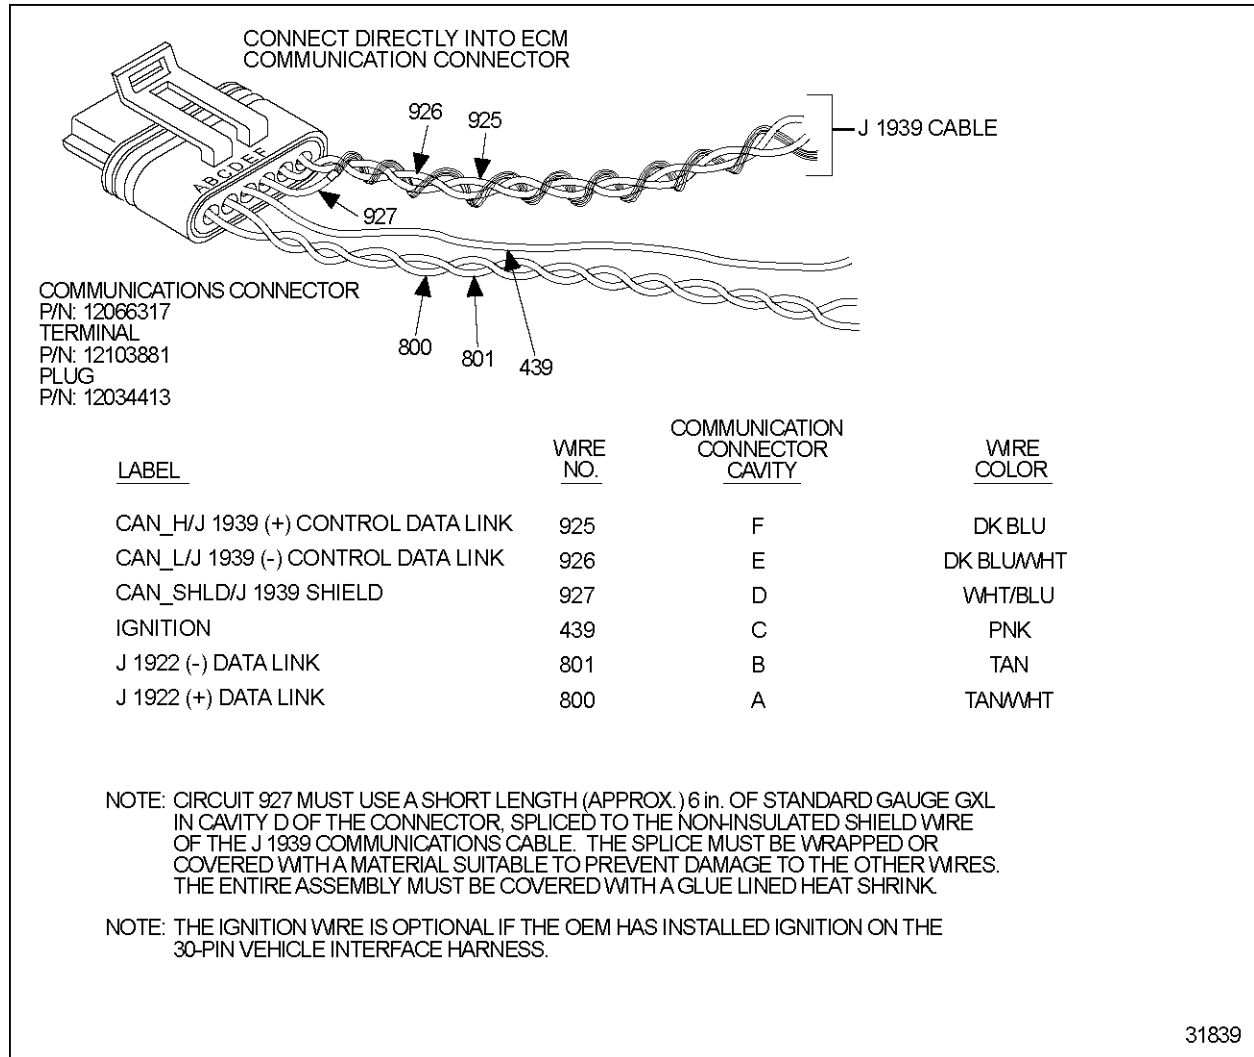


Figure 6-1 Communication Harness

6.4.1 MESSAGE FORMAT

The message format uses the parameter group number as the label for a group of parameters. Each of the parameters within the group can be expressed in ASCII, as scaled data, or as function states consisting of one or more Bits. Alphanumeric data will be transmitted with the most significant byte first. Other parameters consisting of two or more data bytes shall be transmitted least significant byte first. The type of data is also identified for each parameter.

The following sections identify the parameters that are supported by DDEC, parameter group number response definitions (refer to section 6.4.2) and parameter group number command definitions (refer to section 6.4.3).

6.4.2 SAE J1939/71 APPLICATION LAYER

The Application Layer Parameter Group Number (PGN) response definitions are described in the following sections.

Electronic Engine Controller #1 – EEC1

Transmission Rate:	Engine Speed Dependent
Data Length:	8 bytes
Data Page:	0
PDU format:	240
PDU specific:	4
Default priority:	3
PGN:	61,444 (0x00F004)
Byte : 1	Status_EEC1
Bits: 8-5	Not Defined
Bits: 4-1	Engine / Retarder Torque Mode (SPN 899)
	0000: Low Idle Governor/No Request (Default Mode)
	0001: Accelerator Pedal/Operator Selection
	0010: Cruise Control
	0011: PTO Governor
	0100: Road Speed Governor
	0101: ASR Control
	0110: Transmission Control
	0111: ABS Control
	1000: Torque Limiting
	1001: High Speed Governor
	1010: Braking System
	1011: Remote Accelerator - N/A
	1100: Not Defined
	1101: Not Defined
	1110: Other
	1111: Not Available
Byte: 2	Drivers Demand Engine - Pct Torque (SPN 512)
	Resolution: 1% / Bit, -125% offset
Byte: 3	Actual Engine - Percent Torque (SPN 513)
	Resolution: 1% / Bit, -125% offset
Bytes: 4,5	Engine Speed (SPN 190)
	Resolution: 0.125 rpm / Bit, 0 rpm offset
Byte: 6	Source address of controlling device for engine control (SPN 1483)
Byte: 7	Bits: 8–5 Not Defined
	Bits: 1–4 Engine Starter Mode – N/A
Byte: 8	Engine Demand–Percent Torque – N/A

Electronic Engine Controller #2 – EEC2

Transmission Rate :	50 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	240
PDU specific:	3
Default priority:	3
PGN:	61,443 (0x00F003)
Byte: 1	Status_EEC2
	Bits: 8-5 Not Defined (Transmitted as 1111)
	Bits: 4-3 AP Kickdown Switch (SPN 559)
	00: Kickdown Passive
	01: Kickdown Active
	11: Not Configured
	Bits: 2,1 AP Low Idle Switch (SPN 558)
	00: Not In Low Idle Condition
	01: In Low Idle Condition
	10: Error Detected
	11: Not Configured
Byte: 2	Accelerator Pedal Position (TPS) (SPN 91)
	Resolution: 0.4% / Bit, 0% offset
Byte: 3	Percent Load At Current Speed (SPN 92)
	Resolution: 1% / Bit, 0% offset
Byte: 4	Remote Accelerator–N/A
Bytes: 5-8	Not Defined

Idle Operation — IO

Transmission Rate :	On Request
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	220
Default priority:	6
PGN:	65,244 (0x00FEDC)
Bytes: 1-4	Total Idle Fuel Used (SPN 236)
	Resolution: 0.5 L / Bit, 0 L offset
Bytes: 5-8	Total Idle Hours (SPN 235)
	Resolution: 0.05 hr / Bit, 0 hr offset

Turbocharger — TC

Transmission Rate : 1 sec
 Data Length: 8 bytes
 Data Page: 0
 PDU format: 254
 PDU specific: 221
 Default priority: 6
 PGN: 65, 245 (0x00FEDD)
 Byte: 1 Turbo Oil Pressure - N/A
 Bytes: 2,3 Turbo Speed (SPN 103)
 Resolution: 4 rpm / Bit, 0 rpm offset
 Byte: 4 Bits: 8–7 Turbo Oil Level Switch–N/A
 Bits: 6–1 Not Defined
 Bytes: 5-8 Not Defined

Electronic Engine Controller #3 – EEC3

Transmission Rate : 250 ms
 Data Length: 8 bytes
 Data Page: 0
 PDU format: 253
 PDU specific: 211
 Default priority: 6
 PGN: 65,247 (0x00FEDF)
 Byte: 1 Nominal Friction - Percent Torque (SPN 514)
 Resolution: 1% / Bit, -125% offset
 Bytes: 2,3 Engine's Desired Operating Speed (SPN 515)
 Resolution: 0.125 rpm / Bit, 0 rpm offset
 Byte 4: Engine's Desired Operating Speed Asymmetry Adjustment (SPN 519)
 ratio 0 to 250
 Byte: 5 Engine Controlled Cooling Fan Losses — Percent Torque (SPN 2978)
 Resolution: 1%/Bit, -125% offset
 NOTE: Release 32.0 or later
 Bytes: 6–8 Not Defined

Vehicle Distance — VD

Transmission Rate :	On Request
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	224
Default priority:	6
PGN:	65,248 (0x00FEE0)
Bytes: 1-4	Trip Distance (SPN 244)
	Resolution: 0.125 km / Bit, 0 km offset
Bytes: 5-8	Total Vehicle Distance (SPN 245)
	Resolution: 0.125 km / Bit, 0 km offset

Idle Shutdown — Shutdown

Transmission Rate :	1 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	228
Default priority:	6
PGN:	65,252 (0x00FEE4)
Byte: 1	Idle shutdown_1
	Bits: 8,7 Idle Shutdown Timer State (SPN 590)
	00: Inactive
	01: Active
	Bits: 6,5 Idle Shutdown Timer Override (SPN 592)
	00: Inactive
	01: Active
	Bits: 4,3 Driver Alert Mode (SPN 594)
	00: Inactive
	01: Active
	Bits: 2,1 Engine Has Shutdown by Idle Shutdown (SPN 593)
	00: Engine has not shutdown by idle shutdown
	01: Engine has shutdown by idle shutdown
Byte: 2	Idle shutdown_2
	Bits: 8,7 Idle Shutdown Timer Function (SPN 591)
	00: Disabled in Calibration
	01: Enabled in Calibration
	Bits: 6-1 Not Defined
Byte: 3	Bits: 8,7 Not Defined

	Bits: 6,5	Refrigerant High Pressure Switch- N/A
	Bits: 4,3	Refrigerant Low Pressure Switch- N/A
	Bits: 2,1	A/C High Pressure Fan Switch-N/A
Byte: 4	Lamp_commands - N/A	
Byte: 5	Engine Shutdown_1 (SPN 1107)	
	Bits: 8,7	Engine Protection Shutdown Timer State
		00:Timer not Active
		01:Timer Active
	Bits: 6,5	Engine Protection Shutdown Override (SPN 1108)
		00:Override Off
		01:Override On
	Bits: 4,3	Engine Shutdown Approaching - N/A
	Bits: 2,1	Engine Has Shutdown By Engine Protection System (SPN 1110)
		00:Not Shutdown
		01:Has Shutdown
Byte: 6	Engine Shutdown_2	
	Bits: 8,7	Engine Protection System Configured (SPN 1111)
		00:Not Enabled In Calibration
		01:Enabled In Calibration
	Bits: 6-1	Not Defined
Bytes: 7-8	Not Defined	

■ Engine Hours, Revolutions — Hours

Transmission Rate :	On Request
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	229
Default priority:	6
PGN:	65,253 (0x00FEE5)
Bytes: 1-4	Total Engine Hours (SPN 247)
	Resolution: 0.05 h / Bit, 0 h offset
Bytes: 5-8	Total Engine Revolutions (SPN 249)
	Resolution: 1000 revs / Bit, 0 revs offset

Time/Date — TD

Transmission Rate :	On Request
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	230
Default priority:	6
PGN:	65,254 (0x00FEE6)
Byte: 1	Seconds (SPN 959)
	Resolution: 0.25 sec / Bit, 0 sec offset
Byte: 2	Minutes (SPN 960)
	Resolution: 1 min / Bit, 0 min offset
Byte: 3	Hours (SPN 961)
	Resolution: 1 hour / Bit, 0 h offset
Byte: 4	Month (SPN 963)
	Resolution: 1 month / Bit, 0 month offset
Byte: 5	Day (see Note) (SPN 962)
	Resolution: 0.25 day / Bit, 0 day offset
Byte: 6	Year (SPN 964)
	Resolution: 1 year / Bit, 1985 year offset
Byte: 7	Local Minute Offset – N/A
Byte: 8	Local Hour Offset – N/A
Note:	The Day field represents days elapsed (e.g. 1/1/98 at 12:00 am would be 0 for byte 5 (Day) and 1/1/98 at 1:00 pm would be 2 for byte 5 and 1/15/98 at 1:00 pm would be 62 for byte 5).

Vehicle Hours — VH

Transmission Rate :	On Request
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	231
Default priority:	6
PGN:	65,255 (0x00FEE7)
Bytes: 1-4	Total Vehicle Hours -N/A
Bytes: 5-8	Total Power Takeoff Hours (SPN 248)
	Resolution: 0.05 h / Bit, 0 h offset

■ Fuel Consumption (Liquid) — LFC

Transmission Rate : On Request
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 233
Default priority: 6
PGN: 65,257 (0x00FEE9)

- Byte: 1-4 Trip Fuel (SPN 182)
Resolution: 0.5 L / Bit, 0 L offset
- Bytes: 5-8 Total Fuel Used (SPN 250)
Resolution: 0.5 L / Bit, 0 L offset

■ Cruise Control / Vehicle Speed Setup — CCSS

Transmission Rate : On Request
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 237
Default priority: 6
PGN: 65,261 (0x00FEED)

- Byte: 1 Maximum Vehicle Speed Limit (SPN 74)
Resolution: 1 km/h / Bit, 0 km/h offset
- Byte: 2 Cruise Control High Set Limit Speed (SPN 87)
Resolution: 1 km/h / Bit, 0 km/h offset
- Byte: 3 Cruise Control Low Set Limit Speed (SPN 88)
Resolution: 1 km/h / Bit, 0 km/h offset
- Bytes: 4-8 Not Defined

Engine Temperature #1— ET1

Transmission Rate :	1 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	238
Default priority:	6
PGN:	65,262 (0x00FEEE)
Byte: 1	Engine Coolant Temperature (SPN 110)
	Resolution: 1°C / Bit, -40°C offset
Byte: 2	Fuel Temperature (SPN 174)
	Resolution: 1°C / Bit, -40°C offset
Bytes: 3,4	Engine Oil Temperature (SPN 175)
	Resolution: 0.03125°C / Bit, -273°C offset
Bytes: 5,6	Turbo Oil Temperature -N/A
Byte: 7	Engine Intercooler Temperature (SPN 52)
	Resolution: 1°C / Bit, -40°C offset
Byte 8:	Engine Intercooler Thermostat Opening—N/A

Engine Fluid Level/Pressure #1 — EFL/P1

Transmission Rate :	0.5 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	239
Default priority:	6
PGN:	65,263 (0x00FEEF)
Byte: 1	Fuel Delivery Pressure (SPN 94)
	Resolution: 4 kPa / Bit, 0 kPa offset
Byte: 2	Extended Crankcase Blowby Pressure—N/A
Byte: 3	Engine Oil Level (SPN 98)
	Resolution: 0.4% / Bit, 0% offset
Byte: 4	Engine Oil Pressure (SPN 100)
	Resolution: 4 kPa / Bit, 0 kPa offset
Byte: 5,6	Crankcase Pressure (SPN 101)
	Resolution: 0.0078125 kPa / Bit (1/128 kPa / Bit), -250 kPa offset
Byte: 7	Coolant Pressure (SPN 109)
	Resolution: 2 kPa / Bit, 0 kPa offset
Byte: 8	Coolant Level (SPN 111)
	Resolution: 0.4% / Bit, 0% offset

Power Takeoff Information — PTO

Transmission Rate :	100 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	240
Default priority:	6
PGN:	65,264 (0x00FEF0)
Byte: 1	Power Takeoff Oil Temperature - N/A
Byte: 2,3	Power Takeoff Speed - N/A
Byte: 4,5	Power Takeoff Set Speed (SPN 187)
	Resolution: 0.125 rpm / Bit, 0 rpm offset
Byte: 6	Measured_PTO_1
	Bits: 8,7 Not Defined
	Bits: 6,5 Remote PTO Variable Speed Control Switch - N/A
	Bits: 4,3 Remote PTO Preprogrammed Speed Control Switch (SPN 979)
	00: Switch Off
	01: Switch On
	11: Not Configured
	Bits: 2,1 PTO Enable Switch (SPN 980)
	00: Switch Off
	01: Switch On
	11: Not Configured
Byte: 7	Measured_PTO_2
	Bits: 8,7 PTO Accelerate Switch (SPN 981)
	00: Switch Off
	01: Switch On
	11: Not Configured
	Bits: 6,5 PTO Resume Switch (SPN 982)
	00: Switch Off
	01: Switch On
	11: Not Configured
	Bits: 4,3 PTO Coast/Decelerate Switch (SPN 983)
	00: Switch Off
	01: Switch On
	11: Not Configured
	Bits: 2,1 PTO Set Switch (SPN 984)
	00: Switch Off
	01: Switch On
	11: Not Configured
Byte: 8	Not Defined

Cruise Control / Vehicle Speed — CCVS

Transmission Rate :	100 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	241
Default priority:	6
PGN:	65,265 (0x00FEF1)
Byte: 1	Measured_SW1
	Bits: 8,7 Not Defined
	Bits: 6,5 Cruise Control Pause Switch–N/A
	Bits: 4,3 Parking Brake Switch (SPN 70)
	00: Park Brake Not Set
	01: Park Brake Set
	11: Not Configured
	Bits: 2,1 Two Speed Axle Switch - N/A.
Byte: 2,3	Wheel Based Vehicle Speed (SPN 84)
	Resolution: 1/256 km/h / Bit, 0 km/h offset (1/412 mph / Bit, 0 mph offset)
Byte: 4	Measured_CC_SW1
	Bits: 8,7 Clutch Switch (SPN 598)
	00: Clutch Pedal Released
	01: Clutch Pedal Depressed
	10: Error
	11: Not Configured
	Bits: 6,5 Brake Switch (SPN 597)
	00: Brake Pedal Released
	01: Brake Pedal Depressed
	11: Not Configured
	Bits: 4,3 Cruise Control Enable Switch (SPN 596)
	00: Cruise Control Disabled
	01: Cruise Control Enabled
	10: Error
	11: Not Configured
	Bits: 2,1 Cruise Control Active (SPN 595)
	00: Cruise Control Off
	01: Cruise Control On
	11: Not Configured
Byte: 5	Measured _CC_SW2
	Bits: 8,7 Cruise Control Accelerate Switch (SPN 602)
	00: Accelerate Switch Off
	01: Accelerate Switch On

■		10: Error
■		11: Not Configured
■	Bits: 6,5	Cruise Control Resume Switch (SPN 601)
		00: Resume Switch Off
		01: Resume Switch On
■		10: Error
■		11: Not Configured
■	Bits: 4,3	Cruise Control Coast Switch (SPN 600)
		00: Coast Switch Off
		01: Coast Switch On
■		10: Error
■		11: Not Configured
■	Bits: 2,1	Cruise Control Set Switch (SPN 599)
		00: Set Switch Off
		01: Set Switch On
■		10: Error
■		11: Not Configured
■	Byte: 6	Cruise Control Set Speed (SPN 86)
	Resolution:	1 km/h / Bit, 0 km/h offset
■	Byte: 7	State_CC
■	Bits: 8–6	Cruise Control State (SPN 527)
		000: Off/Disabled
		001: Hold
		010: Accelerate
		011: Decelerate/Coast
		100: Resume
		101: Set
		110: Accelerator Override
		111: Not Available
■	Bits: 5-1	PTO State (SPN 976)
■		00000: Off/Disabled
■		00001: Hold (PTO Mode is Active)
		Note: Rel 38.0 or later
■	Byte: 8	Measured_idle_SW1
■	Bits: 8,7	Engine Shutdown Override Switch (SPN 1237)
		00: Off
		01: On
		11: Not Configured
■		Note: Rel 36.0 or later
	Bits: 6,5	Engine Test Mode Switch - N/A
	Bits: 4,3	Idle Decrement Switch - N/A
	Bits: 2,1	Idle Increment Switch - N/A

Fuel Economy (Liquid) – LFE

Transmission Rate :	100 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	242
Default priority:	6
PGN:	65,266 (0x00FEF2)
Bytes: 1,2	Fuel Rate (SPN 183)
	Resolution: 0.05 L/h / Bit, 0 L/h offset
Bytes: 3,4	Instantaneous Fuel Economy (SPN 184)
	Resolution: 1/512 km/L / Bit, 0 km/L offset
Bytes: 5,6	Average Fuel Economy (SPN 185)
	Resolution: 1/512 km/L / Bit, 0 km/L offset
Bytes: 7	Throttle Plate Position (Natural Gas) (SPN 51)
	Resolution: 0.4%/bit, 0% offset
	Note: Rel 36.0 or later
Bytes: 8	Not Defined

Ambient Conditions – AMB

Transmission Rate :	1 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	245
Default priority:	6
PGN:	65,269 (0x00FEF5)
Byte: 1	Barometric Pressure (SPN 108)
	Resolution: 0.5 kPa / Bit, 0 kPa offset
Byte: 2	Cab Interior Temperature - N/A
Bytes: 4,5	Ambient Air Temperature (SPN 171)
	Resolution: 0.03125°C / Bit, -273°C offset
Byte: 6	Air Inlet Temperature (SPN 172)
	Resolution: 1°C / Bit, -40°C offset
Bytes: 7,8	Road Surface Temperature - N/A

■ Inlet / Exhaust Conditions – IC

Transmission Rate :	0.5 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	246
Default priority:	6
PGN:	65,270 (0x00FEF6)
Byte: 1	Particulate Trap Inlet Pressure - N/A
Byte 2:	Boost Pressure (SPN 102)
	Resolution: 2 kPa / Bit, 0 kPa offset
Byte 3:	Intake Manifold Temperature (SPN 105)
	Resolution: 1°C / Bit, -40°C offset
Byte 4:	Air Inlet Pressure (SPN 106)
	Resolution: 2 kPa / Bit, 0 kPa offset
Byte 5:	Air Filter Differential Pressure (SPN 107)
	Resolution: 0.05 kPa / Bit, 0 kPa offset
Bytes: 6,7	Exhaust Gas Temperature (SPN 173)
	Resolution: 0.03125°C / Bit, -273°C offset
Byte: 8	Coolant Filter Differential Pressure - N/A

■ Turbocharger Information #6 – TC16

Note: Rel 36.0 or later

Transmission Rate :	1 sec
Data Length:	8 bytes
Data Page:	0
PDU format:	253
PDU specific:	211
Default priority:	6
PGN:	64,979 (0x00FDD3)
Bytes: 1,2	Turbocharger Compressor Outlet #1 Temperature (SPN 2629)
	Resolution: 0.03125°C/bit, —273°C offset
Bytes: 3,4	Turbocharger Compressor Outlet #2 Temperature – N/A
Bytes: 5,6	Turbocharger Compressor Outlet #3 Temperature – N/A
Bytes: 7,8	Turbocharger Compressor Outlet #4 Temperature – N/A

Exhaust Port Temperature #1 – EPT1

Transmission rate:	1 sec
Data Length:	8 bytes
Data Page:	0
PDU Format:	254
PDU Specific	163
Default Priority:	7
PGN:	65,187 (Ox00FEA3)
Byte: 1, 2	Exhaust Gas Port 1 Temperature (SPN 1137) Resolution: 0.03125°C/bit, –273°C offset
Byte: 3, 4	Exhaust Gas Port 2 Temperature (SPN 1138) Resolution: 0.03125°C/bit, –273°C offset
Byte: 5, 6	Exhaust Gas Port 3 Temperature (SPN 1139) Resolution: 0.03125°C/bit, –273°C offset
Byte: 7, 8	Exhaust Gas Port 4 Temperature (SPN 1140) Resolution: 0.03125°C/bit, –273°C offset

Exhaust Port Temperature #2 – EPT2

Transmission Rate:	1 sec
Data Length:	8 bytes
Data Page:	0
PDU Format:	254
PDU Specific:	162
Default Priority:	7
PGN:	65,186 (Ox00FEA2)
Bytes: 1, 2	Exhaust Gas Port 5 Temperature (SPN 1141) Resolution: 0.03125°C/bit, –273°C offset
Byte: 3, 4	Exhaust Gas Port 6 Temperature (SPN 1142) Resolution: 0.03125°C/bit, –273°C offset
Byte: 5, 6	Exhaust Gas Port 7 Temperature (SPN 1143) Resolution: 0.03125°C/bit, –273°C offset
Byte: 7, 8	Exhaust Gas Port 8 Temperature (SPN 1144) Resolution: 0.03125°C/bit, –273°C offset

■ Exhaust Port Temperature #3 – EPT3

Transmission Rate:	1 sec
Data Length:	8 bytes
Data Page:	0
PDU Format:	254
PDU Specific:	161
Default Priority:	7
PGN:	65,185 (Ox00FEA1)

- Byte: 1, 2 Exhaust Gas Port 9 Temperature (SPN 1145)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 3, 4 Exhaust Gas Port 10 Temperature (SPN 1146)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 5,6 Exhaust Gas Port 11 Temperature (SPN 1147)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 7, 8 Exhaust Gas Port 12 Temperature (SPN 1148)
Resolution: 0.03125°C/bit, –273°C offset

■ Exhaust Port Temperature #4 – EPT4

Transmission Rate:	1 sec
Data Length:	8 bytes
Data Page:	0
PDU Format:	254
PDU Specific:	160
Default Priority:	7
PGN:	65, 184 (Ox00FEA0)

- Byte: 1, 2 Exhaust Gas Port 13 Temperature (SPN 1149)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 3, 4 Exhaust Gas Port 14 Temperature (SPN 1150)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 5, 6 Exhaust Gas Port 15 Temperature (SPN 1151)
Resolution: 0.03125°C/bit, –273°C offset
- Byte: 7, 8 Exhaust Gas Port 16 Temperature (SPN 1152)
Resolution: 0.03125°C/bit, –273°C offset

Vehicle Electrical Power – VEP

Transmission Rate : 1 sec
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 247
Default priority: 6
PGN: 65,271 (0x00FEF7)
Byte: 1 Net Battery Current - N/A
Byte: 2 Alternator Current - N/A
Bytes: 3,4 Alternator Potential (voltage) - N/A
Bytes: 5,6 Electrical Potential (voltage) (SPN 168)
Resolution: 0.05 V / Bit, 0 V offset
Bytes: 7,8 Battery Potential (Voltage), Switched - N/A

Alternate Fuel #1 – A1

Transmission Rate : 500 ms
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 253
Default priority: 6
PGN: 65,277 (0x00FEFD)
Byte: 1 Blower Bypass Valve Position (SPN 72)
Resolution: 0.4% / Bit, 0% offset
Bytes: 2,3 Gas Supply Pressure (SPN 159)
Resolution: 0.5 kPa/bit, 0 kPa offset
Note: Rel 36.0 or later
Bytes: 4-8 Not Defined

Auxiliary Water Pump Pressure – AWPP

Transmission Rate : 1 sec
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 254
Default priority: 6
PGN: 65,278 (0x00FEFE)

Byte: 1 Auxiliary Pump Pressure (SPN 73)
Resolution: 16 kPa / Bit, 0 kPa offset
Byte: 2-8 Not Defined

Engine Fluid Level/Pressure #2 – EFL/P2

Transmission Rate : 500 ms
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 219
Default priority: 6
PGN: 65,243 (0x00FEDB)

Bytes: 1,2 Injection Control Pressure - N/A
Bytes: 3,4 Injector Metering Rail Pressure (SPN 157)
Resolution: 1/256 MPa / Bit, 0 MPa offset
Bytes: 5,6 Injector Timing Rail 1 Pressure–N/A
Bytes: 7,8 Injector Metering Rail 2 Pressure–N/A

High Resolution Vehicle Distance – VDHR

Transmission Rate : 1 sec
Data Length: 8 bytes
Data Page: 0
PDU format: 254
PDU specific: 193
Default priority: 6
PGN: 65,217 (0x00FEC1)

Bytes: 1-4 High Resolution Total Vehicle Distance (SPN 917)
Resolution: 5 m / Bit, 0 m offset (16.4 ft/Bit, 0 ft offset)
Bytes: 5-8 High Resolution Trip Distance (SPN 918)
Resolution: 5 m / Bit, 0 m offset (16.4 ft/Bit, 0 ft offset)

Electronic Engine Controller #4 – EEC4

Transmission Rate :	On Request	
Data Length:	8 bytes	
Data Page:	0	
PDU format:	254	
PDU specific:	190	
Default priority:	6	
PGN:	65,214 (0x00FEBE)	
Bytes: 1,2	Rated Engine Power (SPN 166)	■
	Resolution: 0.5 kW / Bit, 0 kW offset (0.67 hp / Bit, 0 hp offset)	
Bytes: 3,4	Rated Engine Speed (SPN 189)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Bytes: 5-8	Not Defined	

■ Fan Drive – FD

Transmission Rate : 1 sec
 Data Length: 8 bytes
 Data Page: 0
 PDU format: 254
 PDU specific: 189
 Default priority: 6
 PGN: 65,213 (0x00FEBD)

■ Byte: 1 Estimated Percent Fan Speed (SPN 975)

Resolution: 0.4% / Bit, 0% offset

Byte: 2 State_Fan_Drive

Bits: 8-5 Not Defined

■ Bits: 4-1 Fan Drive State (SPN 977)

0000: Fan Off

0001: Engine System - General

0010: Excessive Engine Air Temperature

0011: Excessive Engine Oil Temperature

0100: Excessive Engine Coolant Temperature

0101-1000: Not Defined

1001: Manual Control

1010: Transmission Retarder

1011: A/C System

1100: Timer

1101: Engine Brake

1110: Other

1111: Not Available

Bytes: 3,4 Fan Speed N/A

Bytes: 5-8 Not Defined

Electronic Retarder Controller #1 - ERC1

Transmission Rate :	100 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	240
PDU specific:	0
Default priority:	6
PGN:	61,440 (0x00F000)
Byte : 1	Status_ERC1
	Bits: 8,7 Retarder Enable - Shift Assist Switch - N/A
	Bits: 6,5 Retarder Enable - Brake Assist Switch - N/A
	Bits: 4-1 Engine/Retarder Torque Mode (SPN 900)
	0000: No Request (Default Mode)
	0001: Accelerator Pedal/Operator Selection
	0010: Cruise Control
	0011: PTO Governor
	0100: Road Speed Governor - N/A
	0101: ASR Control
	0110: Transmission Control
	0111: ABS Control
	1000: Torque Limiting - N/A
	1001: High Speed Governor - N/A
	1010: Braking System
	1011: Remote Accelerator - N/A
	1100: Not Defined
	1101: Not Defined
	1110: Other
	1111: Not Available
Byte: 2	Actual Retarder - Percent Torque (SPN 520)
	Resolution: 1% / Bit, -125% offset
Byte: 3	Intended Retarder Percent Torque - N/A
Byte: 4	Coolant Load Increase
	Bits: 8-5 Not Defined
	Bits: 3,4 Retarder Requesting Brake Light-N/A
	Bits: 1,2 Engine Coolant Load Increase-N/A
Byte: 5	Source address of controlling device for retarder control (SPN 1480)
Byte: 6	Drivers Demand Retarder-Percent Torque-N/A
Byte: 7	Retarder Selection, non-engine-N/A
Byte: 8	Actual Maximum Available Retarder-Percent Torque-N/A

■ Software Identification – SOFT

Transmission Rate :	On Request
Data Length:	30 bytes
Data Page:	0
PDU format:	254
PDU specific:	218
Default priority:	6
PGN:	65,242 (0x00FEDA)
Byte: 1	Number of Software Identification Fields - 7
Byte: 2	1st digit of Cal Major Version - ASCII
Byte: 3	2nd digit of Cal Major Version - ASCII
Byte: 4	3rd digit of Cal Major Version - ASCII
Byte: 5	* - Delimiter
Byte: 6	1st digit of Cal Minor Version - ASCII
Byte: 7	2nd digit of Cal Minor Version - ASCII
Byte: 8	3rd digit of Cal Minor Version - ASCII
Byte: 9	* - Delimiter
Byte: 10	1st Digit of Cal Edit Version - ASCII
Byte: 11	2nd Digit of Cal Edit Version - ASCII
Byte: 12	3rd Digit of Cal Edit Version - ASCII
Byte: 13	* - Delimiter
Byte: 14	1st Digit of Edit Build Version - ASCII
Byte: 15	2nd Digit of Edit Build Version - ASCII
Byte: 16	3rd Digit of Edit Build Version - ASCII
Byte: 17	* - Delimiter
Byte: 18	Software Release Type - ASCII
	X - Experimental
	T - Pre-production
	R - Production
Byte: 19	* - Delimiter
Byte: 20	DDEC Hardware Version - ASCII
	3 – DDEC III, 4 – DDEC IV, 5 – DDEC V
Byte 21:	* - Delimiter
Bytes: 22-29	ECM Serial Number - ASCII
Byte: 30	* - Delimiter

Component Identification – CI

Transmission Rate : On Request
Data Length: 37 bytes
Data Page: 0
PDU format: 254
PDU specific: 235
Default priority: 6
PGN: 65,259 (0x00FEEB)
Bytes: 1-5 DTDSC - ASCII
Byte: 6 * - Delimiter
Byte: 7-14 Engine Model Number - ASCII
Byte: 15 * - Delimiter
Byte: 16-25 Engine Serial Number - ASCII
Byte: 26 * - Delimiter
Byte: 27-36 Unit Number (VIN) - ASCII
Byte: 37 * - Delimiter

■ Retarder Configuration – RC

Transmission Rate : 5 sec or upon receipt of a destination specific request
 Data Length: 19 bytes
 Data Page: 0
 PDU format: 254
 PDU specific: 225
 Default priority: 6
 PGN: 65,249 (0x00FEE1)

Byte: 1 Type And Location

Bits: 8-5 Retarder Location (SPN 902)
 0000: Primary Engine Retarder For Compression Brakes
 0001: Primary Engine Retarder For Exhaust Brakes
 Bits: 4-1 Retarder Type (SPN 901)
 0011: Compression Release (Engine Retarder)
 0100: Exhaust

Byte: 2 Retarder Control Method (SPN 557)

255 - when not configured
 0 - DVB
 1 - Konstantdrossel
 2 - Low/High Compression
 3 - Low/Med/High Compression

Bytes: 3, 4 Retarder Speed At Idle, Point 1- N/A

Byte: 5 Percent Torque At Idle, Point 1 - N/A

Bytes: 6, 7 Maximum Retarder Speed, Point 2 - N/A

Byte: 8 Percent Torque At Maximum Speed, Point 2 - N/A

Bytes: 9, 10 Retarder Speed At Point 3 - N/A

Byte: 11 Percent Torque At Point 3 - N/A

Bytes: 12, 13 Retarder Speed At Point 4 - N/A

Byte: 14 Percent Torque At Point 4 - N/A

Bytes: 15,16 Retarder Speed At Peak Torque, Point 5 - N/A

Bytes: 17,18 Reference Retarder Torque - N/A

Bytes: 19 Percent Torque At Peak Torque, Point 5 - N/A

■ Engine Configuration – EC

Transmission Rate : 5 sec, on change of torque/speed points of more than 10% since last transmission, or upon receipt of a destination specific request.

Data Length: 34 bytes

Data Page: 0

PDU format: 254

PDU specific:	227	
Default priority:	6	
PGN:	65,251 (0x00FEE3)	
Bytes: 1,2	Engine Speed At Idle, Point 1 (SPN 188)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 3	Percent Torque At Idle, Point 1 (SPN 539)	■
	Resolution: 1% / Bit, -125% offset	
Bytes: 4, 5	Engine Speed At Point 2 (SPN 528)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 6	Percent Torque At Point 2 (SPN 540)	■
	Resolution: 1% / Bit, -125% offset	
Bytes: 7,8	Engine Speed At Point 3 (SPN 529)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 9	Percent Torque At Point 3 (SPN 541)	■
	Resolution: 1% / Bit, -125% offset	
Bytes: 10, 11	Engine Speed At Point 4 (SPN 530)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 12	Percent Torque At Point 4 (SPN 542)	■
	Resolution: 1% / Bit, -125% offset	
Bytes: 13, 14	Engine Speed At Point 5 (SPN 531)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 15	Percent Torque At Point 5 (SPN 543)	■
	Resolution: 1% / Bit, -125% offset	
Bytes: 16, 17	Engine Speed At High Idle, Point 6 (SPN 532)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Bytes: 18, 19	(KP) Of Endspped Governor - N/A	
Bytes: 20, 21	Reference Engine Torque (SPN 544)	■
	Resolution: 1 Nm / Bit, 0 Nm offset	
Byte: 22, 23	Maximum Momentary Engine Override Speed, Point 7 (SPN 533)	■
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 24	Maximum Momentary Engine Override Time Limit (SPN 534)	■
	Resolution: 0.1 s / Bit, 0 s offset	
Byte: 25	Requested Speed Control Range Lower Limit - 300 RPM (SPN 535)	■
	Resolution: 10 rpm / Bit, 0 rpm offset	
Byte: 26	Requested Speed Control Range Upper Limit (SPN 536)	■
	Resolution: 10 rpm / Bit, 0 rpm offset	
Byte: 27	Requested Torque Control Range Lower Limit (SPN 537)	■
	Resolution: 1% / Bit, -125% offset	
Byte: 28	Requested Torque Control Range Upper Limit (SPN 538)	■
	Resolution: 1 % / Bit, -125% offset	

■ Bytes: 29–30	Extended Range Requested Speed Control Range Upper Limit (SPN 1712)
	Note: Rel 36.0 or later
■ Bytes: 31–32	Resolution: 0.125 rpm/bit, 0 rpm offset
	Engine Moment of Inertia (SPN1794)
■ Bytes: 33–34	Resolution: 0.004 kgm ² /bit, 0 kgm ² offset
	Note: Rel 36.0 or later
	Default Engine Torque Limit – N/A

■ Adaptive Cruise Control – ACC1

Reception rate :	100 ms
Data length:	8 bytes
Data Page:	0
PDU format:	254
PDU specific:	111
PGN:	65135 (0x00FE6F)
Byte : 1	Speed of Forward Vehicle - N/A
Byte : 2	Distance to Forward Vehicle - N/A
Byte : 3	Adaptive Cruise Control Set Speed - N/A
Byte : 4	ACC Status 1
	Bits: 8,7 Not Defined
	Bits: 6-4 Adaptive Cruise Control Set Distance Mode - N/A
	Bits: 3-1 Adaptive Cruise Control State
	110: Error
	111: Not Available
Byte : 5	Road Curvature - N/A
Byte : 6	Not Defined
Byte : 7	Bits: 8,7 Not Defined
	Bits: 5,6 ACC Distance Alert Signal–N/A
	Bits: 3,4 ACC System Shutoff Warning–N/A
	Bits: 1,2 ACC Target Detected–N/A
Byte : 8	Not Defined
Note:	This message is received only from an ACC device. It is not transmitted by the ECM.

Torque Speed Control — TSC1

Reception Rate :	10 ms	
Data Length:	8 bytes	
Data Page:	0	
PDU format:	0	
PDU specific:	Destination Address	
Default priority:	3	
PGN:	0 (0x000000)	
Byte : 1	Control Bits	
	Bits: 8,7	Not Defined
	Bits: 6,5	Override Control Mode Priority (SPN 897)
		00: Highest
		01: High
		10: Medium
		11: Low
	Bits: 4,3	Requested Speed Control Conditions - N/A
	Bits: 2,1	Override Control Modes (SPN 695)
		00: Override Disabled
		01: Speed Control
		10: Torque Control
		11: Speed/Torque Limit
Byte: 2,3	Requested Speed / Speed Limit (SPN 898)	
	Resolution: 0.125 rpm / Bit, 0 rpm offset	
Byte: 4	Requested Torque / Torque Limit (SPN 518)	
	Resolution: 1% / Bit, -125% offset	
	0-125% for engine torque requests	
	-125-0% for retarder torque requests	
Bytes: 5-8	Not Defined	

Electronic Transmission Controller #1 – ETC1

Reception Rate :	10 ms
Data Length:	8 bytes
Data Page:	0
PDU format:	240
PDU specific:	2
Default priority:	3
PGN:	61,442 (0x00F002)
Byte : 1	Status_ETC1
	Bits: 8,7 Not Defined
	Bits: 6,5 Shift in Progress (SPN 574)
	00: shift is not in process
	01: shift in process
	11: N/A
	Bits: 4,3 Torque Converter Lockup Engaged (SPN 573)
	00: Torque Converter Lockup Disengaged
	01: Torque Converter Lockup Engaged
	Note: Rel 38.0 or later
	Bits: 2,1 Driveline Engaged
	00: Driveline Disengaged
	01: Driveline Engaged
	11: N/A
Byte: 2,3	Output Shaft Speed (SPN 191)
	Resolution: 0.125 rpm / Bit, 0 rpm offset
Byte: 4	Percent Clutch Slip - N/A
Byte: 5	Command_ETC1
	Bits: 8-5 Not Defined
	Bits: 4-3 Progressive Shift Disabled (SPN 607)
	00: Progressive Shift Is Not Disabled
	01: Progressive Shift Is Disabled
	11: N/A
	Bits: 2,1 Momentary Engine Overspeed Enable (SPN 606)
	00: Momentary Engine Overspeed Is Disabled
	01: Momentary Engine Overspeed Is Enabled
	11: N/A
Bytes: 6,7	Input Shaft Speed - N/A
Byte: 8	Source Address of Controlling Device for Transmission Control-N/A

6.4.3 SAE J1939/21 DATA LINK LAYER

The Data Link Layer Parameter Group number (PGN) response definitions are described in the following sections.

Acknowledge / Negative Acknowledge – ACK/NACK

Transmission Rate	As Needed
:	
Data Length:	8 bytes
Data Page:	0
PDU format:	232
PDU specific:	Destination Address
Default priority:	6
PGN:	59, 392 (0x00E800)
Byte : 1	Control Byte
	0: Positive Acknowledgment (ACK)
	1: Negative Acknowledgment (NACK)
	2: Access Denied (PGN supported but access denied)
Byte: 2	Group Function Value (if applicable)- N/A
Bytes: 3-5	Not Defined
Bytes: 6	Least Significant Byte of PGN of Requested Information
Byte: 7	Middle Byte of PGN of Requested Information
Byte: 8	Most Significant Byte of PGN of Requested Information

Requests

Transmission Rate :	As Needed
Data Length:	3 bytes
Data Page:	0
PDU format:	234
PDU specific:	Destination Address
Default priority:	6
PGN:	59,904 (0x00EA00)
Byte : 1	Least Significant Byte of PGN
Byte: 2	Byte 2 of PGN
Byte: 3	Most Significant Byte of PGN

NOTE:

It is recommended that requests occur no more than 2 or 3 times per second.

NOTE:

For any unsupported PGN that are destination specific DDEC will transmit a NACK. DDEC will not transmit a NACK to a global request.

Transport Protocol Broadcast Announce (TP.CM_BAM)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format:	236
PDU Specific:	255
Default Priority:	7
Byte: 1	Control Byte — set to 32 for CM_BAM
Byte: 2, 3	Total Message Size, number of bytes
Byte: 4	Total number of packets
Byte: 5	Not Defined
Byte: 6–8	PGN of packeted message

Transport Protocol Data (TP.DT)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format	235
PDU Specific:	255
Default Priority:	7

Byte: 1	Sequence Number
Byte 2–8	Packetized Data (7 bytes)

NOTE:

The last packet of a multi-packet parameter group may require less than eight data bytes. The extra bytes will be filled with 255.

NOTE:

The data packets are spaced between 50 and 200 ms.

Transport Protocol Request to Send (TP.CM_RTS)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format:	236
PDU Specific:	Destination Address
Default Priority:	7

Byte: 1	Control Byte
	16 — Designation Specific Request_To_Send (RTS)
Bytes: 2, 3	Total Message Size, number of bytes
Byte: 4	Total Number of Packets, zero not allowed
Byte: 5	Not Defined
Bytes: 6–8	Parameter group Number (PGN)

NOTE:

The ECM does not support incoming multi-placket messages and will ignore TP.CM_RTS messages.

Transport Protocol Connection Abort (TP.ConnAbort)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format:	236
PDU Specific:	Destination Address
Default Priority:	7

Byte: 1	Control Byte
	255 — Connection Abort
Byte: 2–5	Not Defined
Bytes: 6–8	Parameter Group Number (PGN)

NOTE:

This message is sent if any of the time outs occurs or an invalid packet request occurs.

Transport Protocol End of Message (TP.EndofMsgACK)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format:	236
PDU Specific:	Destination Address
Default Priority:	7

Byte: 1	Control Byte
	19–End_of_Message Acknowledge
Bytes: 2, 3	Total Message Size, number of bytes
Byte: 4	Total Number of Packets, zero not allowed
Byte 5:	Not Defined
Bytes: 6–8	Parameter Group Number (PGN)

Transport Protocol Clear to Send (TP.CM_CTS)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format:	236
PDU Specific:	Destination Address
Default Priority:	7

Byte: 1	Control Byte
	17 — Destination Specific Clear_to_Send (CTS)
Byte: 2	Number of packets that can be sent
Byte: 3	Next packet number to be sent
Bytes: 4-5	Not Defined
Bytes: 6-8	Parameter Group Number (PGN)

Transport Protocol Data (TP.DT)

Transmission Rate:	As Required
Data Length:	8 bytes
Data Page:	0
PDU Format	235
PDU Specific:	Destination Address
Default Priority:	7

Byte: 1	Sequence Number
Bytes: 2–8	Packetized Data (7 Bytes)

NOTE:

The last packet of a multi-packet parameter group may require less than eighty data bytes. The extra bytes will be filled with 255.

The data packets will be spaced no more than 200 ms.

6.4.4 SAE J1939/73 DIAGNOSTIC LAYER

The Diagnostic Layer Parameter Group Number (PGN) response definitions are described in the following sections:

Active Diagnostic Trouble Codes – DM1

Note: Rel 32.0 or later

Transmission Rate: Whenever a DTC becomes an active fault and at a normal update rate of one second or longer, and then becomes inactive, a DM1 message will be transmitted to reflect this state change. If a different DTC changes state within one second update period, a new DM1 message is transmitted to reflect this new DTC.

Data Length: Variable

Data Page: 0

PDU Format: 254

PDU Specific: 202

Default Priority: 6

PGN: 65226 (0x00FECA)

Byte: 1 Bits: 8–7 Malfunction Indicator lamp Status–N/A

Bits: 6–5 Red Stop Lamp Status (SPN 623)
00 – Lamp Off
01 – Lamp On

Bits: 4–3 Amber Warning Lamp Status (SPN 624)
00 – Lamp Off
01 – Lamp On

Bits: 2–1 Protect lamp Status–N/A

Byte: 2 Bits: 8–1 Reserved for SAE assignment Lamp Status (set to 0xFF)

Byte: 3 Bits: 8–1 SPN, 8 least significant bits of SPN

Byte: 4 Bits: 8–1 SPN, 8 second byte of SPN

Byte: 5 Bits: 8–6 SPN, 3 most significant bits
Bits: 5–1 FMI

Byte: 6 Bit: 8 SPN Conversion Method (SPN 1706)
Bits: 7–1 Occurrence Count (SPN 1216)

Byte: 7 Bits: 8–1 Not Defined (Set to 0xFF)

Byte: 8 Bits: 8–1 Not Defined (Set to 0xFF)

Previously Active Diagnostic Trouble Codes – DM2

Note: Rel 32.0 or later

Transmission Rate:		On Request
Data Length:		Variable
Data Page:		0
PDU Format:		254
PDU Specific:		203
Default Priority:		6
PGN:		65227 (0x00FECB)
Byte: 1	Bits: 8–7	Malfunction Indicator lamp Status–N/A
	Bits: 6–5	Red Stop Lamp Status (SPN 623) 00 – Lamp Off 01 – Lamp On
	Bits: 4–3	Amber Warning Lamp Status (SPN 624) 00 – Lamp Off 01 – Lamp On
	Bits: 2–1	Protect lamp Status–N/A
Byte: 2	Bits:8–1	Reserved for SAE assignment Lamp Status (set to 0xFF)
Byte: 3	Bits:8–1	SPN, 8 least significant bits of SPN
Byte: 4	Bits:8–1	SPN, 8 second byte of SPN
Byte: 5	Bits:8–6	SPN, 3 most significant bits
	Bits:5–1	FMI
Byte: 6	Bit: 8	SPN Conversion Method (SPN 1706)
	Bits:7–1	Occurrence Count (SPN 1216)
Byte: 7	Bits:8–1	Not Defined (Set to 0xFF)
Byte: 8	Bits:8–1	Not Defined (Set to 0xFF)

Diagnostic Data Clear/Reset of Previously Active DTCs – DM3

Note: Rel 33.0 or later

Transmission Rate:	On Request using PGN 59904
Data Length:	0
Data Page:	0
PDU Format:	254
PDU Specific:	204
Default Priority:	6
PGN:	65228 (00FECC)

All of the non-permanent diagnostic information pertaining to previously active (inactive) visible diagnostic trouble codes will be erased when this PG is requested. The diagnostic data associated with active trouble codes will not be affected.

Diagnostic Data Clear/Reset of Active DTCs – DM11

Note: Rel 33.0 or later

Transmission Rate:	On Request using PGN 59904
Data Length:	0
Data Page:	0
PDU Format:	254
PDU Specific:	211
Default Priority:	6
PGN:	65235 (0x00FED3)

All of the non-permanent diagnostic information pertaining to active visible diagnostic trouble codes will be erased when this PG is requested. The diagnostic data associated with previously active (inactive) trouble codes will not be affected.

Stop Start Broadcast – DM13

Transmission Rate :	As Needed
Data Length:	8 bytes
Data Page:	0
PDU format:	223
PDU specific:	Destination Address
Default priority:	3

PGN:	57,008 (0x00DF00)	
Byte : 1	SAE Primary Links	
	Bits: 8,7	Current Data Link (SPN 1230)
		00: Stop Broadcast
		01: Start Broadcast
		11: Don't Care
	Bits: 6,5	J1587 * (SPN 608)
		00: Stop Broadcast
		01: Start Broadcast
		11: Don't Care
	Bits: 4,3	J1922 † (SPN 622)
		00: Stop Broadcast
		01: Start Broadcast
		11: Don't Care
	Bits: 2,1	J1939 Network #1, Primary Vehicle Network ‡ (SPN 639)
		00: Stop Broadcast
		01: Start Broadcast
		11: Don't Care
Byte: 2	Other Networks #1	
	Bits: 8,7	J1939 Network #2 - N/A
	Bits: 6,5	ISO 9141 - N/A
	Bits: 4,3	J1850 - N/A
	Bits: 2,1	Other, Manufacture Specified Port - N/A
Byte: 3	Other Networks #2	
	Bits: 8,7	J1939 Network #3 - N/A
	Bits: 6-1	Not Defined
Byte: 4	Control Flags	
	Bits: 8-5	Hold Signal
		0000: All Devices (SPN 1236)
		0001: Devices whose broadcast state has been modified
		0010-1110: Not Defined
		1111: N/A
	Bits: 4-1	Not Defined
Bytes: 5-8	Not Defined	

* Only the broadcast data for the J1587 data link will be shutdown. The ECM will still respond to requests for data.

† Only the broadcast data for the J1922 data link will be shutdown. The ECM will still respond to commands from other devices.

‡ Only the broadcast data for the J1939 data link will be shutdown. The ECM will still respond to requests for data.

THIS PAGE INTENTIONALLY LEFT BLANK

7 TOOLS

Section	Page
7.1 DIAGNOSTIC REQUEST SWITCH	7-3
7.2 VEHICLE ELECTRONIC PROGRAMMING SYSTEM	7-5
7.3 DIAGNOSTIC DATA READER	7-7
7.4 DETROIT DIESEL DIAGNOSTIC LINK	7-11
7.5 DDEC REPROGRAMMING SYSTEM	7-13
7.6 DDEC ENGINE PROTECTION SIMULATION KIT	7-19
7.7 DDEC MANUALS	7-21

THIS PAGE INTENTIONALLY LEFT BLANK

7.1 DIAGNOSTIC REQUEST SWITCH

The Diagnostic Request Switch is used to activate the CEL/SEL lights to flash codes. Active codes are flashed on the SEL and inactive codes are flashed on the CEL (see Figure 7-1). Inactive codes are flashed in numerical order, active codes are flashed in the order received, most recent to least recent. The Diagnostic Request Switch can be used as the SEO switch also. The codes are flashed out of the ECM connected to the switch.

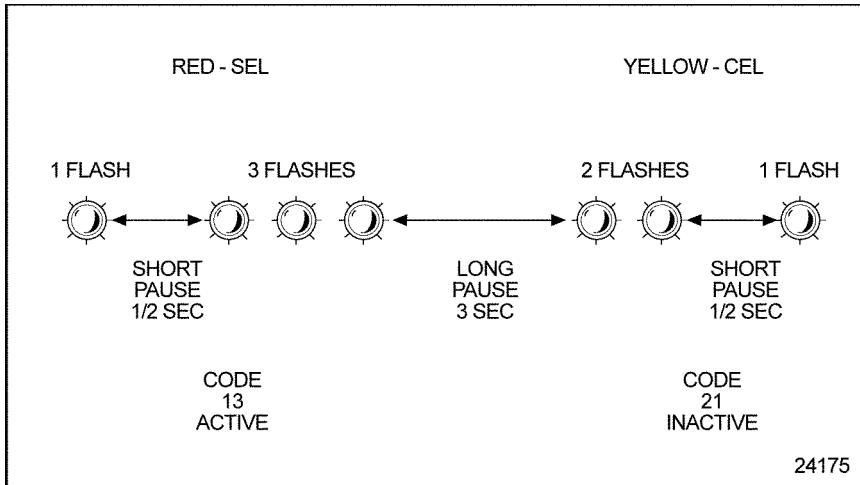


Figure 7-1 Flash Codes

The Diagnostic Request Switch is used to flash codes in the following circumstances:

- ☐ The engine is not running and ignition is on
- ☐ The engine is idling and not in an "engine protection" condition

In both circumstances activating and holding the Diagnostic Request Switch will flash out the diagnostic codes. For additional information, refer to section 5.4, "Diagnostics."

THIS PAGE INTENTIONALLY LEFT BLANK

7.2 VEHICLE ELECTRONIC PROGRAMMING SYSTEM

The purpose of the DDEC Vehicle Electronics Programming System (VEPS) is to give OEMs the ability to configure many ECM parameters. This allows DDEC features to be tailored to the specific customer requirements when the vehicle is assembled. Some of the features which may be configured by VEPS are the transmission type, cruise control, vehicle speed limit, idle shutdown, rating switches, digital inputs, and digital outputs.

7.2.1 SOFTWARE

The VEPS PC software package consists of the several files which are extracted when the software installation program is executed. A System Users Manual which defines the available parameters is included with the software package at the time of purchase.

The PC interface utilizes a communications driver which is defined in the TMC Recommended Practice RP1210A. The RP1210A software is used to translate the datalink signal of the ECM to the format required by Windows programs. The RP1210A communications driver is included as part of the VEPS software package.

7.2.2 HARDWARE

The hardware portion of the VEPS programming package includes the interface module and cables. The components that are included in the package are listed in Table 7-1.

Part Description	Part Number
100 Foot Cable	23512893
SAE J1708 6-Pin Dash Connector	23515957
J1708/RS-232 Translator Box	23512415
6 foot Cable	23515869

Table 7-1 VEPS Hardware

A cable kit, listed in Table 7-2, is also available.

Part Description	Part Number
Cable Kit (includes the 100 foot cable and the 6-pin dash connector)	23512980

Table 7-2 VEPS Cable Kit

A translator and cable kit, listed in Table 7-3, is also available.

Part Description	Part Number
Translator Kit (includes the J1708/RS-232 translator box, 100 foot cable and the 6-pin dash connector)	23512895

Table 7-3 VEPS Translator and Cable Kit

The VEPS software kit, listed in Table 7-4, is available.

Part Description	Part Number
Software Kit (includes the RP1202 Software and the VEPS Software)	Contact DDC Application Engineering

Table 7-4 VEPS Software Kit

7.3 DIAGNOSTIC DATA READER

The hand-held DDR plugs into the Diagnostic Data Link Connector located in the Vehicle Interface Harness (refer to section 3.10.4). This connection allows the DDR to receive data from the ECM. The DDR is used to display:

- ☐ Engine Description via the ENGINE DATA LIST menu
- ☐ Codes via the DIAGNOSTIC CODES menu
- ☐ View/reprogram certain operating parameters

A printout of the information displayed on the DDR can be obtained by attaching a printer.

NOTE:

Suite 8 is required for Rel 33.0 software and later.

7.3.1 REQUIREMENTS

The components and part numbers are listed in Table 7-5. Also see Figure 7-2.

Component	Part Number
Pro-Link Plus with Case	108004
Multi Protocol Cartridge (MPC)	208040
Detroit Diesel Application Suite 8 PC Card, DDEC III/IV	802015
Detroit Diesel MPC PCMCIA Manual	901012
Power and Data Cable (2 pc)	501002
Data Cable Only	501003
Power Cable Only	501004
PC Terminal Cable 8 ft	501005
6-pin Deutsch Adapter w/Atari End	408024
9-pin Deutsch Adapter w/Atari End	408028
6-pin and 9-pin Deutsch Adapter w/Atari End	408048
Storage Case	217003

Table 7-5 Diagnostic Data Reader/Pro-Link® Components and Part Numbers

Pro-Link® is a registered trademark of Micro Processor Systems, Inc.

NOTE:

Printers used in Europe must use a European power supply as listed in Table 7-6. Do not substitute an AC adapter for the European power supply.

Component	Part Number
Pro-Link Printer with Serial Adapter & AC Adapter	178001
Pro-Link Printer with 220–240 V Euro Adapter	171007
Printer AC Adapter	178003
Thermal Paper — 5 rolls	171002
Printer Battery Pack	178004
Euro Power Supply Only	400058

Table 7-6 DDR/Pro-Link® Printers and Power Supply

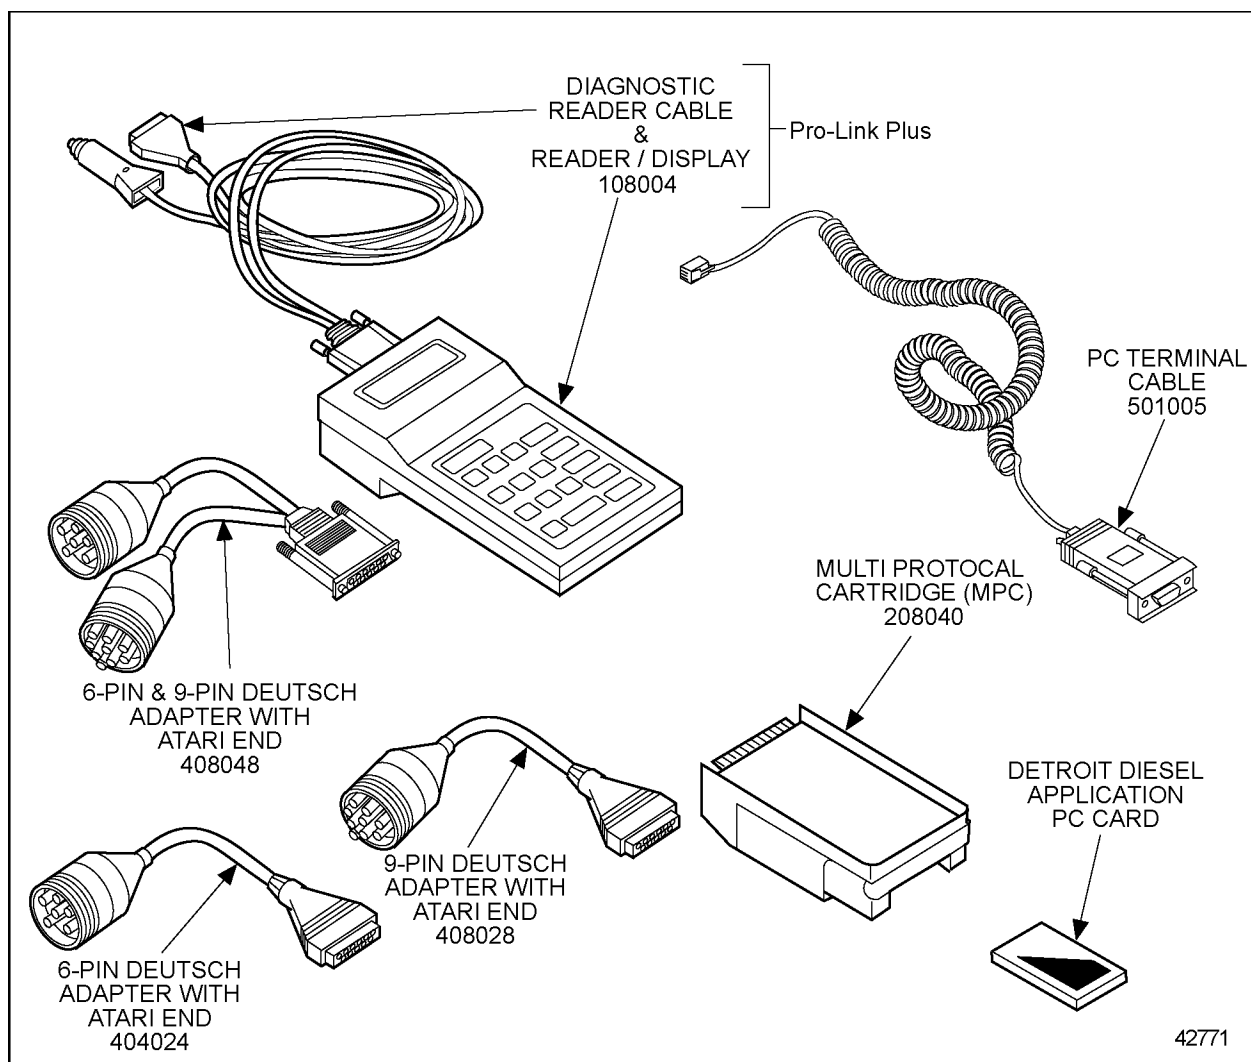


Figure 7-2 Pro-Link Plus/Diagnostic Data Reader Components



CAUTION:

To avoid injury from loss of vehicle/vessel control, the operator of a DDEC equipped engine must not attempt to use or read the Diagnostic Data Reader when the vehicle/vessel is moving.

The DDR can be purchased from:

Nexiq Technologies

Phone: 1-800-639-6774

www.nexiq.com

THIS PAGE INTENTIONALLY LEFT BLANK

7.4 DETROIT DIESEL DIAGNOSTIC LINK

The Detroit Diesel Diagnostic Link® (DDDL) is a sophisticated PC software package supporting the setting up, maintenance and repair of engines using the DDEC IV ECM. For additional information, refer to the on-line Help within the program.

7.4.1 CALIBRATION

You can use the DDDL to:

- ☐ Read and display the current calibration from an ECM.
- ☐ Create a calibration for the ECM on an individual engine.
- ☐ Save a single calibration with an ECM password so that the same calibration can be used conveniently for a fleet of vehicles with the same password, or can be used by a technician who does not have access to the password.
- ☐ Change the engine rating of a vehicle.
- ☐ Set the injector calibration when you replace the injectors.
- ☐ View an audit trail of ECM and injector calibration changes.

7.4.2 DIAGNOSTICS AND MAINTENANCE

You can use the Detroit Diesel Diagnostic Link to:

- ☐ Monitor a wide range of parameters while connected live to the ECM .
- ☐ Select a group of these parameters and plot how they have varied over the last two minutes.
- ☐ Take and save a snapshot of how the parameters vary over a period of time, so that you can replay the snapshot for detailed analysis.
- ☐ Monitor fault codes as they occur while connected live to the ECM. You can also clear any inactive fault codes stored in the ECM.
- ☐ Take a snapshot recording the fault codes occurring over a period of time, and relate their occurrence to the values of measurements made by the ECM.
- ☐ Test for the effect on performance of cutting out individual cylinders.
- ☐ View a record of the injector timings.
- ☐ Set the ECM output functions to particular values to support troubleshooting.
- ☐ Display specific troubleshooting help for any fault codes that occur, or have occurred.
- ☐ View engine and trip totals, and reset the trip counters in the ECM.
- ☐ Reset the ECM counters monitoring component usage when you replace the components.

THIS PAGE INTENTIONALLY LEFT BLANK

7.5 DDEC REPROGRAMMING SYSTEM

The DDEC Reprogramming System (DRS) is composed of Programming Software, DDECcomm Mainframe Communications software, all the hardware required to connect a Personal Computer to the ECM, and a user manual explaining the use of the software. The DRS software is used to reprogram calibrations, modify customer calibration values, upgrade ECM software versions, update injector calibration codes, and program blank ECMs. The DDECcomm software is used to communicate via modem to the DDC Mainframe computer which stores all the DDEC Calibrations.

7.5.1 REQUIREMENTS

The DRS and DDECcomm software require a Personal Computer which meets certain minimum requirements. These minimum requirements include a pentium microprocessor with 16 MB of RAM, a modem, and the Windows 95 Operating System. DDC also sells kits which include a Laptop PC, please contact your Detroit Diesel representative for current Laptop specifications.

7.5.2 DRS WELCOME SCREEN

There are several choices on the Welcome Screen. The following sections describe these menu options.

Program ECM

Reprogram ECMs with a customer calibration that has previously been downloaded from the DDC mainframe computer. The customer configurable parameters are retained through this type of a reprogramming.

Program Fleet ECM

Reprogram fleet units from a single customer calibration that has previously been downloaded from the DDC mainframe computer. The customer configurable parameters are retained through this type of a reprogramming.

Program ECM With Mainframe Data

Reprogram ECMs with a customer calibration that has previously been downloaded from the DDC mainframe computer. Unlike the standard Program ECM option, this option will overwrite the customer configurable parameters, resulting in a calibration exactly like the one created by the factory.

Display Customer Calibration

Displays electronic parameter settings currently programmed in an ECM.

Update Calibration at DDC

This function is used to store the ECM's electronic parameters on the PC. After performing this option, the Upload History function in the DDEC Mainframe Communications Program (DDECcomm) can be used to send the ECM data to the DDC mainframe computer.

Engine Configuration Data

Displays engine and ECM data information.

Update Customer Calibration

Similar to the Display Customer Calibration option, this option allows the electronic parameters to be updated. A customer password is required to perform this function. The following groups of information, listed in Table 7-7, can be modified.

Parameters That Can Be Updated		
Air Compressor	Output Config	VSG Configuration
Auto Cruise Resume	Idle Adjustment	Vehicle Number
CLS Polarity	Idle Shutdown	Function Lockout
Cruise Control	Rating	Lockout Password
Cruise Switch VSG	Rating Receiver #1	Fan Timer
Customer Password	Rating Receiver #2	Engine Brakes
Droop	Rating Password	ESS Config
Dynamic Braking	Progressive Shift	Half Engine Idle
Engine Protection	Transmission	TOP 2 Switch
Receiver Protection	Vehicle Spd Limiting	Fuel Quality Factor
Pressure Sensor Governor	Vehicle Spd Sensor	Low Gear Torque Limiting
Fuel Econ Incentive	Vehicle ID Number	Sensor Configuration
Input Config	Smart Cruise	Governor Gain
PasSmart	Maintenance Alert System	Engine Overspeed
Data Pages / DDEC Data	—	—

Table 7-7 Parameters that can be Updated with the Update Customer Calibration Option

Update Injector Calibration

This option displays a graphical representation of the engine allowing the injector calibration code to be updated. An injector password is required.

Update ECM Accumulators

Update ECM with engine data such as idle hours, engine hours, cruise hours, miles, etc.

DDC Mainframe Communications

This option is used to select DDECcomm to communicate with the server.

Print ECM Parameters

This menu item queries the ECM for the Customer Calibration information and formats it into a report which can be printed out on a printer attached to the parallel port on the computer.

7.5.3 DRS MENU OPTIONS

Other functions available from the pull-down menu at the top of the screen are listed below.

Upgrade ECM Software

New versions of DDEC ECM software may be programmed into customer's ECMs with this option. There is a nominal charge each time this function is performed.

Reset Customer Calibration

Same function as update customer calibration.

Change Passwords

Allows changes to the customer, group lockout, or rating password.

Random Customer Password

This option creates a random customer calibration password.

Random Rating Password

This option creates a random rating password.

Random Lockout Password

This option creates a random lockout password.

Display Available ECM S/W Versions

Displays ECM software versions that are available on the PC. These versions are used to electronically upgrade ECM software for DDEC III and IV.

Display Station Log File

Displays a file containing system usage information.

Display Downloaded Units

This menu item displays the Unit Numbers of the engines which have been downloaded from the mainframe and are available for programming.

Comms Setting

This option allows changes to the comms protocol, interface hardware being used, and the baud rate.

Options

This option allows entry of the application ID for connecting to the DDC server.

7.5.4 DDECCOMM

DDECcomm is a Win95 program which can be invoked by selecting the DDEC Server Interface icon on the Windows desktop or through the Start button via Programs | DDEC Electronic Controls | DDEC Communications. The following menu options are available in this program.

Download Engine Serial Calibration(s)

This option is used to download any changed or desired unit calibrations from the DDC mainframe computer. These calibrations are stored on the PC for a maximum of 14 days, after that period they are automatically deleted.

Download Fleet Calibration(s)

This option allows the download of a single "fleet" unit from the mainframe to the PC. This "fleet" unit calibration may be used to program multiple units in a fleet via the Program Fleet ECM option discussed above.

Upload History

This option takes the programming history on the PC and uploads it to the DDC mainframe. This allows DDC to maintain a current image of the calibration status should further service be required. The history file must first be created by running the Update Calibration at DDC menu option in the DRS Programming Software.

Display Available ECM S/W Versions

Displays ECM software versions that are available on the PC. These versions are used to electronically upgrade ECM software for DDEC III and IV.

Display Station Log File

Displays a file containing system usage information.

Display Downloaded Units

This menu item displays the Unit Numbers of the engines which have been downloaded from the mainframe and are available for programming.

Update Logon Parameters

This option is used to configure mainframe logon and network settings. All user information may be updated when this option is selected.

THIS PAGE INTENTIONALLY LEFT BLANK

7.6 DDEC ENGINE PROTECTION SIMULATION KIT

The DDEC Engine Protection Simulation Kit is used to reduce diagnostic troubleshooting time for DDEC sensors. The normal use for these false sensors is to simulate an engine fault that would result in the engine protection system triggering a code in the DDEC ECM. This kit can also be used for testing and verification of the engine shutdown system, fan control outputs, and coolant level outputs. This will also be useful in simulating an engine protection fault to show customers how the DDEC protection system will react in the event of a failure that would normally cause damage to the engine.

To use, plug the simulator into the connector currently used for the appropriate sensor. Start and run the engine and DDEC will trigger the appropriate code for that fault.

The DDEC Engine Protection Simulation Kit components and part numbers are listed in Table 7-8.

Component	Part Number
Coolant Low Level Simulator	23524785
High Oil/Coolant Temperature Simulator	23524787
Low Oil Pressure Simulator	23524786

Table 7-8 DDEC Engine Protection Simulation Kit, P/N: 23526923

The High Crankcase Pressure Simulator (P/N: 23524784) is for the Series 4000 only and is not included in kit.

7.6.1 COOLANT LEVEL LOW SIMULATOR

This simulator is preset to advise the ECM that the coolant is low. Use only for DDEC III or IV. This simulator can be used to:

- ☐ Verify protection function.
- ☐ Test low coolant level light output to ensure it is configured to the correct output and correct polarity (activates the output).
- ☐ Determine if the actual sensor is bad/shorted. A bad/shorted CLS can result in other fault codes.

7.6.2 HIGH OIL/COOLANT TEMPERATURE SIMULATOR

This simulator is preset to provide a 250°F (121°C) signal to the ECM. Use for any DDEC. This simulator can be used to:

- ☐ Test coolant temperature shutdown logic/protection.
- ☐ Test oil temperature shutdown logic/protection.
- ☐ Test coolant temperature high output.
- ☐ Test oil temperature high output.
- ☐ Fake coolant temperature high to test fan control circuit.

- ☐ Fake oil temperature high to test fan control circuit.

7.6.3 LOW OIL PRESSURE SIMULATOR

This simulator is preset to provide oil pressure signal of 0 psi (0 kPa). This simulator can be used to:

- ☐ Provide a known pressure (oil pressure) for engine protection testing.
- ☐ Provide a known pressure (fuel pressure) for fault code testing.
- ☐ Provide a known pressure (coolant pressure) for engine protection testing.
- ☐ Verify if correct output is configured for low oil pressure (activates the output).
- ☐ Test current OPS to determine if a shorted sensor is causing other codes.
- ☐ Test current FPS to determine if a shorted sensor is causing other codes.
- ☐ Test current CPS to determine if a shorted sensor is causing other codes.

7.6.4 HIGH CRANKCASE PRESSURE SIMULATOR (SERIES 4000 ONLY)

The High Crankcase Pressure Simulator (P/N: 23524784) is not included in the kit. This simulator is preset to provide a crankcase pressure signal of 12 psi / 83 kPa.

7.7 DDEC MANUALS

The following DDC manuals provide more information about troubleshooting and specific DDEC features:

- ☐ *Construction & Industrial EDM and AIM Installation and Troubleshooting (7SA801)*
- ☐ *Construction & Industrial EDM and AIM User Manual (6SE710)*
- ☐ *ProDriver DC User Manual(6SE703)*
- ☐ *Electronic Fire Commander Installation and Troubleshooting (6SE476)*
- ☐ *Optimized Idle - DDEC III/IV - Installation and Troubleshooting (7SA741)*
- ☐ *DDEC III/IV Single ECM Troubleshooting (6SE497)*
- ☐ *IRIS User and Installation Guide(6SE0036)*
- ☐ *Ether Start Installation (7SA727)*

THIS PAGE INTENTIONALLY LEFT BLANK

8 APPLICATIONS

Section	Page
8.1 APPLICATION CODE SYSTEM	8-3
8.2 TYPICAL ON-HIGHWAY APPLICATION	8-11
8.3 TYPICAL INDUSTRIAL APPLICATION - ON-HIGHWAY CRANE	8-13
8.4 TYPICAL FIRE TRUCK APPLICATION	8-15

THIS PAGE INTENTIONALLY LEFT BLANK

8.1 APPLICATION CODE SYSTEM

DDC Application Engineering, Product Engineering, and DDEC Engineering work together to establish and define the Electronic Control Module (ECM) functions and the electronic parameters that are maintained by the DDEC Application Code System (ACS). DDC Application Engineering creates application codes (6N4C groups) that define defaults and validation ranges for the ECM features. ACS provides the flexibility to customize engine speed governing and control, engine protection, and communications. DDC Product Distribution and Distributors use the application codes to process and further customize customers' orders.

This section contains a blank copy of the "DDEC ACS Worksheet." This worksheet may be used by the OEM, or distributor, to specify desired DDEC parameters and help determine the proper 6N4C group. These parameters include:

- ☐ Type of transmission or powertrain
- ☐ Engine speed governing
 - ☐ Idle speed
 - ☐ High idle speed
 - ☐ Droop
 - ☐ Cruise Control options
- ☐ Engine protection strategy
- ☐ DDEC digital inputs
- ☐ DDEC digital outputs

DDEC Nonroad Application Specification

6N4C Group	
(To be assigned by DDC Application Engineering)	

Transmission (The transmission codes are listed in Table 8-1 on page 8-7.)				
Transmission Code:				

Governing				
Type (Circle One)		VSG Only	LSG Only	VSG & LSG
Number of VSG Throttle Locations (0, 1, or 2)				
Number of LSG Throttle Locations (0, 1, or 2)				
VSG MAX RPM	400 to 2500 RPM			
VSG MIN RPM	400 to 2500 RPM			
VSG ALT MIN RPM	400 to 2500 RPM			
VSG DROOP	0 to 300 RPM			
HOT IDLE	400 to 2500 RPM			
COLD IDLE	750 to 1050 RPM			
LSG DROOP	0 to 300 RPM			
Idle Operation at Zero VSG	Yes	No		
Note: VSG ALT MIN RPM must be greater than VSG MIN RPM. LSG DROOP must be greater than or equal to VSG DROOP.				

Cruise Switch VSG				
Cruise Switch VSG (Circle One)		Yes		No
Initial Speed	400 to 2500			
RPM Increment	0 to 250			

Idle Timer Shutdown				
Idle Timer Shutdown (Circle One)		Yes		No
Time	1 to 99 Minutes			
Operates On		Idle Only		Idle & VSG
Override		Yes		No

DDEC Nonroad Application Specification

Engine Protection (Circle required option)				
Coolant Temperature		Shutdown	Rampdown	Warning
Coolant Level		Shutdown	Rampdown	Warning
Coolant Pressure		Shutdown	Rampdown	Warning
Oil Pressure		Shutdown	Rampdown	Warning
Oil Temperature		Shutdown	Rampdown	Warning
Aux. Stop 1		Shutdown	Rampdown	Warning
Aux. Stop 2		Shutdown	Rampdown	Warning
Crankcase Pressure		Shutdown	Rampdown	Warning
Intercooler Temperature		Shutdown	Rampdown	Warning
Engine Overtemperature Protection		Yes		No
Air Temperature Reduction		Yes		No
Continuous Override		Yes		No

Fan Controls (Circle required options)					
Digital Fan Type:	None	Single	Dual	2-Speed	PWM

Engine Brakes (circle required option)				
Engine Brake Type:	None	Jake Brake	KD Brake	DVB

Engine Brake Cruise				
Engine Brake Cruise (Circle One)		Yes		No
Engine Brake Low	1 to 10 MPH			
Increment	1 to 5 MPH			

Vehicle Speed Sensor				
Vehicle Speed Sensor (VSS) (Circle One)		Yes		No
VSS Sensor Type (Circle One)		Transmission		Wheel
VSS Signal Type (Circle One)		Open Collect		Magnetic
Number of Teeth		2 to 200		
Tire Revolutions Per Mile		100 to 1000		
Axle Ratio:				
Final Gear Ratio:				

DDEC Nonroad Application Specification

Vehicle Speed Limit				
Vehicle Speed Limit (Circle One)		Yes		No
Max. Speed	20 to 127 MPH			
Overspeed with Fuel	0 to 127 MPH			
Overspeed w/o Fuel	0 to 127 MPH			

Cruise Control				
Cruise Control (Circle One)		Yes		No
Auto Resume (Circle One)		Yes		No
Min. Speed	20 to 127 MPH			
Max. Speed	20 to 127 MPH			

Air Compressor Controls				
Air Compressor Controls (Circle One)		Yes		No
Load Pressure				
Unload Pressure				
Range 1 Min. Pressure				
Range 1 Max. Pressure				
Range 2 Min. Pressure				
Range 2 Max. Pressure				
Range 3 Min. Pressure				
Range 3 Max. Pressure				

Other Options (Circle required options)			
Fuel Economy Incentive	Yes		No
Pressure Governor System	Yes		No
Progressive Shift	Yes		No

DDEC Nonroad Application Specification

Configuration Of Digital Inputs (A list of Digital Input options and codes is listed in Table 8-2 on page 8-8.)		
VIH Pin Number	VIH Wire Number	Customer Selection
E1	451	
F1	542	
G1	528	
H1	523	
J1	541	
F2	544	
G2	543	
H2	524	
J2	531	
K2	583	
G3	545	
K3	979	

Configuration Of Digital Outputs (A list of Digital Output options and codes is listed in Table 8-3 on page 8-8.)		
VIH Pin Number	VIH Wire Number	Customer Selection
A1	988	
A2	555	
F3	499	
Sensor Harness Pin Number	Sensor Harness Wire Number	Customer Selection
W3	563	
X3	564	
Y3	565	

Refer to section 5.25, "Transmission Interface," for further details of the transmission definition.

Transmission Type	Code	Transmission Type	Code
Manual	00	RTLO-XX610B-T2 – TOP2	27
Allison Hydraulic	01	RTL-XX710B-T2 – TOP2	28
Voith	03	RTLO-XX713A-T2 – TOP2	29
Z-F Ecomat	04	RTLO-XX718B-T2 – TOP2	30
Allison Electronic	09	Eaton Fuller Automatic	33
Allison WT	12	% TPS Hydraulic	26
Other Automatic	14	Optimum Load Curve	32
GE Statex III	15	GE Propulsion System	31
Autoshift / J1939	16		
Note: If application has no transmission enter code "00"			

Table 8-1 Transmission Options and Codes

Refer to section 4.2, "Digital Inputs," for a detailed description of each digital input option.

Description	Code	Description	Code
None	00	Resume / Accel On	22
Engine Brake Low	01	Cruise Enable	23
Engine Brake High	02	PGS System Enable	24
Aux. Shutdown # 1	03	SEO / Diagnostic Request	25
Aux. Shutdown # 2	04	Engine Brake Disable	26
Park Brake Interlock	05	Transmission Retarder Status	27
Idle Validation	06	Dual Throttle	28
Throttle Kickdown	07	A/C Fan Status	29
Pressure RPM Mode	08	N/A	30
Throttle Inhibit	09	Aux CLS	31
External Engine Synchronization	10	Fan Control Override	32
RPM Freeze	11	VSG Station Change	33
Rating Switch # 1	12	VSG Station Complement	34
Rating Switch # 2	13	Air Load Switch	35
Limiting Torque Curve	14	N/A	36
Diagnostic Request	15	N/A	37
Alt Min VSG / Fast Idle	16	In Neutral Switch (ESS)	38
Service Break Release	17	In Gear Switch (ESS)	39
Clutch Released	18	KD Brake	40
Set / Coast On	20	VSG Inhibit	42

Table 8-2 Digital Input Options and Codes

Refer to section 4.3, "Digital Outputs," for a detailed description of each digital output option.

Description	Code	Description	Code
No Function	00	Coolant Temp. High Light	20
N/A	01	Air Compressor Solenoid	21
N/A	02	Crankcase Pressure High	22
Low DDEC Voltage	03	Coolant Pressure Low Light	23
External Engine Synchronization Active	04	Ether Start	24
PSG Pressure Mode Light	05	N/A	25
Vehicle Power Shutdown	06	Optimized Idle Light	26
Starter Lockout	07	N/A	27
External Engine Brake Enable	08	ESS Low Range	28
Transmission Retarder Enable	09	ESS High Range	29
Coolant Level Low Light	10	Shift Solenoid (TOP2)	30
Cruise Active Light	11	Shift Lockout (TOP2)	31
N/A	12	Gas Throttle Actuator	32
Fan Control # 1	13	Fuel Supply Solenoid	33
Fan Control # 2	14	KD Brake Solenoid	34
Deceleration Light	15	Sequential Turbo	35
Engine Brake Active	16	Natural Gas Knock Shutdown	36
VSG Active Indication	17	Cold Engine Signal (S4000)	37
Oil Pressure Low Light	18	Engine Overspeed Signal	39
Oil Temperature High Light	19		

Table 8-3 Digital Output Options and Codes

THIS PAGE INTENTIONALLY LEFT BLANK

8.2 TYPICAL ON-HIGHWAY APPLICATION

This section contains typical parameter settings for on-highway truck applications and the pin assignments for the Vehicle Interface Harness and the Engine Sensor Harness as listed in the Verification Report on the following pages.

The Digital Input and Digital Output ports can be configured for a variety of software options. The location of the connector pin for each software option can be specified at the time of engine order, by VEPS or the Distributor Reprogramming Station. For more information on software options, refer to section 4.2, "Digital Inputs" and section 4.3, "Digital Outputs."

DATE:

VERIFICATION REPORT

SALES ORDER NUMBER:

DDEC III/IV ENGINE SUMMARY					
Series I60	DDEC Appl Group	06N04C0126	DDEC IV HIGHWAY TRK EPL W/O JAKE BRAKE		
	Base group	06N04D6437	370-430 HP STD RAT 1999 DDEC IV LINE HAUL 12L S60		
	Hp Group	06N04M7109	400HP@1800RPM 1056 1999 LINE HAUL TRK 12L S60 (155OFTLB)		
PWM Trans 0 MANUAL		VSG Max RPM	1600	Hot Idle	600
VSG Cruise Switch	YES	VSG Min RPM	600	Cold Idle	2500
Init Speed	1000	VSG Alt Min RPM	600	Max Droop	150
RPM Increment	25	VSG is Primary	NO	LSG Droop	125
				VSG Droop	0
IDLE SHUTDOWN	YES	Time	5 MIN		
		Operates On	IDLE & VSG GOVERNOR		
Maximum Security	NO	Override	NO		
Minimum Security	NO	Min Temp	75 DEGC	Max Temp	75 DEGC
ENGINE PROTECTION		Digital Fan	SINGLE	FUEL ECONOMY INCENTIVE	
Coolant Temp	SHUTDOWN	PWM Fan	NONE	Min MPG	N/A
Coolant Level	SHUTDOWN	Dynamic Brk	NO	Max MPH	0
Coolant Pressure	DISABLED			Conv. Factor	N/A
R1 Coolant Prs		Engine Brakes	NONE	Calc. Type	N/A
Crankcase Prs	DISABLED	Eng Brake Cruise	NO		
Override	YES	Eng Brake Low	3		
Intercool Temp	DISABLED	Increment	2		
Oil Press	SHUTDOWN				
Override		Data Pages	NO		
Oil Temp	SHUTDOWN	Optimized Idle	NO		
R1 Oil Temp		Fan Timer	180 SEC		
Aux Stop 1	SHUTDOWN				
Aux Stop 2	SHUTDOWN	Full Power Override	NO		
Vehicle Speed Sensor	YES	Cruise Control	YES	Press Gov System	NO
VSS Sensor Type	TRANS	AutoResume	NO	Cavitation Timeout	
VSS Signal Type	MAGNETIC	Min Speed	30	Pump Press Incr	
Num Teeth	16	Max Speed	65	Eng Spd Incr	
Tire Rev/Mile	500			Integral Gain	
Axle Ratio	3.55	ATI Port	NONE	Prop Gain	
Final Gear Ratio	1				
Vehicle Speed Limit	YES	Digital Torque Curve		1	
Max Speed	68	Starter Lockout Enable Speed	500		
Overspeed with Fuel	0	Starter Lockout Disable Speed	60		
Overspeed w/o Fuel	0				
PROGRESSIVE SHIFT	NO				
Low Gear #1 Max MPH		Max RPM		Turn-off RPM	
Low Gear #2 Max MPH		Max RPM		Turn-off RPM	
High Gear Max MPH		Max RPM			
Air Comp. System	NO	R1 Min Pressure		R1 Max Pressure	
Load Pressure		R2 Min Pressure		R2 Max Pressure	
Unload Pressure		R3 Min Pressure		R3 Max Pressure	
Pressure Increment		% Integral Gain		Prop Gain	
PIN WIRE# Fn		VIH		Reverse	
E1 #451 32	FAN CONTROL OVERRIDE	PIN Wire# Fn	Polarity		
F1 #542 29	A/C FAN STATUS	A1 #988 10	NO	COOLANT LEVEL LOW LIGHT	
G1 #528 25	SEO/DIAGNOSTIC REQUEST	A2 #555 13	YES	FAN CONTROL #1	
H1 #523 03	AUX SHUTDOWN #1	F3 #499 06	NO	VEHICLE POWER SHUTDOWN	
J1 #541 20	SET/COAST ON				
F2 #544 23	CRUISE ENABLE	ESH	Reverse		
G2 #543 17	SERVICE BRAKE RELEASED	PIN Wire# Fn	Polarity		
H2 #524 05	PARK BRAKE INTERLOCK	W3 #563 00	NO	NO FUNCTION	
J2 #531 18	CLUTCH RELEASED	X3 #564 00	NO	NO FUNCTION	
K2 #583 00	NONE	Y3 #565 00	NO	NO FUNCTION	
G3 #545 22	RESUME/ACCEL ON				
K3 #979 00	NONE				

8.3 TYPICAL INDUSTRIAL APPLICATION - ON-HIGHWAY CRANE

This section contains typical parameter settings for on-highway crane applications and the pin assignments for the Vehicle Interface Harness and the Engine Sensor Harness as listed in the Verification Report on the following pages.

The Digital Input and Digital Output ports can be configured for a variety of software options. The location of the connector pin for each software option can be specified at the time of engine order, by VEPS or the Distributor Reprogramming Station. For more information on software options, refer to section 4.2, "Digital Inputs" and section 4.3, "Digital Outputs."

DATE:

VERIFICATION REPORT

SALES ORDER NUMBER:

DDEC III/IV ENGINE SUMMARY									
Series I60	DDEC Appl Group	06N04C0760	DDEC IV CRANE W/JAKE EPL						
	Base group	06N04D6431	370-430 HP STD RAT 1999 LINE HAUL 11L S60						
	Hp Group	06N04M7103	400HP@2100RPM 1053 1999 LINE HAUL TRK 12L S60 (1450FTLB)						
PWM Trans 0			VSG Max RPM	2100		Hot Idle	700		
VSG Cruise Switch	NO		VSG Min RPM	700		Cold Idle	2500		
Init Speed	1000		VSG Alt Min RPM	1500		Max Droop	125		
RPM Increment	25		VSG is Primary	NO		LSG Droop	100		
						VSG Droop	0		
IDLE SHUTDOWN	NO		Time	5 MIN					
			Operates On	IDLE & VSG GOVERNOR ONLY					
Maximum Security	NO		Override	NO					
Minimum Security	NO		Min Temp	75 DEGC		Max Temp	75 DEGC		
ENGINE PROTECTION			Digital Fan	SINGLE		FUEL ECONOMY INCENTIVE			
Coolant Temp	WARNING		PWM Fan	NONE		Min MPG	N/A		
Coolant Level	WARNING		Dynamic Brk	NO		Max MPH	0		
Coolant Pressure	DISABLED					Conv. Factor	N/A		
R1 Coolant Prs			Engine Brakes	JAKE		Calc. Type	N/A		
Crankcase Prs	DISABLED		Eng Brake Cruise	YES					
Override	YES		Eng Brake Low	5					
Intercool Temp	DISABLED		Increment	2					
Oil Press	WARNING								
Override	YES		Data Pages	YES					
Oil Temp	WARNING		Optimized Idle	NO					
R1 Oil Temp			Fan Timer	180 SEC					
Aux Stop 1	WARNING								
Aux Stop 2	WARNING		Full Power Override	NO					
Vehicle Speed Sensor	YES		Cruise Control	YES		Press Gov System	NO		
VSS Sensor Type	TRANS		AutoResume	YES		Cavitation Timeout			
VSS Signal Type	MAGNETIC		Min Speed	30		Pump Press Incr			
Num Teeth	16		Max Speed	60		Eng Spd Incr			
Tire Rev/Mile	501					Integral Gain			
Axle Ratio	5.87		ATI Port	NONE		Prop Gain			
Final Gear Ratio	1.0								
Vehicle Speed Limit	NO		Digital Torque Curve			1			
Max Speed			Starter Lockout Enable Speed	500					
Overspeed with Fuel			Starter Lockout Disable Speed	60					
Overspeed w/o Fuel									
PROGRESSIVE SHIFT	NO								
Low Gear #1 Max MPH			Max RPM			Turn-off RPM			
Low Gear #2 Max MPH			Max RPM			Turn-off RPM			
High Gear Max MPH			Max RPM						
Air Comp. System	NO		R1 Min Pressure			R1 Max Pressure			
Load Pressure			R2 Min Pressure			R2 Max Pressure			
Unload Pressure			R3 Min Pressure			R3 Max Pressure			
Pressure Increment			% Integral Gain			Prop Gain			
PIN	WIRE#	Fn		VIH		Reverse			
E1	#451	01	ENGINE BRAKE LOW	PIN	Wire#	Fn	Polarity		
F1	#542	02	ENGINE BRAKE MED	A1	#988	00	NO	NO FUNCTION	
G1	#528	18	CLUTCH RELEASED	F3	#555	24	NO	ETHER START	
H1	#523	23	CRUISE ENABLE	A2	#499	13	YES	FAN CONTROL #1	
J1	#541	20	SET/COAST ON						
F2	#544	22	RESUME/ACCEL ON	ESH			Reverse		
G2	#543	17	SERVICE BRAKE RELEASED	PIN	Wire#	Fn	Polarity		
H2	#524	12	RATING SWITCH #1	W3	#563	00	NO	NO FUNCTION	
J2	#531	13	RATING SWITCH #2	X3	#564	00	NO	NO FUNCTION	
K2	#583	25	SEO/DIAGNOSTIC REQUEST	Y3	#565	00	NO	NO FUNCTION	
G3	#545	16	ALT MIN VSG/FAST IDLE						
K3	#979	09	THROTTLE INHIBIT						

8.4 TYPICAL FIRE TRUCK APPLICATION

This section contains typical parameter settings for Fire Truck applications and the pin assignments for the Vehicle Interface Harness and the Engine Sensor Harness as listed in the Verification Report on the following pages.

The Digital Input and Digital Output ports can be configured for a variety of software options. The location of the connector pin for each software option can be specified at the time of engine order, by VEPS or the Distributor Reprogramming Station. For more information on software options, refer to section 4.2, "Digital Inputs" and section 4.3, "Digital Outputs."

DATE:

VERIFICATION REPORT

SALES ORDER NUMBER:

DDEC III ENGINE SUMMARY

Series I60	DDEC Appl Group	06N04C0507	DDEC III/IV APPL FIRETRUCK W/PGS/EOP OFF JB				
	Base group	06N04D6429	470/500 HP PREM RAT 1999 DDEC IV LINE HAUL 12L S60				
	Hp Group	06N04M7095	470HP@2100RPM 1045 1999 LINE HAUL PREM 12L S60 (155OFTLB)				
PWM Trans 12	ALLISON WT		VSG Max RPM	2100	Hot Idle	600	
VSG Cruise Switch		NO	VSG Min RPM	600	Cold Idle	750	
Init Speed	1000		VSG Alt Min RPM	600	Max Droop	150	
RPM Increment	25		VSG is Primary	NO	LSG Droop	125	
					VSG Droop	0	
IDLE SHUTDOWN	NO		Time	5 MIN			
			Operates On	IDLE GOVERNOR ONLY			
Maximum Security	NO		Override	NO			
Minimum Security	NO		Min Temp	75 DEGC	Max Temp	75 DEGC	
ENGINE PROTECTION			Digital Fan	SINGLE	FUEL ECONOMY INCENTIVE		
Coolant Temp	WARNING		PWM Fan	NONE	Min MPG	N/A	
Coolant Level	WARNING		Dynamic Brk	NO	Max MPH	0	
Coolant Pressure	DISABLED				Conv. Factor	N/A	
R1 Coolant Prs			Engine Brakes	JAKE	Calc. Type	N/A	
Crankcase Prs	DISABLED		Eng Brake Cruise	NO			
Override	YES		Eng Brake Low	2			
Intercool Temp	DISABLED		Increment	1			
Oil Press	WARNING						
Override	YES		Data Pages	NO			
Oil Temp	WARNING		Optimized Idle	NO			
R1 Oil Temp			Fan Timer	180 SEC			
Aux Stop 1	WARNING						
Aux Stop 2	WARNING		Full Power Override	NO			
Vehicle Speed Sensor	NO		Cruise Control	NO	Press Gov system	YES	
VSS Sensor Type			AutoResume		Cavitation Timeout	5	
VSS Signal Type			Min Speed		Pump Press Incr	4	
Num Teeth			Max Speed		Eng Spd Incr	25	
Tire Rev/Mile					Integral Gain	10	
Axle Ratio			ATI Port	NONE	Prop Gain	.75	
Final Gear Ratio							
Vehicle Speed Limit	NO		Digital Torque Curve		1		
Max Speed			Starter Lockout Enable Speed		500		
Overspeed with Fuel			Starter Lockout Disable Speed		60		
Overspeed w/o Fuel							
PROGRESSIVE SHIFT	NO						
Low Gear #1 Max MPH			Max RPM		Turn-off RPM		
Low Gear #2 Max MPH			Max RPM		Turn-off RPM		
High Gear Max MPH			Max RPM				
Air Comp. System	NO		R1 Min Pressure		R1 Max Pressure		
Load Pressure			R2 Min Pressure		R2 Max Pressure		
Unload Pressure			R3 Min Pressure		R3 Max Pressure		
Pressure Increment			% Integral Gain		Prop Gain		
PIN	WIRE#	Fn	VIH	Reverse			
E1	#451	15	DIAGNOSTIC REQUEST	PIN	Wire#	Fn	Polarity
F1	#542	16	ALT MIN VSG/FAST IDLE	A1	#988	16	NO ENGINE BRAKE ACTIVE
G1	#528	00	NONE	A2	#555	11	NO CRUISE ACTIVE LIGHT
H1	#523	08	PRESSURE/RPM MODE	F3	#499	05	NO PGS ACTIVE LIGHT
J1	#541	20	SET/COAST ON				
F2	#544	26	ENGINE BRAKE DISABLE	ESH			Reverse
G2	#543	24	PGS SYSTEM ENABLE	PIN	Wire#	Fn	Polarity
H2	#524	09	THROTTLE INHIBIT	W3	#563	10	NO COOLANT LEVEL LOW LIGHT
J2	#531	05	PARK BRAKE INTERLOCK	X3	#564	08	NO EXT BRAKE ENABLE
K2	#583	02	ENGINE BRAKE MED	Y3	#565	07	NO STARTER LOCKOUT
G3	#545	22	RESUME/ACCEL ON				
K3	#979	01	ENGINE BRAKE LOW				

APPENDIX A: CODES

The codes listed may not be used in all applications. A default value in the normal operating range is used by the ECM to provide for engine operation if a sensor failure is present.

DDC Code # (Flashed)	PID	SID	FMI	Description
11	187	--	4	Variable Speed Governor Sensor Voltage Low
11	187	--	7	Variable Speed Governor Switch System Not Responding
12	187	--	3	Variable Speed Governor Sensor Voltage High
13	111	--	4	Coolant Level Sensor Input Voltage Low
13	111	--	6	Add Coolant Level Sensor Input Voltage Low
14	52	--	3	Intercooler Coolant Temperature Sensor Input Voltage High
14	110	--	3	Coolant Temperature Sensor Input Voltage High
14	175	--	3	Oil Temperature Sensor Input Voltage High
15	52	--	4	Intercooler Coolant Temperature Sensor Input Voltage Low
15	110	--	4	Coolant Temperature Sensor Input Voltage Low
15	175	--	4	Oil Temperature Sensor Input Voltage Low
16	111	--	3	Coolant Level Sensor Input Voltage High
16	111	--	5	Add Coolant Level Sensor Input Voltage High
17	51	--	3	Throttle Plate Position Sensor Input Voltage High
17	72	--	3	Blower Bypass Position Input Voltage High
17	354	—	3	Relative Humidity Sensor Circuit Failed High (Release 33.0 or later)
18	51	--	4	Throttle Plate Position Sensor Input Voltage Low
18	72	--	4	Blower Bypass Position Input Voltage Low
18	354	—	4	Relative Humidity Sensor Circuit Failed Low (Release 33.0 or later)
21	91	--	3	Throttle Position Sensor Input Voltage High
22	91	--	4	Throttle Position Sensor Input Voltage Low
23	174	--	3	Fuel Temperature Sensor Input Voltage High
23	--	65	3	Oxygen Content Circuit Input Voltage High
24	174	--	4	Fuel Temperature Sensor Input Voltage Low
24	--	65	4	Oxygen Content Circuit Input Voltage Low
25	--	--	--	Reserved for "No Codes"
26	--	25	11	Aux. Shutdown #1 Active
26	--	61	11	Aux. Shutdown #2 Active
27	105	--	3	Intake Manifold Temperature Sensor Input Voltage High
27	171	--	3	Ambient Air Temperature Sensor Input Voltage High
27	172	--	3	Air Temperature Sensor Input Voltage High
28	105	--	4	Intake Manifold Temperature Sensor Input Voltage Low

DDC Code # (Flashed)	PID	SID	FMI	Description
28	171	--	4	Ambient Air Temperature Sensor Input Voltage Low
28	172	--	4	Air Temperature Sensor Input Voltage Low
29	351	—	4	TCI Temperature Circuit Failed Low (Release 33.0 or later)
29	404	—	4	Turbo Compressor Temperature Out Sensor Input Voltage Low (Release 32.0 or later)
31	--	51	3	Aux. Output #3 Open Circuit (High Side) - S3
31	--	51	4	Aux. Output #3 Short To Ground (High Side) - S3
31	--	51	7	Aux. Output #3 Mechanical System Fail - S3
31	--	52	3	Aux. Output #4 Open Circuit (High Side) - T3
31	--	52	4	Aux. Output #4 Short to Ground (High Side) - T3
31	--	52	7	Aux. Output #4 Mechanical System Failure - T3
32	--	238	3	SEL Short to Battery (+)
32	--	238	4	SEL Open Circuit
32	--	239	3	CEL Short to Battery (+)
32	--	239	4	CEL Open Circuit
33	102	--	3	Turbo Boost Pressure Sensor Input Voltage High
34	102	--	4	Turbo Boost Pressure Sensor Input Voltage Low
35	19	--	3	High Range Oil Pressure Sensor Input Voltage High
35	100	--	3	Oil Pressure Sensor Input Voltage Low
36	19	--	4	High Range Oil Pressure Sensor Input Voltage High
36	100	--	4	Oil Pressure Sensor Input Voltage Low
37	18	--	3	High Range Fuel Pressure Sensor Input Voltage High
37	94	--	3	Fuel Pressure Sensor Input Voltage High
37	95	--	3	Fuel Restriction Sensor Input Voltage High
38	18	--	4	High Range Fuel Pressure Sensor Input Voltage Low
38	94	--	4	Fuel Pressure Sensor Input Voltage Low
38	95		4	Fuel Restriction Sensor Input Voltage Low
39	—	146	2	EGR Leak — Boost Power (Release 33.0 or later)
39	—	146	12	EGR Leak — Boost Jake (Release 33.0 or later)
39	—	146	7	EGR Valve Not Responding (Release 33.0 or later)
39	—	147	2	Low or High Boost – Boost Mode VNT Vanes Not Responding (Boost Mode) (Release 33.0 or later)
39	—	147	11	VNT Vanes at Max — Jake (Release 33.0 or later)
39	—	147	12	Low or High Boost During jake Operation VNT Vanes Not Responding (Jake Mode) (Release 33.0 or later)
39	—	147	14	EGR Flow too Low (Release 33.0 or later)
39	—	147	7	Excessive EGR Flow – EGR Mode VNT Vanes Not Responding (EGR Mode) (Release 33.0 or later)
41	--	21	0	Too Many SRS (missing TRS)

DDC Code # (Flashed)	PID	SID	FMI	Description
42	--	21	1	Too few SRS (missing SRS)
43	111	--	1	Coolant Level Low
44	52	--	0	Intercooler Coolant Temperature High
44	105	--	0	Intake Manifold Temperature High
44	105	—	14	Engine Derate Due to Intake Manifold Temperature
44	110	--	0	Coolant Temperature High
44	110	—	14	Engine Derate Due to Coolant Temperature
44	172	--	0	Air Inlet Temperature High
44	175	--	0	Oil Temperature High
45	19	--	1	High Range Oil Pressure Low
45	100	--	1	Oil Pressure Low
46	168	--	1	ECM Battery Voltage Low
46	--	214	1	RTC Backup Battery Voltage Low (Release 29.0 or later)
46	--	232	1	Sensor Supply Voltage Low
47	18	--	0	High Range Fuel Pressure High
47	94	--	0	Fuel Pressure High
47	102	--	0	Turbo Boost Pressure High
47	102	--	14	Engine Derate Due to Boost Pressure
47	106	--	0	Air Inlet Pressure High
47	164	--	0	Injection Control Pressure High
48	18	--	1	High Range Fuel Pressure Low
48	94	--	1	Fuel Pressure Low
48	106	--	1	Air Inlet Pressure Low
48	164	--	1	Injection Control Pressure Low
48	351	—	1	TCI Temperature Below Range (Release 33.0 or later)
48	404	—	1	Turbo Compressor Temperature Out High (Release 33.0 or later)
48	411	—	1	EGR Differential Pressure Low (Release 33.0 or later)
48	412	—	1	EGR Temperature Low (Release 33.0 or later)
49	351	—	0	TCI Temperature Above Range (Release 33.0 or later)
49	404	—	0	Turbo Compressor Out Temperature High (Release 32.0 or later)
49	404	—	14	Engine Derate Due to TCO Temperature
51	351	—	3	TCI Temperature Circuit Failed High (Release 33.0 or later)
51	404	—	3	Turbo Compressor Out Temperature Sensor Input Voltage High (Release 32.0 or later)
52	--	254	12	A/D Conversion Fail
53	--	253	2	Nonvolatile Checksum Incorrect
53	--	253	12	EEPROM Write Error
53	--	253	13	Out of Calibration

DDC Code # (Flashed)	PID	SID	FMI	Description
54	84	--	12	Vehicle Speed Sensor Fault
55	--	216	14	Other ECU Fault (Release 27.0 or later) (This fault is logged in conjunction with another fault to indicate missing information from another ECU.)
55	--	231	12	J1939 Data Link Fault
55	--	248	8	Proprietary Data Link Fault (Master)
55	--	248	9	Proprietary Data Link Fault (Receiver)
56	--	250	12	J1587 Data Link Fault
57	--	249	12	J1922 Data Link Fault
58	92	--	0	Torque Overload
61	--	xxx	0	Injector xxx Response Time Long
62	--	26	3	Aux. Output #1 Short to Battery (+) - F3
62	--	26	4	Aux. Output #1 Open Circuit - F3
62	—	26	7	Aux. Output #1 Mechanical System Not Responding Properly - F3
62	--	40	3	Aux. Output #2 Short to Battery (+) - A2
62	--	40	4	Aux. Output #2 Open Circuit - A2
62	—	40	7	Aux. Output #2 Mechanical System Not Responding Properly - A2
62	--	53	3	Aux. Output #5 Short to Battery (+) - W3
62	--	53	4	Aux. Output #5 Open Circuit - W3
62	—	53	7	Aux. Output #5 Mechanical System Not Responding Properly - W3
62	--	54	3	Aux. Output #6 Short to Battery (+) - X3
62	--	54	4	Aux. Output #6 Open Circuit - X3
62	--	54	7	Aux. Output #6 Mechanical System Not Responding Properly - X3
62	--	55	3	Aux. Output #7 Short to Battery (+) - Y3
62	--	55	4	Aux. Output #7 Open Circuit - Y3
62	—	55	7	Aux. Output #7 Mechanical System Not Responding Properly - Y3
62	--	56	3	Aux. Output #8 Short to Battery (+) - A1
62	--	56	4	Aux. Output #8 Open Circuit - A1
62	--	56	7	Aux. Output #8 Mechanical System Not Responding Properly - A1
63	--	57	0	PWM #1 Above Normal Range
63	--	57	1	PWM #1 Below Normal Range
63	--	57	3	PWM #1 Short to Battery (+)
63	--	57	4	PWM #1 Open Circuit
63	--	58	0	PWM #2 Above Normal Range
63	--	58	1	PWM #2 Below Normal Range
63	--	58	3	PWM #2 Short to Battery (+)
63	--	58	4	PWM #2 Open Circuit
63	--	59	0	PWM #3 Above Normal Range
63	--	59	1	PWM #3 Below Normal Range

DDC Code # (Flashed)	PID	SID	FMI	Description
63	--	59	3	PWM #3 Short to Battery (+)
63	--	59	4	PWM #3 Open Circuit
63	--	60	0	PWM #4 Above Normal Range
63	--	60	1	PWM #4 Below Normal Range
63	--	60	3	PWM #4 Short to Battery (+)
63	--	60	4	PWM #4 Open Circuit
64	103	--	0	Turbo Overspeed
64	103	--	1	Turbo Speed Low (Rel 38 or later)
64	103	--	8	Turbo Speed Sensor Input Failure — Abnormal Period
65	51	--	0	Throttle Plate Position Above Normal Range
65	51	--	1	Throttle Plate Position Below Normal Range
65	51	--	2	Throttle Plate Position Erratic
65	51	--	7	Throttle Plate Not Responding
65	107	--	3	Air Filter Restriction Sensor Voltage High
65	107	--	4	Air Filter Restriction Sensor Voltage Low
66	99	--	3	Oil Filter Restriction Sensor Voltage High
66	99	--	4	Oil Filter Restriction Sensor Voltage Low
66	--	76	0	Engine Knock Level Above Normal Range
66	--	76	3	Engine Knock Level Sensor Input Voltage High
66	--	76	4	Engine Knock Level Sensor Input Voltage Low
66	--	76	7	Engine Knock Level Sensor Not Responding
67	20	--	3	High Range Coolant Pressure Sensor Input Voltage High
67	20	--	4	High Range Coolant Pressure Sensor Input Voltage Low
67	106	--	3	Air Inlet Pressure Sensor Input Voltage High
67	106	--	4	Air Inlet Pressure Sensor Input Voltage Low
67	109	--	3	Coolant Pressure Sensor Input Voltage High
67	109	--	4	Coolant Pressure Sensor Input Voltage Low
68	--	230	5	TPS Idle Validation Circuit Fault (open circuit)
68	--	230	6	TPS Idle Validation Circuit Fault (short to ground)
71	--	xxx	1	Injector xxx Response Time Short
72	84	--	0	Vehicle Overspeed
72	84	--	11	Vehicle Overspeed (Absolute)
72	--	65	0	Oxygen Content Too High
72	--	65	1	Oxygen Content Too Low
73	107	--	0	Air Filter Restriction High
73	--	77	0	Gas Valve Position Above Normal Range
73	--	77	1	Gas Valve Position Below Normal Range
73	--	77	3	Gas Valve Position Input Voltage High
73	--	77	4	Gas Valve Position Input Voltage Low
73	--	77	7	Gas Metering Valve Not Responding

DDC Code # (Flashed)	PID	SID	FMI	Description
73	--	151	14	ESS Transmission Stuck in Gear
73	--	226	11	Transmission Neutral Switch Failure (ESS Transmission)
73	--	227	2	Aux Analog Input Data Erratic, Intermittent, or Incorrect (ESS Transmission)
73	--	227	3	Aux Analog Input #1 Voltage High (ESS Transmission)
73	--	227	4	Aux Analog Input #1 Voltage Low (ESS Transmission)
74	70	--	4	Optimized Idle Safety Loop Short to Ground
74	99	--	0	Oil Filter Restriction High
75	168	--	0	ECM Battery Voltage High
75	--	214	0	RTC Backup Battery Voltage High (Release 29.0 or later)
75	--	232	0	Sensor Supply Voltage High
76	121	--	0	Engine Overspeed With Engine Brake
77	19	—	0	High Range Oil Pressure High
77	20	—	0	High Range Coolant Pressure High
77	72	—	0	Blower Bypass Door Position High
77	72	—	1	Blower Bypass Door Position Low
77	73	—	1	Fire Pump Pressure Low
77	81	—	0	Exhaust Back Pressure High
77	81	—	1	Exhaust Back Pressure Low
77	81	—	3	Exhaust Back Pressure Sensor Voltage High
77	81	—	4	Exhaust Back Pressure Sensor Voltage Low
77	81	—	12	Exhaust Back Pressure at Rampdown Threshold
77	95	—	1	Fuel Filter Differential Pressure Low
77	99	—	1	Oil Filter Differential Pressure Low
77	100	—	0	Engine Oil Pressure High
77	102	—	1	Turbo Boost Pressure Low
77	105	—	1	Inlet Manifold Temperature Low
77	107	—	1	Air filter Restriction Pressure Low
77	108	—	0	Barometric Pressure High
77	108	—	1	Barometric Pressure Low
77	109	—	0	Coolant Pressure High
77	110	—	1	Coolant Temperature Low
77	111	—	0	Coolant Level High
77	171	—	0	Ambient Air Temperature High
77	171	—	1	Ambient Air Temperature Low
77	172	—	1	Air Inlet Temperature Low
77	174	—	0	Fuel Temperature High
77	174	—	1	Fuel Temperature Low
77	175	—	1	Engine Oil Temperature Low
77	222	—	14	Anti-Theft Fault Present

DDC Code # (Flashed)	PID	SID	FMI	Description
77	251	—	10	Clock Module Abnormal Rate of Change
77	251	—	13	Clock Module Failure
77	252	—	10	Clock Module Abnormal Rate of Change
77	252	—	13	Clock Module Failure
77	354	—	0	Relative Humidity Above Range (Release 33.0 or later)
77	354	—	1	Relative Humidity Below Range (Release 33.0 or later)
77	446	—	0	Cylinder Head Temperature Above Range (Release 33.0 or later)
77	—	151	11	Service Now Lamp Fault Expiration (Release 32.0 or later)
78	86	--	14	Cruise Control/Adaptive Cruise Control Fault (Release 27.0 or later)
81	98	--	3	Oil Level Sensor Input Voltage High
81	101	--	3	Crankcase Pressure Sensor Input Voltage High
81	153	--	3	Extended Crankcase Pressure Input Voltage High (Release 27.0 or later)
81	164	--	3	Injection Control Pressure Sensor Input Voltage High
81	173	--	3	Exhaust Temperature Sensor Input Voltage High
81	411	—	3	EGR Differential Pressure Sensor Circuit Failed High (Release 33.0 or later)
81	412	—	3	EGR Temperature Circuit Failed High (Release 33.0 or later)
81		20	3	Timing Actuator Failed High
81		20	4	Timing Actuator Failed Low
81	--	129	3	Exhaust Port Temperature #1 Sensor Voltage High (Release 32.0 or later)
81	--	130	3	Exhaust Port Temperature #2 Sensor Voltage High (Release 32.0 or later)
81	--	131	3	Exhaust Port Temperature #3 Sensor Voltage High (Release 32.0 or later)
81	--	132	3	Exhaust Port Temperature #4 Sensor Voltage High (Release 32.0 or later)
81	--	133	3	Exhaust Port Temperature #5 Sensor Voltage High (Release 32.0 or later)
81	--	134	3	Exhaust Port Temperature #6 Sensor Voltage High (Release 32.0 or later)
81	--	135	3	Exhaust Port Temperature #7 Sensor Voltage High (Release 32.0 or later)
81	--	136	3	Exhaust Port Temperature #8 Sensor Voltage High (Release 32.0 or later)
81	--	137	3	Exhaust Port Temperature #9 Sensor Voltage High (Release 32.0 or later)
81	--	138	3	Exhaust Port Temperature #10 Sensor Voltage High (Release 32.0 or later)
81	--	139	3	Exhaust Port Temperature #11 Sensor Voltage High (Release 32.0 or later)

DDC Code # (Flashed)	PID	SID	FMI	Description
81	--	140	3	Exhaust Port Temperature #12 Sensor Voltage High (Release 32.0 or later)
81	--	141	3	Exhaust Port Temperature #13 Sensor Voltage High (Release 32.0 or later)
81	--	142	3	Exhaust Port Temperature #14 Sensor Voltage High (Release 32.0 or later)
81	--	143	3	Exhaust Port Temperature #15 Sensor Voltage High (Release 32.0 or later)
81	--	144	3	Exhaust Port Temperature #16 Sensor Voltage High (Release 32.0 or later)
81	—	277	9	EGR Mass Flow Smart Sensor not Responding (Release 33.0 or later)
81	412	—	9	EGR Temperature Smart Sensor not Responding (Release 33.0 or later)
81	—	277	12	EGR Mass Flow Smart Sensor Failed (Release 33.0 or later)
81	412	—	12	EGR Temperature Smart Sensor Failed (Release 33.0 or later)
82	98	--	4	Oil Level Sensor Input Voltage Low
82	101	--	4	Crankcase Pressure Sensor Input Voltage Low
82	153	--	4	Extended Crankcase Pressure Input Voltage Low (Release 27.0 or later)
82	164	--	4	Injection Control Pressure Sensor Input Voltage Low
82	173	--	4	Exhaust Temperature Sensor Input Voltage Low
82	411	—	4	EGR Differential Pressure Sensor Circuit Failed Low (Release 33.0 or later)
82	412	—	4	EGR Temperature Circuit Failed Low (Release 33.0 or later)
82	--	129	4	Exhaust Port Temperature #1 Sensor Voltage Low (Release 32.0 or later)
82	--	130	4	Exhaust Port Temperature #2 Sensor Voltage Low (Release 32.0 or later)
82	--	131	4	Exhaust Port Temperature #3 Sensor Voltage Low (Release 32.0 or later)
82	--	132	4	Exhaust Port Temperature #4 Sensor Voltage Low (Release 32.0 or later)
82	--	133	4	Exhaust Port Temperature #5 Sensor Voltage Low (Release 32.0 or later)
82	--	134	4	Exhaust Port Temperature #6 Sensor Voltage Low (Release 32.0 or later)
82	--	135	4	Exhaust Port Temperature #7 Sensor Voltage Low (Release 32.0 or later)
82	--	136	4	Exhaust Port Temperature #8 Sensor Voltage Low (Release 32.0 or later)
82	--	137	4	Exhaust Port Temperature #9 Sensor Voltage Low (Release 32.0 or later)
82	--	138	4	Exhaust Port Temperature #10 Sensor Voltage Low (Release 32.0 or later)
82	--	139	4	Exhaust Port Temperature #11 Sensor Voltage Low (Release 32.0 or later)

DDC Code # (Flashed)	PID	SID	FMI	Description
82	--	140	4	Exhaust Port Temperature #12 Sensor Voltage Low (Release 32.0 or later)
82	--	141	4	Exhaust Port Temperature #13 Sensor Voltage Low (Release 32.0 or later)
82	--	142	4	Exhaust Port Temperature #14 Sensor Voltage Low (Release 32.0 or later)
82	--	143	4	Exhaust Port Temperature #15 Sensor Voltage Low (Release 32.0 or later)
82	--	144	4	Exhaust Port Temperature #16 Sensor Voltage Low (Release 32.0 or later)
83	73	—	0	Pump Pressure High
83	98	--	0	Oil Level High
83	101	--	0	Crankcase Pressure High
83	153	--	0	Extended Crankcase Pressure High (Release 27.0 or later)
83	173	--	0	Exhaust Temperature High
83	411	—	0	EGR Differential Pressure High (Release 33.0 or later)
83	412	—	0	EGR Temperature High (Release 33.0 or later)
83	--	129	0	Exhaust Port Temperature #1 Sensor Voltage High (Release 32.0 or later)
83	--	130	0	Exhaust Port Temperature #2 Sensor Voltage High (Release 32.0 or later)
83	--	131	0	Exhaust Port Temperature #3 Sensor Voltage High (Release 32.0 or later)
83	--	132	0	Exhaust Port Temperature #4 Sensor Voltage High (Release 32.0 or later)
83	--	133	0	Exhaust Port Temperature #5 Sensor Voltage High (Release 32.0 or later)
83	--	134	0	Exhaust Port Temperature #6 Sensor Voltage High (Release 32.0 or later)
83	--	135	0	Exhaust Port Temperature #7 Sensor Voltage High (Release 32.0 or later)
83	--	136	0	Exhaust Port Temperature #8 Sensor Voltage High (Release 32.0 or later)
83	--	137	0	Exhaust Port Temperature #9 Sensor Voltage High (Release 32.0 or later)
83	--	138	0	Exhaust Port Temperature #10 Sensor Voltage High (Release 32.0 or later)
83	--	139	0	Exhaust Port Temperature #11 Sensor Voltage High (Release 32.0 or later)
83	--	140	0	Exhaust Port Temperature #12 Sensor Voltage High (Release 32.0 or later)
83	--	141	0	Exhaust Port Temperature #13 Sensor Voltage High (Release 32.0 or later)
83	--	142	0	Exhaust Port Temperature #14 Sensor Voltage High (Release 32.0 or later)
83	--	143	0	Exhaust Port Temperature #15 Sensor Voltage High (Release 32.0 or later)
83	--	144	0	Exhaust Port Temperature #16 Sensor Voltage High (Release 32.0 or later)

DDC Code # (Flashed)	PID	SID	FMI	Description
84	98	--	1	Oil Level Low
84	101	--	1	Crankcase Pressure Low
84	153	--	1	Extended Crankcase Pressure Low (Release 27.0 or later)
85	190	--	0	Engine Overspeed
85	190	--	14	Engine Overspeed Signal (Release 28.0 or later)
86	73	--	3	Pump Pressure Sensor Input Voltage High
86	108	--	3	Barometric Pressure Sensor Input Voltage High
87	73	--	4	Pump Pressure Sensor Input Voltage Low
87	108	--	4	Barometric Pressure Sensor Input Voltage Low
88	20	--	1	High Range Coolant Pressure Low
88	109	--	1	Coolant Pressure Low
89	95	--	0	Fuel Restriction High
89	111	--	12	Maintenance Alert Coolant Level Fault


APPENDIX B: HARNESS WIRING DIAGRAMS

The following drawings are posted on the DDC extranet:


- ☐ Vehicle Interface Harness – Series 60
- ☐ Vehicle Interface Harness – Series 50
- ☐ Vehicle Interface Harness – Natural Gas Applications
- ☐ Engine Sensor/Injector Harness – Series 60
- ☐ Engine Sensor/Injector Harness – Series 50
- ☐ Engine Sensor/Injector Coil Harness – Natural Gas Applications

APPENDIX C: SYMBOLS

ALARM




COIL




COIL, RELAY


Normally open single pole double throw relay



DIODE



FEMALE TERMINAL




FUSE



GROUND, BATTERY




INLINE CONNECTION




LIGHT




MALE TERMINAL



PICKUP, MAGNETIC




POTENTIOMETER







RESISTOR



SHIELDED CABLE



SPLICE


SWITCH, LIGHT
(Normally Closed)SWITCH, LIGHT
(Normally Open)SWITCH, MOMENTARY
(Closed)SWITCH, MOMENTARY
(Open)SWITCH, MUSHROOM-HEAD SAFETY
(Normally Closed)

40397


SWITCH, PRESSURE
(Closes on Rising Pressure)




SWITCH, SAFETY INTERLOCKS
(Circuit Closing)




SWITCH, SINGLE POLE, SINGLE THROW
(With Spring Return)

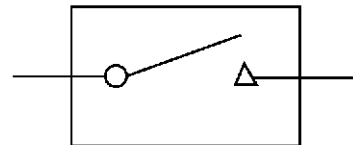


SWITCH, SINGLE POLE, SINGLE THROW
(Without Spring Return)

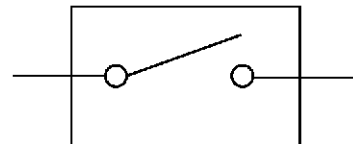


SWITCH, SINGLE POLE, DOUBLE THROW
(Without Spring Return)



SWITCH, SINGLE POLE, DOUBLE THROW
(With Double Spring Action)

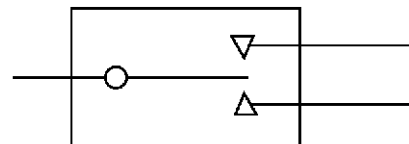

TWISTED PAIR



40398

APPENDIX D: ACRONYMS

ABS	Anti-lock Braking System
ACLS	Add Coolant Level Sensor
ACS	Application Code System
ACPS	Air Compressor Pressure Sensor
AFRS	Air Filter Restriction Sensor
AIM	Auxiliary Interface Module
ATI	Aux Timed Input
ATS	Air Temperature Sensor
CEL	Check Engine Light
CFPS	Common Rail Fuel Pressure Sensor
CLS	Coolant Level Sensor
CPS	Coolant Pressure Sensor
CTS	Coolant Temperature Sensor
DDC	Detroit Diesel Corporation
DDDL	Detroit Diesel Diagnostic Link
DDEC	Detroit Diesel Electronic Controls
DDR	Diagnostic Data Reader
DRS	DDEC Reprogramming System
ECM	Electronic Control Module
EDM	Electronic Display Module

EFC	Electronic Fire Commander
EFPA	Electronic Foot Pedal Assembly
EGR	Exhaust Gas Recirculation
EEPROM	Electronically Erasable Programmable Read Only Memory
EOP	Engine Over Temperature Protection
ESH	Engine Sensor Harness
ETS	Exhaust Temperature Sensor
EUI	Electronic Unit Injectors
EUP	Electronic Unit Pump
FEI	Fuel Economy Incentive
FMI	Failure Mode Identifier
FPS	Fuel Pressure Sensor
FRS	Fuel Restriction Sensor
FTS	Fuel Temperature Sensor
HEI	Half Engine Idle
ICPS	Intercooler Coolant Pressure Sensor
ICTS	Intercooler Coolant Temperature Sensor
IRIS	InfraRed Information System
ISD	Idle Shutdown
LSG	Limiting Speed Governor
OEM	Original Equipment Manufacturer

OI	Optimized Idle
OLS	Oil Level Sensor
OPS	Oil Pressure Sensor
OTS	Oil Temperature Sensor
MAS	Maintenance Alert System
MPG	Miles Per Gallon
MPH	Miles Per Hour
MID	Message IDentification Character
MUI	Mechanical Unit Injector
PGN	Parameter Group Number
PID	Parameter IDentification Character
PTO	Power Take-off
PSG	Pressure Sensor Governor
PVM	Pulse to Voltage Module
PW	Pulse Width
PWM	Pulse Width Modulated
SEL	Stop Engine Light
SEO	Stop Engine Override
SRS	Synchronous Reference Sensor
SID	Subsystem IDentification Character
TBS	Turbo Boost Sensor

TDC	Top Dead Center
TPS	Throttle Position Sensor
TRS	Timing Reference Sensor
TSS	Turbo Speed Sensor
VEPS	Vehicle Electronic Programming System
VGT	Variable Geometry Turbo
VIH	Vehicle Interface Harness
VIN	Vehicle Identification Number
VPOD	Variable Pressure Output Device
VSG	Variable Speed Governor
VSL	Vehicle Speed Limiting
VSS	Vehicle Speed Sensor

APPENDIX E: VENDORS

Compatible engine accessories may be obtained from several vendors. This section provides vendors name, address.

FANS

Single-speed fans are available from:

Linnig Corp.

5131 S Royal Atlanta Drive
Tucker, GA 30084
Phone: (770) 414-9499
www.linnig.com

Index Sensors & Controls, Inc.

7112 265th St NW
Stanwood, WA 98292
Phone: 1-800-726-1737
Fax: 360-629-0838
www.indexsensors.com

Bendix Commercial Vehicle Systems

901 Cleveland St.
Elyria, OH 44035
Phone: 1-800-AIR-BRAKE
www.bendix.com

Borg Warner

Phone: 1-800-828-8127
www.bwinstruments.com

Two-speed fans are available from:

Linnig U.S.A.

P.O. Box 670
Mineola NY 11501-0670
Phone: (516) 742-1900

DIAGNOSTIC DATA READER

Nexiq Technologies

Phone: 1-800-639-6774
www.nexiq.com

MAGNETIC VEHICLE SPEED SENSORS

Wabash Technologies

1375 Swan Streets
Huntington, Indiana 46750-0829
Phone: (260) 356-8300
www.wabashtech.com

Airpax Instruments

Phillips Technologies
150 Knotter Drive
Cheshire, Connecticut 06410
Phone: 1- 800-643-0643

Invensys Electro Corporation

1845 57th Street
Sarasota, Florida 34243
Phone: 1-800-446-5762
Fax: 941-355-3120
www.electrocorp.com

CONNECTORS

FCI Apex connectors are available from:

FCI Automotive

Phone: 1-800-303-3577
734-728-2100

NTI, LLC

300 Randall Street, Suite B
Greer, SC 29651

Phone: 1-864-877-4800
Fax: 864-877-2997

J1939 CABLE**Belden Electronics Division**

2200 U.S. 27 South
Richmond, IN 47374
Phone: 1-800-235-3361
www.belden.com

Tyco Electronics Corporation

Raychem Wire and Harnessing
300 Constitution Drive
Menlo Park, CA 94025
Phone: 1-800-926-2425
www.raychem.com

Hand Throttle**Teleflex Morse**

Phone: (610) 495-7011

SHRINK WRAP**Alpha Wire Corporation**

711 Lidgerwood Ave
P.O. Box 711
Elizabeth, New Jersey 07207-0711
Phone: 1-800-52ALPHA

Tyco Electronics Corporation

Raychem Cable Identification and Protection
300 Constitution Drive
Menlo Park, CA 94025
Phone: 1-800-926-2425
www.raychem.com

ELECTRONIC FOOT PEDAL ASSEMBLY**Williams Controls**

14100 S.W. 72nd Avenue
Portland, Oregon 97223
Phone: (503) 684-8600
www.williamscontrols.com

Bendix Commercial Vehicle

901 Cleveland
Elyria, Ohio 44035
Phone: 1-800-AIR-BRAKE
www.bendix.com

King Controls

5100 West 36th Street
St. Louis Park, Minnesota 55416
Phone: (612) 922-6889
www.kingcontrols.com

DOCUMENTATION**SAE International**

400 Commonwealth Drive
Warrendale, PA 15096
Attention: Publications
Phone: (412) 776-4970
www.sae.org

CRIMP AND REMOVAL TOOLS**Kent-Moore**

Phone: 1-800-345-2233
www.spxkentmoore.com

GLOSSARY

Add Coolant Level Sensor

Provides another coolant level sensor, higher in the top tank of the vehicle cooling system. Typically, this is used to recognize the coolant is low, but not low enough to activate the DDEC engine protection.

Air Temperature Sensor

An intake mounted sensor which provides air temperature information to the ECM. Located in the bottom middle of the air intake manifold on the Series 50 and Series 60 Engines.

Check Engine Light

A panel mounted yellow indicator light, provided by the vehicle OEM as standard.

Coolant Level Sensor

Activates the engine protection if the coolant level is low.

Coolant Temperature Sensor

Provides coolant level information to the ECM. Used for engine protection.

Communication Harness

This OEM supplied harness connects the ECM's J1922 and J1939 ports to other vehicle systems.

Cruise Control

Operates in either Engine or Vehicle Speed Mode and maintain a targeted speed (MPH or RPM) by increasing or decreasing fueling to maximize fuel economy and driveability.

Check Engine Light

A panel mounted yellow indicator light. Provided by the vehicle OEM as standard.

Customer Option Password

A 4 digit alpha-numeric password to protect and change customer parameters in the DDR. This password is set with the DDR. This password does not protect the horsepower rating.

DDEC IV

Fourth generation of Detroit Diesel Electronic Controls.

Deceleration Light

Illuminates on the rear of the vehicle when you take your foot off the accelerator pedal to indicate that the vehicle is slowing down. Typically, this is used on the rear of a bus that operates in the city.

Diagnostic Request Switch

A switch that allows the yellow and red lights to flash two digit diagnostic codes when the engine is idling or off. The yellow light flashes inactive (or historic) codes. The

	red light flashes active codes. These two digit codes are defined on the DDEC diagnostic data reader pocket card. This can be the same switch as the stop engine override.
Electronic Control Module	The ECM includes control logic to provide overall engine management. The ECM continuously performs self diagnostic checks and monitors other system components
Electronic Fire Commander	A complete pressure governor control unit for DDEC IV engines. The EFC displays engine RPM, battery voltage, engine oil pressure, and either engine oil temperature or engine coolant temperature (programmable).
Electronic Unit Injector	Provides fuel delivery to the engine cylinders. The EUI controls injection timing and metering using a solenoid operated valve. The duration of valve closure determines the quantity of fuel injected.
Electronic Fire Commander	Designed for the fire fighting and emergency services market, EFC combines the DDEC Pressure Sensor Governor (PSG), a system monitor, and a pump panel display for vital engine operating parameters into one compact, durable package.
Engine Brakes Cruise Control	Provides cruise control compatibility with engine brakes. While in cruise control, the engine brakes will turn on and go off automatically in order to maintain the same cruise set speed.
Engine Brake LOW ON (Above Cruise Control)	The additional engine speed above the driver selected cruise speed that the low engine brakes (Jake Brakes) turn on.
Engine Brake Medium/High On (Increment)	Sets the engine brake medium and high limits to a vehicle speed above engine brake low.
Engine Fan Braking	Automatically engages the cooling fan clutch when all the engine brakes are on, (HIGH).
Engine Interface Harness	Used in multi-ECM applications is usually installed at the factory and delivered connected to all ECMs. Ends with a quick disconnect connector. The OEM VIH connects to the quick disconnect connector.
Engine Protection	Provides three levels of protection to the engine if it is operating out of the limits. These three levels are warning, rampdown, and shutdown. Coolant level,

coolant temperature, oil temperature, oil pressure, and two additional sensors provide protection to the engine. Typically, the additional sensors are used for high oil temperature in the automatic transmission, low oil level in the engine, and other vehicle systems that require the engine to shutdown.

Engine Over Temperature Protection The reduction in operating power from between the time the CEL and the SEL illuminates. For high coolant and/or oil temperature only.

Engine Overspeed Logs diagnostic code at 2500 RPM, DDC standard.

Engine Sensor Harness Connects the ECM to all engine sensors, facilitates the receipt of inputs and outputs signals, controlling the fuel injection process and engine speed.

Failure Mode Identifier The FMI describes the type of failure detected in the subsystem and identified by the PID or SID.

Fan Clutch Override Used to engage the cooling fan when desired. Fan Controls use the DDEC oil temperature, coolant temperature, or air temperature sensors to engage the cooling fan.

Fuel Pressure Sensor Provides fuel pressure information to the ECM. Used for diagnostics.

Fuel Temperature Sensor Provides fuel temperature information to the ECM. Used for determining hot fuel, and adjusting the calibration based on this temp.

Half Engine Idle The engine idles on three of the cylinders to reduce the amount of white smoke on cold engine startup.

High Range Max MPH Defines the minimum vehicle speed required to activate the high range max RPM function. This is used to encourage the driver to use high gear, while in cruise control.

High Range Max RPM Limits the maximum engine speed in the top range of gears, encouraging the driver to upshift to the next higher gear to increase vehicle speed. This function will determine the vehicle speed limit, unless a slower speed limit is selected for the vehicle speed limit parameter. During the shift sequence, the high range max MPH must be reached before the high range max RPM is achieved.

Horsepower Rating Password	A 4 digit alpha-numeric password to protect and activate the horsepower rating in the ECM. This password is set with the DDR.
Horsepower Rating Security	Protects the multiple horsepower ratings in the ECM. Only one rating will be available with this feature turned on. This lock is set at the time of engine order from DDC or the OEM.
Idle Shutdown Override With Throttle	Allows the engine shutdown to be canceled by depressing the accelerator pedal while the yellow check engine light is flashing 90 seconds before engine shutdown.
Idle Time	The amount of time spent idling before the engine will automatically shutdown; set with the DDR.
Idle Timer Shutdown	Allows the engine to shutdown after a customer set time expires on idling (low idle or high idle or PTO).
Injector Harness	Installed at the factory and are delivered connected to the injection units and the ECMs.
InfraRed Information System	Provides infrared two-way communication between a vehicle and a PC.
Limiting Speed Governor	Maintains vehicle speed based on driver throttle input. The engine changes RPM to maintain a vehicle speed with the accelerator pedal.
Maintenance Alert System	Monitors engine fluid levels and filter restrictions and notifies the driver and/or technician when maintenance is required.
Maximum Security	Protects and locks out <u>all</u> of the programmed parameters in the ECM. This lock is set at the time of engine order from DDC or at the OEM. Feature settings cannot be changed with maximum security turned on.
Oil Pressure Sensor	Provides engine oil pressure to the ECM. Used for engine protection.
Oil Temperature Sensor	Provides the engine oil temperature to the ECM. Used for engine protection and fan controls.
Parameter Identification Character	A PID is a single byte character used in J1587 messages to identify the data byte(s) that follow.

PasSmart	Allows a fleet manager to enable a second Vehicle Limit Speed (VLS) above the normal VLS to assist while passing other vehicles on the highway. This second VLS is programmed for a limited duration during a given time period (interval).
Power Harness	Connects battery power (12 or 24 volts) and ground to the ECM and includes fuse(s) or circuit breaker(s). OEM supplied.
Power Take Off	A mechanical gear device used to divert engine horsepower to other machinery.
Progressive Shifting	Encourages the driver to shift in to a higher gear before the engine reaches governed speed. The Spec Manager program should be utilized to determine maximum vehicle speed. Typically, this is used on 2100 RPM rated engines.
Pressure Sensor Governor For Fire Trucks	Maintains a set water pressure on a fire truck water pump. The engine speed will vary to maintain a constant water pressure. This feature is in fire trucks.
Pressure Sensor Governor Light For Fire Trucks	Indicates that the Pressure Sensor Governor is active.
Pulse Width	The duration of time the injectors are fueling the engine, measured in degrees of rotation of the engine.
Pulse Width Modulated	A type of electrical signal output.
SAE J1587	Communication link used for DDR, Data Hub, ABS, etc.
SAE J1922	Communication link used for traction control systems and CEEMAT Fuller transmissions.
SAE J1939	Communication link used for multiple block engines and other vehicle systems.
Starter Lockout	Prevents the starter from activating after the engine is already running. Typically, this is used in buses.
Stop Engine Light	A panel mounted red indicator light provided by the OEM as standard.
Stop Engine Override	This switch allows an override of the engine protection system when toggled in the rampdown or shutdown mode

	every 30 seconds. This can be the same switch as the diagnostic request.
Subsystem Identification Character	A SID is a single byte character used to identify field-repairable or replaceable subsystems for which failures can be detected or isolated.
Synchronous Reference Sensor	Indicates a specific cylinder in the firing order; tells the ECM when the #1 cylinder is at top dead center of its stroke. DDC standard.
Timing Reference Sensor	Indicates crank position of every cylinder; tells the ECM where the rotation of the engine is or when to fuel each cylinder. DDC standard.
Throttle Inhibit	Disables the accelerator pedal by making it unresponsive when a switch is toggled. Typically, this is used in buses for when the doors are open, or when the pressure governor system is active in a fire truck.
Throttle Position Sensor	Converts the operator's hand throttle and/or foot pedal input into a signal for the ECM, better known as the accelerator pedal. This pedal, located on the floor of the vehicle cab, tells the ECM how much fuel is needed based on the driver input. Provided by the OEM, standard.
Top Dead Center	When the piston is at the top of the stroke nearest the head of the engine. The point at which the piston stops going up and starts going down.
Turbocharger Boost Sensor	Provides air pressure (atmospheric and boost) information from turbocharger to the ECM. This sensor is located in the air intake manifold. Used for white smoke and emissions. DDC standard.
Variable Speed Governor	Maintains a constant engine speed with varying loads. A variable speed governor is referred to as: high idle, fast idle, hand throttle, Vernier, voltage divider, power take off (PTO), cruise control, or cruise switch PTO.
Vehicle Electronic Programming System	A PC software package used to to change the parameters to be programmed into the DDEC IV ECM. OEM supplied.
Vehicle Interface Harness	Connects the ECM to other vehicle systems.

Vehicle Power Shutdown

Allows the chassis power and DDEC power to shutdown after idling on low idle, high idle, or PTO for the set idle time. The idle shutdown override with throttle will override the vehicle power shutdown. In addition, the vehicle power will shutdown after an engine protection shutdown. This can be overridden by the stop engine override switch.

Vehicle Speed Limiting

The vehicle's fastest speed. limits the vehicle from going faster than a preset limit.

Vehicle Speed Maximum

The fastest vehicle speed (MPH/KPH) the driver is allowed to travel on flat ground.

Vehicle Speed Sensor

Tells the ECM how fast the vehicle is going. This magnetic pickup is located on the tail shaft of the transmission or on the rear drive wheel of the vehicle. Provided by the OEM. Required for cruise control, vehicle speed limiting, vehicle overspeed with/without throttle, progressive shift, and engine brakes. Optional.

Wire Comb

A strain relief for the back of the VIH connector to prevent water from entering the connector from the back. Used in all Series 50, Series 149, and Industrial applications.

INDEX

A

Active Codes, 5-24
Add Coolant Level Sensor (ACLS), 3-119
Air Compressor Control, 5-5
 decrease (set/coast on), 5-6
 digital inputs, 4-19
 digital outputs, 4-23
 increase (resume/acceleration on), 5-5
 load switch, 5-6
 multiple pressure ratings, 5-6
 shutdown, 5-6
 solenoid, 5-6
Air Filter Restriction Sensor (AFRS), 3-113
Air Temperature Sensor (ATS), 3-102
Allison World Transmission Series, 5-194
Anti-Lock Brake Systems, 5-11

B

Barometric Pressure Sensor (Baro sensor), 3-102
Battery
 average drain current, 3-48
 switch ground, 3-22
Battery Size, 3-48
Bendix, E-1
Borg Warner, E-1

C

Check Engine Light (CEL)
 activated to flash codes, 5-44
 as used in MAS, 5-98
 engine overtemperature protection, 5-39, 5-42
 engine protection, 5-37
 flashing codes, 4-11
 idle shutdown, 5-77
 rampdown, 5-38
 requirements and guidelines, 3-142
 use in diagnostics, 5-24
 wiring, 3-143
Circuits
 data link, 3-68
 data link, 800 & 801, 3-68
 data link, 900 & 901, 3-68
 return power (ground), 3-68
Codes, A-1

 active flashed, 5-24
 inactive flashed, 5-24

Communication Harness, 3-35, connector-to-ECM, 3-58
Communication Link, J1939, 6-45
Conduit and Loom, 3-97
Connector Removing Tools, 3-69
Connectors
 1708/1587 data link connector, 3-64
 communication harness-to-ECM connector, 3-58
 ESH-to-ECM connector, 3-60
 power harness-to-ECM connector, 3-57
 Required Connectors, 3-53
 SAE 1939/J1587 data link connector, 3-65
 VIH-to-ECM connector, 3-53
Coolant Level Sensor (CLS), 3-115
Coolant Temperature Sensor (CTS), 3-103
Crimp Tools, 3-69
Criteria, wires, 3-67
Cruise Control, 5-15
 cruise power, 5-50
 digital inputs, 4-7
 engine brake, 5-31
 engine speed, 5-15
 vehicle speed, 5-15
Current
 amount of current draw, 3-48
 CEL requirements, 3-142
 rated fuse current, 3-52
 SEL requirement, 3-144

D

Data Card, 5-128
Data Hub, 5-117
Data Link
 1708/1587
 connector, 3-64
 messages, 6-6
 circuits 800 & 801, 3-68
 circuits 900 & 901, 3-68
 SAE J1587, 6-5, 3-68, anti-lock brakes, 5-11
 SAE J1922, 6-37, 3-68, anti-lock brakes, 5-11
 SAE J1939, anti-lock brakes, 5-11
 SAE J1939/J1587, connector, 3-65
DDC, supplied hardware, 3-3
DDEC III Data Pages, 5-118

DDEC Reports, 5-119

DDEC Reprogramming System (DRS), 7-13

Deceleration Light, 4-25

Detroit Diesel Diagnostic Link (DDDL), 7-11

- instrumentation menu, 5-103
- maintenance alert menu, 5-102

Deutsch Connectors, 3-84

Deutsch Terminals

- installation, 3-84
- removal, 3-86

Diagnostic Data Reader (DDR), 7-7, maintenance status menu, 5-101

Diagnostic Request Switch, 7-3, 4-11, 5-24–5-25, 5-44

Diagnostics, 5-23

- check engine light, 5-24
- diagnostic request switch, 5-24
- stop engine light, 5-24
- stop engine override switch, 5-25

Digital Inputs, 4-3, 4-5

- air compressor load switch, 4-19
- auxiliary coolant level switch, 4-18
- cruise control, 4-7
- engine brake, 4-9
- engine protection, 4-11
- engine ratings, 4-13
- fan control, 4-14
- parking brake interlock, 4-19
- pressure sensor governor, 4-15
- rpm freeze, 4-19
- throttle control, 4-16
- throttle kickdown, 4-19

Digital Outputs, 4-3, 4-21

- air compressor load solenoid, 4-23
- coolant level low light, 4-24
- cruise control active light, 4-24
- deceleration light, 4-25
- engine brake active, 4-25
- ether injection, 4-26
- external engine brake enable, 4-27
- external engine synchronization/frequency input
 - active, 4-27
- fan control, 4-28
- high coolant temperature light, 4-29
- high crankcase pressure light, 4-29
- high oil temperature light, 4-30
- low coolant pressure light, 4-30
- low ddec voltage warning light, 4-31
- low oil pressure light, 4-31
- optimized idle active light, 4-32
- pressure sensor governor active light, 4-24

pressure sensor governor mode light, 4-32

starter lockout, 4-33

Top2 shift lockout solenoid, 4-35

Top2 shift solenoid, 4-34

transmission retarder, 4-35

vehicle power shutdown, 4-36

VSG active indication, 4-37

E

EGR Delta Pressure Sensor (EGR Delta P), 3-104

EGR Temperature Sensor, 3-104

Electronic Control Module (ECM), 3-5

- connections to other vehicle systems, 3-15
- diagnostics, 5-23
- environmental conditions, 3-7
- operating voltage, 3-47

Electronic Fire Commander (EFC), 1-5, 5-27

Electronic Foot Pedal Assembly (EFPA), 3-139, as OEM requirement, 3-3

Electronic Unit Injector (EUI), -, 3-38

Engine Brake, 5-31

- active, 5-31
- clutch released input, 5-32
- cruise control, 5-31
- digital inputs, 4-9
- digital outputs, 4-25
- disable, 5-31
- engine fan braking, 5-32
- minimum mph, 5-32
- service brake control of, 5-32

Engine Protection, 5-37

- diagnostic request switch, 5-44
- digital inputs, 4-11
- engine overtemperature protection, 5-39
- rampdown, 5-38
- shutdown, 5-38
- stop engine override
 - continuous override - option 1, 5-46
 - continuous override - option 2, 5-46
 - momentary override, 5-45
- warning only, 5-37

Engine Ratings, 5-49

- cruise power, 5-50
- digital inputs, 4-13
- limiting torque curve, 5-50
- switches, 5-49

Engine Sensor Harness, 3-9

ESH-to-ECM Connector, 3-60

Ether Start, 5-53
 digital outputs, 4-26
 ether start harness, -, 5-56

Exhaust Back Pressure Sensor, 3-135

Exhaust Temperature Sensor, 3-123

Exhaust Temperature Sensor (ETS), 3-123

F

Fan Control, 5-57
 digital inputs, 4-14
 digital outputs, 4-28
 dual fans, 5-64
 single fan, 5-59
 two-speed fan, 5-66
 variable speed single-fan, 5-69

Fire Truck Pump Pressure Sensor, 3-125

Flash Codes, 7-3, 5-24, definition of, 5-26

FMI

 DDEC identifier, 6-5
 definition of, 5-26

Fuel Economy Incentive, 5-73

Fuel Restriction Sensor (FRS), 3-105, 5-109

Fuel Temperature Sensor (FTS), 3-106

G

Governor Droop, 5-167

Governors, 5-167

 limiting speed governor, 5-167
 variable speed governor, 5-171

H

Half Engine Idle, 5-75

Hardware

 supplied by DDC, 3-3
 supplied by OEM, 3-3

Harnesses

 communication harness, 3-35
 communication Harness, 1-2
 engine sensor harness, 3-9
 engine sensor harness, on-highway, -, 3-9
 ether start, -, 5-56
 Injector Harness, 3-37
 MAS display harness, -, 5-115
 power harness, 3-39
 ProDriver DC jumper harness, -, 5-136

ProDriver DC vehicle harness, -, 5-135
 vehicle interface harness, on-highway, 3-15

Hot Idle, 5-167

I

Idle Shutdown Timer, 5-77

 ambient air temperature override disable, 5-80
 enabled on VSG, 5-79
 idle shutdown override, 5-78
 vehicle power shutdown, 5-79

Ignition, ignition source, 3-22

Inactive Codes, 5-24

Index Sensors & Controls, Inc., E-1

K

Kent-Moore, 3-69

L

Lights, 3-141

 CEL, 3-141
 SEL, 3-144

Limiting Speed Governor (LSG), 5-167

 control options, 5-168
 dual electronic foot pedal assembly, 5-170
 electronic foot pedal assembly, 5-168
 with VSG as a secondary control, 5-167

Linnig U.S.A., E-1

Linning Corp., E-1

Low Gear Torque Limiting, 5-95

M

Main Power Supply Shutdown, 3-49

Maintenance Alert System, 5-97

 add coolant level sensor, 5-107
 air filter restriction sensor, 5-105
 Detroit Diesel Diagnostic Link, 5-102
 diagnostic data reader, 5-101
 display module, 5-99
 fuel restriction sensor, 5-109
 oil level sensor, 5-110
 ProDriver DC, 5-99

Management Information Products, 5-117

 data hub, 5-117
 DDEC data, 5-119

DDEC III data pages, 5-118
DDEC reports, 5-119
ProDriver DC, 5-128

Message Identification Character (MID), description of, 6-5

MIDs

DDEC identifier, 6-5
supported by DDEC, 6-37

Multi-ECM

DDC-supplied hardware, 3-3
OEM-supplied hardware, 3-3

O

OEM

diagnostic connector, 3-64
installed sensors, 3-112
supplied hardware, 3-3
supplied harness, 3-15, 3-35, 3-39
supplied lights, 3-141
supplied throttle control device, 3-139

Oil Level Sensor (OLS), 3-107, 5-110

Oil Pressure Sensor (OPS), 3-107

Oil Temperature Sensor (OTS), 3-108

Optical Coolant Level Sensor, 3-121

Optimized Idle, 2-8, 5-139

digital outputs, 4-32
engine mode, 5-140
thermostat mode, 5-140

P

PasSmart, 5-145

PIDs, 6-6–6-8

DDEC identifier, 6-5
definition of, 5-26
double byte parameters, 6-20
single byte parameters, 6-10
variable length parameters, 6-27

Power Harness, 3-39

connector-to-ECM, 3-57
connectors, 3-44
dual-fuse installation, 3-39
single-fuse installation, 3-41

Pressure Governor Light, 4-32

Pressure Mode, 5-153

Pressure Sensor Governor (PSG), 5-153
digital inputs, 4-15

digital outputs, 4-32
pressure mode, 5-153
rpm mode, 5-153
switches, 5-154

ProDriver DC, 1-4, 5-128

data card, 5-128
installation, 5-129
flush mount, -, 5-130
surface mount, -, 5-133
maintenance alert system, 5-99

Progressive Shift, 5-159

high range, 5-161
low range #1, 5-160
low range #2, 5-160

PWM 1 Port, 5-185

R

Relative Humidity/Turbo Compressor Inlet Temperature Sensor, 3-127

RPM Mode, 5-153

S

SAE J1128, 3-19

SAE J1587, 5-185

anti-lock brakes, 5-11
diagnostic connector, 3-66
message format, 6-5
PIDs, 6-6–6-8
double byte parameters, 6-20
single byte parameters, 6-10
transmitter data request, 6-9
variable length parameters, 6-27
transmission interface, 5-194

SAE J1922, 6-37

anti-lock brakes, 5-11
communication harness design guidelines, 3-36
message format, 6-37
MIDs, 6-37
parameters available, 6-37
powertrain control data link, 5-185
transmission interface, 5-194

SAE J1939, 6-45

anti-lock brakes, 5-11
communication harness design guidelines, 3-36
data link layer parameter group number response definitions, 6-73
message format, 6-45
powertrain control data link, 5-185

- transmission interface, 5-194
- SAE J1939/71, application layer parameter group definitions, 6-46
- Safety Precautions, 2-1
- Sensors, 3-101, 3-103, 3-107–3-109, 3-112
 - add coolant level sensor, 3-119
 - air filter restriction sensor, 3-113
 - air temperature sensor, 3-102
 - barometric pressure sensor, 3-102
 - coolant level sensor, 3-115
 - coolant temperature sensor, 3-103
 - egr delta pressure sensor, 3-104
 - egr temperature sensor, 3-104
 - exhaust back pressure sensor, 3-135
 - exhaust temperature sensor, 3-123
 - factory-installed sensors, 3-101, function and location, 3-101
 - fire truck pump pressure sensor, 3-125
 - fuel restriction sensor, 3-105
 - fuel temperature sensor, 3-106
 - OEM-installed sensors, 3-112, function and guidelines, 3-112
 - oil level sensor, 3-107
 - oil pressure sensor, 3-107
 - oil temperature sensor, 3-108
 - optical coolant level sensor, 3-121
 - relative humidity/turbo compressor inlet temperature sensor, 3-127
 - synchronous reference sensor, 3-109
 - throttle position sensor, 3-129
 - timing reference sensor, 3-109
 - turbo boost sensor, 3-110
 - turbo compressor out sensor, 3-110
 - turbo speed sensor, 3-111
 - vehicle speed sensor, 3-130
- SEO Switch, 7-3, 4-11, 5-25
- SIDs
 - DDEC identifier, 6-5
 - definition of, 5-26
- Society of Automotive Engineers (SAE), 3-36
- Starter Lockout, 4-33
- Stop Engine Light (SEL)
 - activated to flash codes, 5-44
 - as used in MAS, 5-98
 - engine overtemperature protection, 5-39, 5-42
 - engine protection, 5-37
 - flashing codes, 4-11
 - rampdown, 5-38
 - requirements and guidelines, 3-144
 - shutdown, 5-38
 - use in diagnostics, 5-24

- wiring, -, 3-145
- Stop Engine Override (SEO) Switch, 5-45
- Stop Engine Override Options, 5-45
- Synchronous Reference Sensor (SRS), 3-109

T

- Tachometer Drive, 5-165
- Tape and Taping, 3-99
- Terminal Installation
 - Deutsch connectors, 3-84
 - pull-to-seat, 3-74
 - push-to-seat, 3-70
- Terminal Removal
 - Deutsch terminals, 3-86
 - pull-to-seat, 3-77
 - push-to-seat, 3-73
- Throttle Control, 3-139, 5-167, digital inputs, 4-16
- Throttle Devices, 3-139, electronic foot pedal assembly, 3-139
- Throttle Position Sensor (TPS), 3-129
- Timing Reference Sensor (TRS), 3-109
- Top2, 5-198, digital outputs, 4-34–4-35
- Transmission Interface, 5-185
 - Allison hydraulic transmission, 5-192
 - Allison interface modules, 5-188
 - Allison world transmission, 5-194
 - digital input and output transmissions, 5-198
 - Eaton CEEMAT transmission, 5-197
 - Eaton Top2, 5-198
 - GE propulsion system controller, 5-190
 - PWM1 operation, 5-185
 - SAE J1939 transmissions, 5-197
 - Voith transmission, 5-191
 - ZF Ecomat, 5-191
- Transmission Retarder, 5-201, digital outputs, 4-35
- Turbo Boost Sensor (TBS), 3-110
- Turbo Compressor Out Sensor, 3-110
- Turbo Speed Sensor, 3-111

V

- Variable Speed Governor (VSG), 5-171
 - alternate minimum VSG, 5-176
 - cruise switch VSG, 5-172
 - dual throttle controls, 5-179
 - electronic foot pedal assembly, 5-175

- frequency input, 5-182
 - hand throttle, 5-174
 - voltage dividers, 5-176
 - Vehicle Electronics Programming System (VEPS), 7-5
 - Vehicle Interface Harness (VIH), on-highway, 3-15
 - Vehicle Power Shutdown, 4-36, 5-77
 - Vehicle Speed Limiting, 5-203
 - Vehicle Speed Sensor (VSS), 3-130
 - magnetic pickup requirements, 3-131
 - open collector requirements, 3-133
 - VIH-to-ECM Connector, 3-53
 - Voith Retarder, 4-35
 - VSG, digital outputs, 4-37
- ## W
- Welding, 3-50
 - Wires
 - criteria, 3-67
 - recommendations, 3-67
 - requirements, 3-67
 - Wiring
 - add coolant level sensor, -, 3-120
 - add coolant level sensor with dash-mounted light, -, 5-108
 - air filter restriction sensor, -, 5-106, 3-114
 - Allison transmission
 - automatic transmission open collector speed sensor, -, 5-190, 5-196
 - hydraulic transmission, -, 5-192
 - maximum feature throttle interface module, -, 5-189
 - throttle interface module, -, 5-188
 - WT-series, -, 5-195
 - CEEMAT transmission, -, 5-197
 - check engine light, -, 3-143
 - coolant level sensor, -, 3-116
 - data link circuits, 3-68
 - dual hand throttle, -, 5-181
 - exhaust temperature sensor harness, -, 3-124
 - fire truck pump pressure sensor, -, 3-126
 - fuel restriction sensor, -, 5-109
 - GE propulsion system controller, -, 5-190
 - magnetic pickup VSS, -, 3-131
 - oil level sensor, -, 5-110
 - open collector VSS, -, 3-132–3-133
 - optical coolant level sensor harness, -, 3-122
 - power harness - single-ECM, dual-fuse, -, 3-39
 - power harness - single-ECM, single-fuse, -, 3-41
 - power harness wire resistance, 3-68
 - pressure sensor governor, -, 5-155
 - ProDriver DC jumper harness, -, 5-136
 - ProDriver DC vehicle harness, -, 5-135
 - return power (ground) circuits, 3-68
 - stop engine light, -, 3-145
 - tachometer, -, 5-165
 - Top2 transmission, -, 5-199
 - Voith transmission, -, 5-191
 - ZF Ecomat transmission, -, 5-191