



Robex 290LC-9

CRAWLER EXCAVATOR



SERVICE MANUAL

FOREWORD	8
1. Structure	8
2. How To Read The Service Manual	9
3. Conversion Table	10
SECTION 1 GENERAL	16
Group 1 Safety	17
Group 2 Specifications	26
1. Major Component	26
2. Specifications	27
3. Working Range	31
4. Weight	34
5. Lifting Capacities	37
6. Bucket Selection Guide	47
7. Undercarriage	49
8. Specifications For Major Components	51
9. Recommended Oils	55
SECTION 2 STRUCTURE AND FUNCTION	56
Group 1 Pump Device	57
1. Structure	57
2. Function	63
Group 2 Main Control Valve (#0163 And Up)	76
1. Structure	76
2. Hydraulic Circuit	82
3. Function	83
Group 2 Main Control Valve (up To #0162)	110
1. Structure	110
2. Hydraulic Circuit	116
3. Function	117
Group 3 Swing Device	144
1. Structure	144
2. Function	147
Group 4 Travel Device (#0318 And Up)	155
1. Construction	155
2. Specification 1)	156
3. Principle Of Driving	157
Group 4 Travel Device (up To #0317)	164
1. Construction	164
2. Specification 1)	165
2)	166
3. Operation	167

Group 5 Rcv Lever	178
1. Structure	178
2. Functions	181
Group 6 Rcv Pedal	185
1. Structure	185
2. Function	187
SECTION 3 HYDRAULIC SYSTEM	191
Group 1 Hydraulic Circuit	192
Group 2 Main Circuit	193
1. Suction And Delivery Circuit	193
2. Return Circuit	194
3. Drain Circuit	195
Group 3 Pilot Circuit	196
1. Suction, Delivery And Return Circuit	197
2. Safety Solenoid Valve (safety Lever)	198
3. Boom Priority System.	199
4. Travel Speed Control System	200
5. Main Relief Pressure Change Circuit	201
6. Arm Regeneration Cut System.	202
7. Swing Parking Brake Release	203
8. Swing Priority System.	204
Group 4 Single Operation	205
1. Boom Up Operation.	205
2. Boom Down Operation	206
3. Arm In Operation.	207
4. Arm Out Operation	208
5. Bucket In Operation	209
6. Bucket Out Operation.	210
7. Swing Operation	211
8. Travel Forward And Reverse Operation	213
Group 5 Combined Operation	215
1. Outline	215
2. Combined Swing And Boom Up Operation.	216
3. Combined Swing And Arm Operation	217
4. Combined Swing And Bucket Operation.	218
5. Combined Swing And Travel Operation	219
6. Combined Boom And Travel Operation	220
7. Combined Arm And Travel Operation	221
8. Combined Bucket And Travel Operation.	222
SECTION 4 ELECTRICAL SYSTEM	223
Group 1 Component Location	224
1. Location 1	224
2. Location 2.	225

Memorandum.	228
1. Power Circuit	229
2. Starting Circuit.	231
3. Charging Circuit	233
4. Head And Work Light Circuit.	235
5. Beacon Lamp And Cab Light Circuit	237
6. Wiper And Washer Circuit.	239
Group 3 Electrical Component Specification.	244
Group 4 Connectors	252
1. Connector Destination	252
2. Connection Table For Connectors	256
SECTION 5 MECHATRONICS SYSTEM	275
Group 1 Outline.	276
Group 2 Mode Selection System.	278
1. Power Mode Selection System.	278
2. Work Mode Selection System	279
3. User Mode Selection System	280
Group 3 Automatic Deceleration System.	281
1. When Auto Idle Pilot Lamp On 2. When Auto Idle Pilot Lamp Off	281
Group 4 Power Boost System	282
Group 5 Travel Speed Control System.	283
Group 6 Automatic Warming Up System.	284
Group 7 Engine Overheat Prevention System	285
Group 8 Variable Power Control System.	286
Group 9 Attachment Flow Control System	287
Group 10 Anti-restart System	288
1. Anti-restart Function	288
Group 11 Self-diagnostic System	289
3. Machine Error Codes Table	290
4. Engine Fault Code	293
Group 12 Engine Control System	302
1. Mcu And Engine Ecm (electronic Control Module) 2. Mcu Assembly.	302
Group 13 Eppr Valve.	303
1. Pump Eppr Valve.	303
2. Boom Priority Eppr Valve	306
Group 14 Monitoring System.	308
1. Outline	308
2. Cluster	308
3. Cluster Connector	310
Group 15 Fuel Warmer System	331
1. Specification.	331
2. Operation	331

3. Electric Circuit	331
-------------------------------	-----

SECTION 6 TROUBLESHOOTING. 332

Group 1 Before Troubleshooting	333
--	-----

1. Introduction	333
2. Diagnosing Procedure	334

Group 2 Hydraulic And Mechanical System	336
---	-----

1. Introduction	336
2. Drive System	337
3. Hydraulic System.	339
4. Swing System	341
5. Travel System	345
6. Attachment System.	350

Group 3 Electrical System	356
-------------------------------------	-----

1. When Starting Switch Is Turned On, Monitor Panel Display Does Not Appear.	356
3. Battery Charging Warning Lamp Lights Up(starting Switch : On)	358
4. When Coolant Overheat Warning Lamp Lights Up (engine Is Started).	359
5. When Air Cleaner Warning Lamp Lights Up (engine Is Started).	360
6. When Engine Oil Pressure Warning Lamp Lights Up (engine Is Started).	361
7. When Hydraulic Oil Temperature Warning Lamp Lights Up (engine Is Started)	362
8. When Coolant Temperature Gauge Does Not Operate (hcespn 304, Fmi 3 Or 4)	363
9. When Fuel Gauge Does Not Operate(hcespn 301, Fmi 3 Or 4).	364
10. When Safety Solenoid Does Not Operate.	365
11. When Travel Speed 1, 2 Does Not Operate (hcespn 167, Fmi 5 Or 6)	366
12. When Engine Does Not Start (Lights Up Condition)	367
13. When Starting Switch On Does Not Operate	368
14. When Starting Switch Is Turned On, Wiper Motor Does Not Operate	369
15. When Starting Switch Is Turned On, Head Lamp Does Not Lights Up.	370
16. When Starting Switch Is Turned On, Work Lamp Does Not Lights Up.	371

Group 4 Mechatronics Systegroup System	372
--	-----

1. All Actuators Speed Are Slow	372
2. Engine Stall	374
3. Malfunction Of Cluster Or Mode Selection System	376
4. Malfunction Of Accel Dial	377
5. Auto Decel System Does Not Work.	379
6. Malfunction Of Pump 1 Pressure Sensor	381
7. Malfunction Of Pump 2 Pressure Sensor	383
8. Malfunction Of Pump 3 Pressure Sensor	385
9. Malfunction Of Negative 1 Pressure Sensor	387
10. Malfunction Of Negative 2 Pressure Sensor.	389
11. Malfunction Of Swing Pressure Sensor.	391

12. Malfunction Of Arm In/out & Bucket In Pressure Sensor	393
13. Malfunction Of Boom Up Pressure Sensor	395
14. Malfunction Of Power Max	397
15. Malfunction Of Boom Priority Eppr Valve	399
16. Malfunction Of Arm Regeneration Solenoid	400

SECTION 7 MAINTENANCE STANDARD 402

Group 1 Operational Performance Test	403
1. Purpose.	403
2. Terminology.	404
3. Operation For Performance Tests	405
Group 2 Major Component.	423
1. Main Pump	423
2. Main Control Valve	424
3. Swing Device	425
4. Travel Motor (up To #0306)	426
4. Travel Motor (#0307 And Up)	428
5. Travel Reduction Gear	429
6. Rcv Lever.	430
7. Rcv Pedal.	431
8. Turning Joint	432
9. Cylinder.	433
Group 3 Track And Work Equipment.	434
1. Track	434
2. Work Equipment	439

SECTION 8 DISASSEMBLY AND ASSEMBLY 440

Group 1 Precautions	441
1. Removal Work	441
2. Install Work	442
3. Completing Work.	443
Group 2 Tightening Torque.	444
1. Major Components	444
2. Torque Chart	445
Group 3 Pump Device	447
1. Removal And Install	447
2. Main Pump (1/2)	449
3. Regulator	459
Group 4 Main Control Valve	470
1. Removal And Install Of Motor	470
2. Structure	471
3. Disassembly And Assembly	476
Group 5 Swing Device	491
1. Removal And Install Of Motor	491
2. Swing Motor.	492

3. Removal And Install Of Reduction Gear	504
4. Reduction Gear	505
Group 6 Travel Device (#0318 And Up)	515
1. Removal And Install	515
2. Specification 1)	516
2. Disassembling	518
3. Disassembling Reduction Unit	533
6. Assembling Reduction Gear	539
Group 6 Travel Device (up To #0317)	548
1. Removal And Install	548
2. Travel Motor 1)	549
3. Disassembling	552
4. Reassembling	558
5. Travel Reduction Gear 1)	562
6. Disassembling	564
Group 7 Rcv Lever	579
1. Removal And Install	579
2. Disassembly And Assembly	580
Group 8 Turning Joint	593
1. Removal And Install	593
2. Disassembly And Assembly	594
Group 9 Boom, Arm And Bucket Cylinder	598
1. Removal And Install	598
2. Disassembly And Assembly	604
Group 10 Undercarriage	615
1. Track Link	615
2. Carrier Roller	616
3. Track Roller	617
4. Idler And Recoil Spring	618
Group 11 Work Equipment.	627
1. Structure	627
2. Removal And Install	628
SECTION 9 COMPONENT MOUNTING TORQUE	631
Group 1 Introduction Guide.	632
Group 2 Engine System	633
Group 3 Electric System	635
Group 4 Hydraulic System	637
Group 5 Undercarriage.	640
Group 6 Structure	642
Group 7 Work Equipment	646

FOREWORD

1. STRUCTURE

This service manual has been prepared as an aid to improve the quality of repairs by giving the serviceman an accurate understanding of the product and by showing him the correct way to perform repairs and make judgements. Make sure you understand the contents of this manual and use it to full effect at every opportunity.

This service manual mainly contains the necessary technical information for operations performed in a service workshop.

For ease of understanding, the manual is divided into the following sections.

SECTION 1 GENERAL

This section explains the safety hints and gives the specification of the machine and major components.

SECTION 2 STRUCTURE AND FUNCTION

This section explains the structure and function of each component. It serves not only to give an understanding of the structure, but also serves as reference material for troubleshooting.

SECTION 3 HYDRAULIC SYSTEM

This section explains the hydraulic circuit, single and combined operation.

SECTION 4 ELECTRICAL SYSTEM

This section explains the electrical circuit, monitoring system and each component. It serves not only to give an understanding electrical system, but also serves as reference material for trouble shooting.

SECTION 5 MECHATRONICS SYSTEM

This section explains the computer aided power optimization system and each component.

SECTION 6 TROUBLESHOOTING

This section explains the troubleshooting charts correlating **problems** to **causes**.

SECTION 7 MAINTENANCE STANDARD

This section gives the judgement standards when inspecting disassembled parts.

SECTION 8 DISASSEMBLY AND ASSEMBLY

This section explains the order to be followed when removing, installing, disassembling or assembling each component, as well as precautions to be taken for these operations.

SECTION 9 COMPONENT MOUNTING TORQUE

This section shows bolt specifications and standard torque values needed when mounting components to the machine.

The specifications contained in this shop manual are subject to change at any time and without any advance notice. Contact your HYUNDAI distributor for the latest information.

2. HOW TO READ THE SERVICE MANUAL

Distribution and updating

Any additions, amendments or other changes will be sent to HYUNDAI distributors.

Get the most up-to-date information before you start any work.

Filing method


1. See the page number on the bottom of the page.

File the pages in correct order.

2. Following examples shows how to read the page number.

Example 1

2 - 3

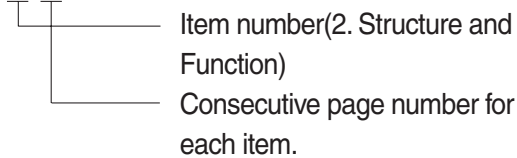

3. Additional pages : Additional pages are indicated by a hyphen(-) and number after the page number. File as in the example.

10 - 4

10 - 4 - 1

10 - 4 - 2

10 - 5

Added pages

Revised edition mark(①②③...)

When a manual is revised, an edition mark is recorded on the bottom outside corner of the pages.

Revisions

Revised pages are shown at the list of revised pages on the between the contents page and section 1 page.

Symbols

So that the shop manual can be of ample practical use, important places for safety and quality are marked with the following symbols.

Symbol	Item	Remarks
	Safety	Special safety precautions are necessary when performing the work.
		Extra special safety precautions are necessary when performing the work because it is under internal pressure.
	Caution	Special technical precautions or other precautions for preserving standards are necessary when performing the work.

3. CONVERSION TABLE

Method of using the Conversion Table

The Conversion Table in this section is provided to enable simple conversion of figures. For details of the method of using the Conversion Table, see the example given below.

Example

1. Method of using the Conversion Table to convert from millimeters to inches

Convert 55mm into inches.

- (1) Locate the number 50 in the vertical column at the left side, take this as ①, then draw a horizontal line from ①.
- (2) Locate the number 5 in the row across the top, take this as ②, then draw a perpendicular line down from ②.
- (3) Take the point where the two lines cross as ③. This point ③ gives the value when converting from millimeters to inches. Therefore, 55mm = 2.165 inches.

2. Convert 550mm into inches.

- (1) The number 550 does not appear in the table, so divide by 10 (Move the decimal point one place to the left) to convert it to 55mm.
- (2) Carry out the same procedure as above to convert 55mm to 2.165 inches.
- (3) The original value (550mm) was divided by 10, so multiply 2.165 inches by 10 (Move the decimal point one place to the right) to return to the original value.
This gives 550mm = 21.65 inches.

Millimeters to inches

②

1mm = 0.03937 in

	0	1	2	3	4	5	6	7	8	9
0		0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
① 50	1.969	2.008	2.047	2.087	2.126	③ 2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Millimeters to inches

1mm = 0.03937in

	0	1	2	3	4	5	6	7	8	9
0		0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Kilogram to Pound

1kg = 2.2046lb

	0	1	2	3	4	5	6	7	8	9
0		2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84
10	22.05	24.25	26.46	28.66	30.86	33.07	35.27	37.48	39.68	41.89
20	44.09	46.30	48.50	50.71	51.91	55.12	57.32	59.5	61.73	63.93
30	66.14	68.34	70.55	72.75	74.96	77.16	79.37	81.57	83.78	85.98
40	88.18	90.39	92.59	94.80	97.00	99.21	101.41	103.62	105.82	108.03
50	110.23	112.44	114.64	116.85	119.05	121.25	123.46	125.66	127.87	130.07
60	132.28	134.48	136.69	138.89	141.10	143.30	145.51	147.71	149.91	152.12
70	154.32	156.53	158.73	160.94	163.14	165.35	167.55	169.76	171.96	174.17
80	176.37	178.57	180.78	182.98	185.19	187.39	189.60	191.80	194.01	196.21
90	198.42	200.62	202.83	205.03	207.24	209.44	211.64	213.85	216.05	218.26

Liter to U.S. Gallon

1 l = 0.2642 U.S.Gal

	0	1	2	3	4	5	6	7	8	9
0		0.264	0.528	0.793	1.057	1.321	1.585	1.849	2.113	2.378
10	2.642	2.906	3.170	3.434	3.698	3.963	4.227	4.491	4.755	5.019
20	5.283	5.548	5.812	6.076	6.340	6.604	6.869	7.133	7.397	7.661
30	7.925	8.189	8.454	8.718	8.982	9.246	9.510	9.774	10.039	10.303
40	10.567	10.831	11.095	11.359	11.624	11.888	12.152	12.416	12.680	12.944
50	13.209	13.473	13.737	14.001	14.265	14.529	14.795	15.058	15.322	15.586
60	15.850	16.115	16.379	16.643	16.907	17.171	17.435	17.700	17.964	18.228
70	18.492	18.756	19.020	19.285	19.549	19.813	20.077	20.341	20.605	20.870
80	21.134	21.398	21.662	21.926	22.190	22.455	22.719	22.983	23.247	23.511
90	23.775	24.040	24.304	24.568	24.832	25.096	25.631	25.625	25.889	26.153

Liter to U.K. Gallon

1 l = 0.21997 U.K.Gal

	0	1	2	3	4	5	6	7	8	9
0		0.220	0.440	0.660	0.880	1.100	1.320	1.540	1.760	1.980
10	2.200	2.420	2.640	2.860	3.080	3.300	3.520	3.740	3.950	4.179
20	4.399	4.619	4.839	5.059	5.279	5.499	5.719	5.939	6.159	6.379
30	6.599	6.819	7.039	7.259	7.479	7.699	7.919	8.139	8.359	8.579
40	8.799	9.019	9.239	9.459	9.679	9.899	10.119	10.339	10.559	10.778
50	10.998	11.281	11.438	11.658	11.878	12.098	12.318	12.528	12.758	12.978
60	13.198	13.418	13.638	13.858	14.078	14.298	14.518	14.738	14.958	15.178
70	15.398	15.618	15.838	16.058	16.278	16.498	16.718	16.938	17.158	17.378
80	17.598	17.818	18.037	18.257	18.477	18.697	18.917	19.137	19.357	19.577
90	19.797	20.017	20.237	20.457	20.677	20.897	21.117	21.337	21.557	21.777

kgf · m to lbf · ft

1 kgf · m = 7.233 lbf · ft

	0	1	2	3	4	5	6	7	8	9
		7.2	14.5	21.7	28.9	36.2	43.4	50.6	57.9	65.1
10	72.3	79.6	86.8	94.0	101.3	108.5	115.7	123.0	130.2	137.4
20	144.7	151.9	159.1	166.4	173.6	180.8	188.1	195.3	202.5	209.8
30	217.0	224.2	231.5	238.7	245.9	253.2	260.4	267.6	274.9	282.1
40	289.3	296.6	303.8	311.0	318.3	325.5	332.7	340.0	347.2	354.4
50	361.7	368.9	376.1	383.4	390.6	397.8	405.1	412.3	419.5	426.8
60	434.0	441.2	448.5	455.7	462.9	470.2	477.4	484.6	491.8	499.1
70	506.3	513.5	520.8	528.0	535.2	542.5	549.7	556.9	564.2	571.4
80	578.6	585.9	593.1	600.3	607.6	614.8	622.0	629.3	636.5	643.7
90	651.0	658.2	665.4	672.7	679.9	687.1	694.4	701.6	708.8	716.1
100	723.3	730.5	737.8	745.0	752.2	759.5	766.7	773.9	781.2	788.4
110	795.6	802.9	810.1	817.3	824.6	831.8	839.0	846.3	853.5	860.7
120	868.0	875.2	882.4	889.7	896.9	904.1	911.4	918.6	925.8	933.1
130	940.3	947.5	954.8	962.0	969.2	976.5	983.7	990.9	998.2	10005.4
140	1012.6	1019.9	1027.1	1034.3	1041.5	1048.8	1056.0	1063.2	1070.5	1077.7
150	1084.9	1092.2	1099.4	1106.6	1113.9	1121.1	1128.3	1135.6	1142.8	1150.0
160	1157.3	1164.5	1171.7	1179.0	1186.2	1193.4	1200.7	1207.9	1215.1	1222.4
170	1129.6	1236.8	1244.1	1251.3	1258.5	1265.8	1273.0	1280.1	1287.5	1294.7
180	1301.9	1309.2	1316.4	1323.6	1330.9	1338.1	1345.3	1352.6	1359.8	1367.0
190	1374.3	1381.5	1388.7	1396.0	1403.2	1410.4	1417.7	1424.9	1432.1	1439.4

kgf/cm² to lbf/in²

1 kgf / cm² = 14.2233 lbf / in²

	0	1	2	3	4	5	6	7	8	9
		14.2	28.4	42.7	56.9	71.1	85.3	99.6	113.8	128.0
10	142.2	156.5	170.7	184.9	199.1	213.4	227.6	241.8	256.0	270.2
20	284.5	298.7	312.9	327.1	341.4	355.6	369.8	384.0	398.3	412.5
30	426.7	440.9	455.1	469.4	483.6	497.8	512.0	526.3	540.5	554.7
40	568.9	583.2	597.4	611.6	625.8	640.1	654.3	668.5	682.7	696.9
50	711.2	725.4	739.6	753.8	768.1	782.3	796.5	810.7	825.0	839.2
60	853.4	867.6	881.8	896.1	910.3	924.5	938.7	953.0	967.2	981.4
70	995.6	1010	1024	1038	1053	1067	1081	1095	1109	1124
80	1138	1152	1166	1181	1195	1209	1223	1237	1252	1266
90	1280	1294	1309	1323	1337	1351	1365	1380	1394	1408
100	1422	1437	1451	1465	1479	1493	1508	1522	1536	1550
110	1565	1579	1593	1607	1621	1636	1650	1664	1678	1693
120	1707	1721	1735	1749	1764	1778	1792	1806	1821	1835
130	1849	2863	1877	1892	1906	1920	1934	1949	1963	1977
140	1991	2005	2020	2034	2048	2062	2077	2091	2105	2119
150	2134	2148	2162	2176	2190	2205	2219	2233	2247	2262
160	2276	2290	2304	2318	2333	2347	2361	2375	2389	2404
170	2418	2432	2446	2460	2475	2489	2503	2518	2532	2546
180	2560	2574	2589	5603	2617	2631	2646	2660	2674	2688
200	2845	2859	2873	2887	2901	2916	2930	2944	2958	2973
210	2987	3001	3015	3030	3044	3058	3072	3086	3101	3115
220	3129	3143	3158	3172	3186	3200	3214	3229	3243	3257
230	3271	3286	3300	3314	3328	3343	3357	3371	3385	3399
240	3414	3428	3442	3456	3470	3485	3499	3513	3527	3542

TEMPERATURE

Fahrenheit-Centigrade Conversion.

A simple way to convert a fahrenheit temperature reading into a centigrade temperature reading or vice verse is to enter the accompanying table in the center or boldface column of figures.

These figures refer to the temperature in either Fahrenheit or Centigrade degrees.

If it is desired to convert from Fahrenheit to Centigrade degrees, consider the center column as a table of Fahrenheit temperatures and read the corresponding Centigrade temperature in the column at the left.

If it is desired to convert from Centigrade to Fahrenheit degrees, consider the center column as a table of Centigrade values, and read the corresponding Fahrenheit temperature on the right.

°C		°F	°C		°F	°C		°F	°C		°F
-40.4	-40	-40.0	-11.7	11	51.8	7.8	46	114.8	27.2	81	117.8
-37.2	-35	-31.0	-11.1	12	53.6	8.3	47	116.6	27.8	82	179.6
-34.4	-30	-22.0	-10.6	13	55.4	8.9	48	118.4	28.3	83	181.4
-31.7	-25	-13.0	-10.0	14	57.2	9.4	49	120.2	28.9	84	183.2
-28.9	-20	-4.0	-9.4	15	59.0	10.0	50	122.0	29.4	85	185.0
-28.3	-19	-2.2	-8.9	16	60.8	10.6	51	123.8	30.0	86	186.8
-27.8	-18	-0.4	-8.3	17	62.6	11.1	52	125.6	30.6	87	188.6
-27.2	-17	1.4	-7.8	18	64.4	11.7	53	127.4	31.1	88	190.4
-26.7	-16	3.2	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-26.1	-15	5.0	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-25.6	-14	6.8	-6.1	21	69.8	13.3	56	132.8	32.8	91	195.8
-25.0	-13	8.6	-5.6	22	71.6	13.9	57	134.6	33.3	92	197.6
-24.4	-12	10.4	-5.0	23	73.4	14.4	58	136.4	33.9	93	199.4
-23.9	-11	12.2	-4.4	24	75.2	15.0	59	138.2	34.4	94	201.2
-23.3	-10	14.0	-3.9	25	77.0	15.6	60	140.0	35.0	95	203.0
-22.8	-9	15.8	-3.3	26	78.8	16.1	61	141.8	35.6	96	204.8
-22.2	-8	17.6	-2.8	27	80.6	16.7	62	143.6	36.1	97	206.6
-21.7	-7	19.4	-2.2	28	82.4	17.2	63	145.4	36.7	98	208.4
-21.1	-6	21.2	-1.7	29	84.2	17.8	64	147.2	37.2	99	210.2
-20.6	-5	23.0	-1.1	35	95.0	21.1	70	158.0	51.7	125	257.0
-20.0	-4	24.8	-0.6	31	87.8	18.9	66	150.8	40.6	105	221.0
-19.4	-3	26.6	0	32	89.6	19.4	67	152.6	43.3	110	230.0
-18.9	-2	28.4	0.6	33	91.4	20.0	68	154.4	46.1	115	239.0
-18.3	-1	30.2	1.1	34	93.2	20.6	69	156.2	48.9	120	248.0
-17.8	0	32.0	1.7	35	95.0	21.1	70	158.0	51.7	125	257.0
-17.2	1	33.8	2.2	36	96.8	21.7	71	159.8	54.4	130	266.0
-16.7	2	35.6	2.8	37	98.6	22.2	72	161.6	57.2	135	275.0
-16.1	3	37.4	3.3	38	100.4	22.8	73	163.4	60.0	140	284.0
-15.6	4	39.2	3.9	39	102.2	23.3	74	165.2	62.7	145	293.0
-15.0	5	41.0	4.4	40	104.0	23.9	75	167.0	65.6	150	302.0
-14.4	6	42.8	5.0	41	105.8	24.4	76	168.8	68.3	155	311.0
-13.9	7	44.6	5.6	42	107.6	25.0	77	170.6	71.1	160	320.0
-13.3	8	46.4	6.1	43	109.4	25.6	78	172.4	73.9	165	329.0
-12.8	9	48.2	6.7	44	111.2	26.1	79	174.2	76.7	170	338.0
-12.2	10	50.0	7.2	45	113.0	26.7	80	176.0	79.4	172	347.0

SECTION 1 GENERAL

Group 1 Safety Hints	1-1
Group 2 Specifications	1-10

SECTION 1 GENERAL


GROUP 1 SAFETY

FOLLOW SAFE PROCEDURE

Unsafe work practices are dangerous. Understand service procedure before doing work; Do not attempt shortcuts.

WEAR PROTECTIVE CLOTHING


Wear close fitting clothing and safety equipment appropriate to the job.

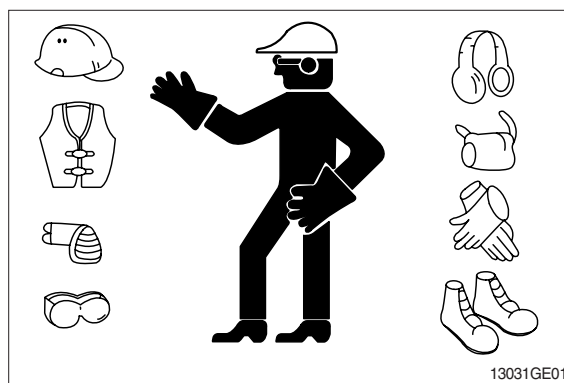

WARN OTHERS OF SERVICE WORK

Unexpected machine movement can cause serious injury.

Before performing any work on the excavator, attach a 「Do Not Operate」 tag on the right side control lever.

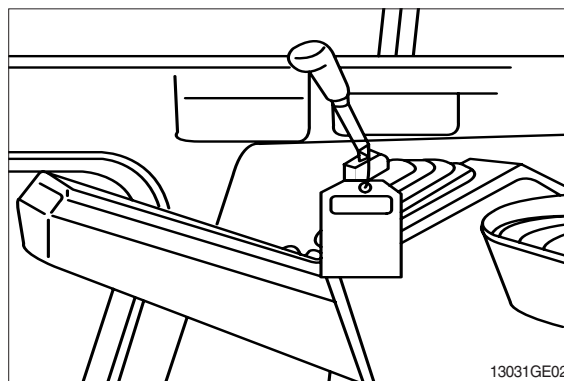


USE HANDHOLDS AND STEPS

Falling is one of the major causes of personal injury.

When you get on and off the machine, always maintain a three point contact with the steps and handrails and face the machine. Do not use any controls as handholds.

Never jump on or off the machine. Never mount or dismount a moving machine.

Be careful of slippery conditions on platforms, steps, and handrails when leaving the machine.

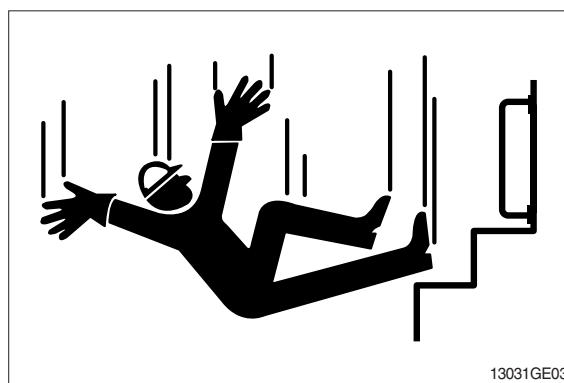


PREPARE FOR EMERGENCIES

Be prepared if a fire starts.


Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

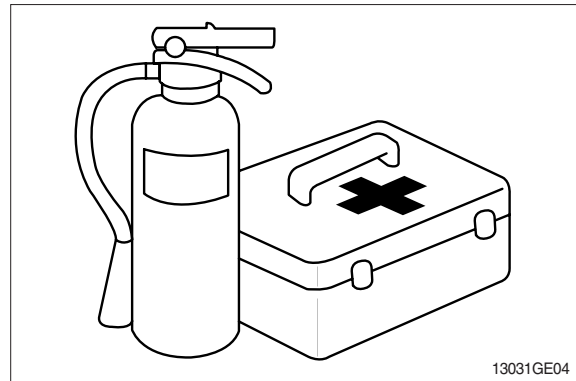

PROTECT AGAINST FLYING DEBRIS


Guard against injury from flying pieces of metal or debris; Wear goggles or safety glasses.

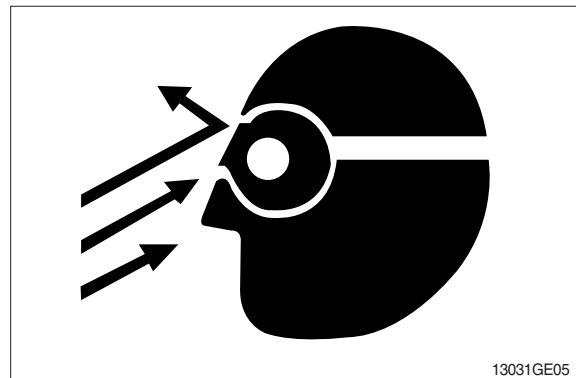

PROTECT AGAINST NOISE

Prolonged exposure to loud noise can cause impairment or loss of hearing.


Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

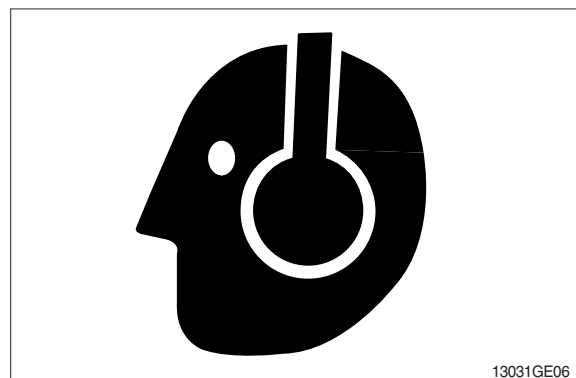

AVOID POWER LINES

Serious injury or death can result from contact with electric lines.


Never move any part of the machine or load closer to electric line than 3m(10ft) plus twice the line insulator length.

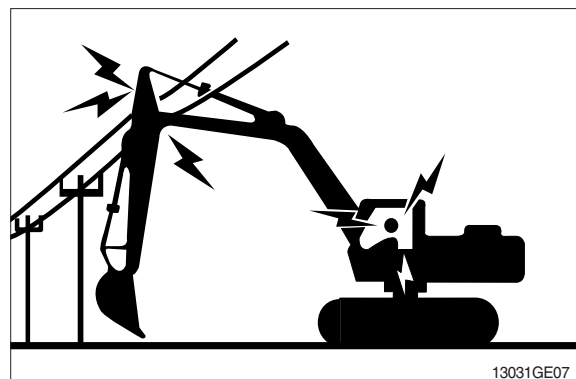

KEEP RIDERS OFF EXCAVATOR

Only allow the operator on the excavator. Keep riders off.

Riders on excavator are subject to injury such as being struck by foreign objects and being thrown off the excavator. Riders also obstruct the operator's view resulting in the excavator being operated in an unsafe manner.

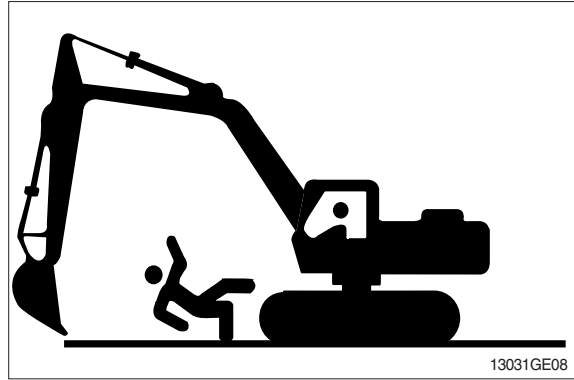


MOVE AND OPERATE MACHINE SAFELY

Bystanders can be run over. Know the location of bystanders before moving, swinging, or operating the machine.

Always keep the travel alarm in working condition. It warns people when the excavator starts to move.

Use a signal person when moving, swinging, or operating the machine in congested areas. Coordinate hand signals before starting the excavator.

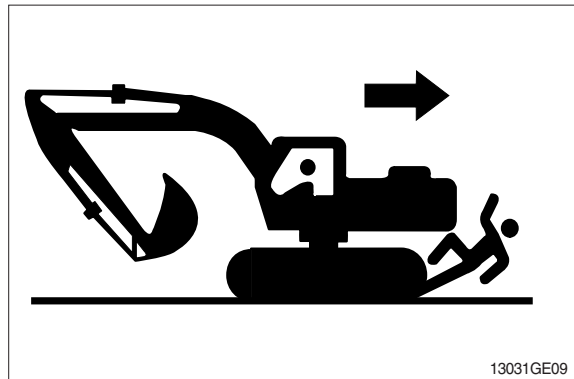

OPERATE ONLY FROM OPERATOR'S SEAT

Avoid possible injury machine damage. Do not start engine by shorting across starter terminals.

NEVER start engine while standing on ground. Start engine only from operator's seat.



PARK MACHINE SAFELY

Before working on the machine:


- Park machine on a level surface.
- Lower bucket to the ground.
- Turn auto idle switch off.
- Run engine at 1/2 speed without load for 2 minutes.
- Turn key switch to OFF to stop engine. Remove key from switch.
- Move pilot control shutoff lever to locked position.
- Allow engine to cool.

SUPPORT MACHINE PROPERLY

Always lower the attachment or implement to the ground before you work on the machine. If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load.


Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

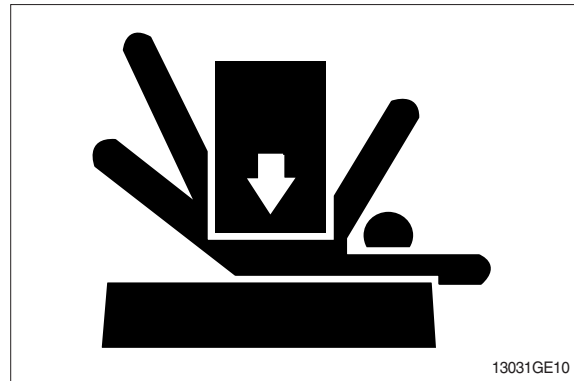

SERVICE COOLING SYSTEM SAFELY


Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off engine. Only remove filler cap when cool enough to touch with bare hands.

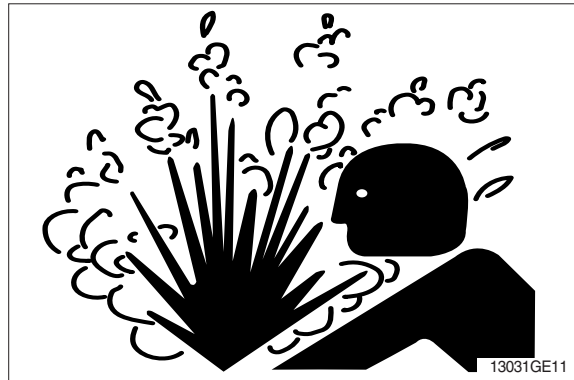

HANDLE FLUIDS SAFELY-AVOID FIRES


Handle fuel with care; It is highly flammable. Do not refuel the machine while smoking or when near open flame or sparks. Always stop engine before refueling machine. Fill fuel tank outdoors.

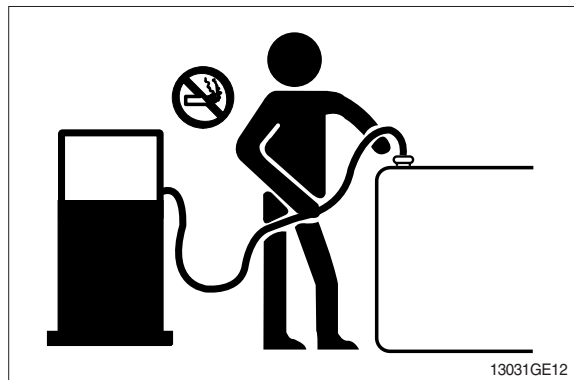

Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.

Make sure machine is clean of trash, grease, and debris.

Do not store oily rags; They can ignite and burn spontaneously.

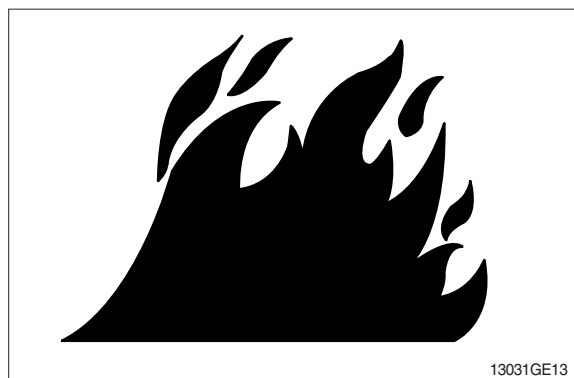

BEWARE OF EXHAUST FUMES

Prevent asphyxiation. Engine exhaust fumes can cause sickness or death.

If you must operate in a building, be positive there is adequate ventilation. Either use an exhaust pipe extension to remove the exhaust fumes or open doors and windows to bring enough outside air into the area.

REMOVE PAINT BEFORE WELDING OR HEATING


Avoid potentially toxic fumes and dust.

Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch.

Do all work outside or in a well ventilated area. Dispose of paint and solvent properly.

Remove paint before welding or heating:

- If you sand or grind paint, avoid breathing the dust.
Wear an approved respirator.
- If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

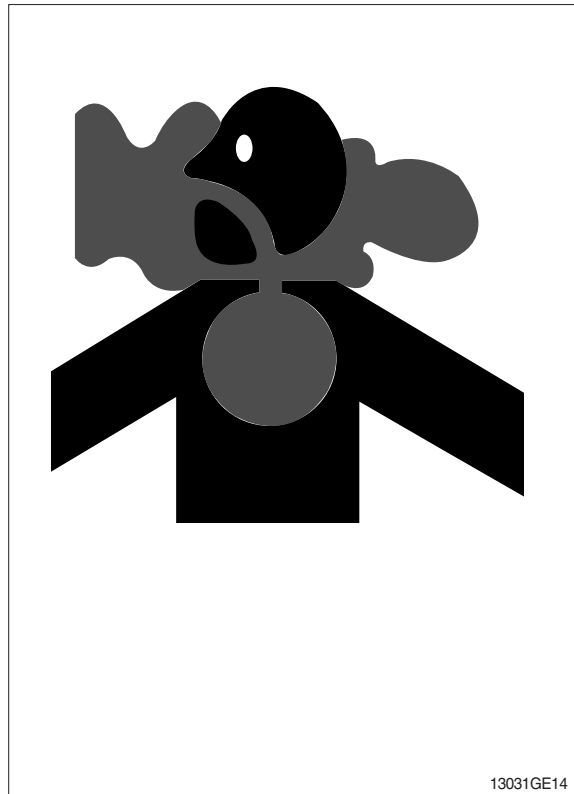

ILLUMINATE WORK AREA SAFELY


Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.



SERVICE MACHINE SAFELY

Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.


Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

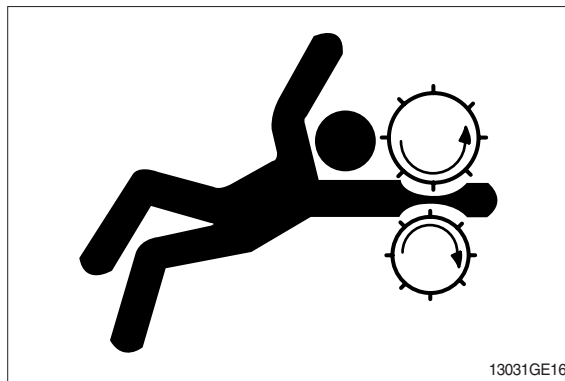

STAY CLEAR OF MOVING PARTS

Entanglements in moving parts can cause serious injury.

To prevent accidents, use care when working around rotating parts.

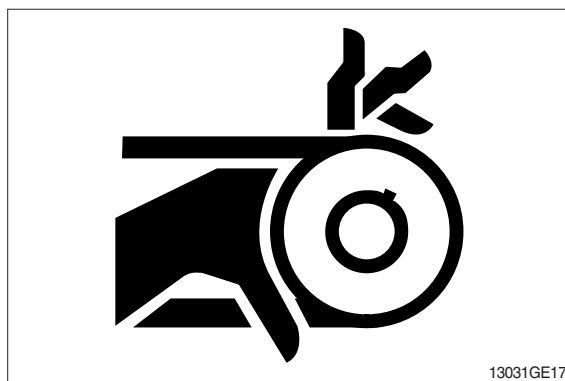


AVOID HIGH PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result.

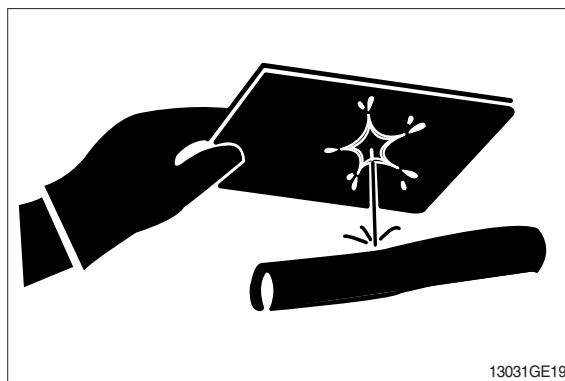

AVOID HEATING NEAR PRESSURIZED FLUID LINES

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials.

Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area. Install fire resisting guards to protect hoses or other materials.



PREVENT BATTERY EXPLOSIONS

Keep sparks, lighted matches, and flame away from the top of battery. Battery gas can explode.

Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.

Do not charge a frozen battery; It may explode. Warm battery to 16° C (60° F).



PREVENT ACID BURNS

Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid the hazard by:


1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10-15 minutes. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.

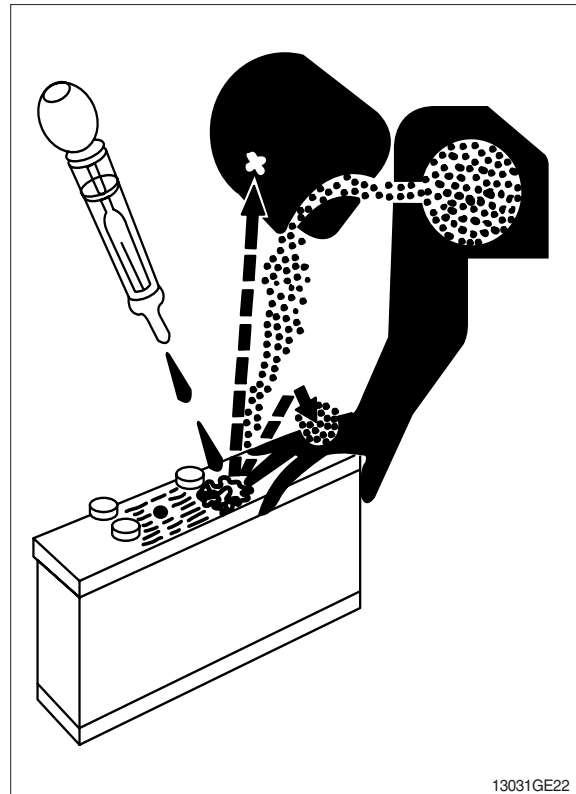


USE TOOLS PROPERLY

Use tools appropriate to the work. Makeshift tools, parts, and procedures can create safety hazards.

Use power tools only to loosen threaded tools and fasteners.

For loosening and tightening hardware, use the correct size tools. DO NOT use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches.

Use only recommended replacement parts. (See Parts catalogue.)

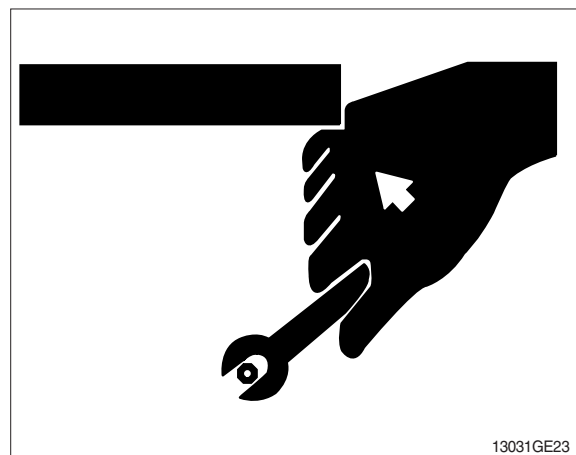


DISPOSE OF FLUIDS PROPERLY

Improperly disposing of fluids can harm the environment and ecology. Before draining any fluids, find out the proper way to dispose of waste from your local environmental agency.


Use proper containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

DO NOT pour oil into the ground, down a drain, or into a stream, pond, or lake. Observe relevant environmental protection regulations when disposing of oil, fuel, coolant, brake fluid, filters, batteries, and other harmful waste.

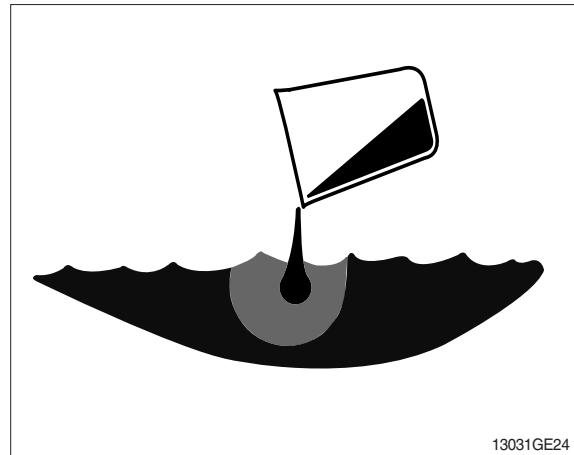

REPLACE SAFETY SIGNS

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

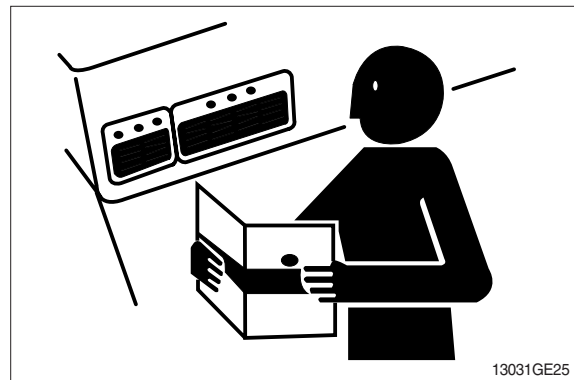


LIVE WITH SAFETY

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

GROUP 2 SPECIFICATIONS

1. MAJOR COMPONENT

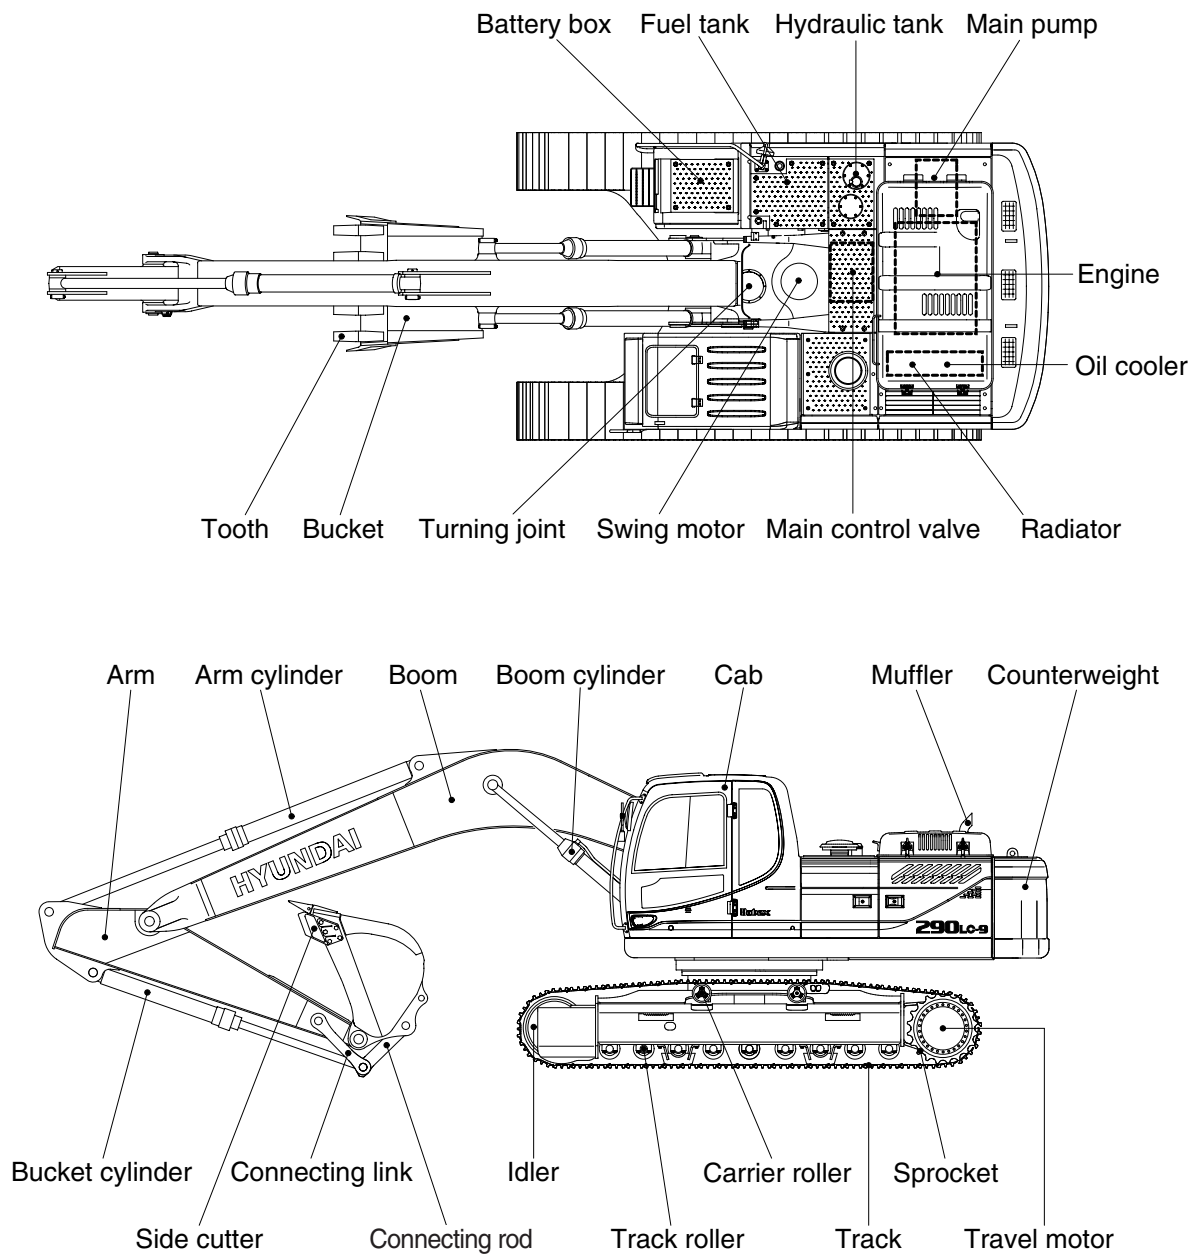


29092SP01A

2. SPECIFICATIONS

1) R290LC-9

·6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

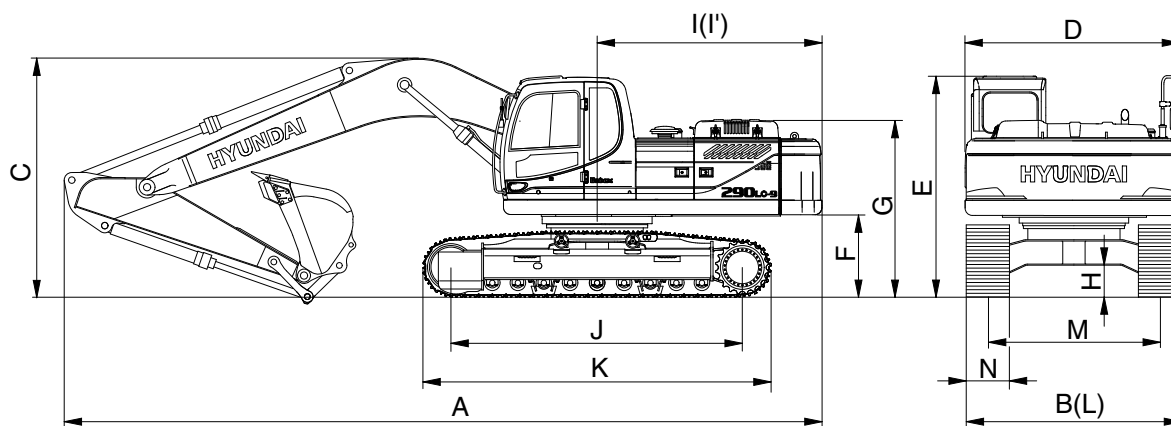


29092SP02

Description		Unit	Specification
Operating weight		kg (lb)	29700 (65480)
Bucket capacity (SAE heaped), standard		m³ (yd³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10560 (34' 8")
Overall width, with 600mm shoe	B		3200 (10' 6")
Overall height	C		3290 (10' 10")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3120 (10' 3")
Rear-end swing radius	I'		3200 (10' 6")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		3200 (10' 6")
Track gauge	M		2600 (8' 6")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.5/5.0 (2.2/3.1)
Swing speed		rpm	10.2
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm² (psi)	0.57 (8.11)
Max traction force		kg (lb)	27300 (60200)

2) R290NLC-9

·6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

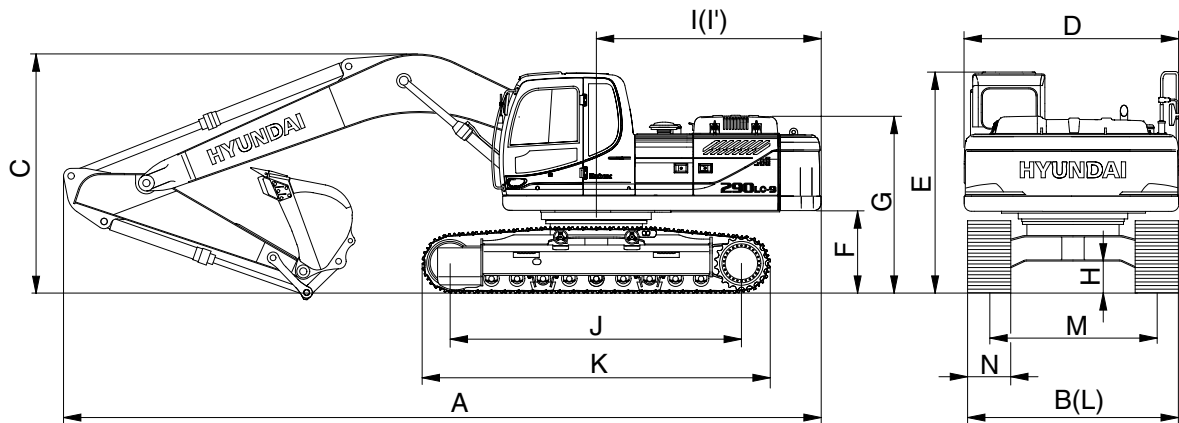


29092SP08

Description		Unit	Specification
Operating weight		kg (lb)	29100 (64150)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10560 (34' 8")
Overall width, with 600mm shoe	B		2990 (9' 10")
Overall height	C		3290 (10' 10")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3120 (10' 3")
Rear-end swing radius	I'		3200 (10' 6")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		2990 (9' 10")
Track gauge	M		2390 (7' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.1/5.2 (1.9/3.2)
Swing speed		rpm	10.2
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.55 (7.82)
Max traction force		kg (lb)	27300 (60200)

3) R290LC-9 LONG REACH

· 10.2 m (33' 6") BOOM and 7.85 m (25' 9") ARM

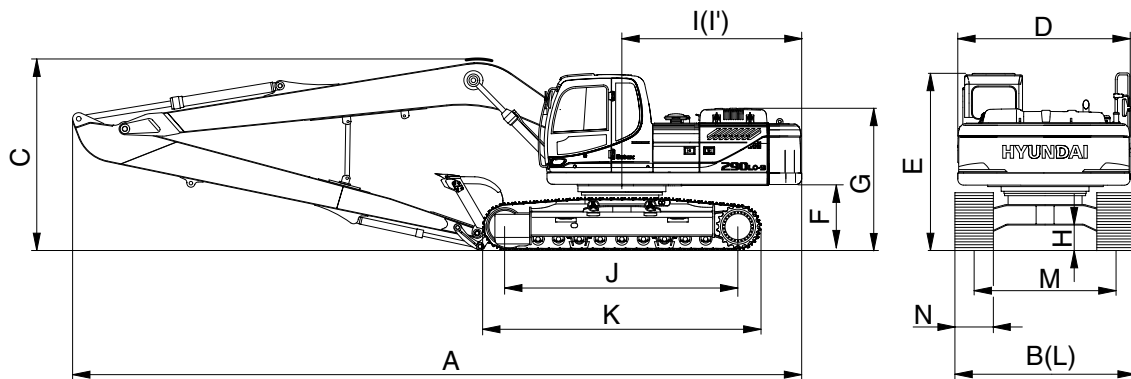


29092SP03

Description		Unit	Specification
Operating weight		kg (lb)	32690 (72630)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.52 (0.68)
Overall length	A	mm (ft-in)	14550 (47' 9")
Overall width, with 800 mm shoe	B		3400 (11' 2")
Overall height	C		3550 (11' 8")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3120 (10' 3")
Rear-end swing radius	I'		3200 (10' 6")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		3400 (11' 2")
Track gauge	M		2600 (8' 6")
Track shoe width, standard	N		800 (31' 5")
Travel speed (low/high)		km/hr (mph)	3.1/5.2 (1.9/3.2)
Swing speed		rpm	10.2
Gradeability		Degree (%)	35 (70)
Ground pressure (800 mm shoe)		kgf/cm ² (psi)	0.47 (6.68)
Max traction force		kg (lb)	27300 (60200)

4) R290LC-9 HIGH WALKER

·6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

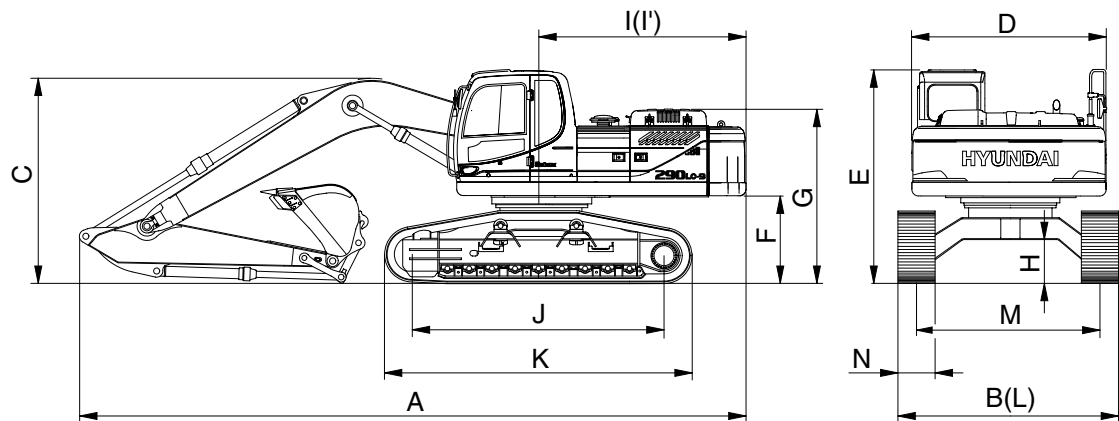


29092SP04

Description		Unit	Specification
Operating weight		kg (lb)	32140 (70860)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10430 (34' 3")
Overall width, with 600 mm shoe	B		3470 (11' 5")
Overall height	C		3350 (11' 0")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3380 (11' 1")
Ground clearance of counterweight	F		1500 (4' 11")
Engine cover height	G		3500 (11' 6")
Minimum ground clearance	H		765 (2' 6")
Rear-end distance	I		3120 (10' 3")
Rear-end swing radius	I'		3200 (10' 6")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4950 (16' 3")
Undercarriage width	L		3470 (11' 5")
Track gauge	M		2870 (9' 5")
Track shoe width, standard	N		600 (23' 6")
Travel speed (low/high)		km/hr (mph)	3.1/5.2 (1.9/3.2)
Swing speed		rpm	10.2
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.62 (8.82)
Max traction force		kg (lb)	27300 (60200)

3. WORKING RANGE

1) R290LC-9, R290NLC-9

·6.25 m (20' 6") BOOM

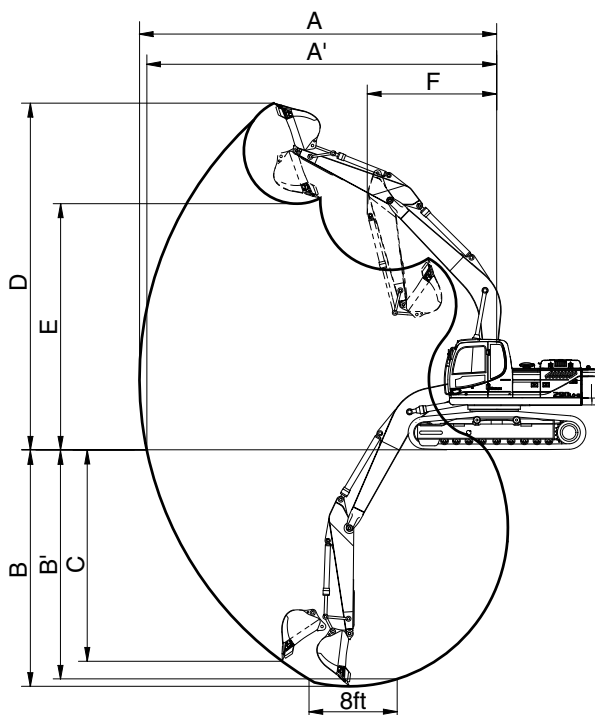


29092SP05

Description		2.10m (6' 11") Arm	2.50 m (8' 2") Arm	3.05 m (10' 0") Arm	3.75 m (12' 4") Arm
Max digging reach	A	10020 mm (32' 10")	10280 mm (33' 7")	10820 mm (35' 6")	11400 mm (37' 5")
Max digging reach on ground	A'	9820 mm (32' 3")	10080 mm (33' 1")	10620 mm (34' 10")	11220 mm (36' 10")
Max digging depth	B	6440 mm (21' 1")	6840 mm (22' 5")	7390 mm (24' 3")	8090 mm (26' 7")
Max digging depth (8 ft level)	B'	6240 mm (20' 6")	6630 mm (21' 9")	7300 mm (23' 11")	7920 mm (25' 12")
Max vertical wall digging depth	C	6000 mm (19' 8")	5850 mm (19' 2")	6380 mm (20' 11")	7080 mm (23' 3")
Max digging height	D	10070 mm (33' 0")	10110 mm (33' 2")	10160 mm (33' 4")	10360 mm (33' 12")
Max dumping height	E	6940 mm (22' 9")	7030 mm (23' 1")	7110 mm (23' 4")	7310 mm (23' 12")
Min swing radius	F	4380 mm (14' 4")	4260 mm (13' 12")	4230 mm (13' 11")	4140 mm (13' 7")
Bucket digging force	SAE	166.7 [181] kN	166.7 [181] kN	166.7 [181] kN	166.7 [181] kN
		17000 [18460] kgf	17000 [18460] kgf	17200 [18460] kgf	17000 [18460] kgf
		37480 [40690] lbf	37480 [40690] lbf	37920 [40690] lbf	37480 [40690] lbf
	ISO	189.3 [205.5] kN	189.3 [205.5] kN	189.3 [205.5] kN	189.3 [205.5] kN
		19300 [20950] kgf	19300 [20950] kgf	19300 [20950] kgf	19300 [20950] kgf
		42550 [46200] lbf	42550 [46200] lbf	42550 [46200] lbf	42550 [46200] lbf
Arm digging force	SAE	180.4 [195.9] kN	156.9 [170.4] kN	131.4 [142.7] kN	114.7 [124.6] kN
		18400 [19980] kgf	16000 [17370] kgf	13400 [14550] kgf	11700 [12700] kgf
		40570 [44050] lbf	35270 [38290] lbf	29540 [32070] lbf	25790 [28000] lbf
	ISO	190.3 [206.6] kN	163.8 [177.8] kN	136.3 [148] kN	119.6 [129.9] kN
		19400 [21060] kgf	16700 [18130] kgf	13900 [15090] kgf	12200 [13250] kgf
		42770 [46440] lbf	36820 [39980] lbf	30640 [33270] lbf	26900 [29210] lbf

[] : Power boost

2) R290LC-9 LONG REACH

· 10.2 m (33' 6") BOOM

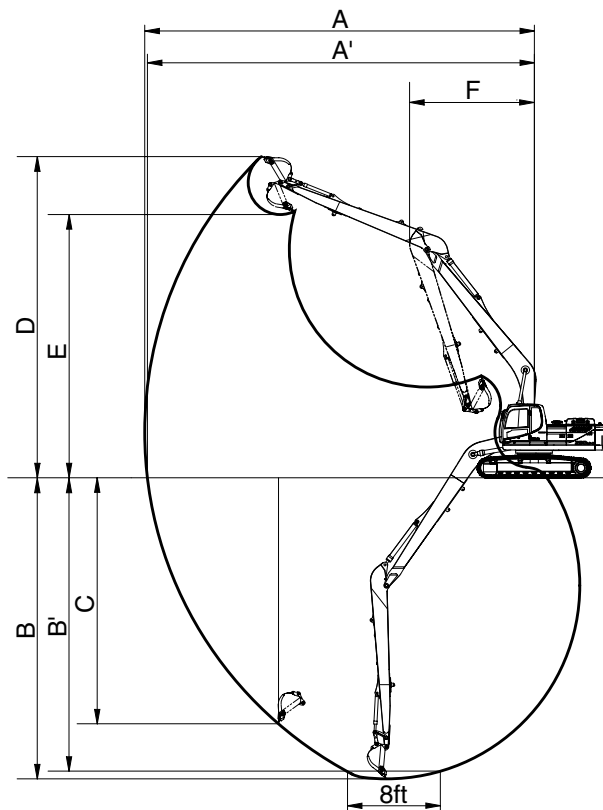


29092SP06

Description		7.85 m (25' 9") Arm
Max digging reach	A	18510 (60' 9")
Max digging reach on ground	A'	18400 (60' 4")
Max digging depth	B	14820 (48' 7")
Max digging depth (8 ft level)	B'	14690 (48' 2")
Max vertical wall digging depth	C	12020 (39' 5")
Max digging height	D	14500 (47' 7")
Max dumping height	E	12190 (39' 12")
Min swing radius	F	6250 (20' 6")
Bucket digging force	SAE	70 kN
		7100 kgf
		15650 lbf
	ISO	80 kN
		8200 kgf
		18080 lbf
Arm crowd force	SAE	47.1 kN
		4800 kgf
		10580 lbf
	ISO	48.1 kN
		4900 kgf
		10800 lbf

3) R290LC-9 HIGH WALKER

·6.25 m (20' 6") BOOM

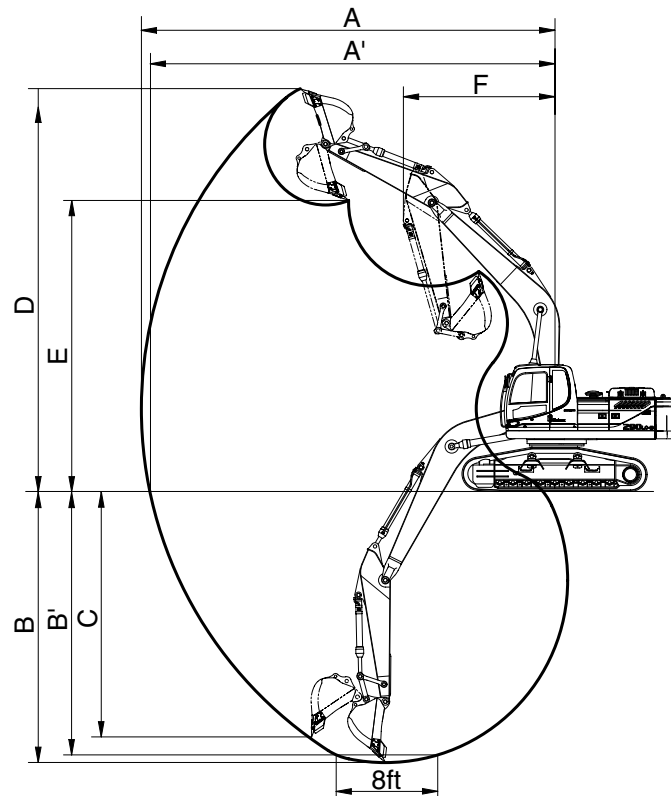

29092SP07

Description		2.10m (6' 11") Arm	2.50 m (8' 2") Arm	3.05 m (10' 0") Arm	3.75 m (12' 4") Arm
Max digging reach	A	10020 mm (32' 10")	10280 mm (33' 7")	10790 mm (35' 5")	11400 mm (37' 5")
Max digging reach on ground	A'	9750 mm (32' 0")	10020 mm (32' 10")	10530 mm (34' 7")	11160 mm (36' 7")
Max digging depth	B	6140 mm (20' 2")	6540 mm (21' 5")	7090 mm (23' 3")	7790 mm (25' 7")
Max digging depth (8 ft level)	B'	5930 mm (19' 5")	6330 mm (20' 9")	6910 mm (22' 8")	7630 mm (25' 0")
Max vertical wall digging depth	C	5700 mm (18' 8")	5560 mm (18' 3")	6090 mm (20' 0")	6790 mm (22' 3")
Max digging height	D	10370 mm (34' 0")	10220 mm (33' 6")	10440 mm (34' 3")	10660 mm (35' 0")
Max dumping height	E	7240 mm (23' 9")	7170 mm (23' 6")	7400 mm (24' 3")	7610 mm (25' 0")
Min swing radius	F	4380 mm (14' 4")	4260 mm (14' 0")	4230 mm (13' 11")	4140 mm (13' 7")
Bucket digging force	SAE	166.7 [181] kN	166.7 [181] kN	166.7 [181] kN	166.7 [181] kN
		17000 [18460] kgf	17000 [18460] kgf	17000 [18460] kgf	17000 [18460] kgf
		37480 [40690] lbf	37480 [40690] lbf	37480 [40690] lbf	37480 [40690] lbf
	ISO	189.3 [205.5] kN	189.3 [205.5] kN	189.3 [205.5] kN	189.3 [205.5] kN
		19300 [20950] kgf	19300 [20950] kgf	19300 [20950] kgf	19300 [20950] kgf
		42550 [46200] lbf	42550 [46200] lbf	42550 [46200] lbf	42550 [46200] lbf
Arm digging force	SAE	180.4 [195.9] kN	156.9 [170.4] kN	131.4 [142.7] kN	114.7 [124.6] kN
		18400 [19980] kgf	16000 [17370] kgf	13400 [14550] kgf	11700 [12700] kgf
		40570 [44050] lbf	35270 [38290] lbf	29540 [32070] lbf	25790 [28000] lbf
	ISO	190.3 [206.6] kN	163.8 [177.8] kN	136.3 [148] kN	119.6 [129.9] kN
		19400 [21060] kgf	16700 [18130] kgf	13900 [15090] kgf	12200 [13250] kgf
		42770 [46440] lbf	36820 [39980] lbf	30640 [33270] lbf	26900 [29210] lbf

[] : Power boost

4. WEIGHT

1) R290LC-9, R290NLC-9

Item	R290LC-9		R290NLC-9	
	kg	lb	kg	lb
Upperstructure assembly	12610	27800	←	←
Main frame weld assembly	2670	5890	←	←
Engine assembly	556	1230	←	←
Main pump assembly	140	310	←	←
Main control valve assembly	220	490	←	←
Swing motor assembly	390	860	←	←
Hydraulic oil tank assembly	250	560	←	←
Fuel tank assembly	240	530	←	←
Counterweight	5200	11460	←	←
Cab assembly	490	1080	←	←
Lower chassis assembly	10740	23680	10600	23370
Track frame weld assembly	3765	8300	3625	7990
Swing bearing	430	950	←	←
Travel motor assembly	400	880	←	←
Turning joint	54	120	←	←
Track recoil spring	205	450	←	←
Idler	252	560	←	←
Carrier roller	35	80	←	←
Track roller	54	119	←	←
Track-chain assembly (600 mm standard triple grouser shoe)	1860	4110	←	←
Front attachment assembly (6.25 m boom, 3.05 m arm, 1.27 m³ SAE heaped bucket)	5550	12240	←	←
6.25 m boom assembly	2285	5040	←	←
3.05 m arm assembly	1025	2260	←	←
1.27 m³ SAE heaped bucket	1010	2230	←	←
Boom cylinder assembly	270	600	←	←
Arm cylinder assembly	360	790	←	←
Bucket cylinder assembly	220	485	←	←
Bucket control link assembly	110	240	←	←

2) R290LC-9 LONG REACH

Item	R290LC-9 LONG REACH	
	kg	lb
Upperstructure assembly	14410	31810
Main frame weld assembly	2670	5890
Engine assembly	556	1230
Main pump assembly	140	310
Main control valve assembly	220	490
Swing motor assembly	390	860
Hydraulic oil tank assembly	250	560
Fuel tank assembly	240	530
Counterweight	7000	15450
Cab assembly	490	1080
Lower chassis assembly	10900	24030
Track frame weld assembly	3765	8300
Swing bearing	430	950
Travel motor assembly	400	880
Turning joint	54	120
Track recoil spring	205	450
Idler	252	560
Carrier roller	35	80
Track roller	54	119
Track-chain assembly (800 mm standard triple grouser shoe)	2340	5160
Front attachment assembly (10.2 m boom, 7.85 m arm, 0.51 m³ SAE heaped bucket)	5920	13050
10.2 m boom assembly	2960	6530
7.85 m arm assembly	1340	2960
0.51 m³ SAE heaped bucket	460	1010
Boom cylinder assembly	270	600
Arm cylinder assembly	360	790
Bucket cylinder assembly	96	212
Bucket control link assembly	110	240

3) R290LC-9 HIGH WALKER

Item	R290LC-9 HIGH WAKER	
	kg	lb
Upperstructure assembly	12610	27800
Main frame weld assembly	2670	5890
Engine assembly	556	1230
Main pump assembly	155	340
Main control valve assembly	220	490
Swing motor assembly	390	860
Hydraulic oil tank assembly	250	560
Fuel tank assembly	240	530
Counterweight	5200	11460
Cab assembly	490	1080
Lower chassis assembly	12800	28220
Track frame weld assembly	5825	12840
Swing bearing	430	950
Travel motor assembly	400	880
Turning joint	54	120
Track recoil spring	205	450
Idler	252	560
Carrier roller	35	80
Track roller	54	119
Track-chain assembly (600 mm standard triple grouser shoe)	1860	4110
Front attachment assembly (6.25 m boom, 3.05 m arm, 1.27 m³ SAE heaped bucket)	5550	12240
6.25 m boom assembly	2285	5040
3.05 m arm assembly	1025	2260
1.27 m³ SAE heaped bucket	1010	2230
Boom cylinder assembly	270	600
Arm cylinder assembly	360	790
Bucket cylinder assembly	220	485
Bucket control link assembly	110	240

5. LIFTING CAPACITIES

1) R290LC-9

(1) 6.25 m (20' 6") boom, 2.10 m (6' 11") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 5200 kg counterweight.

-  : Rating over-front
-  : Rating over-side or 360 degree

Load point height		Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
												m (ft)
7.5 m (25 ft)	kg lb					*5760 *12700	*5760 *12700			*5290 *11660	4580 10100	8.01 (26.3)
6.0 m (20 ft)	kg lb					*6090 *13430	*6090 *13430	*5900 10910	4950	*5380 *11860	3670 8090	8.90 (29.2)
4.5 m (15 ft)	kg lb			*8940 *19710	*8940 *19710	*7040 *15520	*7040 *15520	*6210 *13690	4820 10630	5270 11620	3200 7050	9.42 (30.9)
3.0 m (10 ft)	kg lb			*11660 *25710	10180 22440	*8270 *18230	6600 14550	*6800 *14990	4610 10160	4990 11000	2990 6590	9.64 (31.6)
1.5 m (5 ft)	kg lb			*13520 *29810	9490 20920	*9370 *20660	6210 13690	7330 16160	4400 9700	4980 10980	2970 6550	9.58 (31.4)
Ground Line	kg lb			*14060 *31000	9290 20480	*10020 *22090	5980 13180	7180 15830	4270 9410	5260 11600	3140 6920	9.23 (30.3)
-1.5 m (-5 ft)	kg lb	*13470 *29700	*13470 *29700	*13770 *30360	9310 20530	*10110 *22290	5920 13050	7150 15760	4240 9350	5970 13160	3590 7910	8.57 (28.1)
-3.0 m (-10 ft)	kg lb	*17570 *38740	*17570 *38740	*12710 *28020	9480 20900	*9440 *20810	6020 13270			*6180 *13620	4610 10160	7.47 (24.5)
-4.5 m (-15 ft)	kg lb	*14150 *31200	*14150 *31200	*10330 *22770	9880 21780							

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 6.25 m (20' 6") boom, 2.50 m (8' 2") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 5200 kg counterweight.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*4880 *10760	4330 9550	8.34 (27.4)
6.0 m (20 ft)	kg lb									*5470 *12060	5060 11160	*5020 *11070	3510 7740	9.19 (30.2)
4.5 m (15 ft)	kg lb					*8180 18030	*8180 *18030	*6610 *14570	*6610 *14570	*5880 *12960	4900 10800	5070 11180	3080 6790	9.69 (31.8)
3.0 m (10 ft)	kg lb					*10910 *24050	10440 23020	*7890 *17390	6700 14770	*6530 *14400	4660 10270	4790 10560	2870 6330	9.90 (32.5)
1.5 m (5 ft)	kg lb					*13040 *28750	9630 21230	*9080 *20020	6270 13820	*7190 *15850	4430 9770	4770 10520	2840 6260	9.84 (32.3)
Ground Line	kg lb					*13950 *30750	9310 20530	9870 *21760	6000 13230	7180 15830	4270 9410	5000 11020	2980 6570	9.51 (31.2)
-1.5 m (-5 ft)	kg lb			*14370 *31680	*14370 *31680	*13930 *30710	9260 20410	*10120 *22310	5900 13010	7110 15670	4210 9280	5610 12370	3360 7410	8.87 (29.1)
-3.0 m (-10 ft)	kg lb	*16270 *35870	*16270 *35870	*18700 *41230	*18700 *41230	*13110 *28900	9390 20700	*9690 *21360	5950 13120			*6310 *13910	4210 9280	7.82 (25.7)
-4.5 m (-15 ft)	kg lb			*15620 *34440	*15620 *34440	*11170 *24630	9720 21430							

(3) 6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 5200 kg counterweight.

Load point height		Load radius												At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity		Reach
																m (ft)
7.5 m (25 ft)	kg lb													*4780 *10540	3850 8490	8.94 (29.3)
6.0 m (20 ft)	kg lb									*5270 *11620	5190 11440			*4940 *10890	3170 6990	9.74 (32.0)
4.5 m (15 ft)	kg lb							*6380 *14070	*6380 *14070	*5780 *12740	4980 10980			4660 10270	2790 6150	10.20 (33.5)
3.0 m (10 ft)	kg lb			*10490 *23130	*10490 *23130	*10510 *23170	*10510 *23170	*7800 *17200	6830 15060	*6530 *14400	4710 10380	*4420 *9740	3380 7450	4410 9720	2600 5730	10.40 (34.1)
1.5 m (5 ft)	kg lb					*13100 *28880	9840 21690	*9190 *20260	6340 13980	*7320 *16140	4440 9790	*5230 *11530	3240 7140	4380 9660	2560 5640	10.35 (34.0)
Ground Line	kg lb			*10140 *22350	*10140 *22350	*14530 *32030	9340 20590	*10220 *22530	6000 13230	7190 15850	4240 9350	*4600 *10140	3140 6920	4560 10050	2660 5860	10.04 (32.9)
-1.5 m (-5 ft)	kg lb	*10990 *24230	*10990 *24230	*14250 *31420	*14250 *31420	*14890 *32830	9180 20240	10140 22350	5830 12850	7070 15590	4130 9110			5050 11130	2960 6530	9.44 (31.0)
-3.0 m (-10 ft)	kg lb	*14880 *32800	*14880 *32800	*19250 *42440	*19250 *42440	*14380 *31700	9240 20370	10130 22330	5830 12850	7090 15630	4150 9150			6060 13360	3610 7960	8.48 (27.8)
-4.5 m (-15 ft)	kg lb	*19470 *42920	*19470 *42920	*18400 *40570	*18400 *40570	*12820 *28260	9500 20940	*9370 *20660	6010 13250					*6400 *14110	5150 11350	6.97 (22.9)

(4) 6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 5200 kg counterweight.

Load point height		Load radius												At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity		Reach
																m (ft)
7.5 m (25 ft)	kg lb													*3930 *8660	3310 7300	9.67 (31.7)
6.0 m (20 ft)	kg lb									*4160 *9170	*4160 *9170	*2370 *5220	*2370 *5220	*4090 *9020	2770 6110	10.40 (34.1)
4.5 m (15 ft)	kg lb									*4710 *10380	*4710 *10380	*3720 *8200	3550 7830	4160 9170	2460 5420	10.83 (35.5)
3.0 m (10 ft)	kg lb			*13490 *29740	*13490 *29740	*8320 *18340	*8320 *18340	*6410 *14130	*6410 *14130	*5470 *12060	4760 10490	*4740 *10450	3400 7500	3950 8710	2300 5070	11.02 (36.2)
1.5 m (5 ft)	kg lb			*9980 *22000	*9980 *22000	*11050 *24360	10090 22240	*7850 *17310	6420 14150	*6300 *13890	4470 9850	*5440 *11990	3240 7140	3920 8640	2260 4980	10.97 (36.0)
Ground Line	kg lb	*6470 *14260	*6470 *14260	*10300 *22710	*10300 *22710	*12890 *28420	9400 20720	*9020 *19890	6010 13250	*7030 *15500	4220 9300	5300 11680	3100 6830	4050 8930	2330 5140	10.68 (35.0)
-1.5 m (-5 ft)	kg lb	*9310 *20530	*9310 *20530	*12760 *28130	*12760 *28130	*13720 *30250	9090 20040	*9730 *21450	5770 12720	6970 15370	4070 8970	5210 11490	3020 6660	4410 9720	2560 5640	10.12 (33.2)
-3.0 m (-10 ft)	kg lb	*12290 *27090	*12290 *27090	*16240 *35800	*16240 *35800	*13690 *30180	9040 19930	*9880 *21780	5700 12570	6920 15260	4020 8360			5140 11330	3030 6680	9.25 (30.3)
-4.5 m (-15 ft)	kg lb	*15740 *34700	*15740 *34700	*18940 *41760	18940 41760	*12770 *28150	9190 20260	*9310 *20530	5780 12740					*5780 *12740	4030 8880	7.92 (26.0)

2) R290NLC-9

(1) 6.25 m (20' 6") boom, 2.10 m (6' 11") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 5200 kg counterweight.

-  : Rating over-front
-  : Rating over-side or 360 degree

Load point height		Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
												m (ft)
7.5 m (25 ft)	kg lb					*5760 *12700	*5760 *12700			*5290 *11660	4140 9130	8.01 (26.3)
6.0 m (20 ft)	kg lb					*6090 *13430	*6090 *13430	*5900 *13010	4470 9850	*5380 *11860	3300 7280	8.90 (29.2)
4.5 m (15 ft)	kg lb			*8940 *19710	*8940 *19710	*7040 *15520	6390 14090	*6210 *13690	4350 9590	5250 11570	2860 6310	9.42 (30.9)
3.0 m (10 ft)	kg lb			*11660 *25710	9090 20040	*8270 *18230	5930 13070	*6800 *14990	4140 9130	4960 10930	2660 5860	9.64 (31.6)
1.5 m (5 ft)	kg lb			*13520 *29810	8420 18560	*9370 *20660	5550 12240	7290 16070	3940 8690	4950 10910	2640 5820	9.58 (31.4)
Ground Line	kg lb			*14060 *31000	8220 18120	*10020 *22090	5330 11750	7140 15740	3800 8380	5230 11530	2790 6150	9.23 (30.3)
-1.5 m (-5 ft)	kg lb	*13470 *29700	*13470 *29700	*13770 *30360	8240 18170	*10110 *22290	5270 11620	7110 15670	3780 8330	5930 13070	3210 7080	8.57 (28.1)
-3.0 m (-10 ft)	kg lb	*17570 *38740	*17290 *38120	*12710 *28020	8410 18540	*9440 *20810	5370 11840			*6180 *13620	4130 9110	7.47 (24.5)
-4.5 m (-15 ft)	kg lb	*14150 *31200	*14150 *31200	*10330 *22770	8800 19400							

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. * indicates load limited by hydraulic capacity.

This as a preview PDF file from **best-manuals.com**



Download full PDF manual at **best-manuals.com**