



HYUNDAI
CONSTRUCTION EQUIPMENT

Robex 300LC-9S

CRAWLER EXCAVATOR



SERVICE MANUAL

FOREWORD	9
1. Structure	9
2. How To Read The Service Manual	10
3. Conversion Table	11
SECTION 1 GENERAL	17
Group 1 Safety	18
Group 2 Specifications	27
1. Major Component	27
2. Specifications	28
3. Working Range	32
4. Weight	35
5. Lifting Capacities	38
1)r300lc-9s	38
2)r300nlc-9s	41
3)r300lc-9s Long Reach	44
6. Bucket Selection Guide	48
7. Undercarriage	50
8. Specifications For Major Components	52
9. Recommended Oils	56
SECTION 2 STRUCTURE AND FUNCTION	57
Group 1 Pump Device	58
1. Structure	58
2. Function	64
2. Hydraulic Circuit	83
3. Function	84
Group 3 Swing Device	112
1. Structure	112
2. Function	115
Group 4 Travel Device	122
1. Construction	122
3. Principle Of Driving	124
Group 4 Travel Device (type 2, 3)	131
1. Construction	131
2. Specification 1)	132
2)	133
3. Operation	134
Group 5 Rcv Lever	145
1. Structure	145
2. Functions	148
Group 6 Rcv Pedal	152

1. Structure	152
2. Function	154
SECTION 3 HYDRAULIC SYSTEM	158
GROUP 1 HYDRAULIC CIRCUIT	159
Group 2 Main Circuit	161
1. Suction And Delivery Circuit	161
2. Return Circuit	162
3. Drain Circuit.	163
Group 3 Pilot Circuit	164
1. Suction, Delivery And Return Circuit	165
2. Safety Solenoid Valve (safety Lever)	166
3. Boom Priority System.	167
4. Travel Speed Control System	168
5. Main Relief Pressure Change Circuit	169
6. Arm Regeneration Cut System (cluster Type 1)	170
7. Swing Parking Brake Release	171
8. Swing Priority System.	172
Group 4 Single Operation	173
1. Boom Up Operation.	173
2. Boom Down Operation	174
3. Arm In Operation.	175
4. Arm Out Operation	176
5. Bucket In Operation	177
6. Bucket Out Operation.	178
7. Swing Operation	179
8. Travel Forward And Reverse Operation	181
Group 5 Combined Operation	183
1. Outline	183
2. Combined Swing And Boom Up Operation.	184
3. Combined Swing And Arm Operation	185
4. Combined Swing And Bucket Operation.	186
5. Combined Swing And Travel Operation	187
6. Combined Boom And Travel Operation	188
7. Combined Arm And Travel Operation	189
8. Combined Bucket And Travel Operation.	190
SECTION 4 ELECTRICAL SYSTEM	191
Group 1 Component Location	192
1. Location 1.	192
2. Location 2.	193
Memorandum.	198
1. Power Circuit (cluster Type 1)	199
2. Starting Circuit (cluster Type 1)	203
3. Charging Circuit (cluster Type 1)	207

4. Head And Work Light Circuit (cluster Type 1)	211
5. Beacon Lamp And Cab Light Circuit (cluster Type 1)	215
6. Wiper And Washer Circuit (cluster Type 1)	219
Group 3 Electrical Component Specification	229
Group 4 Connectors	237
1. Connector Destination	237
2. Connection Table For Connectors	241
SECTION 5 MECHATRONICS SYSTEM	260
Group 1 Outline (cluster Type 1)	261
Outline (cluster Type 2)	263
Group 2 Mode Selection System (cluster Type 1)	265
1. Power Mode Selection System	265
Group 2 Mode Selection System (cluster Type 1, Hcec Engine)	266
1. Power Mode Selection System	266
2. Work Mode Selection System	267
3. User Mode Selection System	268
3. User Mode Selection System (hcec Engine)	269
Mode Selection System (cluster Type 2)	270
1. Power Mode Selection System	270
2. Work Mode Selection System	271
3. User Mode Selection System	272
Group 3 Automatic Deceleration System (cluster Type 1)	273
1. When Auto Idle Pilot Lamp On 2. When Auto Idle Pilot Lamp Off	273
Group 3 Automatic Deceleration System (cluster Type 1, Hcec Engine)	274
1. When Auto Idle Pilot Lamp On 2. When Auto Idle Pilot Lamp Off	274
Automatic Deceleration System (cluster Type 2)	275
1. When Auto Idle Pilot Lamp On 2. When Auto Idle Pilot Lamp Off	275
Group 4 Power Boost System (cluster Type 1)	276
Power Boost System (cluster Type 2)	277
Group 5 Travel Speed Control System (cluster Type 1)	278
Travel Speed Control System (cluster Type 2)	279
Group 6 Automatic Warming Up System (cluster Type 1)	280
Automatic Warming Up System (cluster Type 2)	281
Group 7 Engine Overheat Prevention System (cluster Type 1)	282
Engine Overheat Prevention System (cluster Type 2)	283
Group 8 Variable Power Control System (cluster Type 1)	284
Group 9 Attachment Flow Control System (cluster Type 1)	285
Group 10 Anti-restart System	286
1. Anti-restart Function	286
Group 11 Self-diagnostic System (cluster Type 1)	287

3. Machine Error Codes Table	288
Self-diagnostic System (cluster Type 2)	291
3. Error Codes Table	292
Group 12 Engine Control System	294
1. Mcu (machine Control Unit) 2. Mcu Assembly	294
3. Exchange Method Of The Rom In The Cluster (type 2)	295
Group 13 Eppr Valve (cluster Type 1)	296
1. Pump Eppr Valve.	296
Eppr Valve (cluster Type 2).	297
1. Pump Eppr Valve.	297
2. Boom Priority Eppr Valve (cluster Type 1,2)	300
Group 14 Monitoring System (cluster Type 1)	302
1. Outline	302
2. Cluster	302
3. Cluster Connector	304
Monitoring System (cluster Type 2).	325
1. Outline Monitoring System Consists Of The Monitor Part And Switch Part. The Monitor Part Gives Warnings When Any Abnormality.	325
Group 15 Fuel Warmer System	334
1. Specification.	334
2. Operation	334
3. Electric Circuit	334
SECTION 6 TROUBLESHOOTING.	335
Group 1 Before Troubleshooting.	336
1. Introduction	336
2. Diagnosing Procedure	337
Group 2 Hydraulic And Mechanical System	339
1. Introduction	339
2. Drive System	340
3. Hydraulic System.	342
4. Swing System	344
5. Travel System	348
6. Attachment System.	353
Group 3 Electrical System (cluster Type 1)	359
1. When Starting Switch Is Turned On, Monitor Panel Display Does Not Appear.	359
3. Battery Charging Warning Lamp Lights Up(starting Switch : On)	361
4. When Coolant Overheat Warning Lamp Lights Up (engine Is Started).	362
5. When Air Cleaner Warning Lamp Lights Up (engine Is Started).	363
6. When Engine Oil Pressure Warning Lamp Lights Up (engine Is Started).	364
7. When Hydraulic Oil Temperature Warning Lamp Lights Up (engine Is Started)	365
8. When Coolant Temperature Gauge Does Not Operate (hcespn 304, Fmi 3 Or 4)	

.....	366
9. When Fuel Gauge Does Not Operate(hcespn 301, Fmi 3 Or 4).	367
10. When Safety Solenoid Does Not Operate.	368
11. When Travel Speed 1, 2 Does Not Operate (hcespn 167, Fmi 5 Or 6)	369
Group 3 Electrical System (cluster Type 2)	375
1. When Starting Switch Is Turned On, Monitor Panel Display Does Not Appear.	375
2. Communication Error Flashes On The Cluster	376
3. Battery Charging Warning Lamp Lights Up(starting Switch : On)	377
4. When Coolant Overheat Warning Lamp Lights Up(engine Is Started)	378
5. When Air Cleaner Warning Lamp Lights Up(engine Is Started)	379
6. When Engine Oil Pressure Warning Lamp Lights Up(engine Is Started)	380
7. When Hydraulic Oil Temperature Warning Lamp Lights Up(engine Is Started)	381
8. When Coolant Temperature Gauge Does Not Operate	382
9. When Fuel Gauge Does Not Operate(check Warning Lamp On/off).	383
10. When Safety Solenoid Does Not Operate.	384
11. When Travel Speed 1, 2 Does Not Operate.	385
Group 4 Mechatronics System (cluster Type 1)	386
1. All Actuators Speed Are Slow	386
2. Engine Stall	388
3. Malfunction Of Cluster Or Mode Selection System	390
5. Auto Decel System Does Not Work.	393
6. Malfunction Of Pump 1 Pressure Sensor	395
7. Malfunction Of Pump 2 Pressure Sensor	397
8. Malfunction Of Pump 3 Pressure Sensor	399
9. Malfunction Of Swing Pressure Sensor	401
10. Malfunction Of Boom Up Pressure Sensor	403
11. Malfunction Of Power Max	405
12. Malfunction Of Boom Priority Eppr Valve	407
13. Malfunction Of Arm Regeneration Solenoid	408
Mechatronics System (cluster Type 2)	410
1. All Actuators Speed Are Slow	410
2. Engine Stall	412
3. Malfunction Of Cluster Or Mode Selection System	414
5. Auto Decel System Does Not Work.	417
6. Malfunction Of Pump 1 Pressure Sensor	419
7. Malfunction Of Pump 2 Pressure Sensor	421
8. Malfunction Of Pump 3 Pressure Sensor	423
9. Malfunction Of Power Max.	425
10. Malfunction Of Boom Priority Eppr Valve	427
SECTION 7 MAINTENANCE STANDARD	428
Group 1 Operational Performance Test	429

1. Purpose	429
2. Terminology	430
3. Operation For Performance Tests	431
Group 2 Major Component.	451
1. Main Pump	451
2. Main Control Valve	452
3. Swing Device	453
4. Travel Motor.	454
5. Travel Reduction Gear	455
6. Rcv Lever	456
7. Rcv Pedal.	457
8. Turning Joint	458
9. Cylinder.	459
Group 3 Track And Work Equipment.	460
1. Track	460
2. Work Equipment	465
SECTION 8 DISASSEMBLY AND ASSEMBLY	466
Group 1 Precautions	467
1. Removal Work	467
2. Install Work	468
3. Completing Work.	469
Group 2 Tightening Torque.	470
1. Major Components	470
2. Torque Chart	471
Group 3 Pump Device	473
1. Removal And Install	473
2. Main Pump (1/2)	475
3. Regulator	485
Group 4 Main Control Valve	496
1. Removal And Install Of Motor	496
2. Structure	497
3. Disassembly And Assembly	502
Group 5 Swing Device	517
1. Removal And Install Of Motor	517
2. Swing Motor.	518
3. Removal And Install Of Reduction Gear.	534
4. Reduction Gear	535
Group 6 Travel Device	545
1. Removal And Install	545
2. Disassembling	548
3. Disassembling Reduction Unit	563
6. Assembling Reduction Gear	569
Group 7 Rcv Lever	578

1. Removal And Install	578
2. Disassembly And Assembly	579
Group 8 Turning Joint	592
1. Removal And Install	592
2. Disassembly And Assembly	593
Group 9 Boom, Arm And Bucket Cylinder	597
1. Removal And Install	597
2. Disassembly And Assembly	603
Group 10 Undercarriage	614
1. Track Link	614
2. Carrier Roller	615
3. Track Roller	616
4. Idler And Recoil Spring	617
Group 11 Work Equipment.	626
1. Structure	626
2. Removal And Install	627
SECTION 9 COMPONENT MOUNTING TORQUE	630
Group 1 Introduction Guide.	631
Group 2 Engine System	632
Group 3 Electric System	634
Group 4 Hydraulic System	636
Group 5 Undercarriage.	639
Group 6 Structure	641
Group 7 Work Equipment	645

FOREWORD

1. STRUCTURE

This service manual has been prepared as an aid to improve the quality of repairs by giving the serviceman an accurate understanding of the product and by showing him the correct way to perform repairs and make judgements. Make sure you understand the contents of this manual and use it to full effect at every opportunity.

This service manual mainly contains the necessary technical information for operations performed in a service workshop.

For ease of understanding, the manual is divided into the following sections.

SECTION 1 GENERAL

This section explains the safety hints and gives the specification of the machine and major components.

SECTION 2 STRUCTURE AND FUNCTION

This section explains the structure and function of each component. It serves not only to give an understanding of the structure, but also serves as reference material for troubleshooting.

SECTION 3 HYDRAULIC SYSTEM

This section explains the hydraulic circuit, single and combined operation.

SECTION 4 ELECTRICAL SYSTEM

This section explains the electrical circuit, monitoring system and each component. It serves not only to give an understanding electrical system, but also serves as reference material for trouble shooting.

SECTION 5 MECHATRONICS SYSTEM

This section explains the computer aided power optimization system and each component.

SECTION 6 TROUBLESHOOTING

This section explains the troubleshooting charts correlating **problems** to **causes**.

SECTION 7 MAINTENANCE STANDARD

This section gives the judgement standards when inspecting disassembled parts.

SECTION 8 DISASSEMBLY AND ASSEMBLY

This section explains the order to be followed when removing, installing, disassembling or assembling each component, as well as precautions to be taken for these operations.

SECTION 9 COMPONENT MOUNTING TORQUE

This section shows bolt specifications and standard torque values needed when mounting components to the machine.

The specifications contained in this shop manual are subject to change at any time and without any advance notice. Contact your HYUNDAI distributor for the latest information.

2. HOW TO READ THE SERVICE MANUAL

Distribution and updating

Any additions, amendments or other changes will be sent to HYUNDAI distributors.

Get the most up-to-date information before you start any work.

Filing method


1. See the page number on the bottom of the page.

File the pages in correct order.

2. Following examples shows how to read the page number.

Example 1

2 - 3

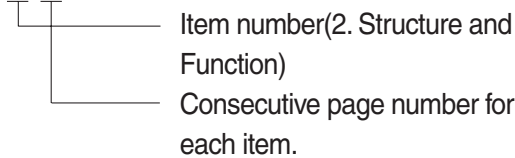

3. Additional pages : Additional pages are indicated by a hyphen(-) and number after the page number. File as in the example.

10 - 4

10 - 4 - 1

10 - 4 - 2

10 - 5

Added pages

Revised edition mark(①②③...)

When a manual is revised, an edition mark is recorded on the bottom outside corner of the pages.

Revisions

Revised pages are shown at the list of revised pages on the between the contents page and section 1 page.

Symbols

So that the shop manual can be of ample practical use, important places for safety and quality are marked with the following symbols.

Symbol	Item	Remarks
	Safety	Special safety precautions are necessary when performing the work.
		Extra special safety precautions are necessary when performing the work because it is under internal pressure.
	Caution	Special technical precautions or other precautions for preserving standards are necessary when performing the work.

3. CONVERSION TABLE

Method of using the Conversion Table

The Conversion Table in this section is provided to enable simple conversion of figures. For details of the method of using the Conversion Table, see the example given below.

Example

1. Method of using the Conversion Table to convert from millimeters to inches

Convert 55mm into inches.

- (1) Locate the number 50 in the vertical column at the left side, take this as (a), then draw a horizontal line from (a).
- (2) Locate the number 5 in the row across the top, take this as (b), then draw a perpendicular line down from (b).
- (3) Take the point where the two lines cross as (c). This point (c) gives the value when converting from millimeters to inches. Therefore, 55mm = 2.165 inches.

2. Convert 550mm into inches.

- (1) The number 550 does not appear in the table, so divide by 10 (Move the decimal point one place to the left) to convert it to 55mm.
- (2) Carry out the same procedure as above to convert 55mm to 2.165 inches.
- (3) The original value (550mm) was divided by 10, so multiply 2.165 inches by 10 (Move the decimal point one place to the right) to return to the original value.
This gives 550mm = 21.65 inches.

Millimeters to inches

(b)

1mm = 0.03937 in

	0	1	2	3	4	5	6	7	8	9
0		0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
(a) 50	1.969	2.008	2.047	2.087	2.126	(c) 2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Millimeters to inches

1mm = 0.03937in

	0	1	2	3	4	5	6	7	8	9
0		0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Kilogram to Pound

1kg = 2.2046lb

	0	1	2	3	4	5	6	7	8	9
0		2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84
10	22.05	24.25	26.46	28.66	30.86	33.07	35.27	37.48	39.68	41.89
20	44.09	46.30	48.50	50.71	51.91	55.12	57.32	59.5	61.73	63.93
30	66.14	68.34	70.55	72.75	74.96	77.16	79.37	81.57	83.78	85.98
40	88.18	90.39	92.59	94.80	97.00	99.21	101.41	103.62	105.82	108.03
50	110.23	112.44	114.64	116.85	119.05	121.25	123.46	125.66	127.87	130.07
60	132.28	134.48	136.69	138.89	141.10	143.30	145.51	147.71	149.91	152.12
70	154.32	156.53	158.73	160.94	163.14	165.35	167.55	169.76	171.96	174.17
80	176.37	178.57	180.78	182.98	185.19	187.39	189.60	191.80	194.01	196.21
90	198.42	200.62	202.83	205.03	207.24	209.44	211.64	213.85	216.05	218.26

Liter to U.S. Gallon

1 ℓ = 0.2642 U.S.Gal

	0	1	2	3	4	5	6	7	8	9
0		0.264	0.528	0.793	1.057	1.321	1.585	1.849	2.113	2.378
10	2.642	2.906	3.170	3.434	3.698	3.963	4.227	4.491	4.755	5.019
20	5.283	5.548	5.812	6.076	6.340	6.604	6.869	7.133	7.397	7.661
30	7.925	8.189	8.454	8.718	8.982	9.246	9.510	9.774	10.039	10.303
40	10.567	10.831	11.095	11.359	11.624	11.888	12.152	12.416	12.680	12.944
50	13.209	13.473	13.737	14.001	14.265	14.529	14.795	15.058	15.322	15.586
60	15.850	16.115	16.379	16.643	16.907	17.171	17.435	17.700	17.964	18.228
70	18.492	18.756	19.020	19.285	19.549	19.813	20.077	20.341	20.605	20.870
80	21.134	21.398	21.662	21.926	22.190	22.455	22.719	22.983	23.247	23.511
90	23.775	24.040	24.304	24.568	24.832	25.096	25.631	25.625	25.889	26.153

Liter to U.K. Gallon

1 ℓ = 0.21997 U.K.Gal

	0	1	2	3	4	5	6	7	8	9
0		0.220	0.440	0.660	0.880	1.100	1.320	1.540	1.760	1.980
10	2.200	2.420	2.640	2.860	3.080	3.300	3.520	3.740	3.950	4.179
20	4.399	4.619	4.839	5.059	5.279	5.499	5.719	5.939	6.159	6.379
30	6.599	6.819	7.039	7.259	7.479	7.699	7.919	8.139	8.359	8.579
40	8.799	9.019	9.239	9.459	9.679	9.899	10.119	10.339	10.559	10.778
50	10.998	11.281	11.438	11.658	11.878	12.098	12.318	12.528	12.758	12.978
60	13.198	13.418	13.638	13.858	14.078	14.298	14.518	14.738	14.958	15.178
70	15.398	15.618	15.838	16.058	16.278	16.498	16.718	16.938	17.158	17.378
80	17.598	17.818	18.037	18.257	18.477	18.697	18.917	19.137	19.357	19.577
90	19.797	20.017	20.237	20.457	20.677	20.897	21.117	21.337	21.557	21.777

kgf · m to lbf · ft

1 kgf · m = 7.233 lbf · ft

	0	1	2	3	4	5	6	7	8	9
		7.2	14.5	21.7	28.9	36.2	43.4	50.6	57.9	65.1
10	72.3	79.6	86.8	94.0	101.3	108.5	115.7	123.0	130.2	137.4
20	144.7	151.9	159.1	166.4	173.6	180.8	188.1	195.3	202.5	209.8
30	217.0	224.2	231.5	238.7	245.9	253.2	260.4	267.6	274.9	282.1
40	289.3	296.6	303.8	311.0	318.3	325.5	332.7	340.0	347.2	354.4
50	361.7	368.9	376.1	383.4	390.6	397.8	405.1	412.3	419.5	426.8
60	434.0	441.2	448.5	455.7	462.9	470.2	477.4	484.6	491.8	499.1
70	506.3	513.5	520.8	528.0	535.2	542.5	549.7	556.9	564.2	571.4
80	578.6	585.9	593.1	600.3	607.6	614.8	622.0	629.3	636.5	643.7
90	651.0	658.2	665.4	672.7	679.9	687.1	694.4	701.6	708.8	716.1
100	723.3	730.5	737.8	745.0	752.2	759.5	766.7	773.9	781.2	788.4
110	795.6	802.9	810.1	817.3	824.6	831.8	839.0	846.3	853.5	860.7
120	868.0	875.2	882.4	889.7	896.9	904.1	911.4	918.6	925.8	933.1
130	940.3	947.5	954.8	962.0	969.2	976.5	983.7	990.9	998.2	10005.4
140	1012.6	1019.9	1027.1	1034.3	1041.5	1048.8	1056.0	1063.2	1070.5	1077.7
150	1084.9	1092.2	1099.4	1106.6	1113.9	1121.1	1128.3	1135.6	1142.8	1150.0
160	1157.3	1164.5	1171.7	1179.0	1186.2	1193.4	1200.7	1207.9	1215.1	1222.4
170	1129.6	1236.8	1244.1	1251.3	1258.5	1265.8	1273.0	1280.1	1287.5	1294.7
180	1301.9	1309.2	1316.4	1323.6	1330.9	1338.1	1345.3	1352.6	1359.8	1367.0
190	1374.3	1381.5	1388.7	1396.0	1403.2	1410.4	1417.7	1424.9	1432.1	1439.4

kgf/cm² to lbf/in²

1 kgf / cm² = 14.2233 lbf / in²

	0	1	2	3	4	5	6	7	8	9
		14.2	28.4	42.7	56.9	71.1	85.3	99.6	113.8	128.0
10	142.2	156.5	170.7	184.9	199.1	213.4	227.6	241.8	256.0	270.2
20	284.5	298.7	312.9	327.1	341.4	355.6	369.8	384.0	398.3	412.5
30	426.7	440.9	455.1	469.4	483.6	497.8	512.0	526.3	540.5	554.7
40	568.9	583.2	597.4	611.6	625.8	640.1	654.3	668.5	682.7	696.9
50	711.2	725.4	739.6	753.8	768.1	782.3	796.5	810.7	825.0	839.2
60	853.4	867.6	881.8	896.1	910.3	924.5	938.7	953.0	967.2	981.4
70	995.6	1010	1024	1038	1053	1067	1081	1095	1109	1124
80	1138	1152	1166	1181	1195	1209	1223	1237	1252	1266
90	1280	1294	1309	1323	1337	1351	1365	1380	1394	1408
100	1422	1437	1451	1465	1479	1493	1508	1522	1536	1550
110	1565	1579	1593	1607	1621	1636	1650	1664	1678	1693
120	1707	1721	1735	1749	1764	1778	1792	1806	1821	1835
130	1849	2863	1877	1892	1906	1920	1934	1949	1963	1977
140	1991	2005	2020	2034	2048	2062	2077	2091	2105	2119
150	2134	2148	2162	2176	2190	2205	2219	2233	2247	2262
160	2276	2290	2304	2318	2333	2347	2361	2375	2389	2404
170	2418	2432	2446	2460	2475	2489	2503	2518	2532	2546
180	2560	2574	2589	5603	2617	2631	2646	2660	2674	2688
200	2845	2859	2873	2887	2901	2916	2930	2944	2958	2973
210	2987	3001	3015	3030	3044	3058	3072	3086	3101	3115
220	3129	3143	3158	3172	3186	3200	3214	3229	3243	3257
230	3271	3286	3300	3314	3328	3343	3357	3371	3385	3399
240	3414	3428	3442	3456	3470	3485	3499	3513	3527	3542

TEMPERATURE

Fahrenheit-Centigrade Conversion.

A simple way to convert a fahrenheit temperature reading into a centigrade temperature reading or vice verse is to enter the accompanying table in the center or boldface column of figures.

These figures refer to the temperature in either Fahrenheit or Centigrade degrees.

If it is desired to convert from Fahrenheit to Centigrade degrees, consider the center column as a table of Fahrenheit temperatures and read the corresponding Centigrade temperature in the column at the left.

If it is desired to convert from Centigrade to Fahrenheit degrees, consider the center column as a table of Centigrade values, and read the corresponding Fahrenheit temperature on the right.

°C		°F	°C		°F	°C		°F	°C		°F
-40.4	-40	-40.0	-11.7	11	51.8	7.8	46	114.8	27.2	81	117.8
-37.2	-35	-31.0	-11.1	12	53.6	8.3	47	116.6	27.8	82	179.6
-34.4	-30	-22.0	-10.6	13	55.4	8.9	48	118.4	28.3	83	181.4
-31.7	-25	-13.0	-10.0	14	57.2	9.4	49	120.2	28.9	84	183.2
-28.9	-20	-4.0	-9.4	15	59.0	10.0	50	122.0	29.4	85	185.0
-28.3	-19	-2.2	-8.9	16	60.8	10.6	51	123.8	30.0	86	186.8
-27.8	-18	-0.4	-8.3	17	62.6	11.1	52	125.6	30.6	87	188.6
-27.2	-17	1.4	-7.8	18	64.4	11.7	53	127.4	31.1	88	190.4
-26.7	-16	3.2	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-26.1	-15	5.0	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-25.6	-14	6.8	-6.1	21	69.8	13.3	56	132.8	32.8	91	195.8
-25.0	-13	8.6	-5.6	22	71.6	13.9	57	134.6	33.3	92	197.6
-24.4	-12	10.4	-5.0	23	73.4	14.4	58	136.4	33.9	93	199.4
-23.9	-11	12.2	-4.4	24	75.2	15.0	59	138.2	34.4	94	201.2
-23.3	-10	14.0	-3.9	25	77.0	15.6	60	140.0	35.0	95	203.0
-22.8	-9	15.8	-3.3	26	78.8	16.1	61	141.8	35.6	96	204.8
-22.2	-8	17.6	-2.8	27	80.6	16.7	62	143.6	36.1	97	206.6
-21.7	-7	19.4	-2.2	28	82.4	17.2	63	145.4	36.7	98	208.4
-21.1	-6	21.2	-1.7	29	84.2	17.8	64	147.2	37.2	99	210.2
-20.6	-5	23.0	-1.1	35	95.0	21.1	70	158.0	51.7	125	257.0
-20.0	-4	24.8	-0.6	31	87.8	18.9	66	150.8	40.6	105	221.0
-19.4	-3	26.6	0	32	89.6	19.4	67	152.6	43.3	110	230.0
-18.9	-2	28.4	0.6	33	91.4	20.0	68	154.4	46.1	115	239.0
-18.3	-1	30.2	1.1	34	93.2	20.6	69	156.2	48.9	120	248.0
-17.8	0	32.0	1.7	35	95.0	21.1	70	158.0	51.7	125	257.0
-17.2	1	33.8	2.2	36	96.8	21.7	71	159.8	54.4	130	266.0
-16.7	2	35.6	2.8	37	98.6	22.2	72	161.6	57.2	135	275.0
-16.1	3	37.4	3.3	38	100.4	22.8	73	163.4	60.0	140	284.0
-15.6	4	39.2	3.9	39	102.2	23.3	74	165.2	62.7	145	293.0
-15.0	5	41.0	4.4	40	104.0	23.9	75	167.0	65.6	150	302.0
-14.4	6	42.8	5.0	41	105.8	24.4	76	168.8	68.3	155	311.0
-13.9	7	44.6	5.6	42	107.6	25.0	77	170.6	71.1	160	320.0
-13.3	8	46.4	6.1	43	109.4	25.6	78	172.4	73.9	165	329.0
-12.8	9	48.2	6.7	44	111.2	26.1	79	174.2	76.7	170	338.0
-12.2	10	50.0	7.2	45	113.0	26.7	80	176.0	79.4	172	347.0

SECTION 1 GENERAL

Group 1 Safety Hints	1-1
Group 2 Specifications	1-10

SECTION 1 GENERAL


GROUP 1 SAFETY

FOLLOW SAFE PROCEDURE

Unsafe work practices are dangerous. Understand service procedure before doing work; Do not attempt shortcuts.

WEAR PROTECTIVE CLOTHING


Wear close fitting clothing and safety equipment appropriate to the job.

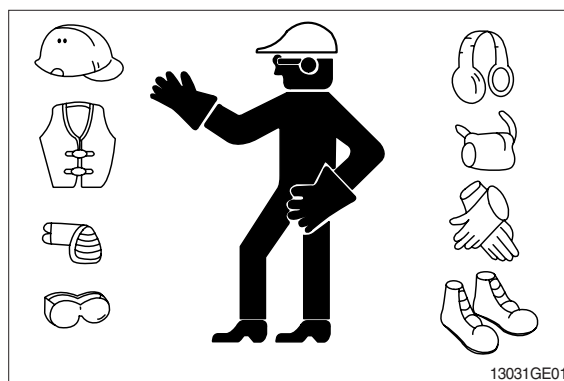

WARN OTHERS OF SERVICE WORK

Unexpected machine movement can cause serious injury.

Before performing any work on the excavator, attach a 「Do Not Operate」 tag on the right side control lever.

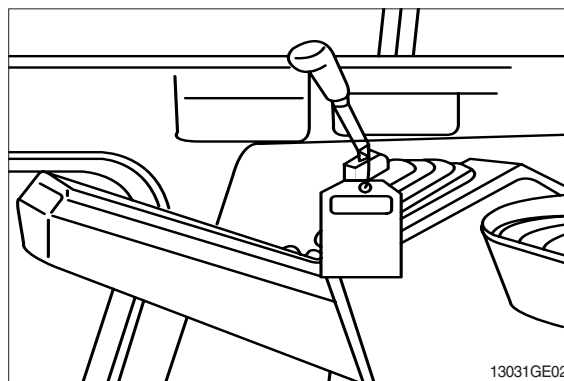


USE HANDHOLDS AND STEPS

Falling is one of the major causes of personal injury.

When you get on and off the machine, always maintain a three point contact with the steps and handrails and face the machine. Do not use any controls as handholds.

Never jump on or off the machine. Never mount or dismount a moving machine.

Be careful of slippery conditions on platforms, steps, and handrails when leaving the machine.

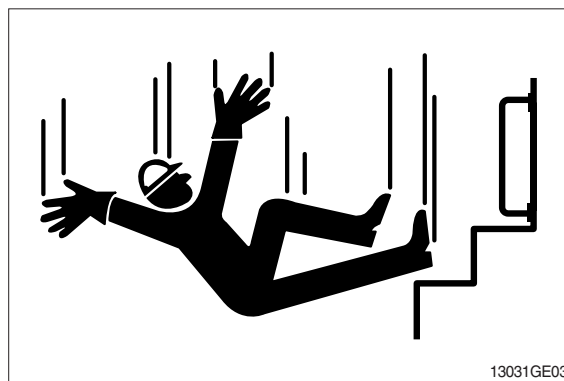


PREPARE FOR EMERGENCIES

Be prepared if a fire starts.


Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

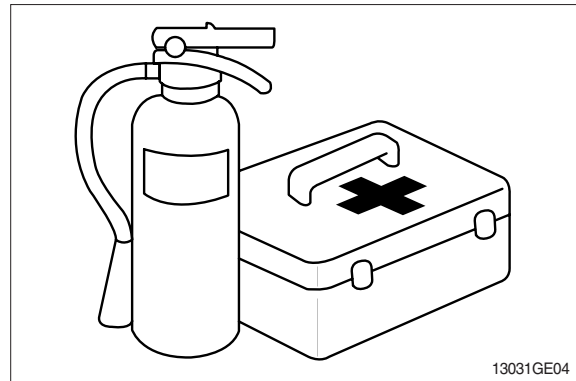

PROTECT AGAINST FLYING DEBRIS


Guard against injury from flying pieces of metal or debris; Wear goggles or safety glasses.

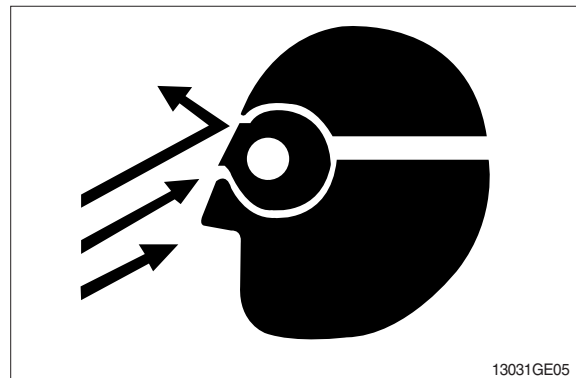

PROTECT AGAINST NOISE

Prolonged exposure to loud noise can cause impairment or loss of hearing.


Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

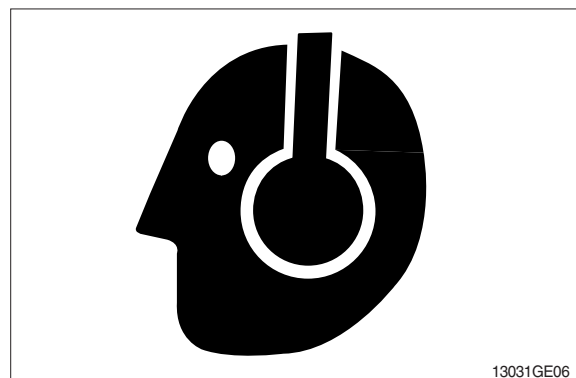

AVOID POWER LINES

Serious injury or death can result from contact with electric lines.


Never move any part of the machine or load closer to electric line than 3m(10ft) plus twice the line insulator length.

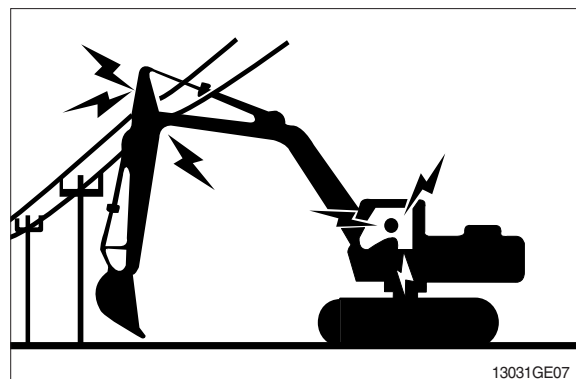

KEEP RIDERS OFF EXCAVATOR

Only allow the operator on the excavator. Keep riders off.

Riders on excavator are subject to injury such as being struck by foreign objects and being thrown off the excavator. Riders also obstruct the operator's view resulting in the excavator being operated in an unsafe manner.

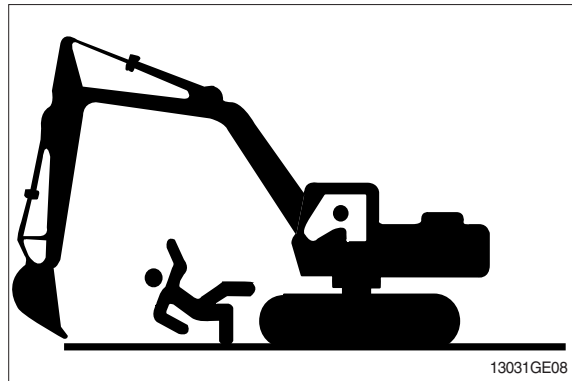


MOVE AND OPERATE MACHINE SAFELY

Bystanders can be run over. Know the location of bystanders before moving, swinging, or operating the machine.

Always keep the travel alarm in working condition. It warns people when the excavator starts to move.

Use a signal person when moving, swinging, or operating the machine in congested areas. Coordinate hand signals before starting the excavator.

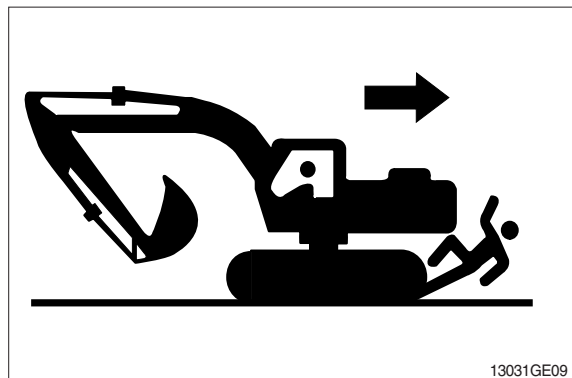

OPERATE ONLY FROM OPERATOR'S SEAT

Avoid possible injury machine damage. Do not start engine by shorting across starter terminals.

NEVER start engine while standing on ground. Start engine only from operator's seat.



PARK MACHINE SAFELY

Before working on the machine:


- Park machine on a level surface.
- Lower bucket to the ground.
- Turn auto idle switch off.
- Run engine at 1/2 speed without load for 2 minutes.
- Turn key switch to OFF to stop engine. Remove key from switch.
- Move pilot control shutoff lever to locked position.
- Allow engine to cool.

SUPPORT MACHINE PROPERLY

Always lower the attachment or implement to the ground before you work on the machine. If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load.


Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

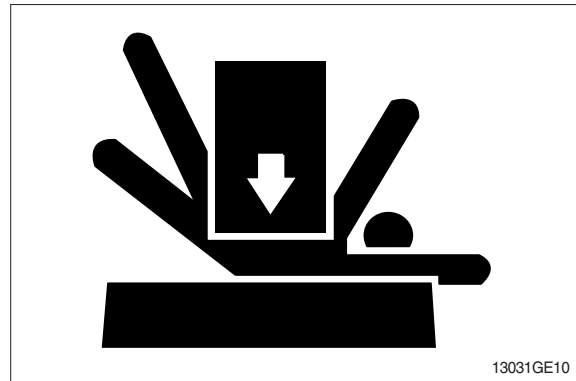

SERVICE COOLING SYSTEM SAFELY


Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off engine. Only remove filler cap when cool enough to touch with bare hands.

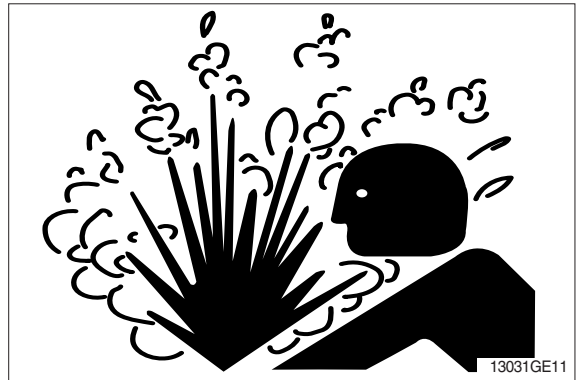

HANDLE FLUIDS SAFELY-AVOID FIRES


Handle fuel with care; It is highly flammable. Do not refuel the machine while smoking or when near open flame or sparks. Always stop engine before refueling machine. Fill fuel tank outdoors.

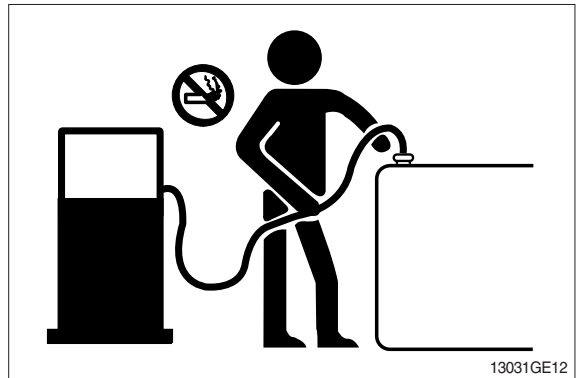

Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.

Make sure machine is clean of trash, grease, and debris.

Do not store oily rags; They can ignite and burn spontaneously.

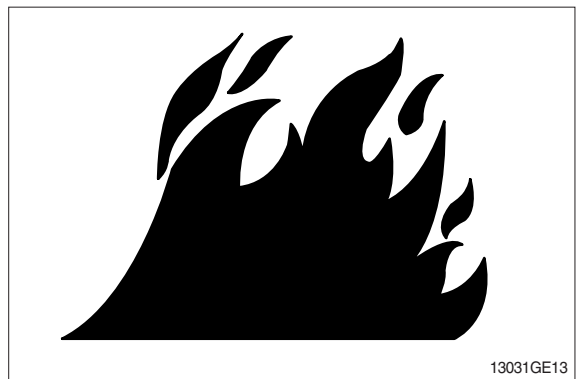

BEWARE OF EXHAUST FUMES

Prevent asphyxiation. Engine exhaust fumes can cause sickness or death.

If you must operate in a building, be positive there is adequate ventilation. Either use an exhaust pipe extension to remove the exhaust fumes or open doors and windows to bring enough outside air into the area.

REMOVE PAINT BEFORE WELDING OR HEATING


Avoid potentially toxic fumes and dust.

Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch.

Do all work outside or in a well ventilated area. Dispose of paint and solvent properly.

Remove paint before welding or heating:

- If you sand or grind paint, avoid breathing the dust.
Wear an approved respirator.
- If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

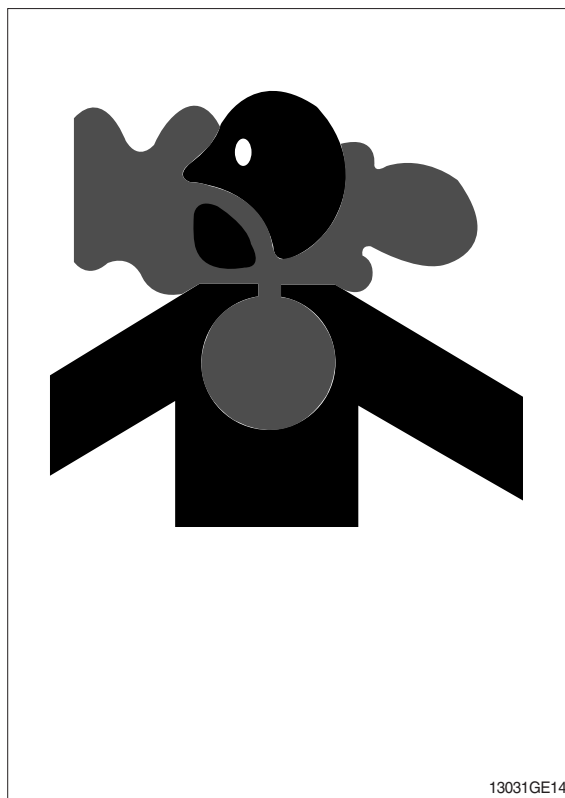

ILLUMINATE WORK AREA SAFELY


Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.



SERVICE MACHINE SAFELY

Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.


Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

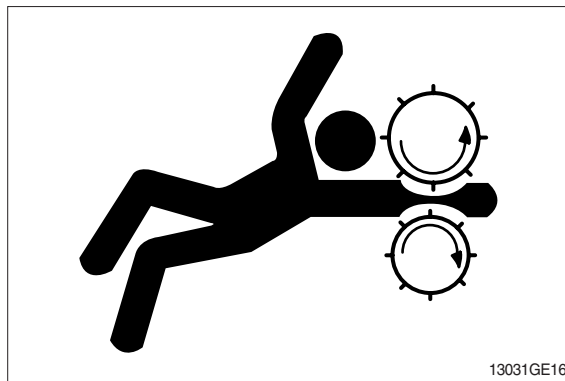

STAY CLEAR OF MOVING PARTS

Entanglements in moving parts can cause serious injury.

To prevent accidents, use care when working around rotating parts.

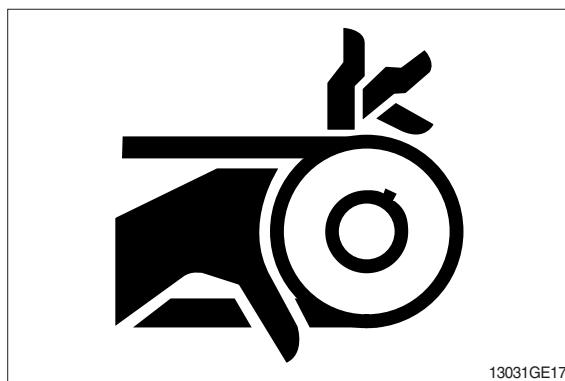


AVOID HIGH PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result.

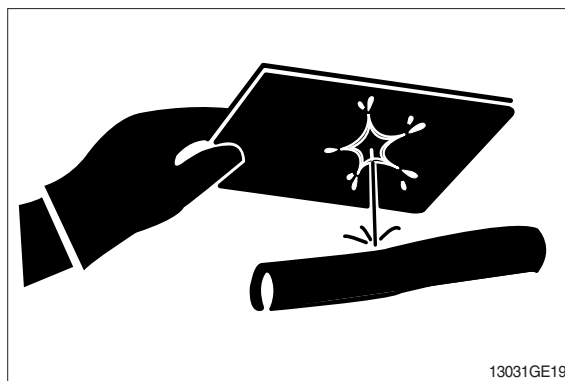

AVOID HEATING NEAR PRESSURIZED FLUID LINES

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials.

Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area. Install fire resisting guards to protect hoses or other materials.



PREVENT BATTERY EXPLOSIONS

Keep sparks, lighted matches, and flame away from the top of battery. Battery gas can explode.

Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.

Do not charge a frozen battery; It may explode. Warm battery to 16°C (60°F).



PREVENT ACID BURNS

Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid the hazard by:


1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10-15 minutes. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.

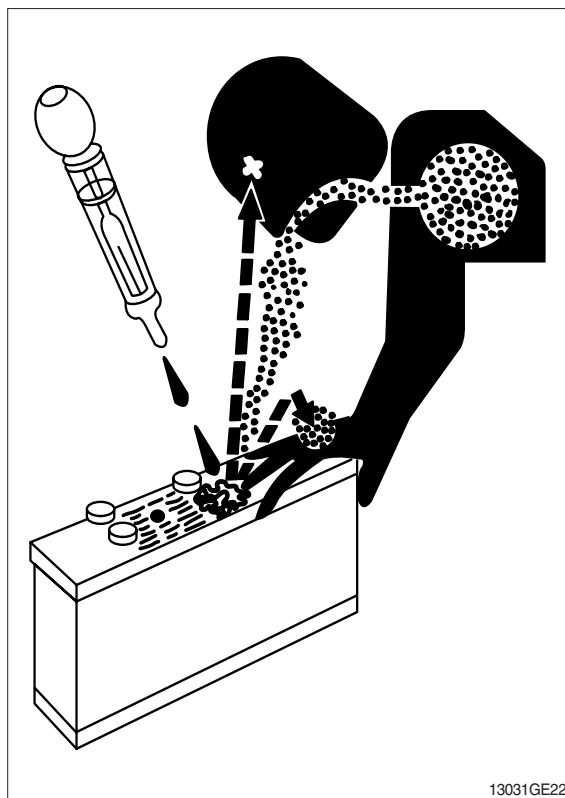


USE TOOLS PROPERLY

Use tools appropriate to the work. Makeshift tools, parts, and procedures can create safety hazards.

Use power tools only to loosen threaded tools and fasteners.

For loosening and tightening hardware, use the correct size tools. DO NOT use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches.

Use only recommended replacement parts. (See Parts catalogue.)

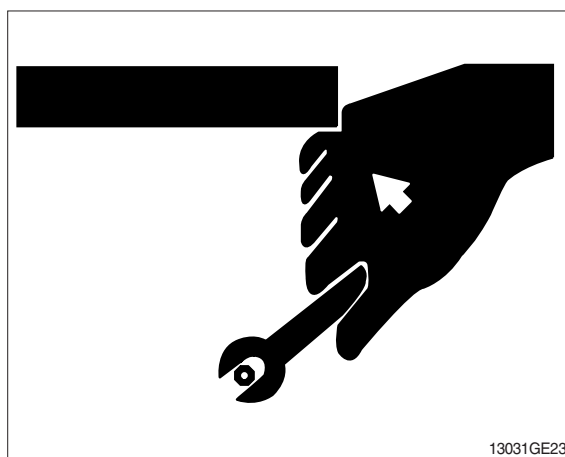


DISPOSE OF FLUIDS PROPERLY

Improperly disposing of fluids can harm the environment and ecology. Before draining any fluids, find out the proper way to dispose of waste from your local environmental agency.


Use proper containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

DO NOT pour oil into the ground, down a drain, or into a stream, pond, or lake. Observe relevant environmental protection regulations when disposing of oil, fuel, coolant, brake fluid, filters, batteries, and other harmful waste.

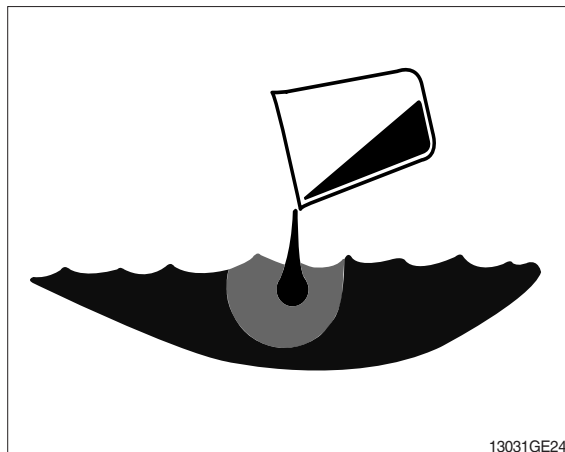

REPLACE SAFETY SIGNS

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

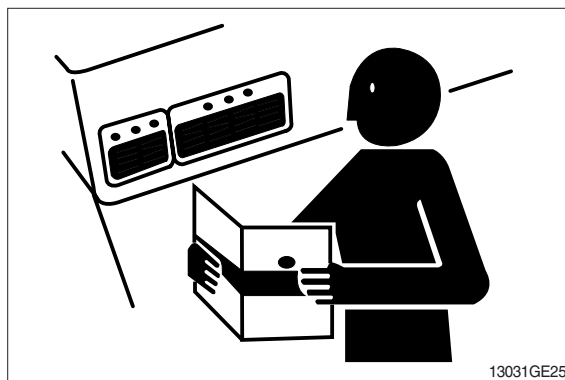


LIVE WITH SAFETY

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

GROUP 2 SPECIFICATIONS

1. MAJOR COMPONENT

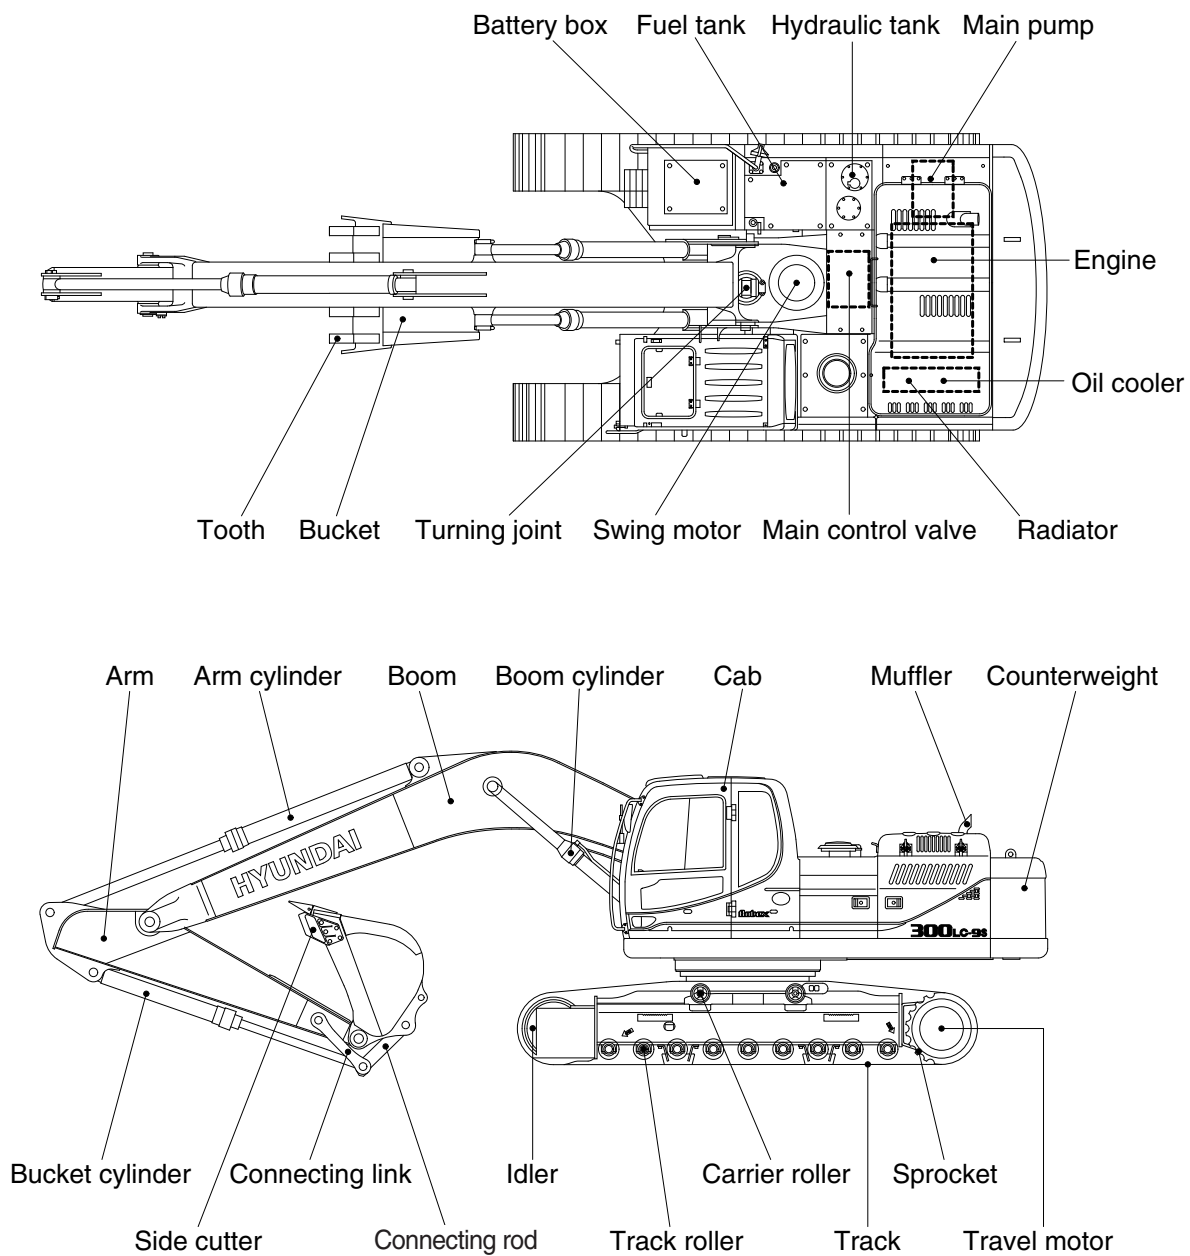


3009S2SP01

2. SPECIFICATIONS

1) R300LC-9S

· 6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

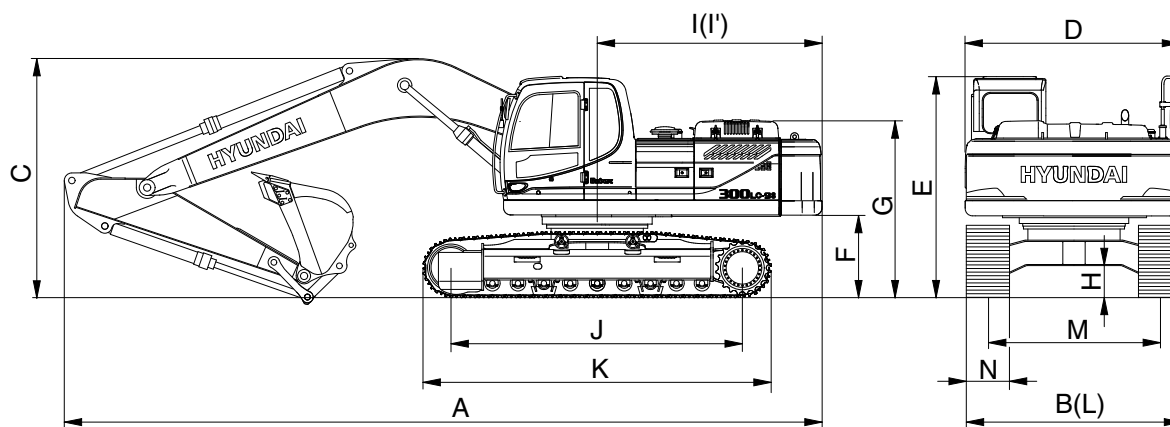


3009S2SP02

Description		Unit	Specification
Operating weight		kg (lb)	29700 (65480)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10705 (35' 1")
Overall width, with 600mm shoe	B		3200 (10' 6")
Overall height	C		3290 (10' 10")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3345 (11' 0")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		3200 (10' 6")
Track gauge	M		2600 (8' 6")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.4/6.0 (2.1/3.7)
Swing speed		rpm	11.6
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.57 (8.11)
Max traction force		kg (lb)	27300 (60200)

2) R300NLC-9S

· 6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

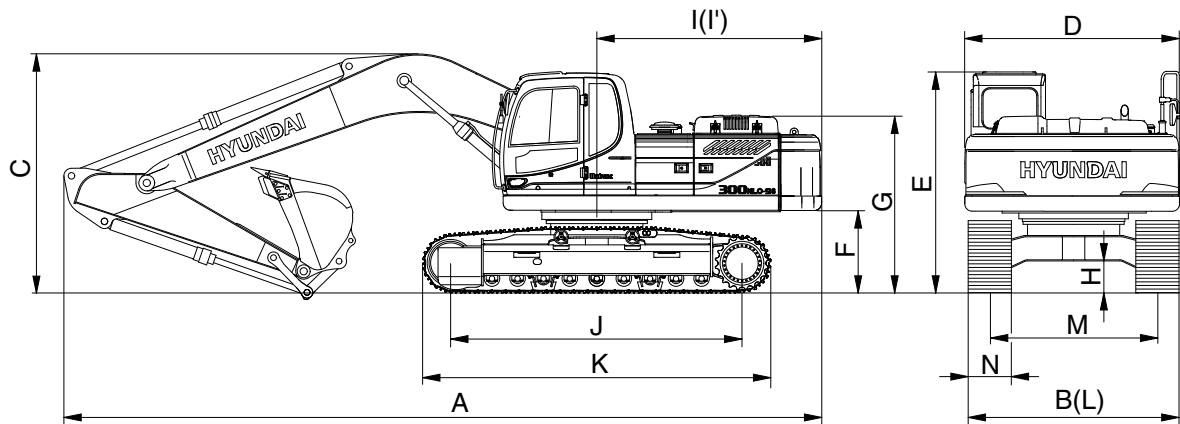


3009S2SP03

Description		Unit	Specification
Operating weight		kg (lb)	29500 (65040)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10705 (35' 1")
Overall width, with 600mm shoe	B		2990 (9' 10")
Overall height	C		3290 (10' 10")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3345 (11' 0")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		2990 (9' 10")
Track gauge	M		2390 (7' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.4/6.0 (2.1/3.7)
Swing speed		rpm	11.6
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.57 (8.11)
Max traction force		kg (lb)	27300 (60200)

3) R300LC-9S LONG REACH

· 10.2 m (33' 6") BOOM and 7.85 m (25' 9") ARM

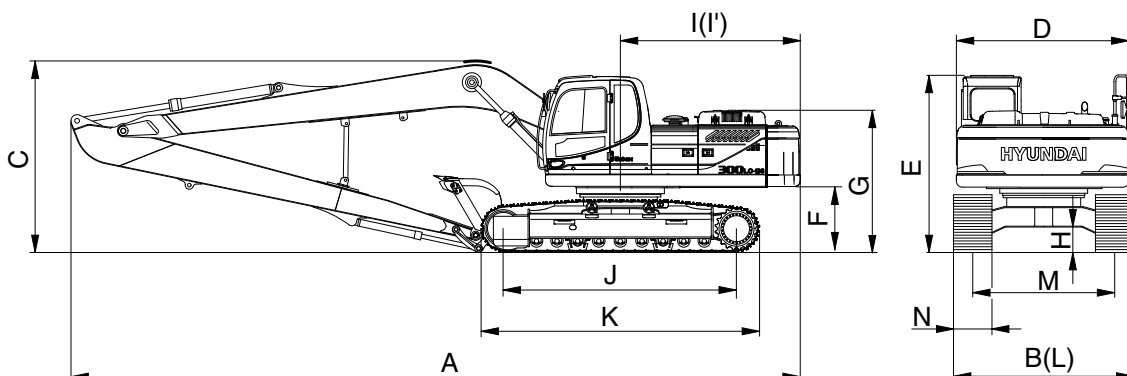


3009S2SP04

Description		Unit	Specification
Operating weight		kg (lb)	33580 (74030)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.52 (0.68)
Overall length	A	mm (ft-in)	14745 (48' 5")
Overall width, with 800 mm shoe	B		3400 (11' 2")
Overall height	C		3560 (11' 8")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3010 (9' 11")
Ground clearance of counterweight	F		1190 (3' 11")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3345 (11' 0")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		3400 (11' 2")
Track gauge	M		2600 (8' 6")
Track shoe width, standard	N		800 (32")
Travel speed (low/high)		km/hr (mph)	3.4/6.0 (2.1/3.7)
Swing speed		rpm	11.6
Gradeability		Degree (%)	35 (70)
Ground pressure (800 mm shoe)		kgf/cm ² (psi)	0.48 (6.83)
Max traction force		kg (lb)	27300 (60200)

4) R300LC-9S HIGH WALKER

· 6.25 m (20' 6") BOOM and 3.05 m (10' 0") ARM

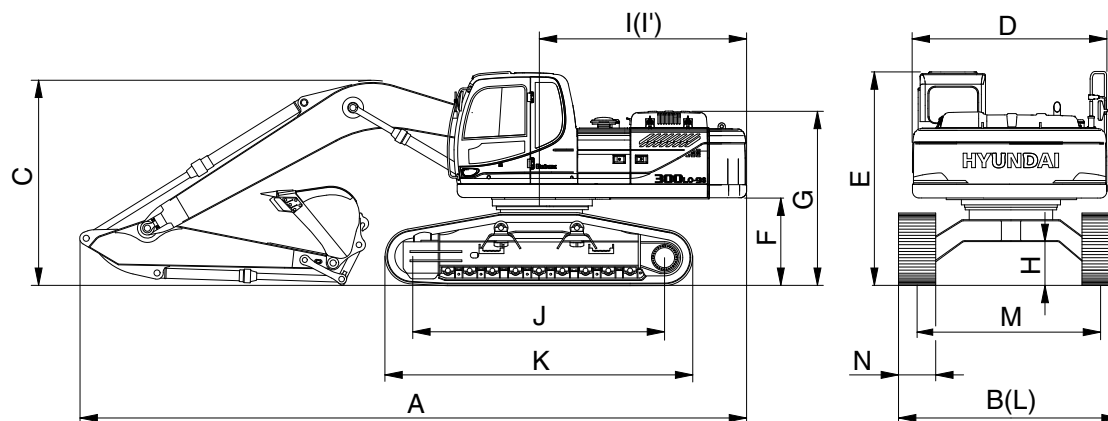


3009S2SP05

Description		Unit	Specification
Operating weight		kg (lb)	32540 (71740)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.27 (1.66)
Overall length	A	mm (ft-in)	10575 (34' 8")
Overall width, with 600 mm shoe	B		3470 (11' 5")
Overall height	C		3350 (11' 0")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3380 (11' 1")
Ground clearance of counterweight	F		1500 (4' 11")
Engine cover height	G		3500 (11' 6")
Minimum ground clearance	H		765 (2' 6")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3345 (11' 0")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4950 (16' 3")
Undercarriage width	L		3470 (11' 5")
Track gauge	M		2870 (9' 5")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.4/6.0 (2.1/3.7)
Swing speed		rpm	11.6
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.62 (8.82)
Max traction force		kg (lb)	27300 (60200)

3. WORKING RANGE

1) R300LC-9S, R300NLC-9S

· 6.25 m (20' 6") BOOM

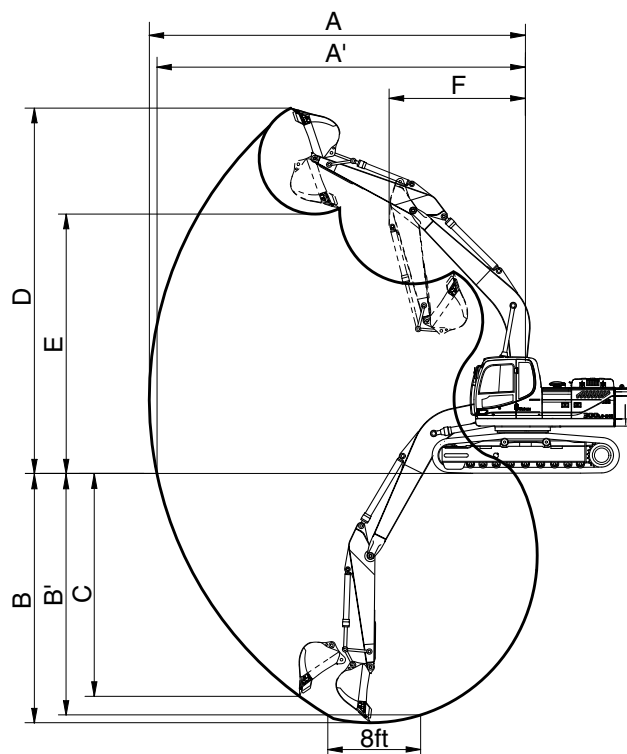


3009SH2SP06

Description		2.10m (6' 11") Arm	2.50 m (8' 2") Arm	3.05 m (10' 0") Arm	3.75 m (12' 4") Arm
Max digging reach	A	10020 mm (32' 10")	10280 mm (33' 7")	10820 mm (35' 6")	11400 mm (37' 5")
Max digging reach on ground	A'	9820 mm (32' 3")	10080 mm (33' 1")	10620 mm (34' 10")	11220 mm (36' 10")
Max digging depth	B	6440 mm (21' 1")	6840 mm (22' 5")	7390 mm (24' 3")	8090 mm (26' 7")
Max digging depth (8 ft level)	B'	6240 mm (20' 6")	6630 mm (21' 9")	7200 mm (23' 7")	7920 mm (26' 0")
Max vertical wall digging depth	C	6000 mm (19' 8")	5850 mm (19' 2")	6380mm (20' 11")	7080 mm (23' 3")
Max digging height	D	10070 mm (33' 0")	10110 mm (33' 2")	10160 mm (33' 4")	10360 mm (34' 0")
Max dumping height	E	6940 mm (22' 9")	7030 mm (23' 1")	7110 mm (23' 4")	7310 mm (24' 0")
Min swing radius	F	4380 mm (14' 4")	4260 mm (14' 0")	4230 mm (13' 11")	4190 mm (13' 9")
Bucket digging force	SAE	168.7 [183.1] kN	168.7 [183.1] kN	168.7 [183.1] kN	168.7 [183.1] kN
		17200 [18760] kgf	17200 [18760] kgf	17200 [18760] kgf	17200 [18760] kgf
		37920 [41370] lbf	37920 [41370] lbf	37920 [41370] lbf	37920 [41370] lbf
	ISO	192.2 [209.7] kN	192.2 [209.7] kN	192.2 [209.7] kN	192.2 [209.7] kN
		19600 [21380] kgf	19600 [21380] kgf	19600 [21380] kgf	19600 [21380] kgf
		43210 [47140] lbf	43210 [47140] lbf	43210 [47140] lbf	43210 [47140] lbf
Arm digging force	SAE	180.4 [195.9] kN	156.9 [170.4] kN	131.4 [142.7] kN	114.7 [124.6] kN
		18400 [19980] kgf	16000 [17370] kgf	13400 [14550] kgf	11700 [12700] kgf
		40570 [44050] lbf	35270 [38290] lbf	29540 [32070] lbf	25790 [28000] lbf
	ISO	190.3 [206.6] kN	163.8 [177.8] kN	136.3 [148] kN	119.6 [129.9] kN
		19400 [21060] kgf	16700 [18130] kgf	13900 [15090] kgf	12200 [13250] kgf
		42770 [46440] lbf	36820 [39980] lbf	30640 [33270] lbf	26900 [29210] lbf

[] : Power boost

2) R300LC-9S LONG REACH

· 10.2 m (33' 6") BOOM

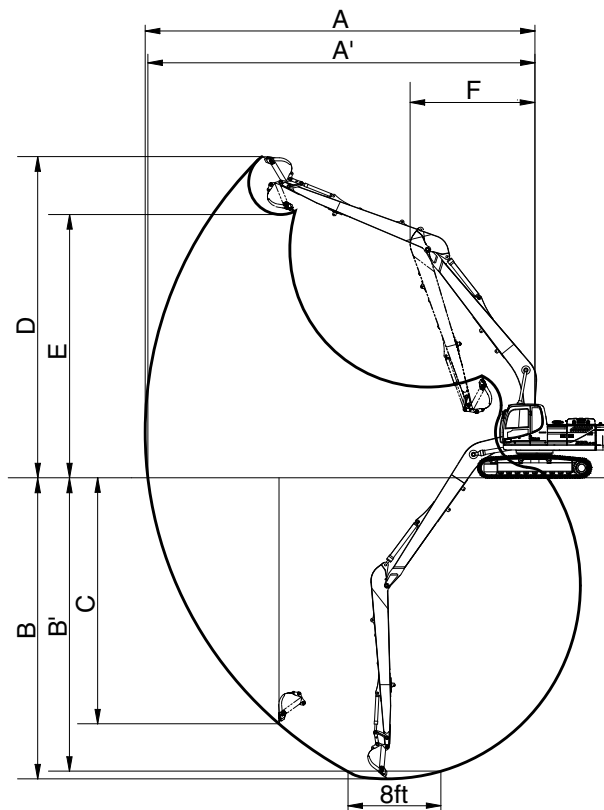


29092SP06

Description		7.85 m (25' 9") Arm
Max digging reach	A	18510 (60' 9")
Max digging reach on ground	A'	18400 (60' 4")
Max digging depth	B	14820 (48' 7")
Max digging depth (8 ft level)	B'	14690 (48' 2")
Max vertical wall digging depth	C	12020 (39' 5")
Max digging height	D	14500 (47' 7")
Max dumping height	E	12190 (40' 0")
Min swing radius	F	6250 (20' 6")
Bucket digging force	SAE	70 kN
		7100 kgf
		15650 lbf
	ISO	80 kN
		8200 kgf
		18080 lbf
Arm crowd force	SAE	47.1 kN
		4800 kgf
		10580 lbf
	ISO	48.1 kN
		4900 kgf
		10800 lbf

3) R300LC-9S HIGH WALKER

· 6.25 m (20' 6") BOOM

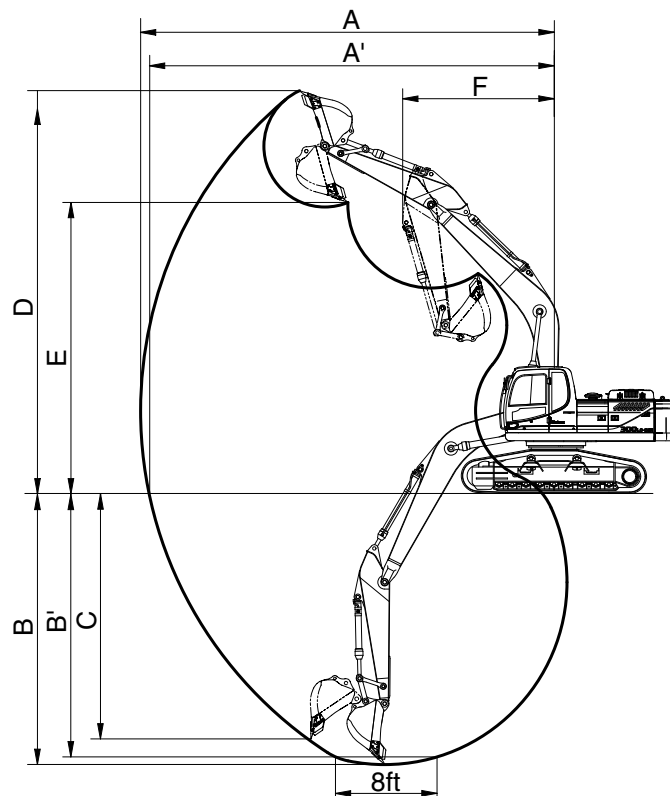

3009SH2SP07

Description		2.10m (6' 11") Arm	2.50 m (8' 2") Arm	3.05 m (10' 0") Arm	3.75 m (12' 4") Arm
Max digging reach	A	10020 mm (32' 10")	10280 mm (33' 7")	10790 mm (35' 5")	11400 mm (37' 5")
Max digging reach on ground	A'	9750 mm (32' 0")	10020 mm (32' 10")	10530 mm (34' 7")	11160 mm (36' 7")
Max digging depth	B	6140 mm (20' 2")	6540 mm (21' 5")	7090 mm (23' 3")	7790 mm (25' 7")
Max digging depth (8 ft level)	B'	5930 mm (19' 5")	6330 mm (20' 9")	6910 mm (22' 8")	7630 mm (25' 0")
Max vertical wall digging depth	C	5700 mm (18' 8")	5560 mm (18' 3")	6090 mm (20' 0")	6790 mm (22' 3")
Max digging height	D	10370 mm (34' 0")	10220 mm (33' 6")	10440 mm (34' 3")	10660 mm (35' 0")
Max dumping height	E	7240 mm (23' 9")	7170 mm (23' 6")	7400 mm (24' 3")	7610 mm (25' 0")
Min swing radius	F	4380 mm (14' 4")	4260 mm (14' 0")	4230 mm (13' 11")	4140 mm (13' 7")
Bucket digging force	SAE	168.7 [184] kN	168.7 [184] kN	168.7 [184] kN	168.7 [184] kN
		17200 [18760] kgf	17200 [18760] kgf	17200 [18760] kgf	17200 [18760] kgf
		37920 [41370] lbf	37920 [41370] lbf	37920 [41370] lbf	37920 [41370] lbf
	ISO	192.2 [209.7] kN	192.2 [209.7] kN	192.2 [209.7] kN	192.2 [209.7] kN
		19600 [21380] kgf	19600 [21380] kgf	19600 [21380] kgf	19600 [21380] kgf
		43210 [47140] lbf	43210 [47140] lbf	43210 [47140] lbf	43210 [47140] lbf
Arm digging force	SAE	180.4 [195.9] kN	156.9 [170.4] kN	131.4 [142.7] kN	114.7 [124.6] kN
		18400 [19980] kgf	16000 [17370] kgf	13400 [14550] kgf	11700 [12700] kgf
		40570 [44050] lbf	35270 [38290] lbf	29540 [32070] lbf	25790 [28000] lbf
	ISO	190.3 [206.6] kN	163.8 [177.8] kN	136.3 [148] kN	119.6 [129.9] kN
		19400 [21060] kgf	16700 [18130] kgf	13900 [15090] kgf	12200 [13250] kgf
		42770 [46440] lbf	36820 [39980] lbf	30640 [33270] lbf	26900 [29210] lbf

[] : Power boost

4. WEIGHT

1) R300LC-9S, R300NLC-9S

Item	R300LC-9SH		R300NLC-9SH	
	kg	lb	kg	lb
Upperstructure assembly	12250	27010	←	←
Main frame weld assembly	2740	6040	←	←
Engine assembly	620	1370	←	←
Main pump assembly	140	310	←	←
Main control valve assembly	220	490	←	←
Swing motor assembly	370	820	←	←
Hydraulic oil tank assembly	250	560	←	←
Fuel tank assembly	240	530	←	←
Counterweight	4600	10140	←	←
Cab assembly	490	1080	←	←
Lower chassis assembly	10740	23680	10600	23370
Track frame weld assembly	3765	8300	3625	7990
Swing bearing	430	950	←	←
Travel motor assembly	360	790	←	←
Turning joint	54	120	←	←
Track recoil spring	205	450	←	←
Idler	252	560	←	←
Carrier roller	35	80	←	←
Track roller	54	119	←	←
Track-chain assembly (600 mm standard triple grouser shoe)	1860	4110	←	←
Front attachment assembly (6.25 m boom, 3.05 m arm, 1.27 m³ SAE heaped bucket)	5550	12240	←	←
6.25 m boom assembly	2285	5040	←	←
3.05 m arm assembly	1025	2260	←	←
1.27 m³ SAE heaped bucket	1010	2230	←	←
Boom cylinder assembly	270	600	←	←
Arm cylinder assembly	360	790	←	←
Bucket cylinder assembly	220	485	←	←
Bucket control link assembly	110	240	←	←

2) R300LC-9S LONG REACH

Item	R300LC-9SH LONG REACH	
	kg	lb
Upperstructure assembly	14050	30980
Main frame weld assembly	2740	6040
Engine assembly	620	1370
Main pump assembly	140	310
Main control valve assembly	220	490
Swing motor assembly	370	820
Hydraulic oil tank assembly	250	560
Fuel tank assembly	240	530
Counterweight	7000	15450
Cab assembly	490	1080
Lower chassis assembly	10900	24030
Track frame weld assembly	3765	8300
Swing bearing	430	950
Travel motor assembly	360	790
Turning joint	54	120
Track recoil spring	205	450
Idler	252	560
Carrier roller	35	80
Track roller	54	119
Track-chain assembly (800 mm standard triple grouser shoe)	2340	5160
Front attachment assembly (10.2 m boom, 7.85 m arm, 0.52 m³ SAE heaped bucket)	5920	13050
10.2 m boom assembly	2960	6530
7.85 m arm assembly	1340	2960
0.52 m³ SAE heaped bucket	460	1010
Boom cylinder assembly	270	600
Arm cylinder assembly	360	790
Bucket cylinder assembly	96	212
Bucket control link assembly	110	240

3) R300LC-9S HIGH WALKER

Item	R300LC-9SH HIGH WAKER	
	kg	lb
Upperstructure assembly	12250	27010
Main frame weld assembly	2740	6040
Engine assembly	620	1370
Main pump assembly	140	310
Main control valve assembly	220	490
Swing motor assembly	370	820
Hydraulic oil tank assembly	250	560
Fuel tank assembly	240	530
Counterweight	4600	10140
Cab assembly	490	1080
Lower chassis assembly	12800	28220
Track frame weld assembly	5825	12840
Swing bearing	430	950
Travel motor assembly	360	790
Turning joint	54	120
Track recoil spring	205	450
Idler	252	560
Carrier roller	35	80
Track roller	54	119
Track-chain assembly (600 mm standard triple grouser shoe)	1860	4110
Front attachment assembly (6.25 m boom, 3.05 m arm, 1.27 m³ SAE heaped bucket)	5550	12240
6.25 m boom assembly	2285	5040
3.05 m arm assembly	1025	2260
1.27 m³ SAE heaped bucket	1010	2230
Boom cylinder assembly	270	600
Arm cylinder assembly	360	790
Bucket cylinder assembly	220	485
Bucket control link assembly	110	240

5. LIFTING CAPACITIES

1) R300LC-9S

(1) 6.25 m (20' 6") boom, 2.10 m (6' 11") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 4600 kg (10140 lb) counterweight.

·  : Rating over-front

·  : Rating over-side or 360 degree

Load point height		Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
												m (ft)
7.5 m (25 ft)	kg lb					*6200 *13670	*6200 *13670			*5710 *12590	4600 10140	8.01 (26.3)
6.0 m (20 ft)	kg lb					*6560 *14460	*6560 *14460	*6370 *14040	4980 10980	*5810 *12810	3680 8110	8.90 (29.2)
4.5 m (15 ft)	kg lb			*9620 *21210	*9620 *21210	*7590 *16730	7110 15670	*6700 *14770	4850 10690	5310 11710	3210 7080	9.42 (30.9)
3.0 m (10 ft)	kg lb			*12550 *27670	10260 22620	*8910 *19640	6640 14640	*7330 *16160	4630 10210	5020 11070	3000 6610	9.64 (31.6)
1.5 m (5 ft)	kg lb			*14540 *32060	9550 21050	*10090 *22240	6240 13760	7390 16290	4430 9770	5010 11050	2970 6550	9.58 (31.4)
Ground Line	kg lb			*15120 *33330	9340 20590	10330 22770	6010 13250	7230 15940	4290 9460	5290 11660	3150 6940	9.23 (30.3)
-1.5 m (-5 ft)	kg lb	*14250 *31420	*14250 *31420	*14810 *32650	9360 20640	10250 22600	5950 13120	7200 15870	4260 9390	6010 13250	3600 7940	8.57 (28.1)
-3.0 m (-10 ft)	kg lb	*18890 *41650	*18890 *41650	*13670 *30140	9540 21030	*10170 *22420	6050 13340			*6670 *14700	4620 10190	7.47 (24.5)
-4.5 m (-15 ft)	kg lb	*15250 *33620	*15250 *33620	*11130 *24540	9950 21940							

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 6.25 m (20' 6") boom, 2.50 m (8' 2") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 4600 kg (10140 lb) counterweight.

Load point height		Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb											*5240 *11550	4330 9550	8.34 (27.4)
6.0 m (20 ft)	kg lb									*5870 *12940	5060 11160	*5400 *11900	3500 7720	9.19 (30.2)
4.5 m (15 ft)	kg lb					*8760 *19310	*8760 *19310	*7090 *15630	*7090 *15630	*6310 *13910	4890 10780	5070 11180	3060 6750	9.69 (31.8)
3.0 m (10 ft)	kg lb					*11680 *25750	10460 23060	*8460 *18650	6700 14770	*7000 *15430	4650 10250	4790 10560	2850 6280	9.90 (32.5)
1.5 m (5 ft)	kg lb					*13960 *30780	9630 21230	*9730 *21450	6260 13800	7380 16270	4420 9740	4770 10520	2810 6190	9.84 (32.3)
Ground Line	kg lb					*14930 *32910	9290 20480	10300 22710	5980 13180	7200 15870	4250 9370	5010 11050	2950 6500	9.51 (31.2)
-1.5 m (-5 ft)	kg lb			*15220 *33550	*15220 *33550	*14910 *32870	9240 20370	10180 22440	5880 12960	7130 15720	4190 9240	5620 12390	3340 7360	8.87 (29.1)
-3.0 m (-10 ft)	kg lb	*17240 *38010	*17240 *38010	*20000 *44090	19740 43520	*14040 *30950	9380 20680	10240 22580	5930 13070			*6780 *14950	4190 9240	7.82 (25.7)
-4.5 m (-15 ft)	kg lb			*16720 *36860	*16720 *36860	*11970 *26390	9720 21430							

(3) 6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 4600 kg (10140 lb) counterweight.

Load point height		Load radius												At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity		Reach
																m (ft)
7.5 m (25 ft)	kg lb													*4780 *10540	3820 8420	8.94 (29.3)
6.0 m (20 ft)	kg lb									*5270 *11620	5150 11350			*4940 *10890	3140 6920	9.74 (32.0)
4.5 m (15 ft)	kg lb							*6380 *14070	*6380 *14070	*5780 *12740	4950 10910			4630 10210	2760 6080	10.20 (33.5)
3.0 m (10 ft)	kg lb			*10490 *23130	*10490 *23130	*10510 *23170	*10510 *23170	*7800 *17200	6780 14950	*6530 *14400	4670 10300	*4420 *9740	3350 7390	4390 9680	2570 5670	10.40 (34.1)
1.5 m (5 ft)	kg lb					*13100 *28880	9770 21540	*9190 *20260	6290 13870	*7320 *16140	4410 9720	*5230 *11530	3210 7080	4350 9590	2530 5580	10.35 (34.0)
Ground Line	kg lb			*10140 *22350	*10140 *22350	*14530 *32030	9270 20440	*10220 *22530	5950 13120	7150 15760	4200 9260	*4600 *10140	3110 6860	4540 10010	2640 5820	10.04 (32.9)
-1.5 m (-5 ft)	kg lb	*10990 *24230	*10990 *24230	*14250 *31420	*14250 *31420	*14890 *32830	9110 20080	10080 22220	5780 12740	7030 15500	4090 9020			5020 11070	2940 6480	9.44 (31.0)
-3.0 m (-10 ft)	kg lb	*14880 *32800	*14880 *32800	*19250 *42440	*19250 *42440	*14380 *31700	9170 20220	10080 22220	5780 12740	7050 15540	4110 9060			6030 13290	3580 7890	8.48 (27.8)
-4.5 m (-15 ft)	kg lb	*19470 *42920	*19470 *42920	*18400 *40570	*18400 *40570	*12820 *28260	9430 20790	*9370 *20660	5960 13140					*6400 *14110	5110 11270	6.97 (22.9)

(4) 6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 1.27 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 4600 kg (10140 lb) counterweight.

Load point height		Load radius												At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity		Reach
																m (ft)
7.5 m (25 ft)	kg lb													*4230 *9330	3290 7250	9.67 (31.7)
6.0 m (20 ft)	kg lb									*4470 *9850	*4470 *9850	*2540 *5600	*2540 *5600	*4400 *9700	2750 6060	10.40 (34.1)
4.5 m (15 ft)	kg lb									*5050 *11130	5040 11110	*3970 *8750	3530 7780	4150 9150	2430 5360	10.83 (35.5)
3.0 m (10 ft)	kg lb			*14430 *31810	*14430 *31810	*8910 *19640	*8910 *19640	*6870 *15150	*6870 *15150	*5870 *12940	4740 10450	*5060 *11160	3370 7430	3940 8690	2260 4980	11.02 (36.2)
1.5 m (5 ft)	kg lb			*10550 *23260	*10550 *23260	*11820 *26060	10080 22220	*8410 *18540	6410 14130	*6760 *14900	4440 9790	5440 11990	3200 7050	3900 8600	2220 4890	10.97 (36.0)
Ground Line	kg lb	*6830 *15060	*6830 *15060	*10900 *24030	*10900 *24030	*13790 *30400	9370 20660	*9670 *21320	5980 13180	7150 15760	4190 9240	5290 11660	3060 6750	4040 8910	2290 5050	10.68 (35.0)
-1.5 m (-5 ft)	kg lb	*9850 *21720	*9850 *21720	*13520 *29810	*13520 *29810	*14680 *32360	9060 19970	10040 22130	5740 12650	6970 15370	4030 8880	5200 11460	2980 6570	4400 9700	2520 5560	10.12 (33.2)
-3.0 m (-10 ft)	kg lb	*13010 *28680	*13010 *28680	*17210 *37940	*17210 *37940	*14640 *32280	9000 19840	9950 21940	5660 12480	6910 15230	3980 8770			5140 11330	2990 6590	9.25 (30.3)
-4.5 m (-15 ft)	kg lb	*16680 *36770	*16680 *36770	*20250 *44640	19320 42590	*13660 *30120	9160 20190	*9980 *22000	5740 12650					*6200 *13670	4000 8820	7.92 (26.0)

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

This as a preview PDF file from **best-manuals.com**



Download full PDF manual at **best-manuals.com**