



Kuzer

RKE 150 4x2 Rigid

Didistribusikan oleh:

 **ASTRA international**
UD TRUCKS SALES OPERATION

PT ASTRA INTERNATIONAL

Jl. Danau Sunter Selatan Blok 0/5, Podomoro, Sunter Jaya,
Jakarta Utara, Indonesia.

Phone : +62 21 6508008

Fax : +62 21 6508005


Call Center : +62 (kode area) 500 898

Dicetak di Indonesia. © Hak Cipta UD Trucks 2014. Semua hak dilindungi undang-undang.
Harap perhatikan bahwa perlengkapan ini mungkin bersifat opsional dan mungkin tidak sama di setiap negara.
Kami berhak mengubah spesifikasi produk tanpa pemberitahuan sebelumnya.

UD Trucks Indonesia

Sentral Senayan III, 12 floor. Jl Asia Afrika No. 8, Jakarta Pusat 10270, Indonesia
udtrucks.com



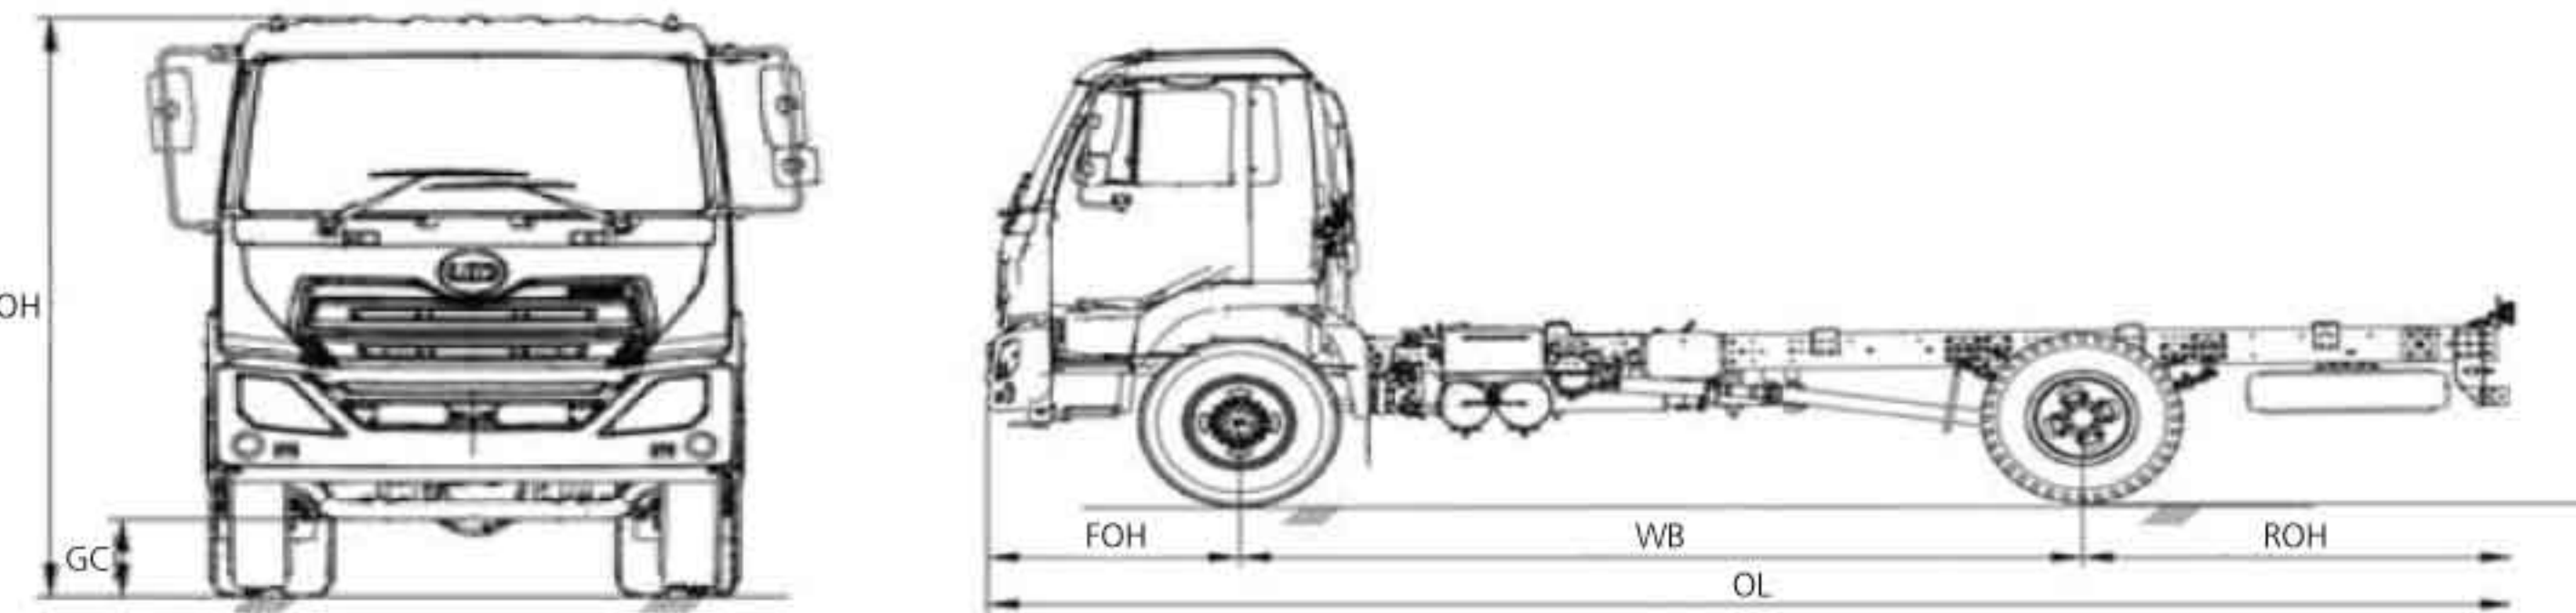

Description		RKE 150 WB 3350	RKE 150 WB 3850	RKE 150 WB 3350 HD
DIMENSION				
Wheel base	mm	3,350	3,850	3,350
Overall Length	mm	6,258	7,153	6,060
Overall Width	mm	2,206	2,206	2,206
Overall Height	mm	2,540	2,540	2,540
Front tread	mm	1,800	1,800	1,800
Rear tread	mm	1,645	1,645	1,645
Cabin to rear axle	mm	2,713	3,213	2,713
Ground clearance	mm	180	180	180
Front Overhang	mm	1,198	1,198	1,198
Rear over hang	mm	1,710	2,105	1,512
Box length	mm	NA	NA	NA
WEIGHT				
Chassis & Cabin	Kg	3,210	3,230	3,210
Front axle	Kg	2,750	2,750	2,750
Rear axle	Kg	5,750	5,750	5,750
Max. GVW/GCW	Kg	8,500	8,500	8,500
ABILITY				
Min. Turning Rad.	m	5.75	7.00	5.75
Max. Speed	km/h	110	110	110
Max. Grade ability	Tan @	40.8%	40.8%	46.6%
Max Tractive force	kN	36.70	36.70	41.53
ENGINE				
Model		GH4E	GH4E	GH4E
Diameter x Stroke	mm	100x120	100x120	100x120
Volume	cc	3,760	3,760	3,760
Max. Out put	Hp	150	150	150
Max engine Rpm	Rpm	2,800	2,800	2,800
Max. Torque	Nm	490	490	490
Rpm max Tourque	Rpm	1400-1800	1400-1800	1400-1800
TRANSMISSION				
Type		STO0506-1 (6 Forward 1 Reverse), overdrive	STO0506-1 (6 Forward 1 Reverse), overdrive	STO0506-2 (6 Forward 1 Reverse), overdrive
Gear Ratio	I	6.38	6.38	7.22
	II	3.54	3.54	4.01
	III	2.09	2.09	2.36
	IV	1.38	1.38	1.47
	V	1.00	1.00	1.00
	VI	0.77	0.77	0.77
	R1	6.38	6.38	7.22

Description		RKE 150 WB 3350	RKE 150 WB 3850	RKE 150 WB 3350 HD
AXLE				
		--		
Front axle capacity	Kg	2,750	2,750	2,750
Rear axle capacity	Kg	5,750	5,750	5,750
Final gear ratio		4.80	4.80	4.80
BRAKE				
		RKE 150 WB 3350		
Type		Dual Circuit Fully Air Brakes	Dual Circuit Fully Air Brakes	Dual Circuit Fully Air Brakes
CLUTCH				
Type		Ceramic facing with clutch booster	Ceramic facing with clutch booster	Ceramic facing with clutch booster
Diameter	mm	330	330	330
WHEEL & TIRE				
Front		7.5 x 16 - 14 PR RIB resp.	7.5 x 16 - 14 PR RIB resp.	7.5 x 16 - 14 PR RIB resp.
Rear		7.5 x 16 - 14 PR RIB resp.	7.5 x 16 - 14 PR RIB resp.	7.5 x 16 - 14 PR RIB resp.
Wheel rim		6x16*	6x16*	6x16*
Stud bolt	pcs	6	6	6
FUEL TANK CAP.				
	ltr	190	190	100
BATTERY	AMP	24V-100 Ah	24V-100 Ah	24V-100 Ah
ALTERNATOR	AMP	75	75	75
SIDE RAIL DIMENSION				
THICKNESS SIDE RAIL	mm	5	5	5
WEB	mm	210	210	210
FLANGE	mm	76	76	76
SUSPENSION				
		Semi elliptical leaf spring with shock absorber	Semi elliptical leaf spring with shock absorber	Semi elliptical leaf spring with shock absorber
SPRING FRONT				
		Semi elliptical leaf spring	Semi elliptical leaf spring	Semi elliptical leaf spring
LEAF QTY		10X8	10X8	10X8
SHOCK ABSORBER		Double acting	Double acting	Double acting
SPRING REAR				
		Semi elliptical leaf spring	Semi elliptical leaf spring	Semi elliptical leaf spring
LEAF QTY		Main leaf - 9 Helper leaf - 8	Main leaf - 9 Helper leaf - 8	Main leaf - 9 Helper leaf - 9
SHOCK ABSORBER		Double acting	Double acting	Double acting
OPTION				
AIR CONDITION		Optional	Optional	Optional
FOG LAMP		STD	STD	STD
CRUISE CONTROL		STD	STD	STD
ABS		Optional	Optional	Optional
TELEMATIC		Optional	Optional	Optional
PTO TRANSM		Optional	Optional	STD
ENG PTO		-	-	STD (MIXER)
FINAL RATIO (ALTERNATIVE)		-	-	-