



汽车起重机 / Truck Crane


XCT130



130t



61m



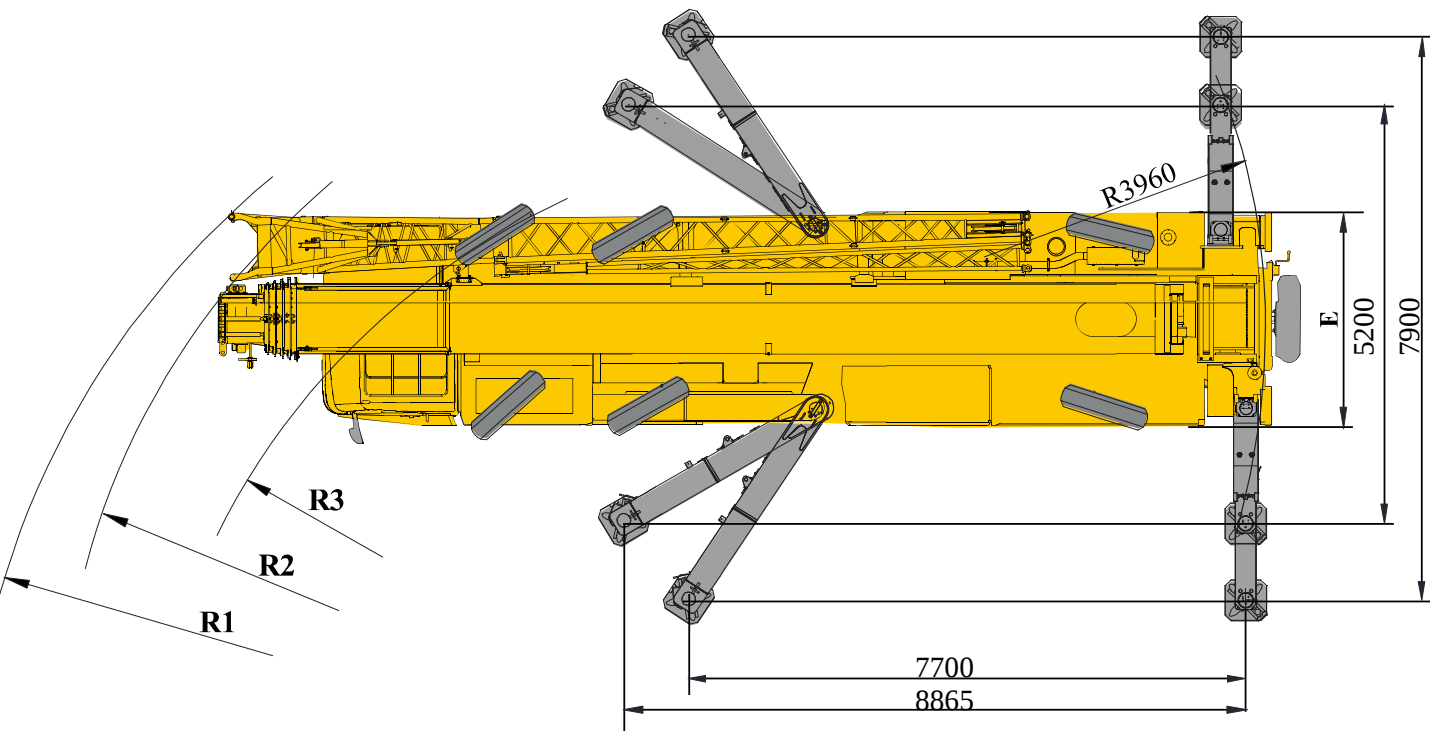
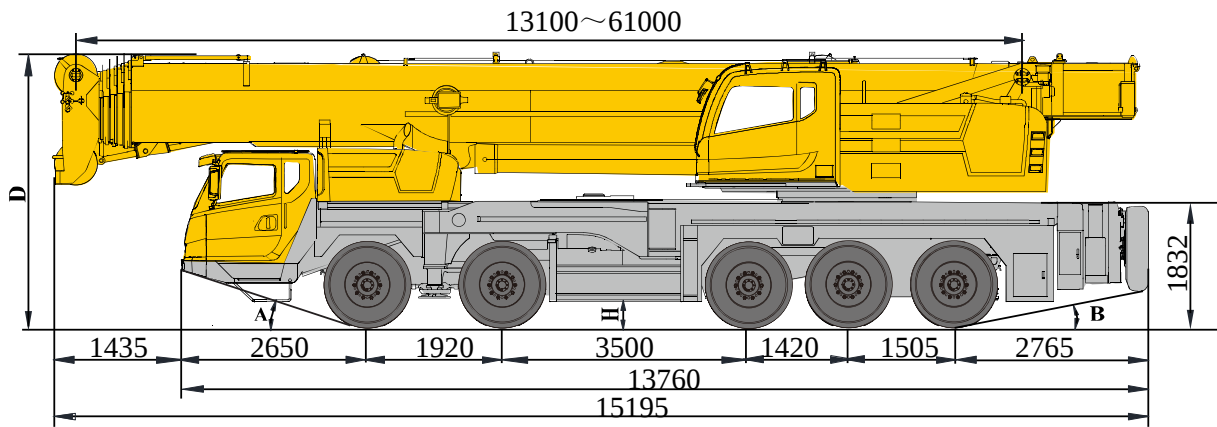
85.3m



目录
Contents

尺寸参数 Dimensions	3
技术规格 Technical specifications	4-7
重量/作业速度 Weight / Working speeds	8
平衡重 Counterweight	9
臂架组合方案 Boom / Jib combinations	10-11
主臂 Boom	12-18
副臂 Jib	19-23
符号标识 Description of symbols	24
注意事项 Notes	25

尺寸参数
Dimensions



	A	B	D	E	R1	R2	R3	H
12.00R24-20PR*	18°	13°	3970	3000	14300	13400	11500	312

技术规格

Technical specifications

 底盘	
车架	徐工设计、制造，全覆盖式走台板，防扭转箱型结构，高强度钢材制造。
支腿	4支腿，K形布置，采用双级水平支腿，水平伸缩和垂直伸缩由液压控制，底盘两侧装有电控操纵控制台，控制台板装有水平仪、照明灯和调速按钮，支腿油缸均设有单向阀，且垂直支腿带有双向液压锁。 支脚盘尺寸：480mm×615mm 最大起重量时支腿反力：104KN
发动机	WP12.430E50，直列六缸水冷电控柴油发动机，潍柴制造，额定功率316kW/1900rpm，最大扭矩2060Nm/1000-1400rpm，国V排放标准。 燃油箱容积：360L。
变速箱	美国艾利逊自动变速箱，6个前进档，1个倒档。
分动箱	德国ZF分动箱，带高低档，带差速锁。
车桥	美驰高强度车桥，2,3,4桥驱动，1,2,5转向。
悬挂	前悬架采用板簧平衡悬架，后悬架采用双纵臂板簧平衡悬架结构。
轮胎	14个轮胎，1个备胎，1,2,5桥单胎，3,4桥双胎。 轮胎规格：12.00R24-20PR*
制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-5轴车轮。 辅助制动：发动机排气制动和缓速制动。
转向	1、2桥机械转向+液压助力，5桥液控随动转向，可适应多种工况的要求，实现多种转向模式。
驾驶室	新型复合结构全宽驾驶室，全封闭、装备豪华舒适。优越的密封性和防腐蚀、防震设计；配置大视野的前挡风安全玻璃、后视镜，电控洗涤器，电子门窗升降器，冷暖空调，收音机等。主驾采用空气悬浮座椅副驾采用简易卧铺，2公斤灭火器 标配冷暖空调。
电气系统	直流24伏特，串联12伏特的电池组2个。 发电机 28伏特-80安培。

 上车	
结构	徐工设计、制造，高强度钢材制造。
发动机	WP6G240E330，直列六缸水冷高压共轨柴油发动机，潍柴制造，额定功率176kW/2300rpm，最大扭矩860Nm/1200-1700rpm，国III排放标准； 燃油箱容积：280L。
液压系统	上车发动机驱动变量柱塞泵和齿轮泵用于起升、变幅、伸缩、回转；电比例先导液压油控制的负荷敏感式比例多路换向阀； 液压油箱有效容积：1100L
操纵方式	上车操纵方式为先导电比例操纵，采用PLC集成智能控制技术，CAN-BUS总线的控制网络，除常规控制功能外，还具有系统实时监测、故障自动诊断、智能臂架控制、单缸插销控制和无线遥控配重挂接功能。
主起升机构	液压控制调速，装有绳槽卷筒，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。
回转机构	三排滚柱外齿式回转支承，由液压马达驱动行星齿轮驱动回转减速机，可连续回转360°；具有动力控制或自由回转的功能，可无级调速。
变幅机构	单变幅油缸，带有自补偿功能的电比例控制平衡阀。
操纵室	新型钢制操纵室，装有无视野死角的前景窗，安全玻璃，车窗装有遮阳板，推拉式车门，操纵员座椅靠背可倾斜定位，操纵杆安装在座椅两侧的扶手台上。带推拉踏板，方便人员进出。前窗、顶窗装有雨刮器。操纵室内采用人机交互系统控制面板，操纵室可向上翻转约20°，标配冷暖空调。
安全装置	液压平衡阀；液压溢流阀；液压双向锁；力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪
组合配重	总重45t，有0t、13t、23t、33t和45t共五种组合方式。

技术规格

Technical specifications



臂架系统

主臂	6节，“U”形截面的筒形焊接结构。单缸插销伸缩机构 主臂长度：13.1m～61m。
臂端单滑轮	单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，起重性能与主臂相同，但最大起重量不超过11.5t。
固定副臂	两节侧置挂接桁架结构副臂，具有 0°、15°、30°三种固定副臂安装角，收存在主臂旁。 固定副臂长度：11.55m/20m

选装配置

主臂加长节	选装1节8m副臂加长节
上车发动机	OM906LA.E3A/2，直列六缸水冷电控柴油发动机，戴姆勒制造，额定功率190kW/2200rpm，最大扭矩1000Nm/1200-1600rpm，国III排放标准。
底盘发动机	MC11.44-50，直列六缸水冷电控柴油发动机，中国重汽集团，额定功率327kW/1900rpm，最大扭矩2100Nm/1000-1400rpm，国V排放标准。 燃油箱容积：360L。
底盘发动机	WP12.430N，直列六缸水冷电控柴油发动机，潍柴动力，额定功率316kW/1900rpm，最大扭矩2060Nm/1000-1400rpm，国III排放标准。 燃油箱容积：360L。
无线遥控装置	可对起重机配重挂接动作进行远程操作，提高操作的方便性及安全性。

产品各部件明细如上所述，具体部件明细请参照产品报价单

技术规格

Technical specifications



Chassis

Frame	Designed and manufactured by XCMG, with all covered walking surface, anti-torsion box structure and optimal load-bearing structure design, made of imported high strength steel.
Outrigger	4 outriggers, K-shaped arrangement, lateral and vertical outrigger controlled by the hydraulic control. Both sides of the chassis equipped with electronic control console, the console installed with luminous level, lighting and speed buttons; outrigger cylinders equipped with one-way valve, and the vertical outrigger has two-way hydraulic lock. Float dimension: 480mm×615mm; Reaction force of outrigger at max. lifting load:104KN
Engine	WP12.430E50, in-line six-cylinder water-cooled EFI diesel engine, manufactured by WEICHAI POWER, rated power 316kW /1900rpm, max. torque 2060Nm / 1000-1400rpm, the national V emission standards. Fuel tank capacity : 360L
Gearbox	Electric controlled transmission imported from ALLISON American, with automatic AT control, equipped with retarded brake, with 6 forward gears and 1 reverse gears available
Transfercase	Mechanical transfer box is originally imported from ZF Germany, which can transfer power to superstructure.
Alxes	High strength axle with reliable performance, 1st axle: for steering; 2nd axle: for steering and driving; 3rd axle: for driving; 4th axle: for driving; 5th axle: for steering.
Suspension	Leaf spring balanced suspensions are adopted for front axle, and dual longitudinal arm leaf spring balanced suspensions are adopted for rear axle.
Tires	14 tires and 1 spare tire; Tire specifications:12.00R24-20PR*
Brakes	Service brake: double-circuit air pressure brake, acting on all wheels. Parking brake: spring energy brake, acting on wheels of 2-5 axles. Auxiliary brake: engine retarded brake.
Cab	New full-dimension enclosed cab, luxury and comfort. It is designed to be leak proof, anti-corrosive and shockproof. It is equipped with a windshield offering outstanding visibility, rear mirrors, electric control washer, electronic lifters of doors and windows, indoor air humidifier with windscreen defroster, air conditioner, radio cassette player, etc.
Electric	24V DC, negative ground, 2 batteries.



Superstructure

Frame	Designed and manufactured by XCMG; Full-covered walking platform, made of high-strength steel
Engine	WP6G240E330,Inline six-cylinder water-cooled and high pressure common rail diesel engine, manufactured by Weichai, rated power 176kW / 2300rpm, the maximum torque of 860Nm / 1200-1700rpm, state III emission standards; Fuel tank capacity : 280L.
Hydraulic system	Hydraulic pump: variable pump and gear pump driven by superstructure engine, used for hoisting, elevating, telescoping and slewing operation; Control valve: Load-sensitive proportional multi-way change valve, controlled by electric proportional pilot hydraulic oil. Oil tank capacity: about 1100 L.
Operating mode	Pilot electric-proportional control is used for controlling the superstructure with PLC integrated intelligent control technology and CAN-BUS control network. Besides normal control functions, it also has the functions such as real-time monitoring, fault automatic diagnosis, intelligent boom control, single-cylinder pinning control and wireless remote control counterweight erection.
Main winch system	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, balance valve and a grooved drum equipped.
Slewing system	3-row roller type external gearing slewing ring is driven by the planetary gear reducer of slewing mechanism driven by a hydraulic motor, may continuously slew 360° . Power control or free slewing function is available, and the slewing speed may be infinitely regulated.
Elevating system	Single-cylinder elevating with boom gravity fall mode to save fuel.
Operator's cab	New fully-enclosed steel cab has better sealing and anti-corrosive properties and it's safe and comfortable to use. It is equipped with a full-view front window. Safety glass and sun shield are used for windows. The cab features a new ergonomic seat design with backrest adjustment and armrests with joysticks fitted. A sliding door and a pull-out step are available to make it easy and safe as access and egress the cab. Wipers are fitted for the windshield and roof window. Control panel with human-machine interactive system is used in operator's cab. The cab can be tilted up to 20°. Heating & air conditioning are available.

技术规格

Technical specifications

Safety devices	Hydraulic system: hydraulic balance valve, hydraulic relief valve, double-way hydraulic valve, etc. are available to make hydraulic system safe and stable. The safety system includes displayer, central controller, length/angle sensor, over-winding switch, oil pressure sensor, etc. Lowering limiter switch can make the drum maintain three circles of wire ropes at least. Height limiter switch can make the lifting height within the max. limit.
Combined counterweight	Total weight is 45t. Counterweights of 0t, 13t, 23t, 33t, and 45t are available.



Boom system

Boom	Anti-torsion design is adopted in telescoping boom with high strength steel structure. Booms are highly stable with the application of U-shaped cross section. The sliders which support the boom are also adjustable. Single-cylinder pinning telescoping mode is adopted to realize various combination of working conditions. Boom length: 13.1m ~ 61m.
Single top	Fitted at boom head, used for single line operation.
Jib	Two lattice jibs are stored besides the boom with 0°, 15° and 30° jib offset angles available. Jib length: 11.55m/20m

Additional equipment

Telescopic boom extension	boom extension of 8m
Engine	OM906LA.E3A/2, Inline six-cylinder water-cooled EFI diesel engine, manufactured by Benz, rated power 190kW / 2200rpm, the maximum torque of 1000Nm / 1200-1600rpm, state III emission standards.
Chassis Engine	MC11.44-50, in-line six-cylinder water-cooled EFI diesel engine, manufactured by SINOTRUK, rated power 327kW / 1900rpm, max. torque 2100Nm / 1000-1400rpm, the national V emission standards. Fuel tank capacity : 360L
Chassis Engine	WP12.430N, in-line six-cylinder water-cooled EFI diesel engine, manufactured by WEICHAI POWER, rated power 316kW / 1900rpm, max. torque 2060Nm / 1000-1400rpm, the national III emission standards. Fuel tank capacity : 360L
Wireless control device	wireless remote control counterweight erection.

Product parts list is as mentioned above, please refer to the product quotation for specific parts.

重量
Weight



车桥 Axle	1	2	3	4	5	总重量 Total weight
t	9.99	10	13	13	9	54.99



吊钩 Hook	倍率 No. of lines	吊钩重量 Weight kg	吊钩尺寸 Dimension mm	备注 Remarks
130t	12	1580	1969×900×688	双钩 Double hook , 标配 Standard
70t	7	980	1871×920×357	单钩 Single hook , 标配 Standard
30t	3	490	1344×544×460	单钩 Single hook , 标配 Standard
11t	1	458	896×476×476	单钩 Single hook , 标配 Standard

作业速度
Working speeds

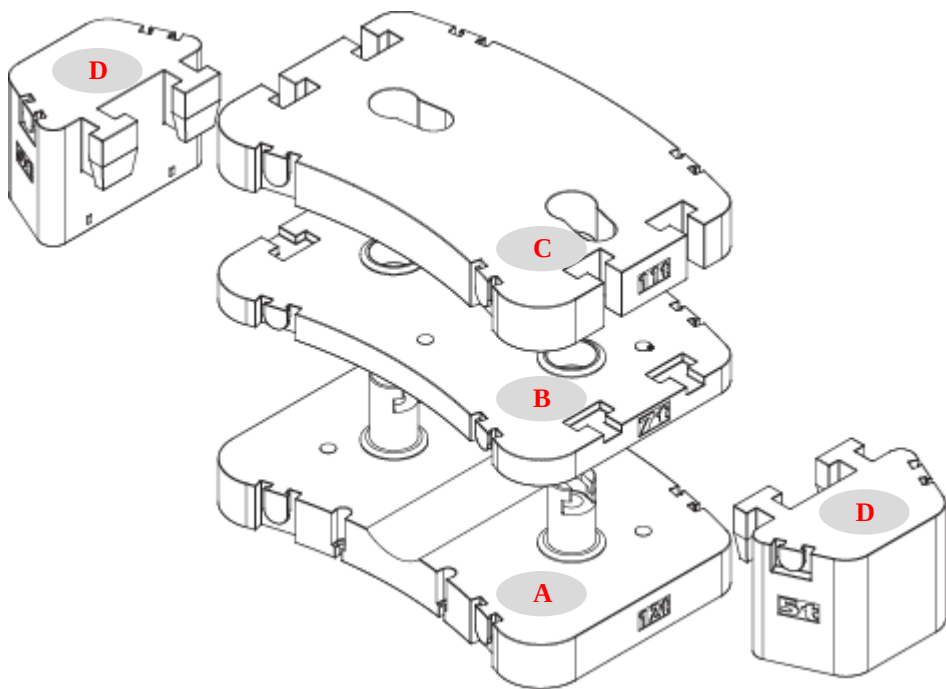


12.00R24-20PR*	3 ~ 80	45%



作业机构 Drive	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-135 m/min , 单绳 , 第四层 m/min, single line, 4th layer	126 kN	24 mm/265 m
	0-135 m/min , 单绳 , 第四层 m/min, single line, 4th layer	126 kN	24 mm/200 m
	0-2.0 r/min		
	从-1°抬起至81°约65s Approx. 65s for boom elevation from -1° to 81°		
	从13.1m伸出至61m约460s Approx. 460s for boom extension from 13.1m to 61m		

平衡重
Counterweight

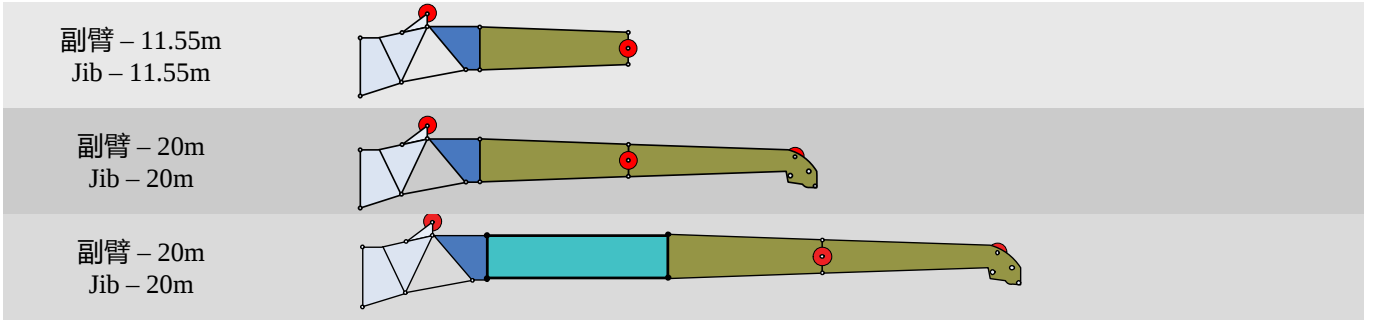


平衡重 Counterweight	A	B	C	D
尺寸 (长×宽×高) m Size (L×W×H) m	3250×2102×372	3250×2102×312	3250×2102×300	1363×1310×934
重量 t Weight t	13	10	10	6

工况模式 Working mode	45t	33t	23t	13t	0t
组合形式 Combinations	A+B+C+D×2	A+B+C	A+B	A	0

臂架组合方案

Boom / Jib combinations



部件 Component	结构形式 Structure	尺寸 (长×宽×高) mm Size (L×W×H) mm	重量 kg Weight kg
连接架 Connection bracket		2100×850×1260	296
旋转架 Swinging bracket		3020×730×1188	328
副臂加长节 Jib extension		8000×580×800	465
一节副臂总成 First jib section assembly		8000×580×800	535
二节副臂总成 Second jib section assembly		8000×360×480	401

臂架组合方案

Boom / Jib combinations

<https://truckmanualshub.com/>



主臂
Telescopic boom

T : 13.1~61m

副臂
Jib

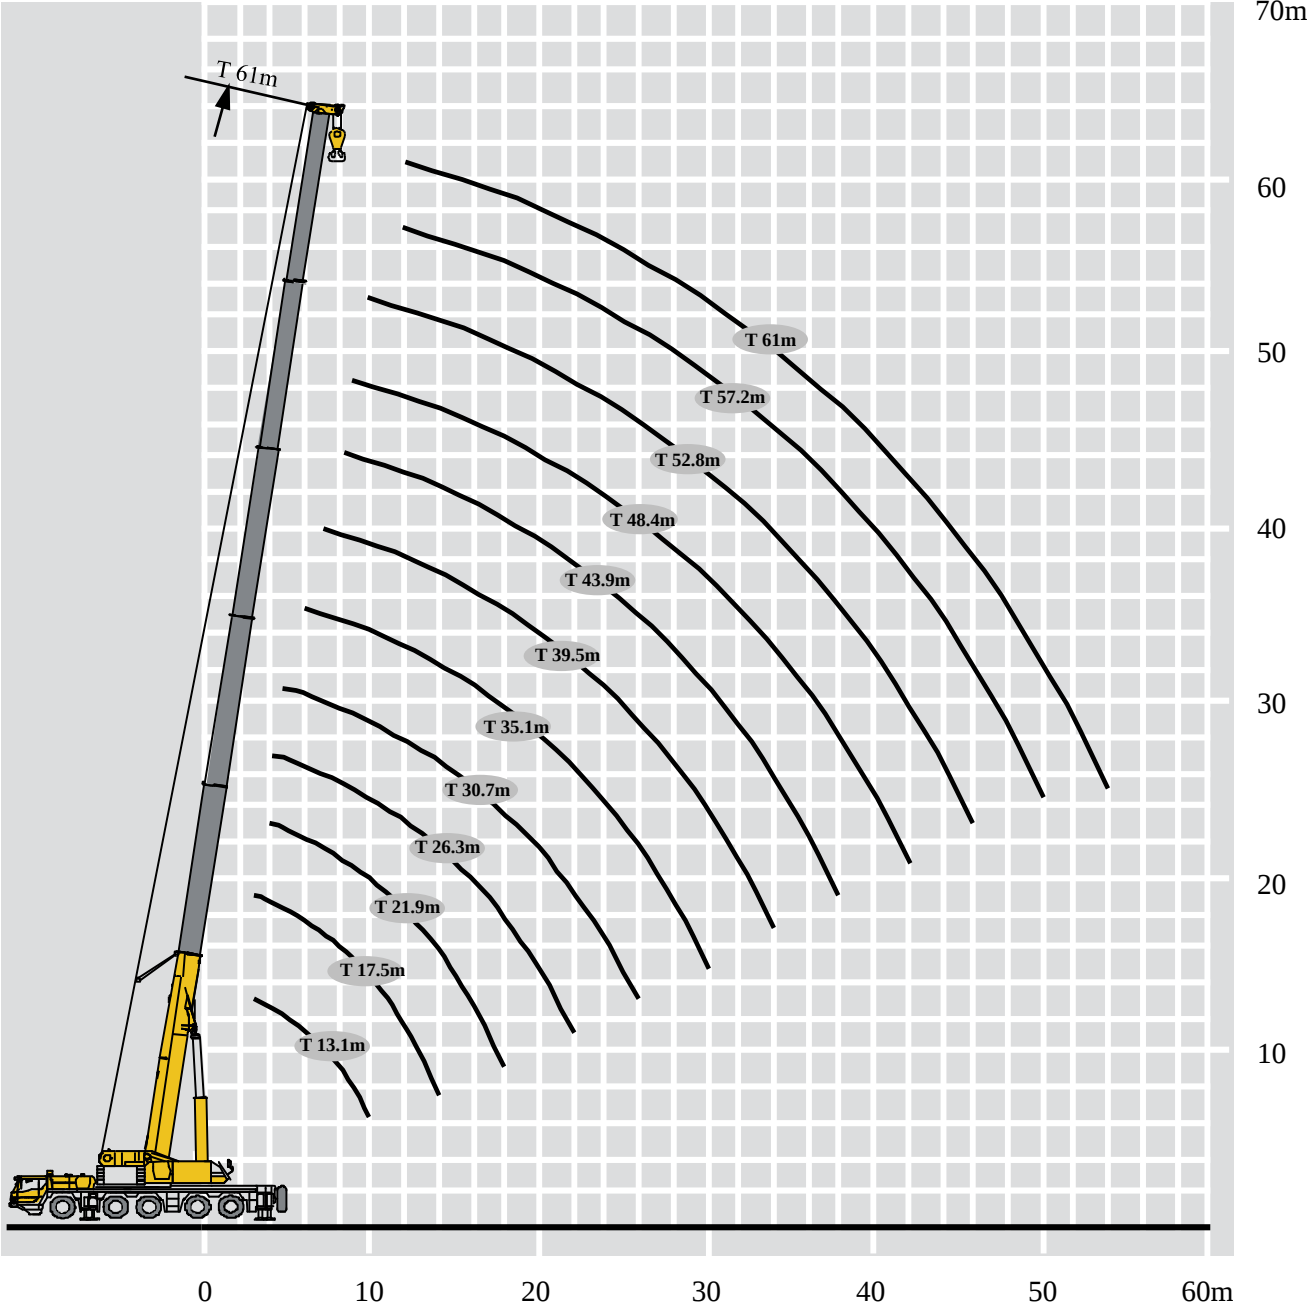
T : 52.8~61m
J : 11.55/20m

副臂加长节
Jib extension

T : 52.8~61m
I : 8m
J : 11.55/20m




起升高度曲线图
Lifting heights


主臂
Boom



起重性能表
Lifting capacities

T 13.1~61m

 13.1-61m  7.7m×7.9m  360°  45t  											
	13.1	17.5	17.5	17.5	21.9	21.9	21.9	26.3	26.3	26.3	
3	130	70.5	100	110							3
3.5	126	70	95	110							3.5
4	117	68	90	106	61	90	91	59	70	77	4
4.5	109	65	87	101	58	90	91	56	69	77	4.5
5	100	63	85	96	56	87	91	52	67	75	5
6	87	61	80	85	52	83	87	47	63	71	6
7	73	58	75	75	48	73	80	41	61	68	7
8	63	52	70	65	45	64	68	39	55	61	8
9	55	48	65	57	42	57	60	36	49	56	9
10	48.5	44	55	51	39	51	53	33	45	50.5	10
12		36	40.5	40	35	40.6	39.9	31	39	40.6	12
14		32.5	32.3	30.5	31.5	32.3	31	28	32.3	31.7	14
16					27	26	24.9	27	26.1	25.6	16
18					22	21.5	20.5	22.5	21.7	21.2	18
20								19	18.3	17.8	20
22								17	15.6	15.1	22
组合	00000	00001	00100	01000	00011	01100	11000	00111	02100	11100	组合

 13.1-61m  7.1m×7.9m  360°  45t  										
	30.7	30.7	30.7	35.1	35.1	35.1	39.5	39.5	39.5	
5	55	63	60							5
6	48	62	57	48	50	53				6
7	46	57	55	45	48	50	36.3	39.5	40.5	7
8	44	53	49	42	46	47	35.2	38.5	40	8
9	38	50	47	37	45	46	34.1	37.4	37	9
10	34	47	46	33	40	42	31.9	35.2	35	10
12	31	41.5	40	30	36.3	38	27.5	31	31	12
14	27	32.5	31	26	31.9	32	25.3	28	28	14
16	26	26.4	25.2	23.5	26.4	25.5	23.1	23.5	24	16
18	23	21.9	20.8	22	22.5	21.5	22	20.9	21	18
20	19.5	18.5	17.4	18.5	19.3	18.1	19.8	18.7	18	20
22	17	15.8	14.8	17	16.6	15.4	16.5	16.5	15.6	22
24	14.5	13.7	12.6	14.8	14.4	13.3	15	14.3	13.5	24
26	12.8	11.9	10.9	13	12.6	11.5	13.2	12.5	11.7	26
28				11.5	11.1	10	11.7	11	10.4	28
30				10.2	9.9	8.8	10.4	9.8	9.1	30
32							9.3	8.7	8	32
34							8.4	7.7	7	34
组合	01111	11110	21100	02111	11111	21110	11112	12111	21111	组合




起重性能表
Lifting capacities




T 13.1~61m

13.1-61m 7.7m×7.9m 360° 45t											
	43.9	43.9	43.9	48.4	48.4	48.4	52.8	52.8	57.2	61	
8	25.2	28.5	30.5								8
9	24	28	30	21.1	23.6	26.2					9
10	23	27	29	20.5	23	25	17.2	19			10
12	21	25	27	19.5	22	23	17	18.5	17.9	13.5	12
14	19	23.5	25	18.2	20	21.5	16	17	16	13.3	14
16	17.5	21.5	23	16.5	17.5	19.5	15.6	15.5	14.5	13	16
18	16	18	21	15.2	16	17.5	15	14.7	13.8	12.7	18
20	15	16	18.8	14	15	16	14	14	13	11.5	20
22	14	14.5	15.8	13	13.5	15	13	13	12.5	10.7	22
24	13.2	13.7	13.6	12	12.5	13.5	12.2	12.3	11.7	10	24
26	12	12.5	12	11.2	11.5	12	11.5	11.5	11.2	9.2	26
28	11	11	10.4	10	10.5	10.5	11	10.9	10.4	8.5	28
30	10.3	9.6	9.2	9.3	9.8	9	9.8	9.6	9.8	8.2	30
32	9.4	8.5	8.1	8.5	8.7	8	8.8	8.4	9	8	32
34	8.5	7.5	7.1	8	7.7	7	7.8	7.5	8.2	7.3	34
36	7.5	6.8	6.3	7.5	6.9	6.3	7.2	6.6	7.2	6.9	36
38	6.7	6	5.2	6.6	6.3	6	6.5	5.9	6.5	6.5	38
40				6.1	5.7	5	5.5	5.2	5.9	5.9	40
42				5.5	5	4.3	5	4.5	5	5.2	42
44							4.5	4	4.7	4.6	44
46							4	3.5	4.2	4.2	46
48									3.7	3.7	48
50									3.1	3.3	50
52										3	52
54										2.7	54
组合	11122	12211	22111	11222	12221	22211	12222	22221	22222	33333	组合

起重性能表
Lifting capacities




T 13.1~61m

											
	13.1	17.5	17.5	17.5	21.9	21.9	21.9	26.3	26.3	26.3	
3	130.0	70.5	91.0	110.0							3
3.5	126.0	70.0	90.0	105.0							3.5
4	117.0	68.0	90.0	99.0	51.0	70.0	91.0	48.0	60.0	77.0	4
4.5	109.0	65.0	85.0	95.0	50.0	69.0	88.0	47.0	59.0	75.0	4.5
5	100.0	62.0	80.0	90.0	48.0	67.0	82.0	45.0	57.0	73.0	5
6	82.8	56.0	75.0	83.0	45.0	65.0	75.0	43.0	54.0	68.0	6
7	58.8	52.0	59.9	59.1	42.0	59.9	58.4	41.0	50.0	59.2	7
8	45.0	47.3	46.1	45.3	40.0	46.1	44.7	39.0	45.0	45.4	8
9	36.2	38.2	37.0	36.4	35.0	37.0	35.8	36.0	37.0	36.5	9
10	29.8	31.8	30.7	30.1	32.5	30.7	29.6	32.6	30.7	30.2	10
12		23.4	22.5	21.8	24.1	22.5	21.4	24.2	22.4	22.0	12
14		18.2	17.3	16.6	18.8	17.3	16.2	18.9	17.3	16.8	14
16					15.2	13.7	12.7	15.3	13.7	13.3	16
18					12.6	11.1	10.2	12.6	11.1	10.7	18
20								10.6	9.1	8.6	20
22								9.0	7.4	7.0	22
组合	00000	00001	00100	01000	00011	01100	11000	00111	02100	11100	组合

											
		30.7	30.7	30.7	35.1	35.1	35.1	39.5	39.5	39.5	
5		45.0	63.0	58.0							5
6		43.0	60.0	56.5	45.8	46.0	53.0				6
7		41.0	57.0	53.5	44.0	45.0	50.0	33.0	35.5	40.5	7
8		38.0	46.3	45.0	40.0	45.0	45.8	32.0	35.0	40.0	8
9		36.0	37.3	36.1	36.0	38.1	36.8	31.0	34.0	37.0	9
10		32.3	31.0	29.8	32.0	31.7	30.5	29.0	31.6	31.3	10
12		23.9	22.6	21.6	23.7	23.4	22.2	23.9	23.3	23.0	12
14		18.6	17.4	16.5	18.5	18.2	17.1	18.6	18.0	17.8	14
16		15.0	13.9	13.0	14.9	14.6	13.5	15.0	14.4	14.2	16
18		12.4	11.3	10.4	12.2	11.9	11.0	12.4	11.8	11.5	18
20		10.4	9.3	8.3	10.2	9.9	9.0	10.4	9.8	9.5	20
22		8.8	7.7	6.7	8.6	8.2	7.3	8.8	8.2	7.9	22
24		7.4	6.3	5.4	7.3	7.0	6.0	7.4	6.9	6.6	24
26		6.3	5.3	4.4	6.2	5.9	5.0	6.3	5.8	5.5	26
28					5.3	5.0	4.1	5.4	4.9	4.6	28
30					4.5	4.2	3.3	4.7	4.2	3.9	30
32								4.0	3.5	3.2	32
34								3.4	3.0	2.7	34
组合		01111	11110	21100	02111	11111	21110	11112	12111	21111	组合

起重性能表
Lifting capacities

T 13.1~61m

 13.1-61m  7.7m×7.9m  360°  23t  											
	43.9	43.9	43.9	48.4	48.4	48.4	52.8	52.8	57.2	61	
8	25.2	28.5	30.5								8
9	24.0	28.0	30.0	21.1	23.6	26.2					9
10	23.0	27.0	29.0	20.5	23.0	25.0	17.2	19.0			10
12	21.0	23.4	22.9	19.5	22.0	23.0	17.0	18.5	17.9	13.5	12
14	18.9	18.2	17.7	18.2	18.5	17.8	16.0	17.0	16.0	13.3	14
16	15.3	14.6	14.1	15.4	14.9	14.2	15.2	14.6	14.5	13.0	16
18	12.6	11.9	11.5	12.7	12.2	11.7	12.6	11.9	12.2	12.3	18
20	10.6	10.0	9.5	10.7	10.2	9.7	10.6	9.9	10.2	10.3	20
22	9.0	8.3	7.8	9.0	8.6	8.0	8.9	8.2	8.6	8.6	22
24	7.7	7.0	6.6	7.8	7.3	6.7	7.6	7.0	7.3	7.3	24
26	6.6	5.9	5.4	6.6	6.2	5.6	6.5	5.8	6.2	6.2	26
28	5.7	5.0	4.6	5.8	5.3	4.7	5.6	5.0	5.3	5.4	28
30	4.9	4.2	3.8	5.0	4.5	4.0	4.8	4.2	4.6	4.6	30
32	4.2	3.6	3.2	4.3	3.8	3.4	4.2	3.6	3.9	3.9	32
34	3.7	3.0	2.6	3.8	3.3	2.8	3.6	3.0	3.4	3.4	34
36	3.2	2.6	2.2	3.3	2.8	2.3	3.1	2.6	2.9	2.9	36
38	2.8	2.2	1.8	2.8	2.4	1.8	2.7	2.1	2.4	2.5	38
40				2.4	2.0	1.5	2.3	1.8	2.0	2.1	40
42				2.1	1.7		2.0		1.7	1.7	42
44							1.7				44
组合	11122	12211	22111	11222	12221	22211	12222	22221	22222	33333	组合

起重性能表
Lifting capacities

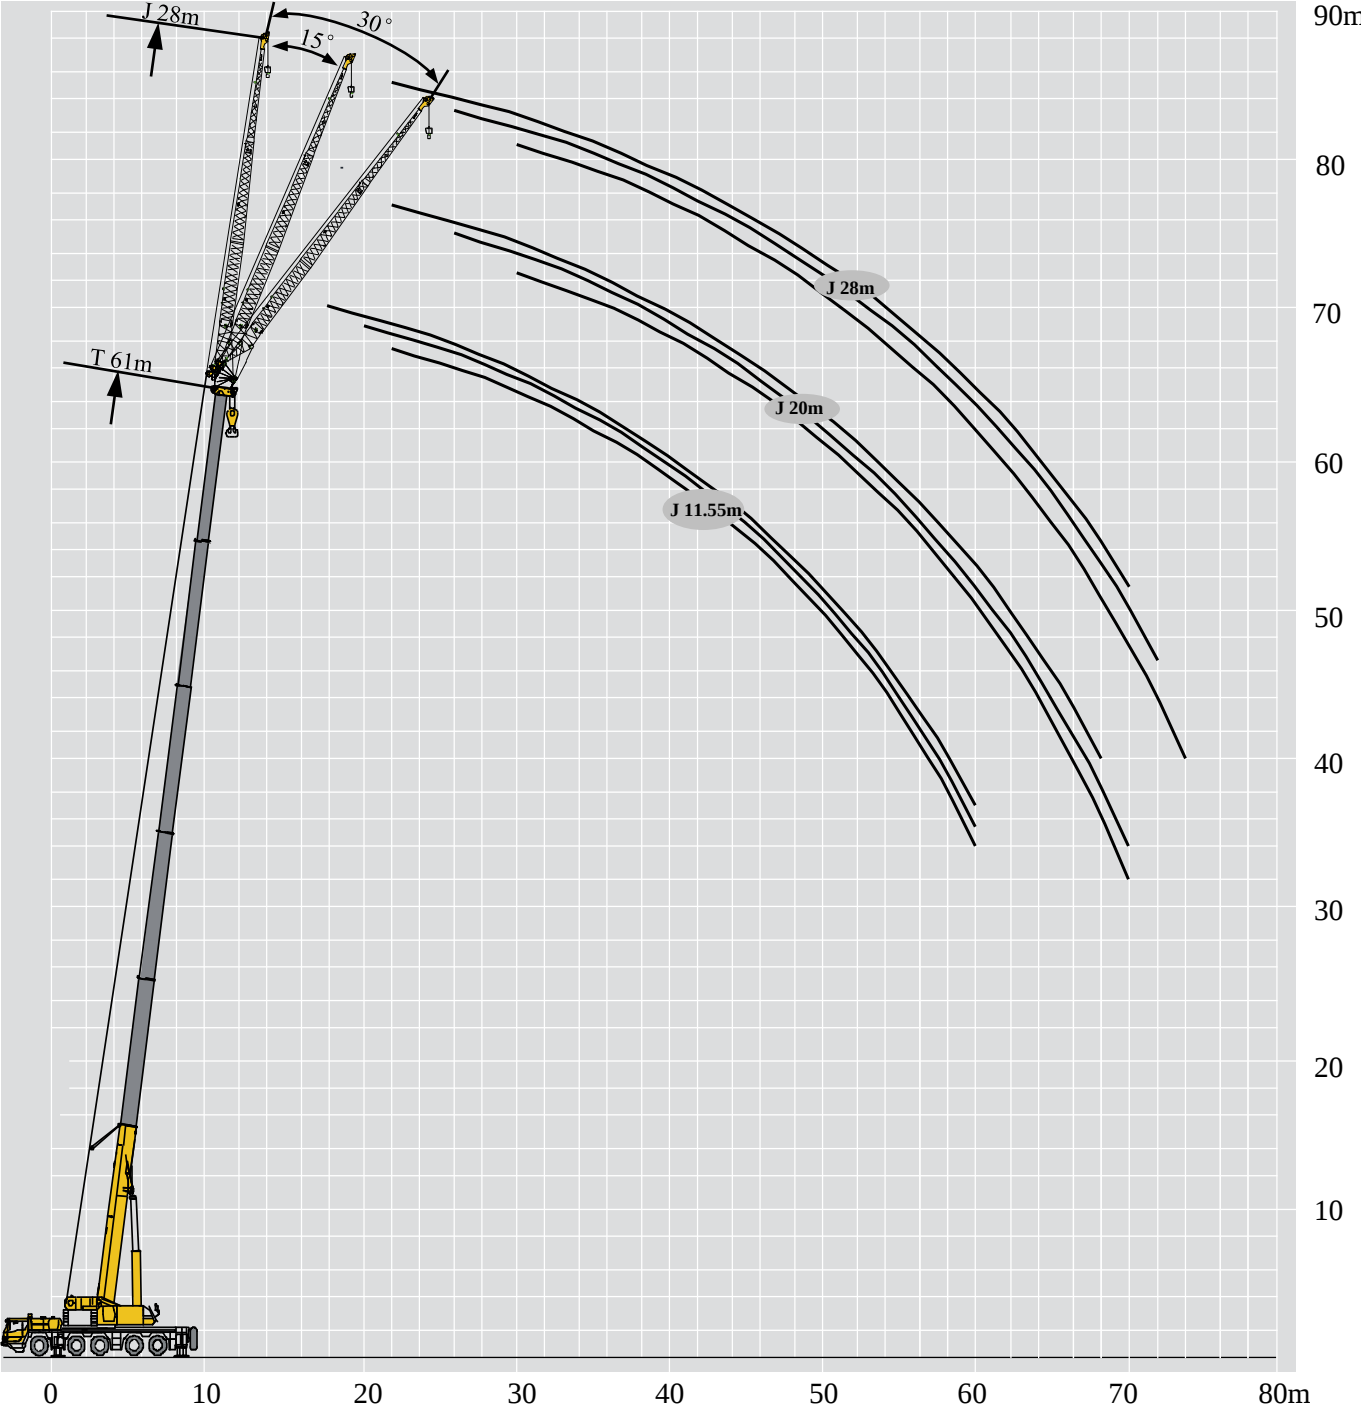
T 13.1~61m

											
		13.1-61m	7.7m×7.9m	360°	0t						
	13.1	17.5	17.5	17.5	21.9	21.9	21.9	26.3	26.3	26.3	
3	130.0	70.5	91.0	110.0							3
3.5	126.0	70.0	90.0	105.0							3.5
4	117.0	68.0	90.0	99.0	51.0	70.0	91.0	48.0	60.0	77.0	4
4.5	109.0	65.0	85.0	95.0	50.0	69.0	88.0	47.0	59.0	75.0	4.5
5	78.6	62.0	80.0	79.0	48.0	67.0	77.8	45.0	57.0	73.0	5
6	47.4	50.2	48.6	47.6	45.0	48.6	46.8	43.0	48.6	47.8	6
7	33.0	35.4	34.1	33.2	36.4	34.1	32.6	36.5	34.0	33.4	7
8	24.7	26.9	25.8	25.0	27.8	25.7	24.3	27.9	25.7	25.0	8
9	18.4	20.9	19.5	18.7	21.8	19.5	18.0	22.0	19.5	18.8	9
10	14.0	16.3	15.1	14.3	17.2	15.1	13.8	17.4	15.0	14.5	10
12		10.8	9.8	9.0	11.6	9.8	8.6	11.7	9.7	9.2	12
14		7.6	6.6	5.9	8.3	6.6	5.5	8.4	6.6	6.1	14
16					6.2	4.6	3.5	6.2	4.6	4.1	16
18					4.6	3.1	2.1	4.7	3.1	2.6	18
20								3.6	2.0	1.6	20
22								2.7			22
组合	00000	00001	00100	01000	00011	01100	11000	00111	02100	11100	组合

		 13.1-61m	 7.1m×7.9m	 360°	 0t						
		30.7	30.7	30.7	35.1	35.1	35.1	39.5	39.5	39.5	
5		45.0	63.0	58.0							5
6		43.0	48.9	47.1	45.8	46.0	48.2				6
7		36.2	34.3	32.9	35.8	35.4	33.8	33.0	35.2	34.7	7
8		27.5	25.9	24.6	27.3	26.8	25.4	27.5	26.7	26.3	8
9		21.6	19.8	18.3	21.4	20.8	19.2	21.6	20.6	20.2	9
10		17.0	15.4	14.0	16.7	16.2	14.8	17.0	16.1	15.7	10
12		11.4	9.9	8.8	11.2	10.8	9.5	11.4	10.6	10.3	12
14		8.2	6.8	5.8	7.9	7.5	6.4	8.2	7.4	7.1	14
16		6.0	4.7	3.8	5.8	5.4	4.4	6.0	5.4	5.0	16
18		4.5	3.3	2.3	4.3	4.0	3.0	4.5	3.8	3.6	18
20		3.4	2.2		3.2	2.9	1.8	3.4	2.7	2.5	20
22		2.5			2.3	2.0		2.5	1.9	1.6	22
24		1.8			1.6			1.8			24
组合		01111	11110	21100	02111	11111	21110	11112	12111	21111	组合

起升高度曲线图
Lifting heights



副臂
Jib





起重性能表

Lifting capacities

J 11.55/20m

    										
52.8m			57.2 m			61 m				
0°	15°	30°	0°	15°	30°	0°	15°	30°		
16	8.7									16
18	8.3	6.3		7.8		7.6				18
20	8.0	6.0	5.5	7.5	5.7	7.3	5.7			20
22	7.7	5.7	5.2	7.1	5.3	5.2	7.0	5.3	4.8	22
24	7.3	5.3	5.0	6.8	5.1	5.0	6.6	5.1	4.6	24
26	7.1	5.1	4.7	6.4	4.8	4.7	6.2	4.7	4.3	26
28	6.7	4.8	4.4	6.0	4.6	4.4	6.0	4.5	4.2	28
30	6.3	4.3	4.2	5.7	4.3	4.2	5.6	4.3	4.1	30
32	6.0	4.1	4.0	5.4	4.1	4.0	5.2	4.0	4.0	32
34	5.7	3.9	3.9	5.0	3.8	3.9	5.0	3.8	3.9	34
36	5.4	3.8	3.8	4.8	3.6	3.8	4.6	3.5	3.8	36
38	5.0	3.6	3.8	4.5	3.5	3.8	4.3	3.4	3.7	38
40	4.8	3.4	3.7	4.3	3.3	3.7	4.0	3.2	3.6	40
42	4.5	3.3	3.6	3.8	3.1	3.6	3.4	3.1	3.5	42
44	4.2	3.1	3.6	3.3	3.0	3.6	2.9	2.8	3.5	44
46	3.8	2.9	3.5	2.9	2.8	3.3	2.7	2.6	3.3	46
48	3.4	2.7	3.1	2.4	2.6	2.8	2.4	2.5	2.8	48
50	2.8	2.6	2.7	2.1	2.3	2.4	2.0	2.2	2.4	50
52		2.2	2.3	1.7	1.9	2.0	1.7	1.9	2.0	52
54				1.4	1.6	1.6	1.4	1.5	1.7	54
56						1.3	1.1	1.2	1.3	56
58									1.0	58
组合	12222			22222			33333			组合

    										
52.8m			57.2 m			61 m				
0°	15°	30°	0°	15°	30°	0°	15°	30°		
20	4.9									20
22	4.6	3.4		4.3		4.0				22
24	4.3	3.2		4.0		3.9				24
26	4.0	3.1	2.2	3.8	2.8	3.7	2.6			26
28	3.7	2.9	2.1	3.7	2.7	2.2	3.5	2.5		28
30	3.5	2.6	2.1	3.5	2.6	2.1	3.4	2.4	2.0	30
32	3.3	2.5	2.0	3.3	2.5	2.0	3.3	2.3	1.9	32
34	3.1	2.4	2.0	3.1	2.4	2.0	3.2	2.2	1.8	34
36	2.9	2.3	1.9	2.9	2.3	1.9	3.1	2.1	1.8	36
38	2.7	2.2	1.9	2.7	2.2	1.9	3.0	2.0	1.7	38
40	2.5	2.2	1.9	2.5	2.1	1.9	2.8	2.0	1.6	40
42	2.4	2.1	1.8	2.4	2.1	1.8	2.7	1.9	1.6	42
44	2.3	2.1	1.8	2.3	2.0	1.8	2.6	1.9	1.5	44
46	2.2	2.0	1.8	2.2	2.0	1.8	2.5	1.8	1.5	46
48	2.1	2.0	1.7	2.1	1.9	1.7	2.4	1.8	1.5	48
50	2.0	1.9	1.7	2.0	1.9	1.7	2.2	1.7	1.4	50
52	1.9	1.9	1.7	1.9	1.8	1.7	2.0	1.7	1.4	52
54	1.9	1.8	1.6	1.7	1.8	1.6	1.6	1.7	1.3	54
56	1.8	1.8	1.6	1.4	1.7	1.6	1.3	1.6	1.3	56
58	1.5	1.7	1.6	1.1	1.4	1.6	1.1	1.4	1.2	58
60		1.4	1.5		1.1	1.3		1.1	1.2	60
62						1.0			1.0	62
组合	12222			22222			33333			组合





起重性能表
Lifting capacities

J 28m

 52.8-61m 28m 7.7m×7.9m 360° 45t 										
52.8m			57.2 m			61 m				
0°	15°	30°	0°	15°	30°	0°	15°	30°		
20	3.2									20
22	3.0	2.2		2.8		2.8				22
24	3.0	2.1		2.7		2.7				24
26	2.8	2.0		2.6	2.0	2.6	2.0			26
28	2.6	1.9	1.6	2.4	1.9	2.4	1.9			28
30	2.4	1.8	1.6	2.3	1.8	2.3	1.8	1.5		30
32	2.3	1.8	1.5	2.2	1.8	2.2	1.8	1.5		32
34	2.2	1.7	1.5	2.1	1.7	2.1	1.7	1.4		34
36	2.1	1.7	1.4	2.0	1.7	2.0	1.6	1.4		36
38	2.0	1.6	1.4	1.9	1.6	1.9	1.6	1.4		38
40	1.9	1.6	1.4	1.8	1.6	1.8	1.6	1.3		40
42	1.8	1.5	1.3	1.7	1.5	1.7	1.5	1.3		42
44	1.7	1.5	1.3	1.5	1.5	1.5	1.5	1.3		44
46	1.6	1.4	1.3	1.4	1.4	1.4	1.4	1.2		46
48	1.5	1.4	1.2	1.3	1.4	1.3	1.4	1.2		48
50	1.4	1.3	1.2	1.3	1.3	1.3	1.3	1.2		50
52	1.3	1.3	1.2	1.3	1.2	1.2	1.3	1.2	1.2	52
54	1.3	1.3	1.2	1.2	1.2	1.1	1.2	1.2	1.1	54
56	1.3	1.3	1.2	1.2	1.2	1.1	1.2	1.2	1.1	56
58	1.2	1.2	1.1	1.2	1.2	1.1	1.2	1.2	1.1	58
60	1.2	1.2	1.1	1.2	1.2	1.1	1.1	1.1	1.0	60
62	1.2	1.2	1.1	1.2	1.1	1.1	1.1	1.1	1.0	62
64	1.0	1.0	1.0		1.0	1.0		1.0	1.0	64
66					1.0			1.0		66
68								1.0		68
70								1.0		70
组合	12222			22222			33333			组合

起重性能表
Lifting capacities





J 11.55/20m

	    									
	52.8m			57.2 m			61 m			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	
18	8.3	6.3		7.8			7.6			18
20	7.6	6.0	5.5	7.2	5.7		7.1	5.7		20
22	6.2	5.7	5.2	5.8	5.3	5.2	5.8	5.3	4.8	22
24	5.2	5.3	5.0	4.8	5.1	5.0	4.8	5.1	4.6	24
26	4.3	4.7	4.7	3.9	4.4	4.7	3.9	4.4	4.3	26
28	3.6	3.9	4.2	3.3	3.7	4.0	3.2	3.6	3.9	28
30	3.0	3.3	3.6	2.6	3.0	3.3	2.6	3.0	3.3	30
32	2.5	2.7	3.0	2.2	2.5	2.7	2.1	2.4	2.7	32
34	2.0	2.2	2.5	1.7	2.0	2.2	1.7	1.9	2.2	34
36	1.6	1.8	2.1	1.3	1.6	1.8	1.3	1.5	1.8	36
38	1.3	1.5	1.7	1.0	1.2	1.4		1.2	1.4	38
40	1.0	1.1	1.3			1.0			1.0	40
42			1.0							42
组合	12222			22222			33333			组合

	52.8-61m 20m 7.7m×7.9m 360° 13t									
	52.8m			57.2 m			61 m			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	
20	4.9									20
22	4.6	3.4		4.3			4.0			22
24	4.3	3.2		4.0			3.9			24
26	4.0	3.1	2.2	3.8	2.8		3.7	2.6		26
28	3.7	2.9	2.1	3.6	2.7	2.2	3.5	2.5		28
30	3.3	2.6	2.1	3.0	2.6	2.1	2.9	2.4	2.0	30
32	2.7	2.5	2.0	2.4	2.5	2.0	2.3	2.3	1.9	32
34	2.3	2.4	2.0	2.0	2.4	2.0	1.9	2.2	1.8	34
36	1.9	2.3	1.9	1.6	2.1	1.9	1.5	2.0	1.8	36
38	1.5	1.9	1.9	1.2	1.7	1.9	1.2	1.6	1.7	38
40	1.2	1.6	1.9		1.4	1.7		1.3	1.6	40
42	1.0	1.3	1.6		1.0	1.4		1.0	1.3	42
44		1.0	1.3			1.0			1.0	44
46			1.0							46
组合	12222			22222			33333			组合

起重性能表
Lifting capacities

J 28m

	 52.8-61m			 28m			 7.7m×7.9m			 360°			 13t			
	52.8m			57.2 m			61 m									
	0°	15°	30°	0°	15°	30°	0°	15°	30°							
20	3.2													20		
22	3.0	2.2		2.8			2.8							22		
24	3.0	2.1		2.7			2.7							24		
26	2.8	2.0		2.6	2.0		2.6	2.0						26		
28	2.6	1.9	1.6	2.4	1.9	1.6	2.4	1.9						28		
30	2.4	1.8	1.6	2.3	1.8	1.5	2.3	1.8	1.5					30		
32	2.3	1.8	1.5	2.2	1.8	1.5	2.2	1.8	1.5					32		
34	2.2	1.7	1.5	2.1	1.7	1.5	2.1	1.7	1.4					34		
36	2.1	1.7	1.4	1.8	1.7	1.4	1.7	1.6	1.4					36		
38	1.7	1.6	1.4	1.4	1.6	1.4	1.4	1.6	1.4					38		
40	1.4	1.6	1.4	1.1	1.6	1.4	1.0	1.6	1.3					40		
42	1.1	1.5	1.3		1.4	1.3		1.3	1.3					42		
44		1.3	1.3		1.0	1.3		1.0	1.3					44		
46		1.0	1.3			1.2			1.2					46		
48			1.1			1.0								48		
组合	12222			22222			33333			组合						

符号标识

Description of symbols

常规标识

General symbols

	上车 Superstructure		底盘 Chassis
	起重能力 lifting capacity		车桥 Axle
	吊臂长度 Boom length		行驶速度 Driving speed
	工作幅度 Radius		爬坡能力 Gradability
	吊臂仰角 Boom position		轮胎 Tyres
	主臂起升高度 Hoist height with Boom		支腿 Outriggers
	固定副臂长度 Fixed jib length		吊钩 Hook block
	副臂安装角 Jib offset angle		平衡重 Counterweight
	副臂起升高度 Hoist height with jib		卷扬 Winch
	360°全回转 360° rotation		

注意事项
Notes

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted to correctly calculate the load weight.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom length given in the rated load charts should accord with the telescoping code of boom sections .



地址：中国江苏徐州市铜山路165号

Add：No.165 Tongshan Road Xuzhou Jiangsu China

电话(Tel)：+86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel)：+86-516-87888268

备件电话(Spare Parts Tel)：+86-516-83461542

邮编(Post Code)：221004

网址(Web)：www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.