

DOOSAN



Lynx 2100 series

6/8/10-Inch Global Compact Turning Center

Lynx 2100 series

Lynx 2100/M

Lynx 2100L/LM/LMS

**MACHINE
GREATNESS™**



Product Preview

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service



Lynx 2100 series

The Lynx 2100 Series – the next generation of the Lynx Series, currently with more than 25000 sales worldwide – aims to deliver even greater customer satisfaction with its superior machining performance, reliability, and user convenience.

Contents

02 Product Overview

Basic Information

- 04 Basic Structure
- 08 Cutting Performance

Detailed Information

- 09 Standard / Optional Specifications
- 11 Applications
- 14 Diagrams
- 24 Machine / CNC Specifications

30 Customer Support Service



Superior Machining Performance

Equipped with a 15 kW (20.1 Hp) high-power motor and machine structure, and further enhanced spindle and axis ball screw stiffness, the Lynx 2100 Series offers excellent cutting capability up to a maximum turning diameter of Ø350 mm (Ø13.8 inch) and a maximum turning length of 550 mm (21.7 inch).

High Reliability

The Series' excellent reliability is based on the adoption of a wider support structure, more stable bed, low vibration/noise spindle, servo-driven turret, and a full slideway cover for preventing coolant leaks and chips from penetrating the machine.

Improved User Convenience

The CNC tailstock, new Easy Operation Package (EOP) and hot keys enable the user to operate peripheral devices quickly and conveniently. User convenience has been further enhanced with grease type lubrication and a lateral / rear side double-purpose chip conveyor.

Product Preview

Basic Structure

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

The Lynx 2100 Series includes a wider support structure for X, Z axes and tailstock traverse. The X and Z axes are fitted with highly rigid roller-type LM Guideways.




Standard chuck size	Models	Travel mm (inch)		Rapid feedrate m/min (ipm)		Functions		
		X-axis	Z-axis	X-axis	Z-axis	2-axis	M	MS
6 inch	Lynx 2100A / MA	205 (8.1)	340 (13.4)	30 (1.2)	36 (1.4)	○	○	-
	Lynx 2100LA / LMA / LMSA		560 (22.0)			○	○	○
8 inch	Lynx 2100B / MB	205 (8.1)	340 (13.4)	30 (1.2)	36 (1.4)	○	○	-
	Lynx 2100LB / LMB / LMSB		560 (22.0)			○	○	○
10 inch	Lynx 2100LC	205 (8.1)	560 (22.0)	30 (1.2)	36 (1.4)	○	○	○

★ M : 2-axis + Milling /
MS : Milling + Sub spindle

Largest Machining Area

The Series also offers the largest machining area window in its class, with a max. turning diameter of Ø350 mm (Ø13.8 inch) and a max. turning length of 550 mm (21.7 inch).

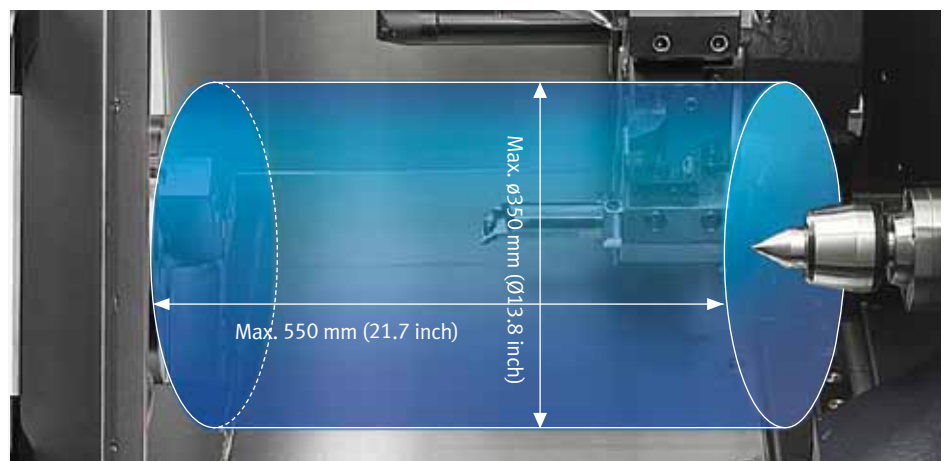

Function	Models	unit	Max. turning dia.	Bar working dia. (6inch / 8inch)	Max. cutting length
2-axis	Lynx 2100A / B	mm (inch)	Ø350 (Ø13.8)	51 / 65 (2.0 / 2.6)	330 (13.0)
	Lynx 2100LA / LB	mm (inch)	Ø350 (Ø13.8)	51 / 65 (2.0 / 2.6)	550 (21.7)
	Lynx 2100LC	mm (inch)	Ø350 (Ø13.8)	81 (3.2) (10 inch)	537 (13.0)
M / MS type	Lynx 2100MA / MB	mm (inch)	Ø300 (Ø11.8)	51 / 65 (2.0 / 2.6)	290 (11.4)
	Lynx 2100LMA / LMB	mm (inch)	Ø300 (Ø11.8)	51 / 65 (2.0 / 2.6)	510 (20.1)
	Lynx 2100LMSA / LMSB	mm (inch)	Ø300 (Ø11.8)	51 / 65 (2.0 / 2.6)	510 (20.1)
	Lynx 2100LMC/LMSC	mm (inch)	Ø300 (Ø11.8)	81 (3.2) (10 inch)	497 (19.6)

Spindle


The high power / torque motor supports high-precision and heavy-duty cutting, improving productivity.



Standard chuck size	Models	Spindle speed r/min	Max.power (15min/cont.) kW (Hp)	Max torque N·m (ft-lbs)
6 inch	Lynx 2100A / LA / MA / LMA / LMSA	6000	15/11 (20.1/14.7)	127 (93.7)
8 inch	Lynx 2100B / LB / MB / LMB / LMSB	4500	15/11 (20.1/14.7)	169 (124.7)
10 inch	Lynx 2100LC / LMC / LMSC	3500	18.5/15 (24.8/20.1)	269 (198.5)

Sub-spindle

The sub-spindle function enables rear-side cutting by a single setup, thereby maximizing the user's productivity and efficiency. Full C axis 0.001 degree control is included to optimize capability.

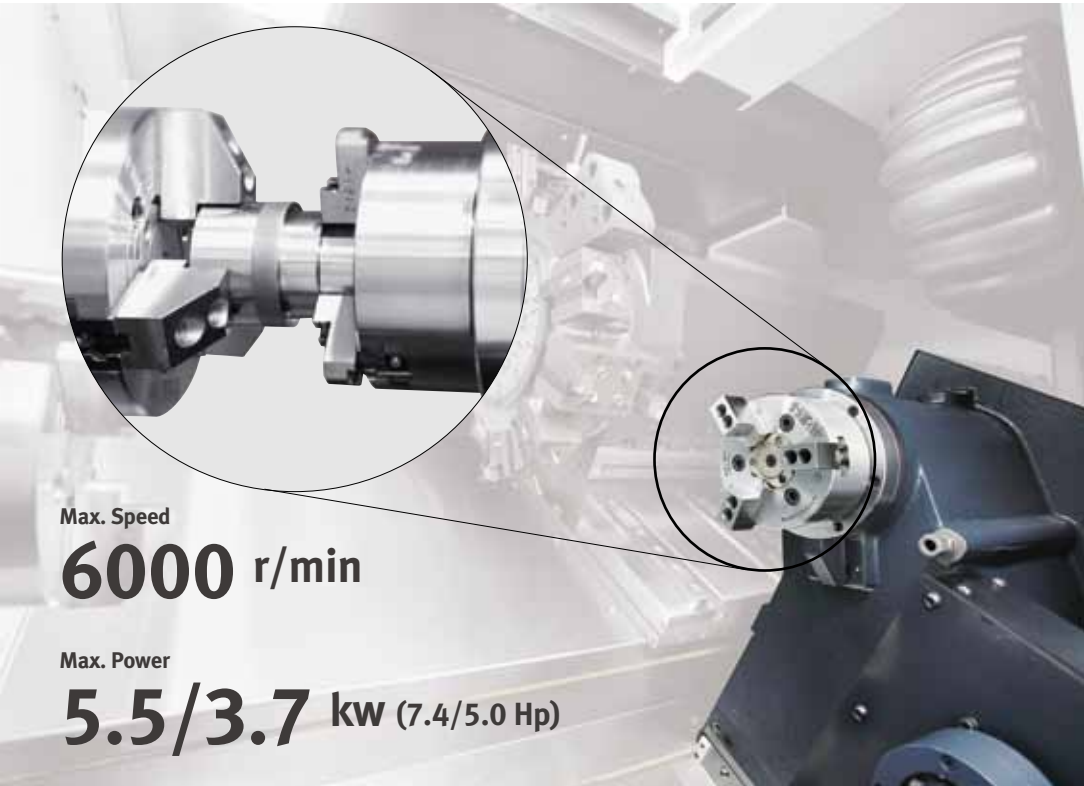

Models	Standard chuck size	Spindle speed r/min	Max.power (15min/cont.) kW	Max torque N·m (ft-lbs)
Lynx 2100LMSA / LMSB / LMSC	5 inch	6000	5.5 / 3.7 (7.4 / 5.0)	47 (34.7)

Product Preview

Turret

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

Rotation of the turret is controlled by servo motor for rapid and accurate selection of tools. The M model is fitted with Doosan's unique BMT₄₅P turret to provide superior performance for milling operations.

Turret for 2-axis Models_ Lynx 2100A / B / LA / LB / LC



No. of Tool Positions

Lynx 2100A/LA/B/LB

10 station option
12 station

Lynx 2100LC

10 station
12 station option

BMT₄₅P Turret for M/MS Models_ Lynx 2100 MA / MB / LMA / LMB / LMC / LMSA / LMSB / LMSC

The BMT₄₅ turret developed using Doosan's unique technology minimizes thermal error by using an air / oil cooling system. The direct turret clamping system improves accuracy and rigidity.



No. of Tool Positions

12 station


Indexing

24 position index

Tailstock

Adoption of the hydraulic actuation type CNC tailstock (hydraulic type) enables tailstock positioning and work setting using the operation panel. The dedicated screen reduces the work setting time by about 50%.


CNC Tailstock (Hydraulic Type)

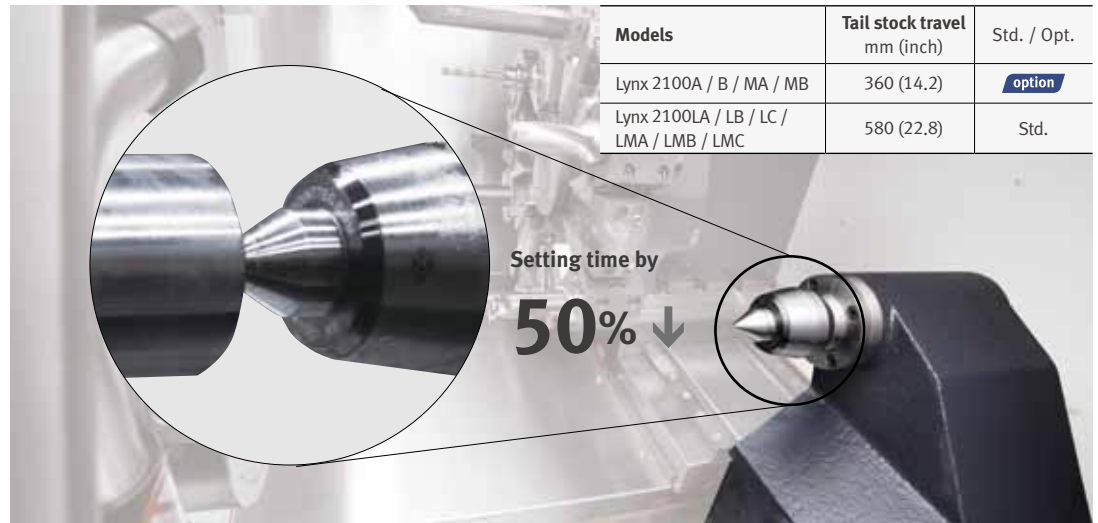

Models	Tail stock travel mm (inch)	Std. / Opt.
Lynx 2100A / B / MA / MB	360 (14.2)	option
Lynx 2100LA / LB / LC / LMA / LMB / LMC	580 (22.8)	Std.




The EOP (Easy Operation Package) System enables fast and easy tailstock position setting and control.

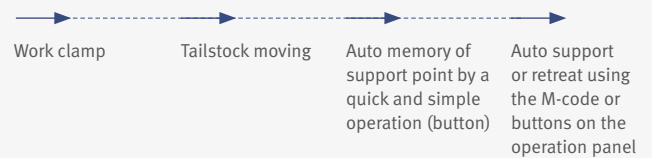

Doosan Gantry Loader

Doosan Gantry Loader is compact and easy customized stand alone type automation solution controlled by motion controller.

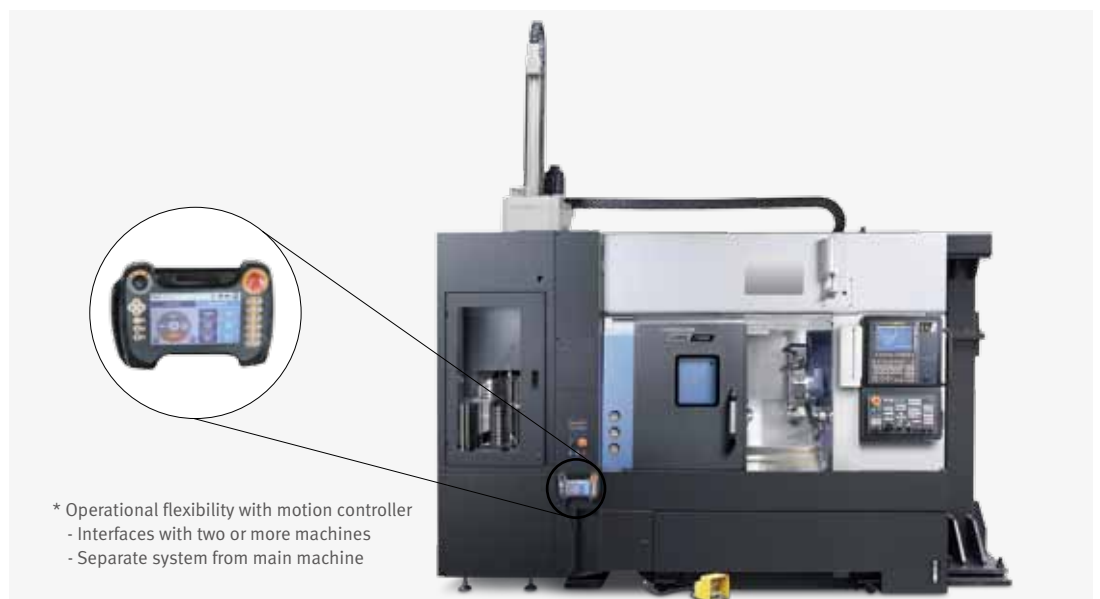

- * Operational flexibility with motion controller
- Interfaces with two or more machines
- Separate system from main machine

Description		Unit	Doosan Gantry Loader
Travel	Z / Y axis	mm (inch)	2080 / 900 (81.9 / 35.4)
Rapid Traverse	Z / Y axis	m/min (ipm)	210 / 180 (8267.7 / 7086.6)
Work Capacity		mm (inch)	Ø150 x 90 (Ø5.9 x 3.5)
		kg (lb)	3 (6.6)
Number of Pallets (Work Stocker)		st	14
Applicable model		-	Lynx 2100 series / PUMA GT2100 series

Product Preview

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

Cutting Performance

Lynx 2100 series has powerful cutting performance.



O.D turning

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	210 (8267.7)
Feed	mm/rev (ipr)	0.56 (0.0)
Spindle speed	r/min	844
Cutting depth	mm (inch)	4 (0.2)
Chip removal rate	cm ³ /min (inch ³ /min)	462 (28.2)



I.D turning (Rough / End)

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	280 / 200 (11023.6 / 7874.0)
Feed	mm/rev (ipr)	0.3 / 0.1 (0.0 / 0.0)
Spindle speed	r/min	1182 / 863
Cutting depth	mm (inch)	3 / 0.4 (0.1 / 0.0)
Tool length	mm (inch)	4.0D / 4.0D (0.2D / 0.2D)



U-drilling

	Unit	Lynx 2100LB
Cutting speed	m/min (ipm)	200 (7874.0)
Feed	mm/rev (ipr)	0.12 (0.0)
Spindle speed	r/min	1011
U-drill dia.	mm (inch)	63 (2.5)
Cutting depth	mm (inch)	176 (6.9)
Chip removal rate	cm ³ /min (inch ³ /min)	378 (23.1)



Face milling

	Unit	Lynx 2100MA
Cutting speed	m/min (ipm)	188 (7401.6)
Feed	mm/min (ipm)	600 (23.6)
Spindle speed	r/min	1500
Cutting depth	mm (inch)	3 (0.1)
Chip removal rate	cm ³ /min (inch ³ /min)	57.6 (3.5)
Tool dia.	mm (inch)	50 (2.0)



End milling

	Unit	Lynx 2100MA
Cutting speed	m/min (ipm)	57 (2244.1)
Feed	mm/min (ipm)	300 (11.8)
Spindle speed	r/min	1500
Cutting depth	mm (inch)	30 (1.2)
Chip removal rate	cm ³ /min (inch ³ /min)	108 (6.6)
Tool dia.	mm (inch)	12 (0.5)



Tap

	Unit	Lynx 2100MA
Tap dia.	mm (inch)	10 (0.4)
Cutting speed	m/min (ipm)	60 (2.4)
Feed	mm/rev (ipr)	1.75 (0.1)
Spindle speed	r/min	1592

* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.



Standard / Optional Specifications

Various optional features are available for customer-specific work environments.

● Standard ○ Optional ✕ Not applicable

NO.	Description	Features	Lynx 2100A/LA	Lynx 2100B/LB	Lynx 2100LC	Lynx 2100MA/LMA/LMSA	Lynx 2100MB/LMB/LMSB	Lynx 2100LMC/LMSC
1	Chuck	6 inch	●	✕	✕	●	✕	✕
2		8 inch	○	●	✕	○	●	✕
3		10 inch	✕	○	●	✕	○	●
4		None	○	○	○	○	○	○
5	Jaw	Soft jaw	●	●	●	●	●	●
6		Hard jaw	○	○	○	○	○	○
7	Chucking option	DUAL PRESSURE CHUCKING	○	○	○	○	○	○
8		CHUCK CLAMP CONFIRMATION	●	●	●	●	●	●
9	Turret	Rotary tool_6000r/min	✕	✕	✕	●	●	●
10		Rotary tool_10000r/min	✕	✕	✕	○	○	○
11	Coolant pump	1.5 bar	●	●	●	●	●	●
12		4.5 bar	○	○	○	○	○	○
13		7 bar	○	○	○	○	○	○
14		10 bar	○	○	○	○	○	○
15		14.5 bar	○	○	○	○	○	○
16	Coolant pump (opt.)	4.5 bar	○	○	○	○	○	○
17	Coolant options	Oil Skimmer	○	○	○	○	○	○
18		Coolant chiller	○	○	○	○	○	○
19		Coolant pressure switch	○	○	○	○	○	○
20		Coolant level switch : Sensing level - Empty / Low / Enough / Full	●	●	●	●	●	●
22	Side chip conveyor	Hinged belt	○	○	○	○	○	○
23		Magnetic scrapper	○	○	○	○	○	○
24		Screw (auger)	○	○	○	○	○	○
25	Rear chip conveyor	Hinged belt	○	○	○	○	○	○
26		Magnetic scrapper	○	○	○	○	○	○
27		Screw (auger)	○	○	○	○	○	○
28	Chip bucket	Forklift 110L (for auger conveyor)	○	○	○	○	○	○
29		Forklift 200L (for auger conveyor)	○	○	○	○	○	○
30		Forklift 220L	○	○	○	○	○	○
31		Forklift 300L	○	○	○	○	○	○
32		Forklift 380L	○	○	○	○	○	○
33		Rotation 220L	○	○	○	○	○	○
34		Rotation 300L	○	○	○	○	○	○
35		Rotation 380L	○	○	○	○	○	○
36	Chip processing options	Air blower	○	○	○	○	○	○
37		Chuck coolant	○	○	○	○	○	○
38		Coolant gun	○	○	○	○	○	○
39		Mist collector ready	○	○	○	○	○	○
40	Measurement & Automation	Assembled mist collector	○	○	○	○	○	○
41		Bar feeder system	○	○	○	○	○	○
42		Auto door	○	○	○	○	○	○
43		Tool setter (Manual)	○	○	○	○	○	○
44	Standard devices	Tool setter (Auto)	○	○	○	○	○	○
45		Parts catcher and box	○	○	○	○	○	○
46		Parts catcher and conveyor	○	○	○	○	○	○
47		Front door interlock	●	●	●	●	●	●
48	Optional devices	Manual book	●	●	●	●	●	●
49		installation parts	●	●	●	●	●	●
50		safety sticker	●	●	●	●	●	●
51		Work light	●	●	●	●	●	●
52		Standard operation tools	●	●	●	●	●	●
53	Customized Special Option	Foot switch	●	●	●	●	●	●
54		Tool monitoring system	○	○	○	○	○	○
55		Signal tower	○	○	○	○	○	○
56		Air gun	○	○	○	○	○	○
57		Auto power off	○	○	○	○	○	○
58		Quick change tooling(CAPTO)	○	○	○	○	○	○
59		Sketch-turn S/W	○	○	○	○	○	○
59		AUTOMATIC TOP DOOR	○	○	○	○ / ○ / ✕	○ / ○ / ✕	○ / ✕
60		SHOWER COOLANT	○	○	○	○	○	○
61		DUAL PRESSURE COOLANT FOR MAIN TURRET	○	○	○	○	○	○
62		AUTO. WORK MEASUREMENT_ OLP40_RENISHAW	○	○	○	○	○	○
63		TSC FOR MAIN/LEFT SPINDLE_PREPARATION	○	○	○	○	○	○
64		MILLING TOOL HOLDER_UNIVERSAL	○	○	○	○	○	○

★ Please contact DOOSAN to select detailed steady rest specifications.

Product Preview

Peripheral Equipment

Basic information


Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

Chip Conveyor (option 21~26)

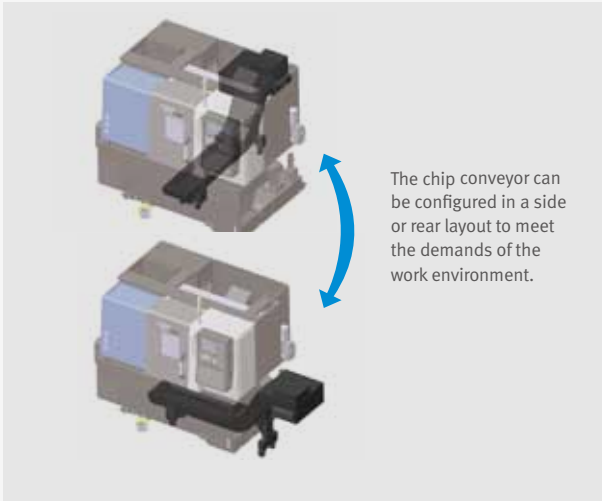

Chip conveyor type	Material	Description
Hinged belt	Steel	Most typical type of chip conveyor. Appropriate for steel materials generating chips of length of 30 mm or more.
Screw (auger)	Steel	Chip conveyor with smallest footprint. Demands 80% of footprint comparing to hinged belt.
Magnetic scrapper	Cast iron	Chip conveyor with magnet equipped: Appropriate for cast iron workpieces generating fine chips.

Quick change CAPTO (option)



The Quick Change Tool system simplifies tool change operation. Recommended for users who need to change tools frequently or reduce the set-up time.

Grease Lubrication System




The standard grease lubrication system eliminates the need for an oil skimmer and reduces lubrication costs by about 80% compared to oil lubrication.

Yearly maintenance cost

Max. **80%** ↓


Coolant Chiller (option 18)

The detachable coolant chiller is recommended to maintain thermal error at a minimal level and achieve superior machining precision.

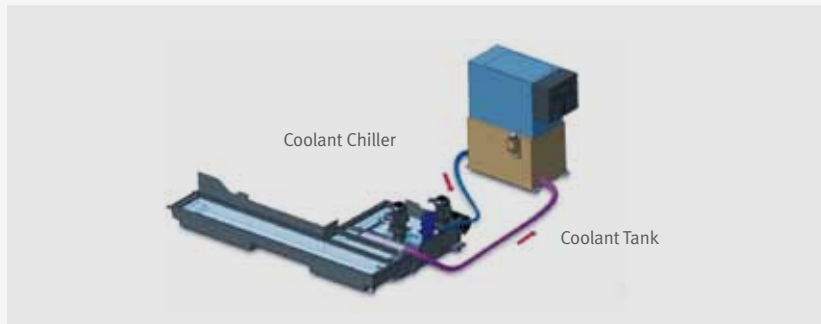

Easy-to-clean Coolant Tank

The coolant tank can be isolated without removing the chip conveyor, significantly enhancing the operator's convenience.

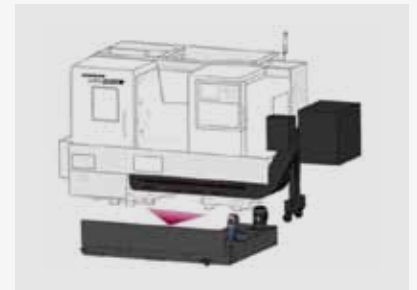

Tool Setter (Manual /Auto) (Tool length measurement device) (option 42~43)

The tool setter facilitates the setting of machining tools, and can be used to automatically compensate for worn tools accurately.



Part Catcher (option 44~45)

The Part Catcher automatically catches finished parts and transfers them to the downstream processes.



Oil Skimmer (option 17)

As the Lynx 2100 Series uses a grease type lubricant, the coolant rarely mixes with oil. This optional oil skimmer helps keep exceptional service life of the coolant.



DOOSAN Fanuc i Plus

DOOSAN Fanuc i Plus is optimized for maximizing customer productivity and convenience.

15 inch screen + New OP

DOOSAN Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.



DOOSAN Fanuc i Plus

- 15 inch color display
- Intuitive and user-friendly design

USB & PCMCIA card QWERTY keyboard

- EZ-guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot key



iHMI Touch screen option


- iHMI provides an intuitive interface that utilizes a touch screen for quick and easy operation

Variety of applications

- Providing various applications related to PLANNING, MACHINING, IMPROVEMENT, and UTILITY for customer convenience.

Improved Productivity

Cycle time, mechanism operating speed, acceleration and deceleration are optimized and non-cutting times during cutting operation are analyzed and minimized to enhance productivity.

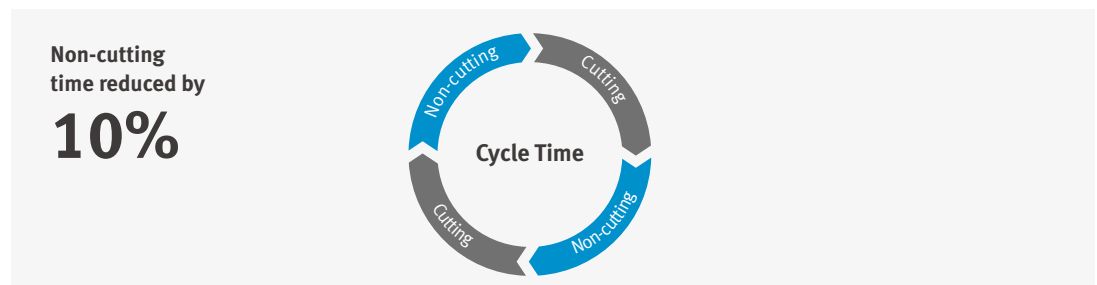

SKETCH-TURN option

DOOSAN Conversational programming software for PC


- Easy to learn for beginners
- Time savings in programming
- Reduce processing cycle time

EZ-Guide i

Using the DOOSAN EZ-Guide i, users can create a cutting program for any desired shape, including patterns, by entering the appropriate figures only.

Exemplary Programming

Cutting shape




→

EZ-Guide i Screen



Enter the dimensions of the desired shape.

→

Automatic creation of cutting program

```
O7000 (SAMPLE PROGRAM) ;
...
M3 S1500 ;
G0 X50. Y125. ;
G0 Z30. ;
G1040 T0.5 J3. H0.2 K0.5 ... ;
G1020 H120. V50. U37. W68. ;
G0 Z80. ;
M5 ;
```

A cutting program is automatically created with the entered values.

Product Preview

Easy Operation Package

Doosan Easy Operation Package (EOP) supports the user with tool, help desk, operation, functionalities to maximize operational efficiency and user convenience.


Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

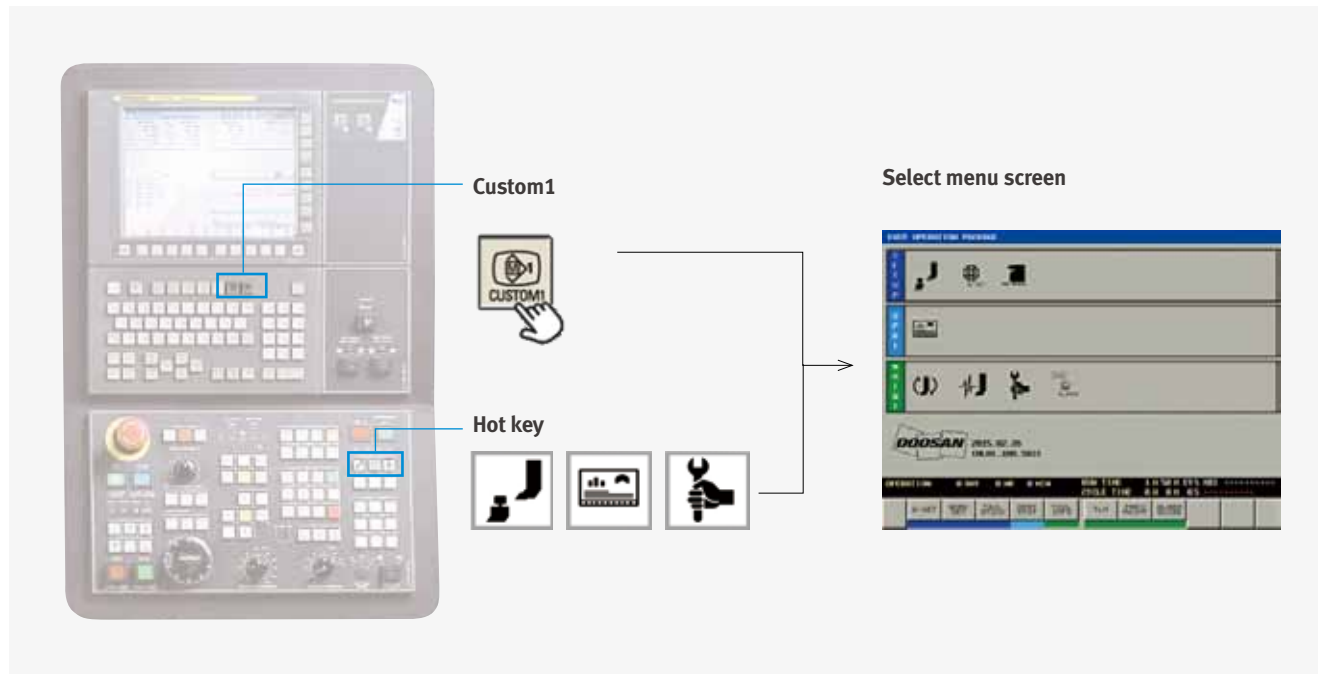

Convenient set up for peripheral equipment

Helps tool setter guide, work setting, tailstock setting, and other measurement and parameter control to reduce setting-up time and facilitates operation.




Screen for monitoring the machine and operating conditions

The screen provides a complete view of machine operation. Information on the feed system position, offset, feedrate and spindle speed, tool life and count in an easy-to-view screen.



Management Convenience Screen

Helps to prepare tools and provides for visual information on alarms to reduce maintenance time.

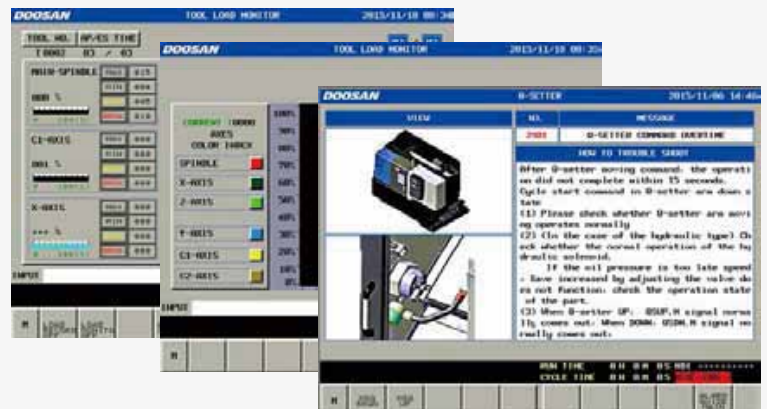

SIEMENS S828D

SIEMENS CNC optimized for DOOSAN machine tools maximizes users' productivity.


15.6 inch screen + New OP

The newly-designed operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.



Conversational Convenient function

The machining monitoring function developed on the basis of the Shop Turn – an interactive machining support function of SIEMENS – provides users with cutting, servicing and maintenance screens for easy and convenient machine operation.



Cutting and operation support function


This function shows a cutting and tool path simulation of a cutting program on a real-time basis.



Tail stock function

Dialogic Screen will help easy setting and operating about CNC Tail stock.basis.

Shop-turn mode[various]
↓
[attachments]



Operation safety function

Spindle and Turret's interference could be checked before crash. So that it Protect operator's mistake.
[offset] [operating parameter]
[attachment setting] [Collision avoidance]


[offset]
↓
[operating parameter]
↓
[attachment setting]
↓
[Collision avoidance]



Maintenance and service convenience function

Maintenance and service of major units and peripheral devices, timer setting and parts counter setting can be easily carried out on a convenient screen.

[offset]
↓
[operating parameter]
↓
[TC service]



Machining accuracy improvement

The NC controls spindle speed at an optimal level for precision threading and turning, making it possible to improve surface roughness automatically.

[various]
↓
[attachment]
↓
[DSSV]



Before applying the function

After applying the function

Product Preview

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications


Customer Support Service

Power-Torque Diagram (FANUC)

Main Spindle


Lynx 2100A / LA / MA / LMA / LMSA

Speed **6000 r/min** Power **15/11 kW**
(20.1/14.8 Hp)

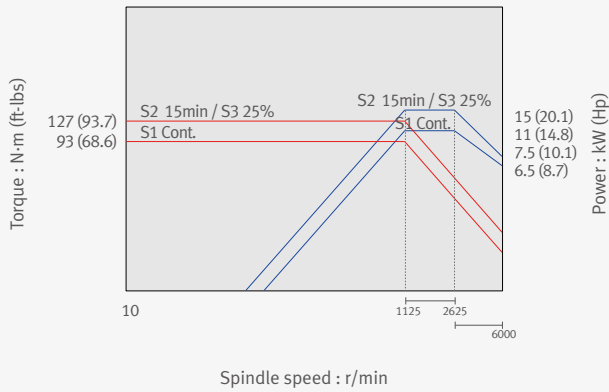


Lynx 2100B / LB / MB / LMB / LMSB

Speed **4500 r/min** Power **15/11 kW**
(20.1/14.8 Hp)

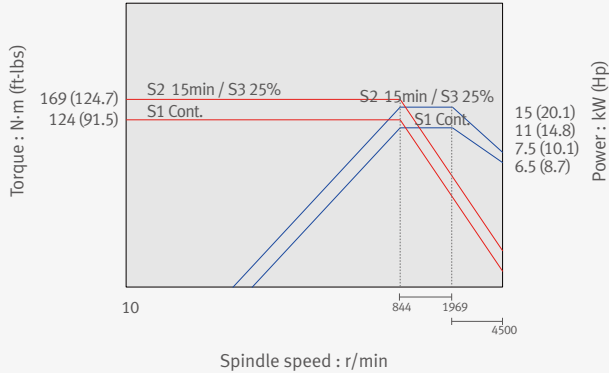

Lynx 2100LC / LMC / LMSC


Speed **3500 r/min** Power **18.5/15 kW**
(24.8/20.1 Hp)

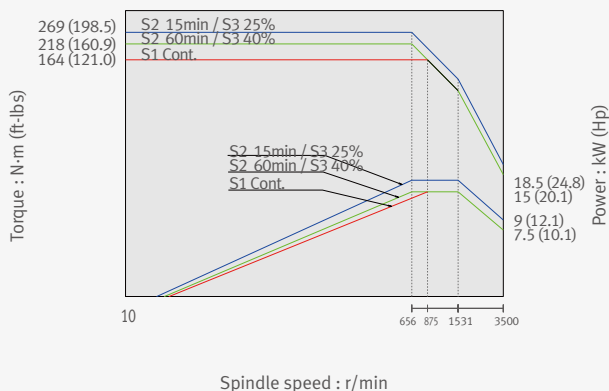

Sub-Spindle

Lynx 2100LMSA / LMSB / LMSC


Speed **6000 r/min** Power **5.5/3.7 kW**
(7.4/5.0 Hp)

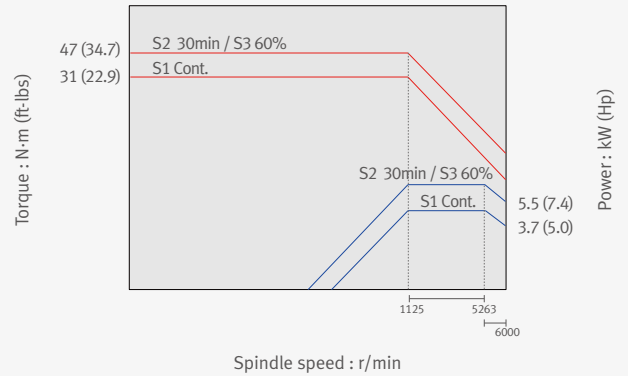

Rotary Tool


Lynx 2100M / LM / LMS

Speed **6000 r/min** Power **3.7/1.1 kW**
(5.0/1.5 Hp)

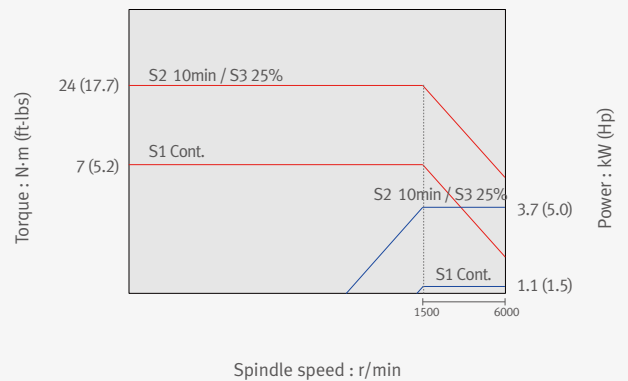


Lynx 2100M / LM / LMS **option**

Speed **10000 r/min** Power **3.7/1.1 kW**
(5.0/1.5 Hp)

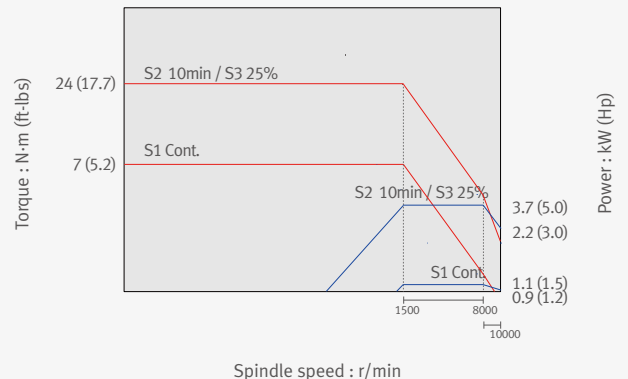


Power-Torque Diagram (SIEMENS)


Main Spindle

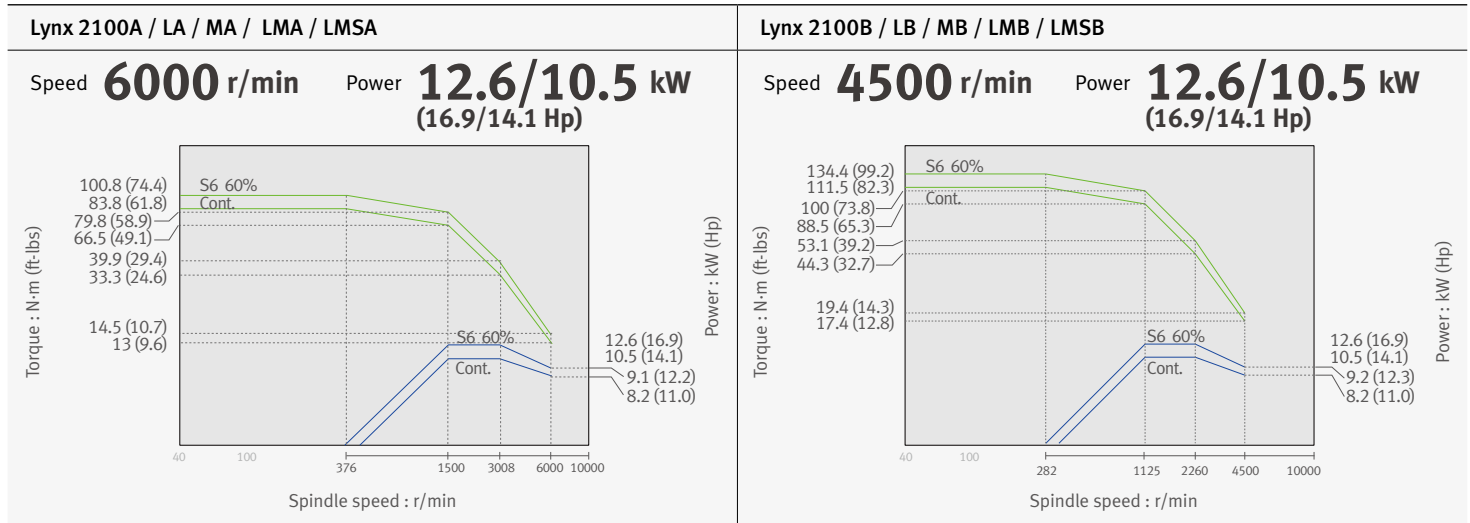

Sub-Spindle

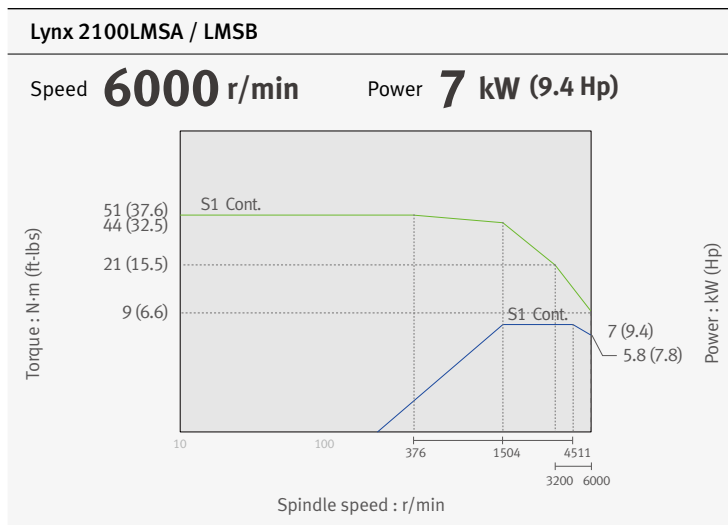

Rotary Tool

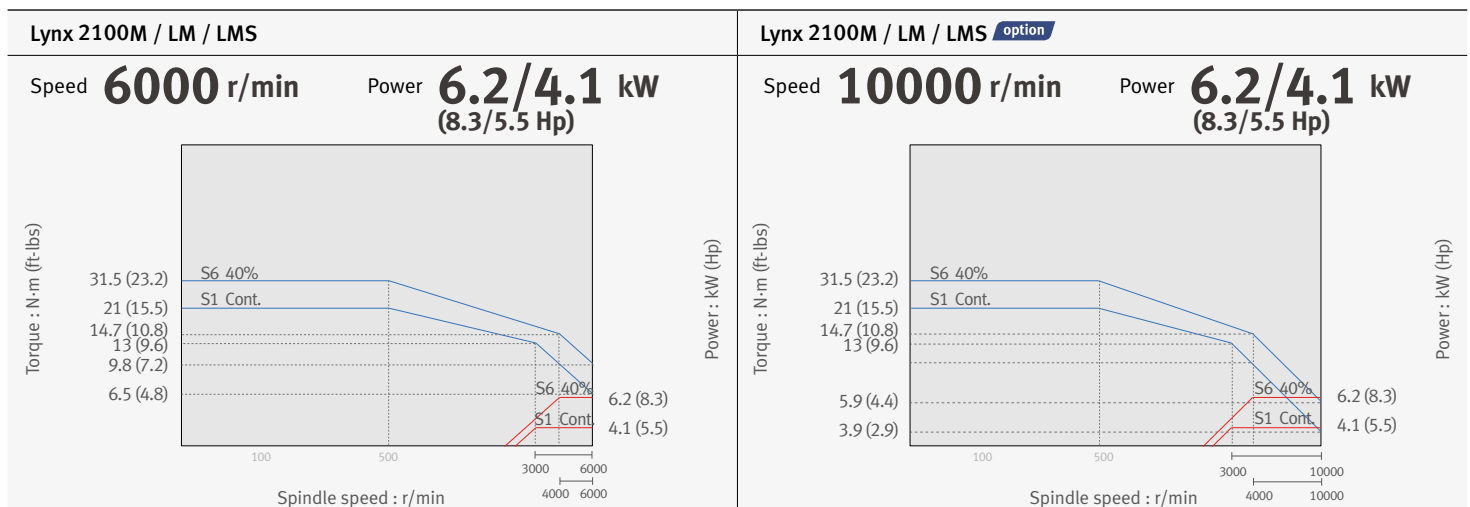

Product Preview

External Dimensions

Basic information

Basic Structure
Cutting
Performance

Detailed Information


Options
Applications
Diagrams
Specifications

Customer Support Service


Lynx 2100 series

Unit : mm (inch)

Top View

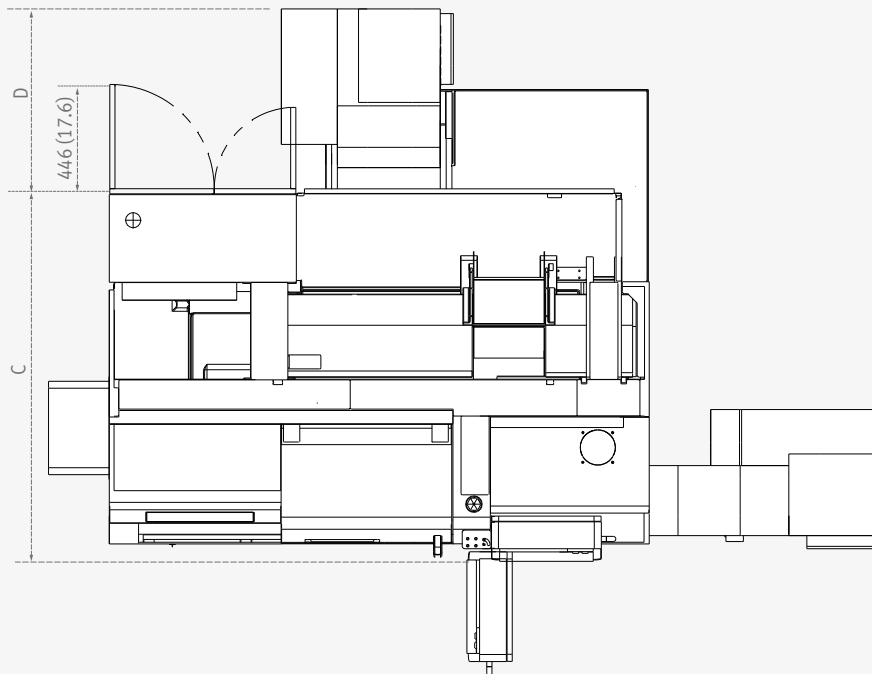

Front View

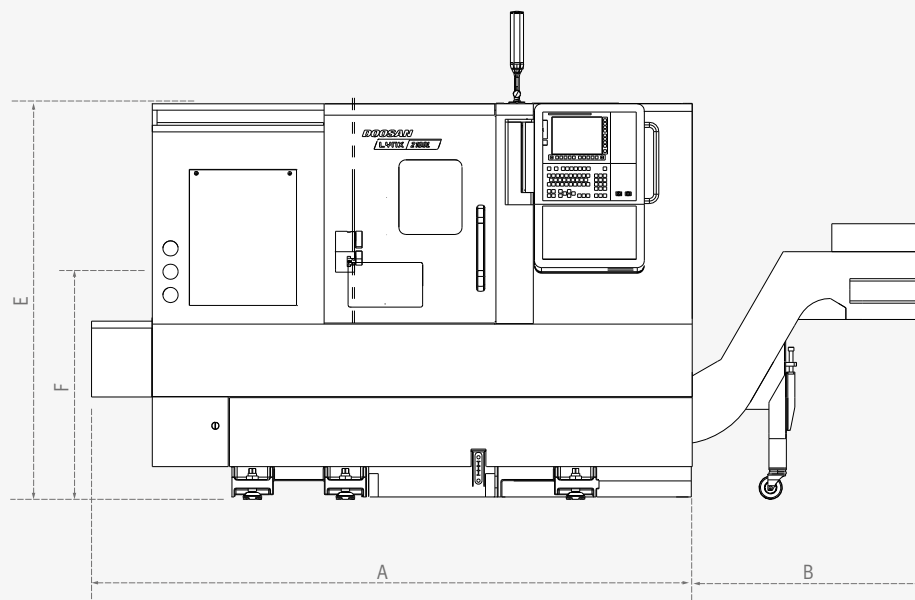


Models	A	B		C	D		E	F
		side hinged chip conveyor	side screw (auger) chip conveyor		rear hinged chip conveyor	rear screw (auger) chip conveyor		
Lynx 2100A / MA [B / MB]	2320 [2350] (91.3 [92.5])	953 (37.5)	759 (29.9)	1595 (62.8)	770 (30.3)	583 (23.0)	1693 (66.7)	1060 (41.7)
Lynx 2100LA / LMA [LB / LMB]	2540 [2570] (100.0 [101.2])	997 (39.3)	830 (32.7)	1595 (62.8)	770 (30.3)	616 (24.3)	1693 (66.7)	1070 (42.1)
Lynx 2100LC / LMC	2570 (101.2)	997 (39.3)	-	1602 (63.1)	770 (30.3)	-	1693 (66.7)	1060 (41.7)
Lynx 2100LMSA [LMSB]	2805 [2835] (110.4 [111.6])	997 (39.3)	830 (32.7)	1595 (62.8)	770 (30.3)	616 (24.3)	1693 (66.7)	1060 (41.7)
Lynx 2100LMSC	2837 (111.7)	993 (39.1)	-	1602 (63.1)	770 (30.3)	-	1693 (66.7)	1060 (41.7)

* Some peripheral equipment can be placed in other places

Tooling System

Lynx 2100A / B / LA / LB / LC (10/12 station)

Unit : mm (inch)

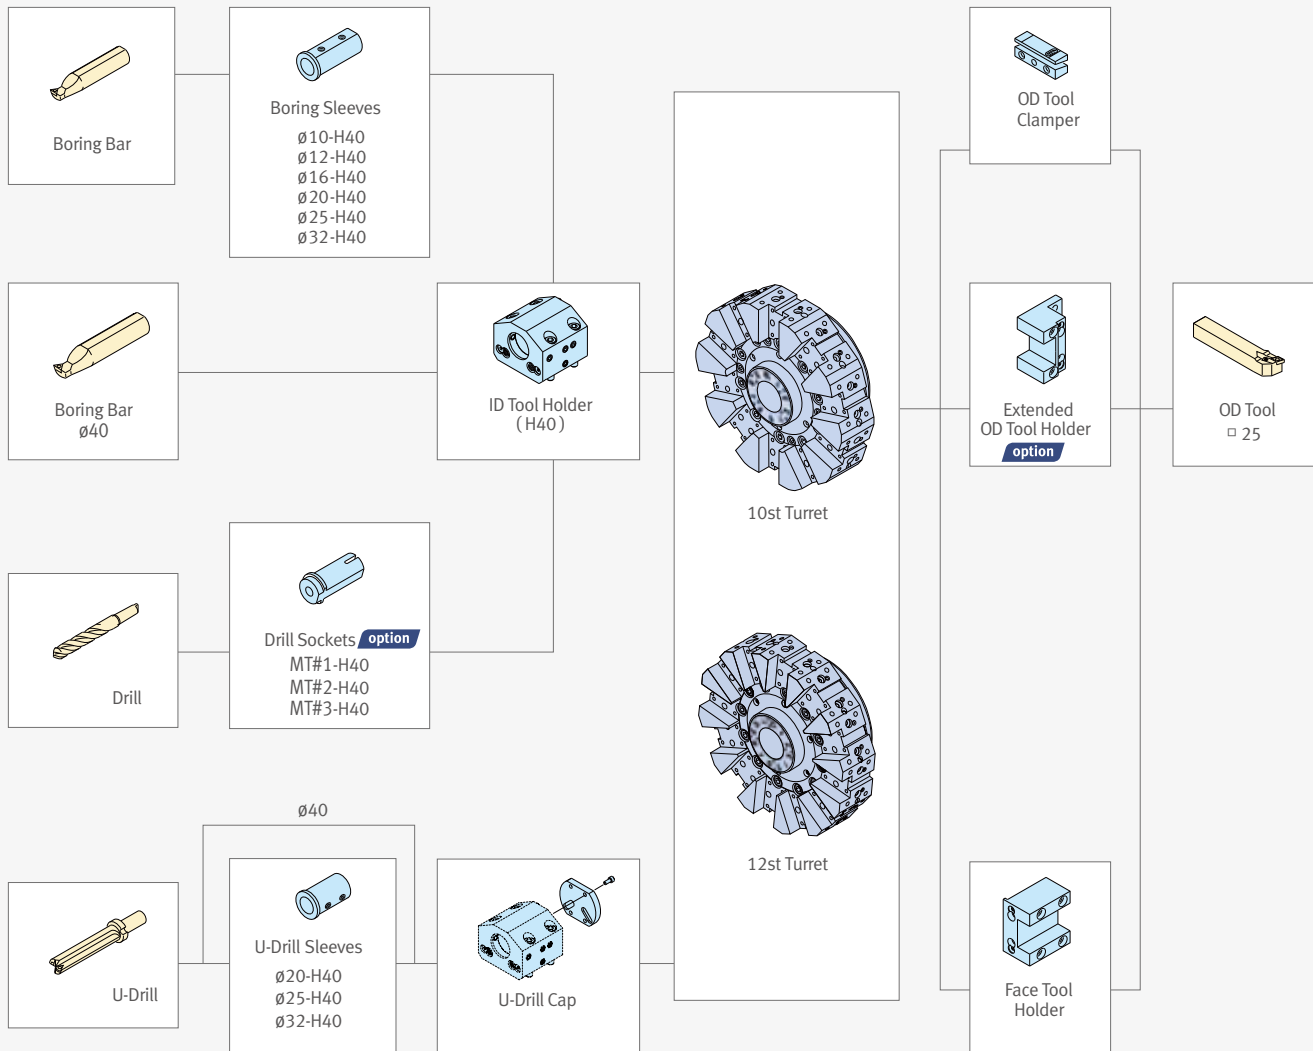

Product Preview

Tooling System

Basic information

Basic Structure
Cutting
Performance


Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

Lynx 2100MA / MB / LMA / LMB / LMC (12 station(24 Position Index), BMT45P)


Unit : mm (inch)

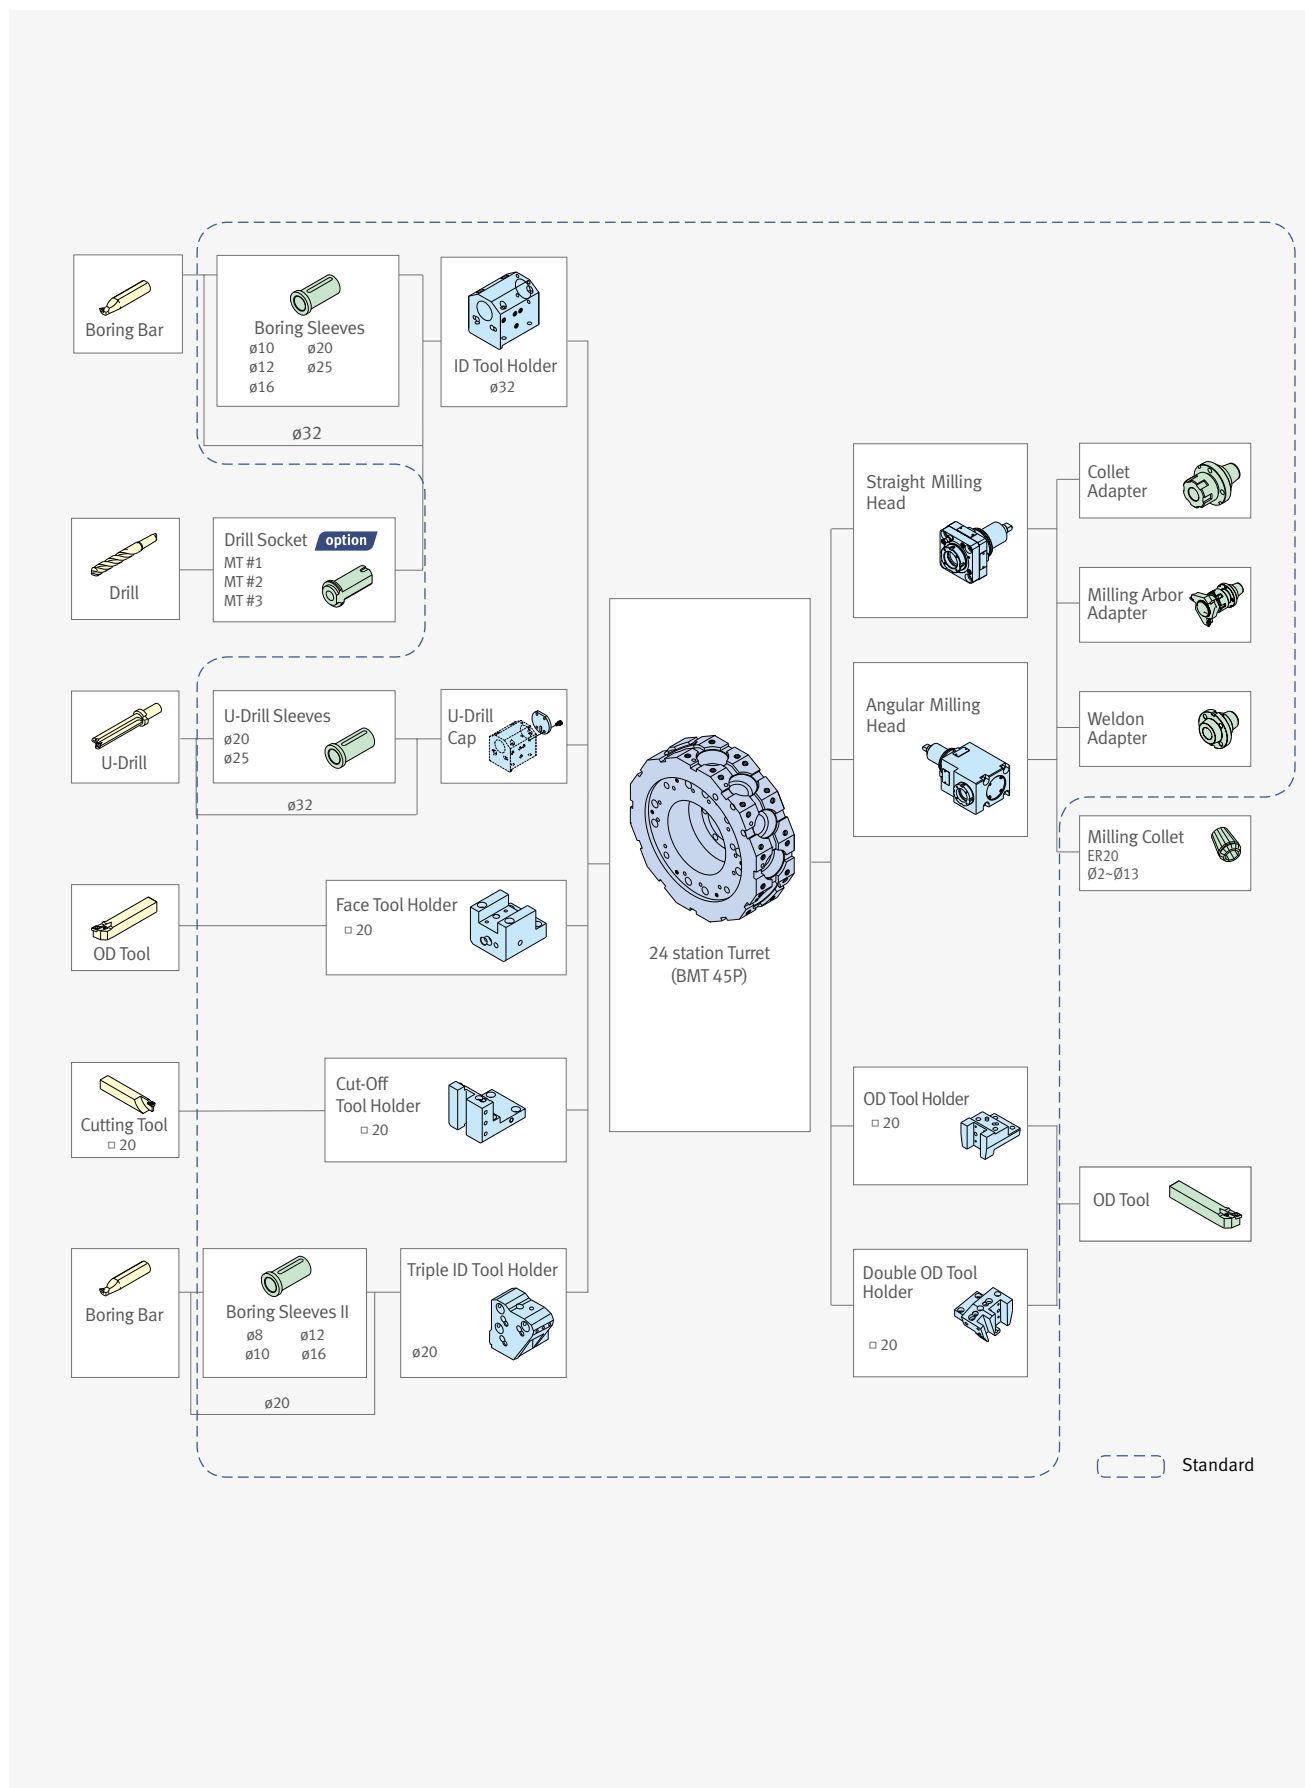

Tooling System

Lynx 2100LMSA / LMSB / LMSC (12 station(24 Position Index), BMT45P)

Unit : mm (inch)

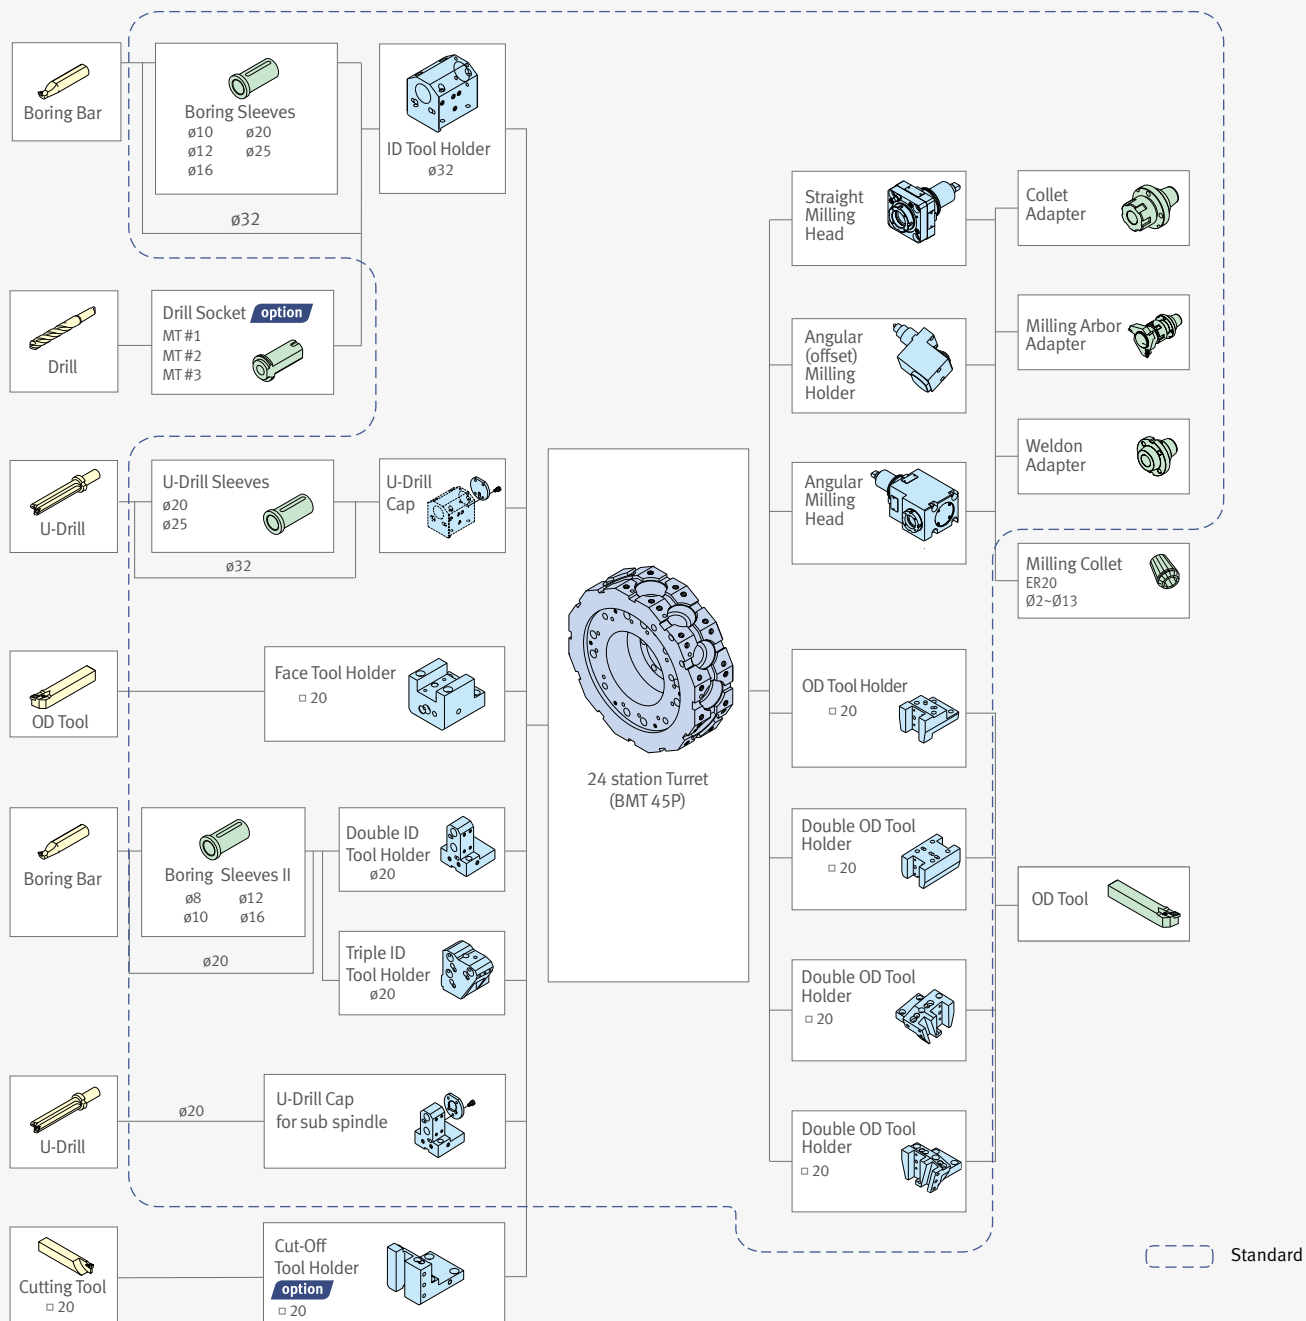

Product Preview

Tool Interference Diagram

Basic information

Basic Structure
Cutting
Performance



Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

Lynx 2100A / B / LA / LB / LC



Unit : mm (inch)

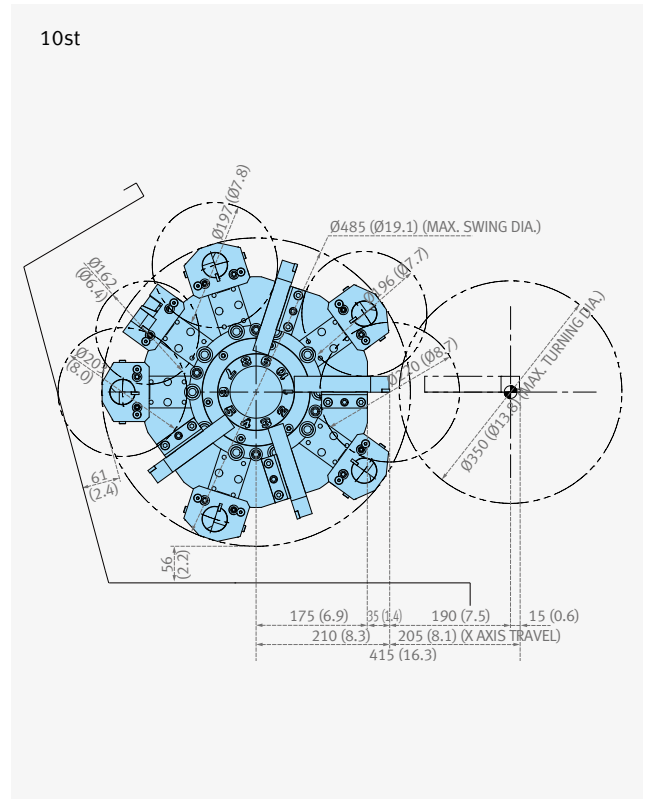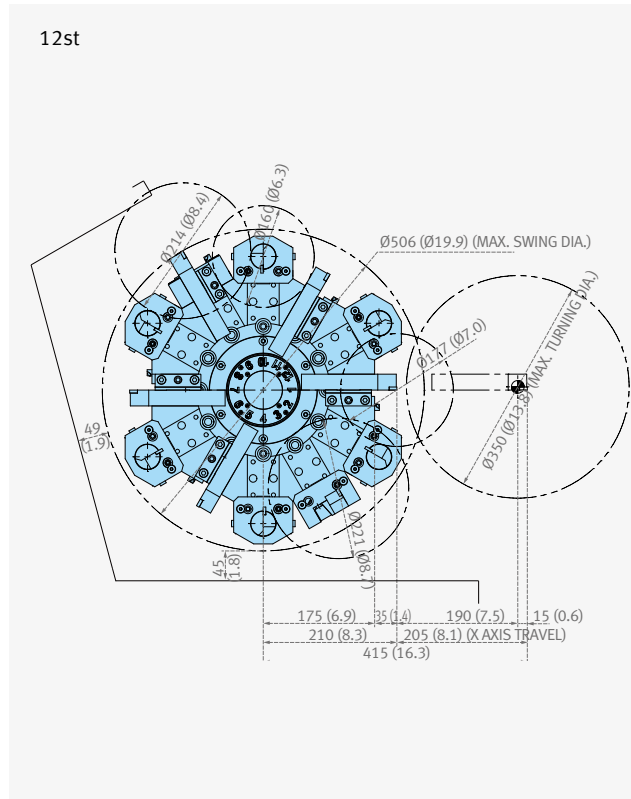

Lynx 2100MA / MB / LMA / LMB / LMC

Lynx 2100LMSA / LMSB / LMSC

Unit : mm (inch)

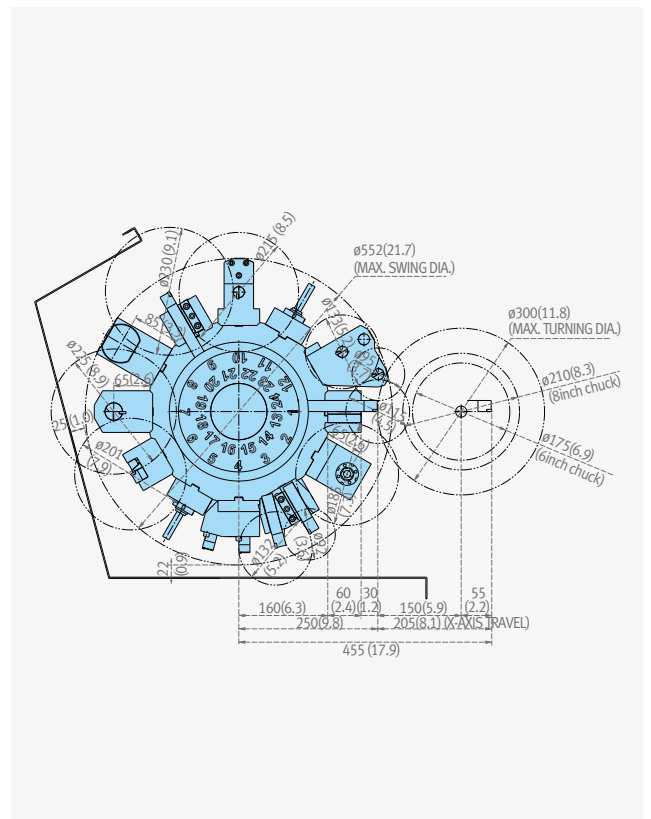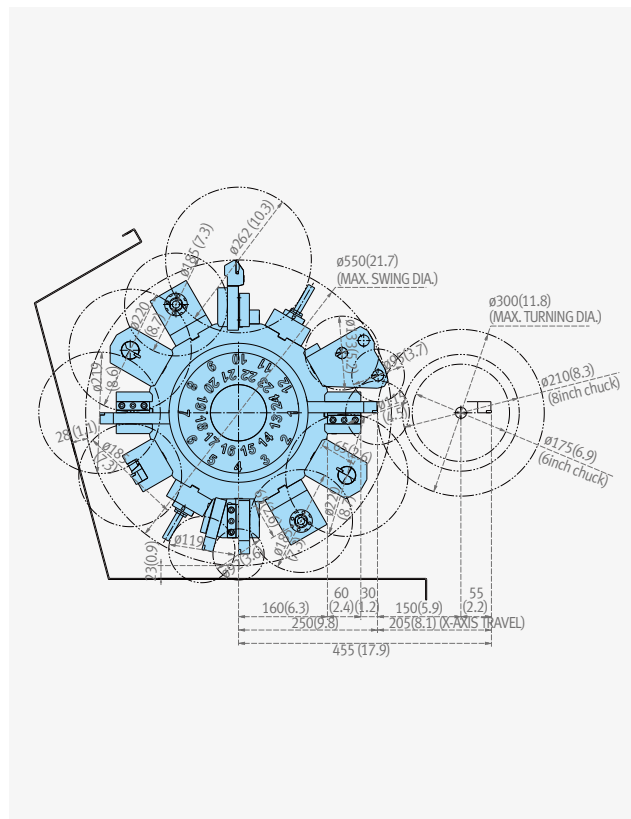


Working Range


Lynx 2100A / B [LA / LB / LC]

Unit : mm (inch)


OD Holder

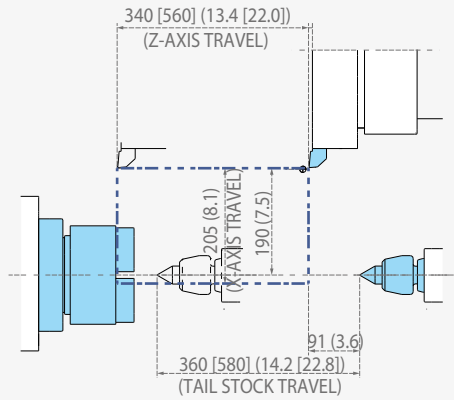


ID HOLDER

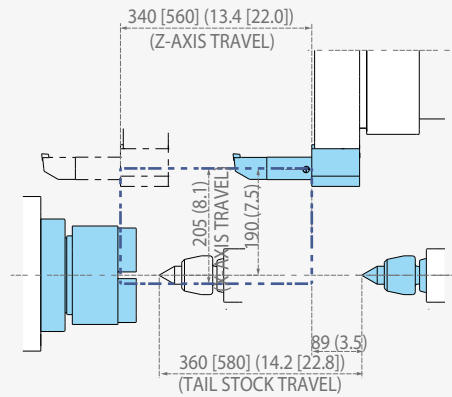

Face Tool Holder

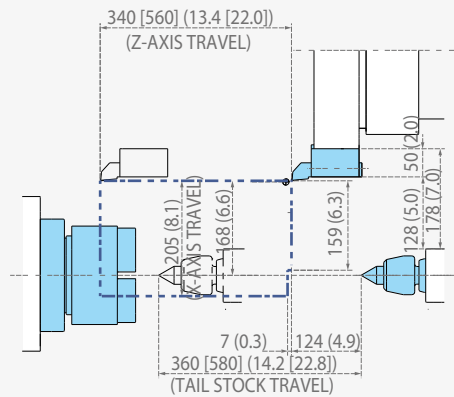

Extended OD Holder

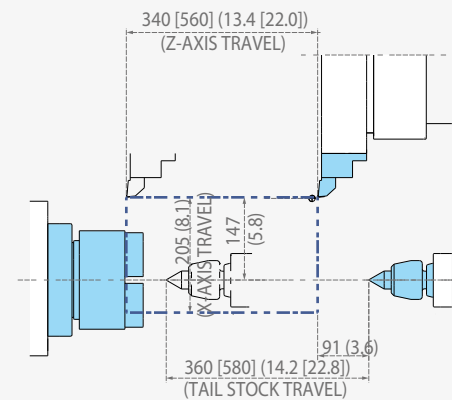

Product Preview

Working Range

Basic information

Basic Structure
Cutting
Performance

Detailed
Information


Options
Applications
Diagrams
Specifications

Customer Support
Service


Lynx 2100MA / MB [LMA / LMB / LMC]

Unit : mm (inch)


OD Holder

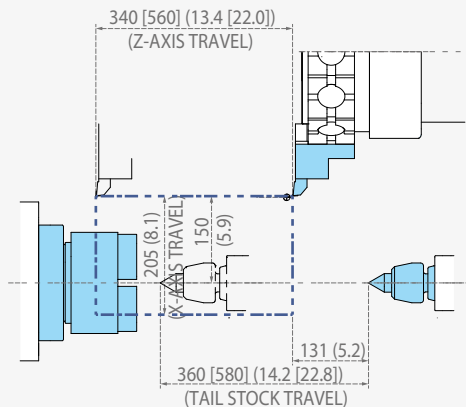


ID HOLDER

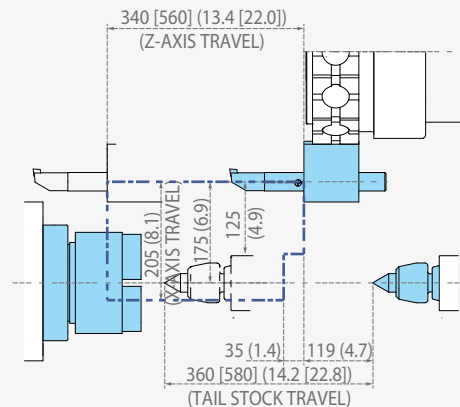


Face Tool Holder

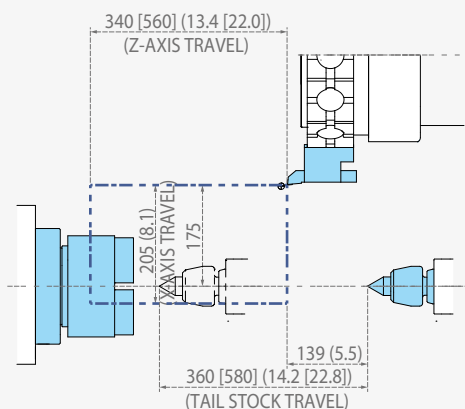


Double OD Holder

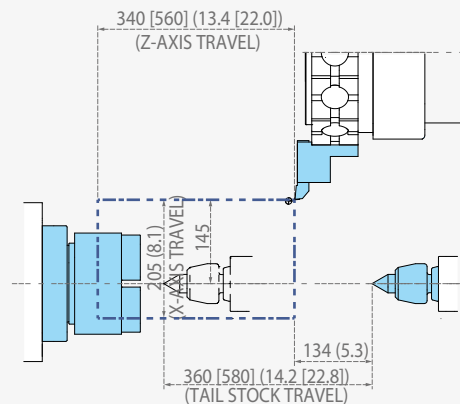

Straight Milling Holder

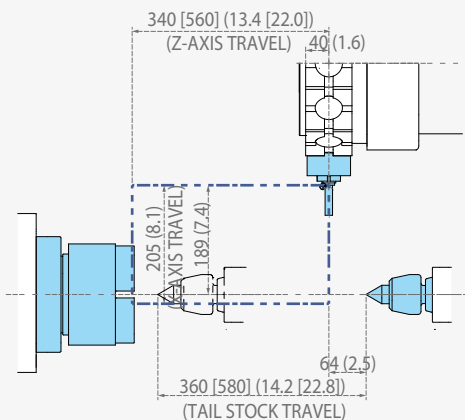


Angular Milling Holder

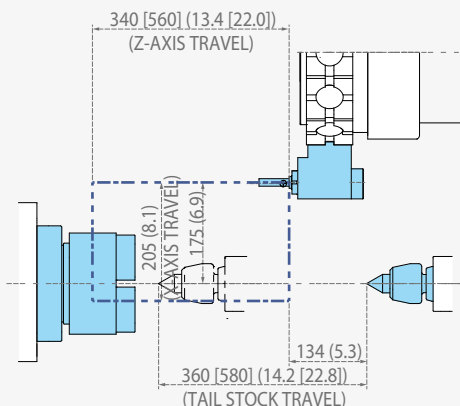


Lynx 2100LMSA/ LMSB / LMSC

Unit : mm (inch)


OD Holder

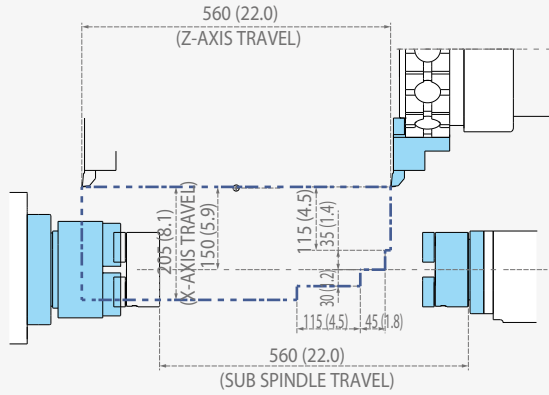


ID HOLDER

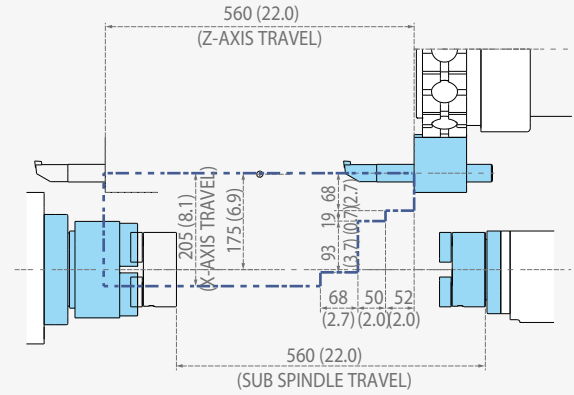

Double OD Holder

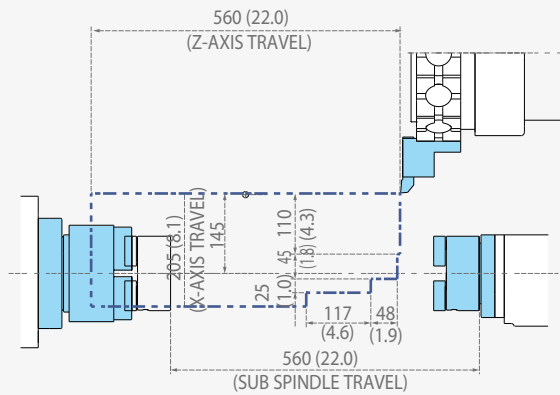

Face Tool Holder

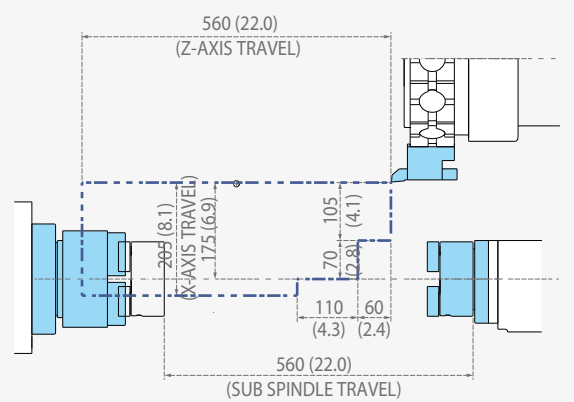

Product Preview

Machine Specifications

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service



Description		Unit	Lynx 2100A [LA]	Lynx 2100MA [LMA]
Capacity	Swing over bed	mm (inch)	600 (23.6)	
	Swing over saddle	mm (inch)	400 (15.7)	
	Recommended turning diameter	mm (inch)	170 (6.7)	
	Max. turning diameter	mm (inch)	350 (13.8)	300 (11.8)
	Max. turning length	mm (inch)	330 [550] (13.0 [21.7])	290 [510] (11.4 [20.1])
	Chuck size	inch	6 {8}*	
	Bar working diameter	mm (inch)	51 (2.0)	
Travel	Travel distance	X-axis	mm (inch)	205 (8.1)
		Z-axis	mm (inch)	340 [560] (13.4 [22.0])
Feedrate	Rapid traverse	X-axis	m/min (ipm)	30 (1181.1)
		Z-axis	m/min (ipm)	36 (1417.3)
Spindle	Spindle speed		r/min	6000
	Spindle motor power (15min/cont.) (FANUC)		kW (Hp)	15/11 (20.1/14.8)
	Spindle motor power (S6 60%/cont.) (SIEMENS)		kW (Hp)	12.6/10.5 (16.9/14.1)
	Max. spindle torque (FANUC)		N-m (ft-lbs)	127 (93.7)
	Max. spindle torque (SIEMENS)		N-m (ft-lbs)	100.8 (74.4)
	Spindel nose		ASA	A2-5
	Spindle bearing diameter		mm (inch)	90 (3.5)
	Spindle inner diameter		mm (inch)	61 (2.4)
	C-axis min.indexing angle		deg	- 0.001
Turret	No.of tool stations		ea	12 {10}* 12
	OD tool size		mm (inch)	25 x 25 (1.0 x 1.0) 20 x 20 (0.8 x 0.8)
	Max.ID tool size		mm (inch)	40 (1.6) 32 (1.3)
	Turret indexing time		s	0.11 {0.15}* 0.11
	Max.rotary tool speed		r/min	- 6000 {10000}*
	Rotary tool motor power (FANUC)		kW (Hp)	- 3.7 (5.0)
	Rotary tool motor power (SIEMENS)		kW (Hp)	- 6.2 (8.3)
Tail stock	Travel distance		mm (inch)	360 [580] (14.1 [22.8]) 360 [580] (14.1 [22.8])
	Quill diameter		mm (inch)	65 (2.6) 65 (2.6)
	Quill taper		MT	MT#4 (Live) MT#4 (Live)
Sub spindle	Spindle speed			- -
	Spindle motor power (15min/cont.) (FANUC)		kW (Hp)	- -
	Spindle motor power (cont.) (SIEMENS)		kW (Hp)	- -
	Max. spindle torque		N-m (ft-lbs)	- -
	Spindel nose			- -
	Spindle bearing diameter		mm (inch)	- -
	Spindle inner diameter		mm (inch)	- -
	C-axis min.indexing angle			- -
Power source	Power consumption		kVA	25.94 25.94
Machine dimensions	Length		mm (inch)	2320 [2540] (91.3 [100.0]) 2320 [2540] (91.3 [100.0])
	Width		mm (inch)	1595 (62.8)
	Height		mm (inch)	1693 (66.7)
	Weight		kg (lb)	3100 [3400] (6834.2 [7495.6]) 3170 [3480] (6988.6 [7672.0])
Control	NC system		DOOSAN Fanuc i Plus, SIEMENS S828D	

Lynx 2100LMSA	Lynx 2100B [LB]	Lynx 2100MB [LMB]	Lynx 2100LMSB	Lynx 2100LC	Lynx 2100LMC	Lynx 2100LMSC
600 (23.6)				600 (23.6)		
400 (15.7)				400 (15.7)		
170 (6.7)				255 (10.0)		
300 (11.8)	350 (13.8)	300 (11.8)	300 (11.8)	350 (13.8)	300 (11.8)	300 (11.8)
510 (20.1)	330 [550] (13.0 [21.7])	290 [510] (11.4 [20.1])	510 (20.1)	537 (21.1)	497 (19.6)	497 (19.6)
6 {8}*	8{10}*			10		
51 (2.0)	65 (2.6)			81 (3.2)		
205 (8.1)				205 (8.1)		
340 [560] (13.4 [22.0])				560 (22.0)		
30 (1181.1)				30 (1181.1)		
36 (1417.3)				36 (1417.3)		
6000	4500			3500		
15/11 (20.1/14.8)				18.5/15 (24.8/20.1)		
12.6/10.5 (16.9/14.1)				**		
127 (93.7)	169 (124.6)			269 (198.5)		
100.8 (74.4)	134.4 (99.2)			**		
A2-5	A2-6			A2-8		
90 (3.5)	110 (4.3)			130 (5.1)		
61 (2.4)	76 (3.0)			91 (3.6)		
0.001	-	0.001	0.001	-	0.001	0.001
12	10 {12}*	12	12	10	12	12
20 x 20 (0.8 x 0.8)	25 x 25 (1.0 x 1.0)	20 x 20 (0.8 x 0.8)	20 x 20 (0.8 x 0.8)	25 x 25 (1.0 x 1.0)	20 x 20 (0.8 x 0.8)	20 x 20 (0.8 x 0.8)
32 (1.3)	40 (1.6)	32 (1.3)	32 (1.3)	40 (1.6)	32 (1.3)	32 (1.3)
0.11	0.15 {0.11}*	0.11	0.11	0.15	0.11	0.11
6000 {10000}*	-	6000 {10000}*	6000 {10000}*	-	6000 {10000}*	6000 {10000}*
3.7 (5.0)	-	3.7 (5.0)	3.7 (5.0)	-	3.7 (5.0)	3.7 (5.0)
6.2 (8.3)	-	6.2 (8.3)	6.2 (8.3)	**		
-	360 [580] (14.1 [22.8])	360 [580] (14.1 [22.8])	-	580 (22.8)	580 (22.8)	-
-	65 (2.6)	65 (2.6)	-	65 (2.6)	65 (2.6)	-
-	MT#4 (Live)	MT#4 (Live)	-	MT#4 (Live)	MT#4 (Live)	-
6000	-	-	6000	-	-	6000
5.5/3.7 (7.4/5.0)	-	-	5.5/3.7 (7.4/5.0)	-	-	5.5/3.7 (7.4/5.0)
7 (9.4)	-	-	7 (9.4)	**		
47 (34.7)	-	-	47 (34.7)	-	-	47 (34.7)
Flat ø110	-	-	Flat ø110	-	-	Flat Ø110
75 (3.0)	-	-	75 (3.0)	-	-	75 (3.0)
43 (1.7)	-	-	43 (1.7)	-	-	43 (1.7)
0.001	-	-	0.001	-	-	0.001
31.8	25.94	25.94	31.8	32.81	32.81	34.84
2805 (110.4)	2350 [2570] (92.5 [101.2])	2350 [2570] (92.5 [101.2])	2835 (111.6)	2570 (101.2)	2570 (101.2)	2837 (111.7)
1595 (62.8)				1602 (63.1)		
1693 (66.7)				1693 (66.7)		
3600 (7936.5)	3100 [3400] (6834.2 [7495.6])	3170 [3480] (6988.6 [7672.0])	3600 (7936.5)	3500 (7716.1)	3580 (7892.4)	3800 (8377.4)
DOOSAN Fanuc i Plus, SIEMENS S828D				DOOSAN Fanuc i Plus, SIEMENS S828D		

* { } : Option

** : Please check with Doosan.

Product Preview

CNC Specifications

● Standard ○ Optional X Not applicable

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

FANUC

NO.	Division	Item	Spec.	DOOSAN Fanuc i Plus		
				2축	M	MS
				A / B / LA / LB / LC	MA / MB / LMA / LMB / LMC	MSA / MSB / LMSB / LMSC
1	Controlled axis	Controlled axes		2(X,Z)	3(X,Z,C)	4(X,Z,C,B)
2		Simultaneously controlled axes		2 axes	3 axes	4 axes
3		Cs contouring control		X	●	●
4		Synchronous / Composite control		X	X	○
5		Torque control		●	●	●
6		HRV2 control		●	●	●
7		Inch / metric conversion		●	●	●
8		Stored stroke check 1		●	●	●
9		Stored stroke check 2,3		●	●	●
10		Stored limit check before move		●	●	●
11		Chamfering on / off		●	●	●
12		Unexpected disturbance torque detection function		●	●	●
13		Position switch		●	●	●
14	Operation	DNC operation	Included in RS232C interface.	●	●	●
15		DNC operation with memory card		●	●	●
16		Quick program restart		○	○	○
17		Tool retract and recover		○	○	○
18		Wrong operation prevention		●	●	●
19		Dry run		●	●	●
20		Single block		●	●	●
21		Reference position shift		●	●	●
22		Handle interruption		○	○	○
23		Incremental feed	X1,X10,X100	●	●	●
24		Manual handle retrace		○	○	○
25	Interpolation functions	Nano interpolation		●	●	●
26		Linear interpolation		●	●	●
27		Circular interpolation		●	●	●
28		Polar coordinate interpolation		X	●	●
29		Cylindrical interpolation		X	●	●
30		Helical interpolation		X	○	○
31		Thread cutting, synchronous cutting		●	●	●
32		Multi threading		●	●	●
33		Thread cutting retract		●	●	●
34		Continuous threading		●	●	●
35		Variable lead thread cutting		●	●	●
36		Polygon machining with two spindles		X	●	●
37		High-speed skip	Input signal is 8 points.	○	○	○
38		2nd reference position return	G30	●	●	●
39		3rd / 4th reference position return		●	●	●
40	Feed function	Override cancel		●	●	●
41		AI contour control I		○	○	○
42		AI contour control II		○	○	○
43		Rapid traverse block overlap		●	●	●
44	Program input	Optional block skip	9 pieces	●	●	●
45		Absolute / incremental programming	Combined use in the same block	●	●	●
46		Diameter / Radius programming		●	●	●
47		Automatic coordinate system setting		●	●	●
48		Workpiece coordinate system	G52 - G59	●	●	●
49		Workpiece coordinate system preset		●	●	●
50		Direct drawing dimension programming		●	●	●
51		G code system	A	●	●	●
52		G code system	B/C	●	●	●
53		Chamfering / Corner R		●	●	●
54		Custom macro		●	●	●

● Standard ○ Optional X Not applicable

NO.	Division	Item	Spec.	DOOSAN Fanuc i Plus		
				2축	M	MS
				A / B / LA / LB / LC	MA / MB / LMA / LMB / LMC	MSA / MSB / LMSC
55	Program input	Addition of custom macro common variables	#100 - #199, #500 - #999	●	●	●
56		Interruption type custom macro		●	●	●
57		Canned cycle		●	●	●
58		Multiple repetitive cycles	G70~G76	●	●	●
59		Multiple repetitive cycles II	Pocket profile	●	●	●
60		Canned cycle for drilling		●	●	●
61		Coordinate system shift		●	●	●
62		Direct input of coordinate system shift		●	●	●
63		Pattern data input		●	●	●
64	Operation Guidance Function	EZ Guide i (Conversational Programming Solution)		●*1)	●*1)	●*1)
65		iHMI with Machining Cycle		○*2)	○*2)	○*2)
66		EZ Operation package		●	●	●
67	Auxiliary / Spindle speed function	Constant surface speed control		●	●	●
68		Spindle override	0 - 150%	●	●	●
69		Spindle orientation		●	●	●
70		Spindle synchronous control		X	X	●
71		Rigid tap		●	●	●
72		Arbitrary speed threading		○	○	○
73	Tool function / Tool compensation	Tool offset pairs	128-pairs	●	●	●
74		Tool offset pairs	200-pairs	○	○	○
75		Tool offset		●	●	●
76		Tool radius / Tool nose radius compensation		●	●	●
77		Tool geometry / wear compensation		●	●	●
78		Automatic tool offset	G36/G37	●	●	●
79		Direct input of offset value measured B		●	●	●
80		Tool life management		●	●	●
81	Accuracy compensation function	Backlash compensation for each rapid traverse and cutting feed		●	●	●
82		Stored pitch error compensation		○	○	○
83	Editing operation	Part program storage size & Number of registerable programs	5120M(2MB)_1000 programs	●	●	●
84		Part program storage size & Number of registerable programs	1280M(512KB)_400 programs	X	X	X
85		Part program storage size & Number of registerable programs	5120M(2MB)_400 programs	X	X	X
86		Program protect		●	●	●
87		Password function		●	●	●
88		Playback		●	●	●
89	Setting and display	Main menu screen		●	●	●
90	Data input / output	Fast data server		○	○	○
91		EXternal data input		●	●	●
92		Memory card input / output		●	●	●
93		USB memory input / output		●	●	●
94		Automatic data backup		●	●	●
95	Interface function	Embedded Ethernet		●	●	●
96		Fast Ethernet		○	○	○
97	Others	Display unit	15" color LCD	●	●	●
98			15" color LCD with Touch Panel	○	○	○
99		Robot interface with PMC I/O module		○	○	○
100		Robot interface with PROFIBUS-DP		○	○	○

*1) Only with 15" LCD standard *2) Only with 15" Touch LCD standard

Product Preview

CNC Specifications

● Standard ○ Optional X Not applicable

Basic information

Basic Structure
Cutting
Performance

Detailed Information

Options
Applications
Diagrams
Specifications

Customer Support Service

SIEMENS

S828D

No.	ITEM	Spec.	S828D
1	Controlled axes	2 axis	X, Z, SP
2	R: Milling spindle	M-type	X, Z, C, R
3	Simultaneously controlled axes	Positioning(G00)/Linear interpolation(G01) : 3 axes Circular interpolation(G02, G03) : 2 axes	●
4	Backlash compensation		●
5	Leadscrew error compensation		●
6	Measuring system error compensation		●
7	Feedforward control	velocity-dependent	●
8	Follow up mode		●
9	Programmable acceleration		●
10	Emergency stop / overtravel		●
11	Least command increment	0.001mm (0.0001 inch)	●
12	Least input increment	0.001mm (0.0001 inch)	●
13	Maximum commandable value	±99999.999mm (±3937 inch)	●
14	Machine lock (PRT)		●
15	Absolute encoder		●
16	Dry run		●
17	Feedrate/Rapid override	0 - 120 %	●
18	Reference point return	G75 FP=1	●
19	2nd reference point return	G75 FP=2	●
20	3rd / 4th reference return	G75 FP=3, 4	●
21	Linear interpolation	Max. 4	●
22	Circular interpolation	G02, G03	●
23	Inverse time feedrate	G93	●
24	Helical interpolation		●
25	Universal interpolator NURBS		●
26	Spline interpolation (A, B and C splines)		○
27	Dwell	G04	●
28	Separate path feed for corners and chamfers		●
29	Reposition		●
30	Acceleration with Jerklimitation		●
31	Positioning	G00	●
32	Cartesian point-to-point (PTP) travel		●
33	TRANSMIT/cylinder surface transformation	Not available for 2-axis type	●
34	Inclined axis	If machine attached inclind Y axis	●
35	Inclined axis TRAANG after TRANSMIT/ TRACYL	If machine attached inclind Y axis	●
36	Couplings	CP-Basic(If machine attached milling spindle)	●
37		CP-Comfort	○
38	Spindle speed, digital setpoint		●
39	Spindle speed, max. programmable value range	106 ... 0.0001 (display: ± 999999999.9999)	●
40	Spindle override	50 - 120 %	●
41	Automatic gear state selection		●
42	Oriented spindle stop		●
43	Spindle speed limitation min./max.		●
44	Constant cutting rate		●
45	Spindle control via PLC (Positioning, oscillation)		●
46	Changeover to axis mode		●
47	Tapping with compensating chuck/rigid tapping		●
48	Retraction for rigid tapping		●
49	Tool radius compensations in plane		●
50	• With approach and retract strategies		●
51	• With transition circle/ellipse on outer edges		●
52	Number of tools/cutting edges in tool list	PPU.4 for S828D SW261 (2 axis/M-type)	256/512
53		PPU.4 for S828D SW281 (S/MS/Y/SY-type)	768/1536
54	Tool length compensation		●
55	Operation with tool management		●
56	Tool list		●
57	Tool offset selection via T and D numbers		●
58	Replacement tools for tool management	Include tool load monitoring option	○
59	Monitoring of tool life and workpiece count		●
60	Manual measurement of tool offset		●
61	Magazine list		●
62	Loading and unloading of tools		●
63	Number of subroutine passes <= 9999		●
64	Number of levels for skip blocks 1		●
65	Number of levels for skip blocks 8		○
66	Polar coordinates		●
67	1/2/3-point contours		●
68	Dimensions metric/inch, changeover manually or via program		●

● Standard ○ Optional X Not applicable

No.	ITEM	Spec.	S828D
69	Program functions		
70	• Dynamic preprocessing memory FIFO		●
71	• Look ahead number of blocks	In 840D, If machine attached milling spindle	1
72	• Frame concept		●
73	• Inclined-surface machining with swivel cycle		●
74	• Axis/spindle replacement		●
75	• Geometry axes, switchable online in the CNC program		●
76	• Program preprocessing		●
77	Online ISO dialect interpreter		●
78	Program/workpiece management		
73	• Parts programs on NCU, max. number		750
74	• Workpieces on NCU, max. number		250
75	• On USB storage medium (e.g. disk drive, USB stick)		●
76	• On network drive		○
77	Settable offsets, max. number	G54, G55, G56 ...	100
78	Program editor		
79	• Programming support for cycles program(Program Guide)		●
80	• CNC editor with editing functions: Marking, copying, deleting		●
81	• Programming graphics/free contour input (contour calculator)		●
82	• Support for parameter input Animated Elements		●
83	• ShopTurn/ShopMill Machining step programming		●
84	Technology cycles for drilling/milling		●
85	Pocket milling free contour and islands stock removal cycle		●
86	Residual material detection		●
87	Access protection for cycles		●
88	Programming support can be extended,e.g. customer cycles		●
89	2D simulation		●
90	3D simulation, finished part		●
91	Simultaneous recording		●
92	JOG		
93	• Handwheel selection		●
94	• Switchover: inch/metric		●
95	• Manual measurement of zero/work offset		●
96	• Manual measurement of tool offset		●
97	• Automatic tool/workpiece measurement		●
98	• Reference point approach, automatic/via CNC program		●
99	Automatic		
100	• Execution from USB or CF card interface on operator panel front		●
101	• Execution from HMI memory on NCU CF card	In 840D, If machine attached milling spindle	X
102	• Execution from network drive		○
103	Operating software languages		
104	• Ch _S,Ch _T, En, Fr, Gr, It, Kr, Pt, Sp		●
105	• Additional languages, use of language extensions		●
106	Working area limitation		●
107	Limit switch monitoring		●
108	Software and hardware limit switches		●
109	Position monitoring		●
110	Standstill (zero-speed) monitoring		●
111	Clamping monitoring		●
112	2D/3D protection zones		●
113	Contour monitoring		●
114	Axis limitation from the PLC		●
115	Alarms and messages		●
116	Action log can be activated for diagnostic purposes		●
117	PLC status		●
118	Remote Control System (RCS) remote diagnostics		
119	• RCS Host remote diagnostics function		○
120	• RCS Commander (viewer function)	RCS Commander for PC/PG on CD-ROM	●
121	Integrated service planner for the monitoring of service intervals		●
122	Measuring, Measuring stage 1 Two probes (switching) with/without deletion of distance-to-go	Measurement prove & receiver is needed	●
123	Measuring cycles for drilling/milling and turning • Calibrating workpiece probes • Workpiece measurement • Tool measuring	Measurement prove & receiver is needed (included in MDynamics 3-axis & 5-axis) In 840D, If machine attached milling spindle	○
124	Easy Extend		●
125	Contour handwheel		●
126	Integrate screens in SINUMERIK Operate with SINUMERIK Integrate Run MyScreens		●
127	Cross-mode actions (ASUPs and synchronized actions in all operating modes)		○

Product Preview

Basic information


Basic Structure
Cutting
Performance

Detailed
Information

Options
Applications
Diagrams
Specifications

Customer Support
Service

Responding to Customers Anytime, Anywhere

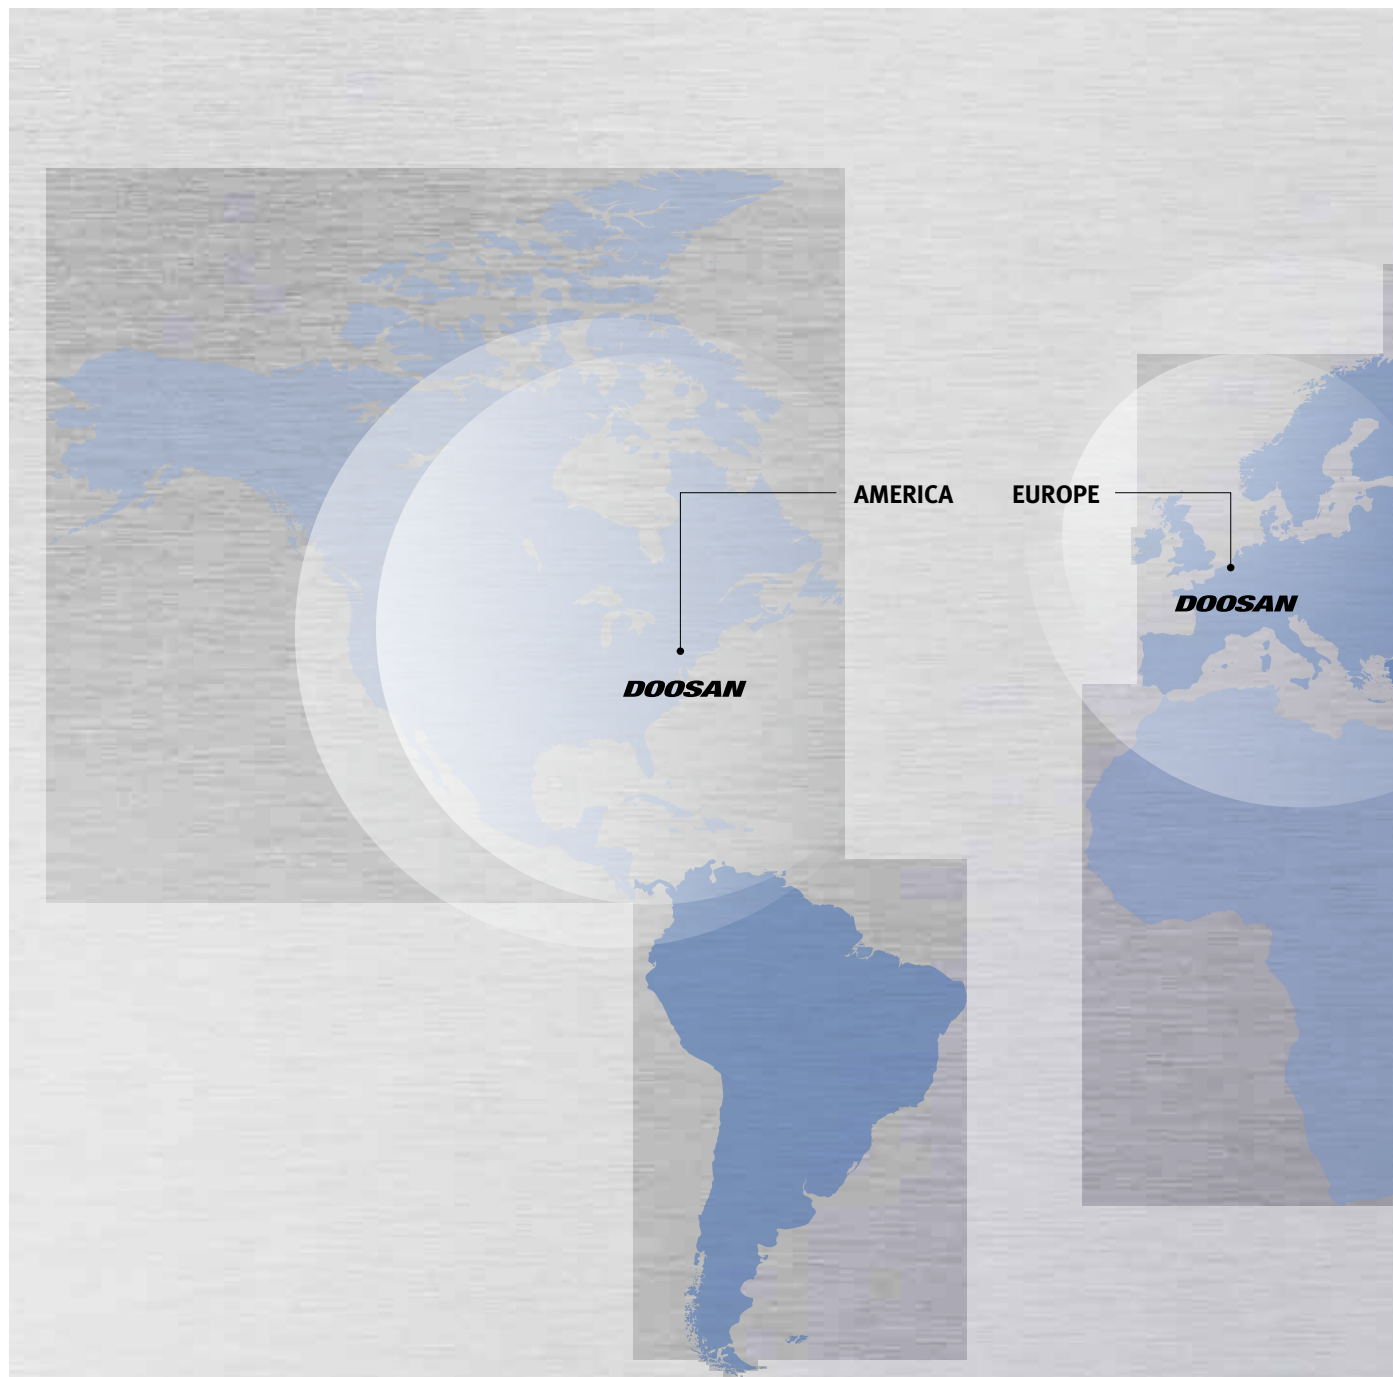

Global Sales and Service Support Network

Corporations

4

Dealer Networks

164

Technical Centers

51

Service Post

198

Factories

3

Technical Center: Sales Support, Service Support, Parts Support

Doosan Machine Tools' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

Doosan machine tools provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands.

By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.



Customer Support Service

We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.

Supplying Parts



- Supplying a wide range of original Doosan spare parts
- Parts repair service

Field Services



- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair

Technical Support



- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

Training



- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering

Major Specifications

Lynx 2100 series



Description	Unit	Lynx 2100 [L]	Lynx 2100M [LM] [LMS]
Max. turning dia.	mm (inch)	Ø350 (Ø13.8)	Ø300 (Ø11.8)
Max. turning length	mm (inch)	330 [550] ^{*1} (13.0 [21.7])	290 [510] [510] ^{*2} (11.4 [20.1] [20.1])
Standard chuck size	inch	6 / 8 / 10	
Max. spindle speed	r/min	6000 / 4500 / 3500	
Max. spindle power	kW (Hp)	15 (20.1) ^{*3}	

*1 : 537 mm (21.1 inch) (Lynx 2100LC)

*2 : 497 mm (19.6 inch) (Lynx 2100LMC, LMSC)

*3 : 18.5 kW (24.8 Hp) (Lynx 2100LC, LMC, LMSC)

Doosan Machine Tools

www.doosanmachinetools.com



Head Office

22FT Tower, 30, Sowol-ro 2-gil, Jung-gu,
Seoul, Korea, 04637

Tel +82-2-6972-0370 / 0350

Fax +82-2-6972-0400

Doosan Machine Tools America

19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.

Tel +1-973-618-2500

Fax +1-973-618-2501

Doosan Machine Tools Europe

Emdener Strasse 24, D-41540 Dormagen,
Germany

Tel +49-2133-5067-100

Fax +49-2133-5067-111

Doosan Machine Tools India

No.82, Jakkuar Village, Yelahanka Hobli,
Bangalore-560064

Tel + 91-80-2205-6900

E-mail india@doosanmt.com

Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuang
Highway No.258 Songjiang District,China
Shanghai(201612)


Tel +86 21-5445-1155

Fax +86 21-6405-1472

* For more details, please contact Doosan Machine Tools.

* The specifications and information above-mentioned may be changed without prior notice.

* Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.



**Fire Safety
Precautions**

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting use coolants and modifying the machine without the consent of the manufacturer. Please check the SAFETY GUIDANCE carefully before using the machine.

ver. EN 200220 SU