
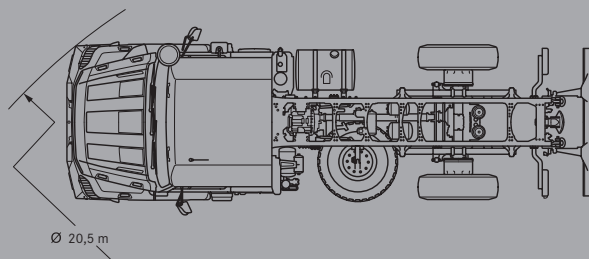
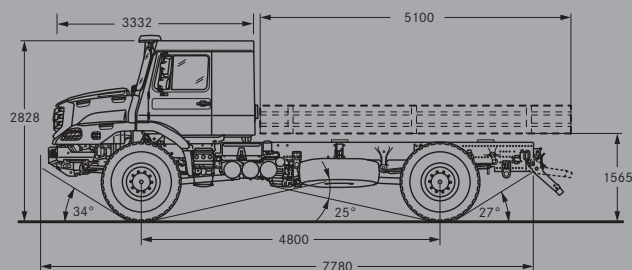


Mercedes-Benz Zetros

Technical data – 4x4 / 6x6



Zetros		1833 A 4x4	2733 A 6x6	2733 AS 6x6
Engine		OM 926 LA – 6 cyl. inline	OM 926 LA – 6 cyl. inline	OM 926 LA – 6 cyl. inline
Power (Euro 5) ¹⁾	kW (hp)	240 (326)	240 (326)	240 (326)
Torque	Nm/revs	1,300/1,200 – 1,600	1,300/1,200 – 1,600	1,300/1,200 – 1,600
Gear box		Allison 3000 SP Automatic	Allison 3000 SP Automatic	Allison 3000 SP Automatic
Transfer box (modes)		MB VG 1700 – 3W/1.6	MB VG 1700 – 3W/1.6	MB VG 1700 – 3W/1.6
Axles		Planetary hub reduction axle	Planetary hub reduction axle	Planetary hub reduction axle
1st front axle	(t)	9.0	9.0	9.0
1st rear axle	(t)	10.5	10.5	10.5
2nd rear axle	(t)		10.5	10.5
Electrics	(V)	24	24	24
Fuel tank capacity	(l)	300	300	300
Steering		ZF 8098	ZF 8098	ZF 8098
Suspension		Leaf springs	Leaf springs	Leaf springs
Brakes		Drum	Drum	Drum
Drive configuration		4x4	6x6	6x6
Wheelbase	(mm)	4,800	4,750 + 1,450	4,750 + 1,450
Unladen weight (without body)	(kg)	8,077	10,500	10,500
Gross vehicle weight	(t)	10.0	13.5	13.5
Gross combination weight	(t)	–	–	40.0
Approach angle	(°)	34 / 27	34 / 32	34 / 32
Turning circle	(Ø m)	20.5	23.5	20.5
Standard Platform (length/width/side height)	(mm)	5,100/2,450/500 ⁷⁾	6,200/2,450/500 ⁷⁾	–
Fording depth	(m)	0.8 (1.19) ⁸⁾	0.8 (1.19) ⁸⁾	0.8 (1.19) ⁸⁾
Speed at 75 % max. rpm	(km/h)	89	89	89